

CATALOG I DIMENSIONAL METROLOGY



|  
- 0 +



EXACTLY

## THE MAHR CATALOG

► | **Measurement affects almost everything.** Whatever your dimensional metrology needs, this catalog can help you. It includes Mahr's complete portfolio of products for precision gages, metrology systems, and services. It is also a useful source for everyone who wants to learn more about Mahr. To ensure that readers are able

### IMAGE

*The most important milestones, principles, data and visions*

### PRECISION GAGES

1-2

*From calipers to height gages*





to find their way around easily, we have color-coded the main sections — the precision gages section is shown in light blue and metrology systems in dark blue. At the beginning of each of the sections you'll find a table of contents that will help you locate specific products and systems.

## METROLOGY SYSTEMS

14-2

*Solutions tailored to  
your individual needs*



## SERVICE

21-2

*Repair, training,  
calibration  
and much more*



## EXPERIENCE



*Mahr has been producing  
measuring instruments  
for over 145 years*

## COMMITMENT



*The perfect solution  
for every need*

## TECHNOLOGY



*Top quality for  
absolute precision*

## RELIABILITY



*Results you can rely on*

### MORE ABOUT MAHR: THE BRAND

► | **Our yardstick is your success.** Quality assurance is playing an ever greater role in the world of production. The more important repeatable precision becomes, the greater the importance of metrology to the final result. We make it our job to ensure that the results are accurate. As one of the world's largest manufacturers of measuring equipment, our leadership in the field of innovation is unrivalled.

Mahr

## SIZE



*Continuous growth,  
a global player*

## COURAGE



*Going its own way  
to new standards*

## IMAGINATION



*Innovation leader  
in industrial metrology*

## VISION



*Seeing things from  
a new perspective*

We have the precise technology required for all conceivable requirements. Our range of products extends from calipers to customized high-end measuring systems. Our closeness to customers is one of the secrets of our innovative edge. The concepts we devise for the future of metrology are the direct result of dialog with production, research and development departments.

EXACTLY

1870



Vernier calipers from Carl Mahr made of steel and brass, produced in 1868

1900



Length measuring machine from 1908. Reading on the vernier 1/10,000 mm

1930



Millimess precision probe, constructed in 1937. First indicating unit for reliably recording dimensional differences down to 1/1,000 mm

1960



Millitron from 1964, compact length measuring instrument that was given the nickname "the miner's lamp"

## MORE ABOUT MAHR: HOW IT ALL STARTED

► | **The measure of all things since 1861.** The industrialization of the 19th century not only saw rapid growth in productivity, but also a call for precision in manufacturing machine parts. As early as 1861, Carl Mahr recognized the demand this would create for precision length measurement instruments. Founded in Esslingen on the Neckar River, his family business grew slowly but surely into a large-scale concern. Feinpruef was founded in 1936 in Göttingen,



**CARL MAHR, ESSLINGEN A. N.**  
Specialität: **Messwerkzeuge.**



1980




*MMQ 2, compact desktop formtester for evaluating roundness*

1983



*Maxum, the world's first digital indicator, launched on the market by Federal Products Co. in 1983*

1985



*M4P, the first microprocessor-controlled roughness measuring instrument, with integrated printer for parameters and profiles*

1997



*MPC 502 from 1997, the first large multisensor measuring machine from WEGU-Messtechnik, which became Mahr Multisensor GmbH in 1999*

2006



*HELIO-SCOPE, optical measuring unit for turned parts with matrix camera for direct use in the production area*

followed in 1973 by the acquisition of Dr. Ing. Perthen GmbH. WEGU-Messtechnik was added in 1999 along with Federal Products Co. in the USA. With OKM, Optische Koordinaten Messtechnik GmbH in Jena, the portfolio of precision length metrology was considerably expanded in 2004. In 2006, after the acquisition of Helios-Messtechnik, Mahr successfully integrated the shaft measuring instruments into its spectrum of products. Today Mahr is a global group of companies with a workforce well in excess of 1,500 employees.

## AUTOMOTIVE




## AEROSPACE



## MEDICINE



## ELECTRICAL ENGINEERING




### MORE ABOUT MAHR: THE EXPERTISE

► | **Industrial metrology for all applications.** We are increasingly committed to developing solutions that provide our customers with a process-oriented spectrum of benefits for every conceivable application. Our ideas extend from initial research to final check. Many





## MECHANICAL ENGINEERING



## PLASTICS



## OPTICS



## PRECISION ENGINEERING



of them are derived from direct dialog with our most loyal customers across a whole range of industries. A comprehensive global service network provides services for everything from procurement of spare parts to calibrations compliant with international calibration standards.






*Measuring the future is a tricky business*



*Accurate predictions are something you shouldn't expect*



*People say there are many ways to reach a goal*



*But none of them is entirely undisputed ...*

## MORE ABOUT MAHR: THE FUTURE

► | **Visions are becoming ever more quantifiable.** What challenges can we expect in the decades ahead? There's no shortage of speculation and theories. Nanotechnology requires workpieces that can be assembled precisely on a molecular level. The surfaces of artificial fibers must already be able to meet requirements that were considered impossible just a few years ago. The trend towards





... **Prophecies** don't always come true



**Forecasts** based on science also come with no guarantee



When it comes to the **future**, only one thing is certain:



**It's on its way**

sustainability means that industry needs to constantly reinforce its commitment to accuracy in the production process. All of this combines to make dimensional metrology a key player in this process — and we are already busy contemplating new forms of measurement. What's important in this development is how you see your own future. So why not talk to us? And let us find the solution to your measurement needs.

## GÖTTINGEN



### **Germany**

Headquarters of the Mahr Group  
Production site for Metrology  
Systems

Mahr GmbH Göttingen  
Carl-Mahr-Str. 1  
D-37073 Göttingen

## ESSLINGEN



### **Germany**

Precision Gages Division  
Sales Europe and Asia

Mahr GmbH Esslingen  
Reutlinger Straße 48  
D-73728 Esslingen

## WADGASSEN



### **Germany**

The MarVision Product Group  
Production and Sales

Mahr Multisensor GmbH  
Wendelstraße 90  
D-66787 Wadgassen

## JENA



### **Germany**

Production and Sales  
Optical Coordinate Metrology

Mahr OKM GmbH  
Carl-Zeiss-Promenade 10  
D-07745 Jena

## **MORE ABOUT MAHR: A GLOBAL PLAYER**

► | **We're there wherever you need us.** As globalization advances, our customers rightly expect that we at Mahr are also represented worldwide. We have therefore built a global network of production sites, branches and agencies with a view to ensuring

**Mahr**

Perthometer M1

$L_1$   
5.60mm ( 0.805 )

AUTO  
PR

测量开始

Ra

Rz

Rmax

Pc

μm



## PROBOSTOV



**Czech Republic**  
Production and Sales  
Precision Gages

Mahr spol s.r.o.  
Kpt. Jarose 552  
CZ-41712 Probostov

## PROVIDENCE



**USA**  
Headquarters NAFTA  
Production and Sales  
Precision Gages and Metrology  
Systems

Mahr Federal Inc.  
1144 Eddy Street,  
Providence, RI 02905

## SUZHOU



**China**  
Production and Sales  
Precision Gages

Mahr Precision Metrology  
#399 Su Hong Road  
Suzhou Industrial Park  
Suzhou 21501, P.R.

## MAHR IS REPRESENTED IN


Argentina, Australia, Austria, Belgium,  
Brazil, Bulgaria, Chile, China, CIS,  
Croatia, Czech Republic, Denmark,  
Egypt, Finland, France, Germany,  
Greece, Hong Kong, Hungary, India,  
Indonesia, Iran, Ireland, Israel, Italy,  
Japan, Korea, Malaysia, Mexico,  
Netherlands, Norway, Pakistan, Peru,  
Philippines, Poland, Portugal, Romania,  
Serbia, Singapore, Slovakia, Slovenia,  
South Africa, Spain, Sweden,  
Switzerland, Taiwan, Thailand, Tunisia,  
Turkey, UAE, United Kingdom, USA,  
Vietnam

the optimum level of quality service in every country throughout the world. You can find Mahr metrology contacts in Europe, North America, Latin America and Asia. We're there wherever and whenever you need us. Measure us by this pledge!





# MAHR PRECISION GAGES

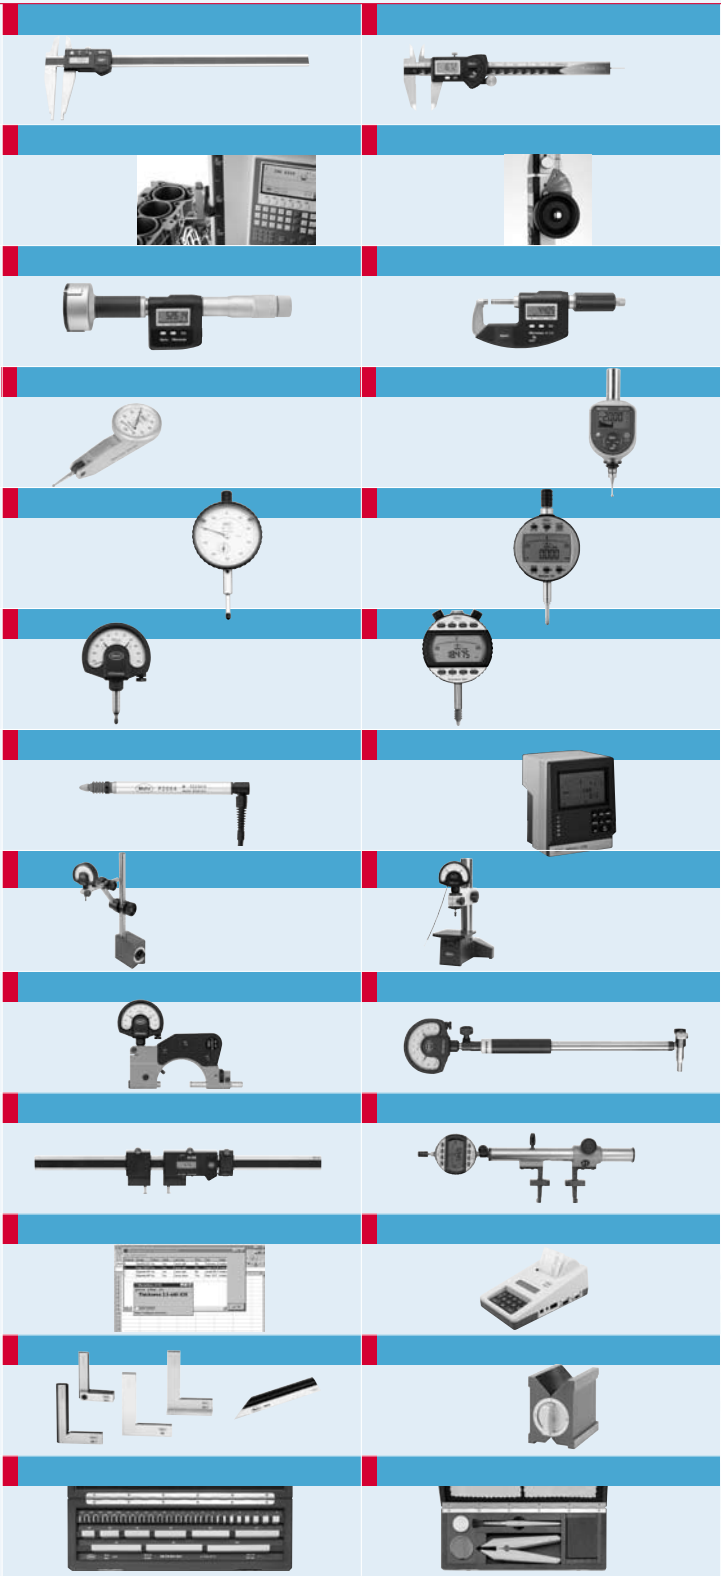



## ► | Contents

<b>MarCal</b>	Calipers	<b>1- 2</b>
<b>Digimar®</b>	Height Measuring Instruments	<b>2- 2</b>
<b>Micromar</b>	Micrometers	<b>3- 2</b>
<b>MarTest®</b>	Test Indicators / 3D Touch Probes	<b>4- 2</b>
<b>MarCator</b>	Digital / Dial Indicators	<b>5- 2</b>
<b>Millimess®</b>	Digital / Dial Comparators	<b>6- 2</b>
<b>Millimar®</b>	Electrical Length Measuring Instruments / Air Gaging	<b>7- 2</b>
<b>MarStand</b>	Indicator Stands / Comparator Stands	<b>8- 2</b>
<b>MaraMeter</b>	Indicating Measuring Instruments	<b>9- 2</b>
<b>Multimar®</b>	Universal Measuring Instruments	<b>10- 2</b>
<b>MarConnect</b>	Interfaces / Data Processing	<b>11- 2</b>
<b>MarTool</b>	Measuring and Inspection Equipment	<b>12- 2</b>
<b>MarGage</b>	Standards, Gages and Gage Blocks	<b>13- 2</b>

# FOR SIMPLE MEASUREMENT THE RULE OF THUMB IS SUFFICIENT. **FOR THE REST THERE IS MARCAL.**



The latest information on MARCAL products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 203**

► | High-quality calipers are amongst the most important measuring instruments in Dimensional Metrology because they are both versatile and easy to use, such as the MarCal series from Mahr. The EX digital caliper series is simple to operate, has a large, easy to read display and enables fast and uncomplicated data transmission thus meeting all requirements of modern metrology. The new generation of Mahr calipers is the MarCal 16 EW a waterproof digital caliper, which enables measurement even in the most difficult workshop conditions. In addition all the Mahr calipers have a highly precise slide movement as well as both the slide and beam being made of hardened stainless steel thus completing the outstanding characteristics of Mahr calipers.

## ► | MarCal. Calipers

### Overview

#### MarCal Calipers

1- 2

### Standard Calipers

#### MarCal 16 EW / 16 EX

1- 4

With a Digital Display

#### MarCal 16 DN / 16 FN / 16 GN / 16 N

1- 8

With a Line Scale (Vernier)

#### MarCal 16 U

1- 9

With a Circular Scale

### Universal Calipers

#### MarCal 16 EXV

1-10

With a Digital Display

### Workshop Calipers

#### MarCal 18 EX / 18 ESA

1-12

With a Digital Display

#### MarCal 18 NA / 18 N / 18 DN

1-15

With a Line Scale (Vernier)

### Depth Calipers

#### MarCal 30 EW / 30 EX / 30 EXN / 30 EWD

1-18

With a Digital Display

#### MarCal 30 ND / 30 N / 30 NH

1-21

With a Line Scale (Vernier)

### Linear Machine Scales

#### MarCal 31 ES / 32 ES

1-23

With a Digital Display

# MarCal. Calipers

## Overview

### MarCal - Design Features

**Reading examples**

**Metric (mm)**

Readings: 0.05 mm

A:	7	mm
B:	(0.05 x 13)	0.65 mm
C:	7.65	mm

**Metric (mm)**


Readings: 0.02 mm

A:	8	mm
B:	(0.02 x 32)	0.64 mm
C:	8.64	mm


### MarCal - Measuring Possibilities

With calipers from the 16 series (e.g. 16 EW, 16 U, 16 FN) the following 4 possible measurements can be conducted:


a) Outside measurement

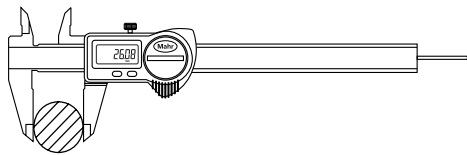


b) Inside measurement

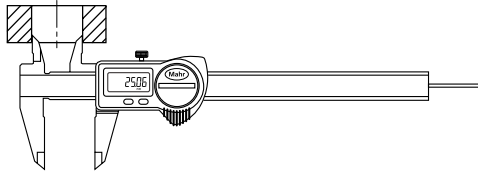

c) Depth measurement

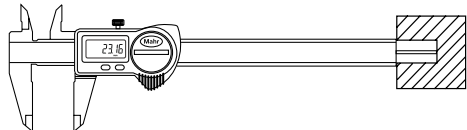

d) Step (Distance) measurement

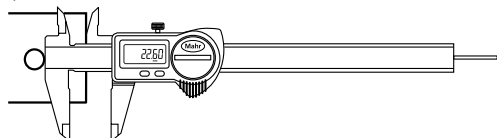

### Error limits G according to DIN 862

Measuring length  /	Error limits G in μm		
	Readings		Resolution
	0.1 and 0.05	0.02	0.01
50	50	20	20
100			
200			
300			
400	60	30	30
500	70		
600	80		
700	90		
800	100	40	40
900	110		
1000	120		
1200	140	50	—
1400	160	60	
1600	180		
1800	200		
2000	220		


## MarCal - Types of Calipers

**Mahr** - Calipers are available with the following means of indication:

a) Digital display





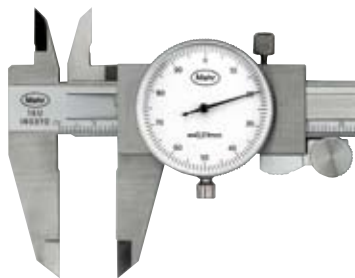

b) Circular scale



c) Vernier scale (graduated)



## Function keys of Digital Calipers

Functions		Type					
		16 EW 16 EX*	16 EX** 16 EXC	30 EW	16 EXV 18 EX 30 EX	30 EXN	18 ESA 30 ESD 31 ES 32 ES
ON/OFF	Switch On/Off	•	•	•	•	•	•
0	Set display to zero	•	•	•	•	•	•
mm/in	Switch between mm/inch	•	•	•	•	•	•
PR	Enter a numerical value			•	•	•	
+/-	Change measuring direction					•	
Reference Lock	Secure the zero position 	•		•			
Hold	Displayed value will be stored						•
Data	Data transmission   		•		•	•	•***

\* without data output

\*\* with data output

\*\*\* only 18 ESA, 300 mm






## MarCal. Calipers

► | The water proof digital caliper **MarCal 16 EW**, is now available with the protection class IP67. Even in the most difficult workshop conditions, precise and reliable results are assured.

Both the housing and operating buttons are made from Ultradur®, which has an excellent chemical resistance

Lapped guide ways allow smooth and even movement


Large display with 7.5 mm high numerals

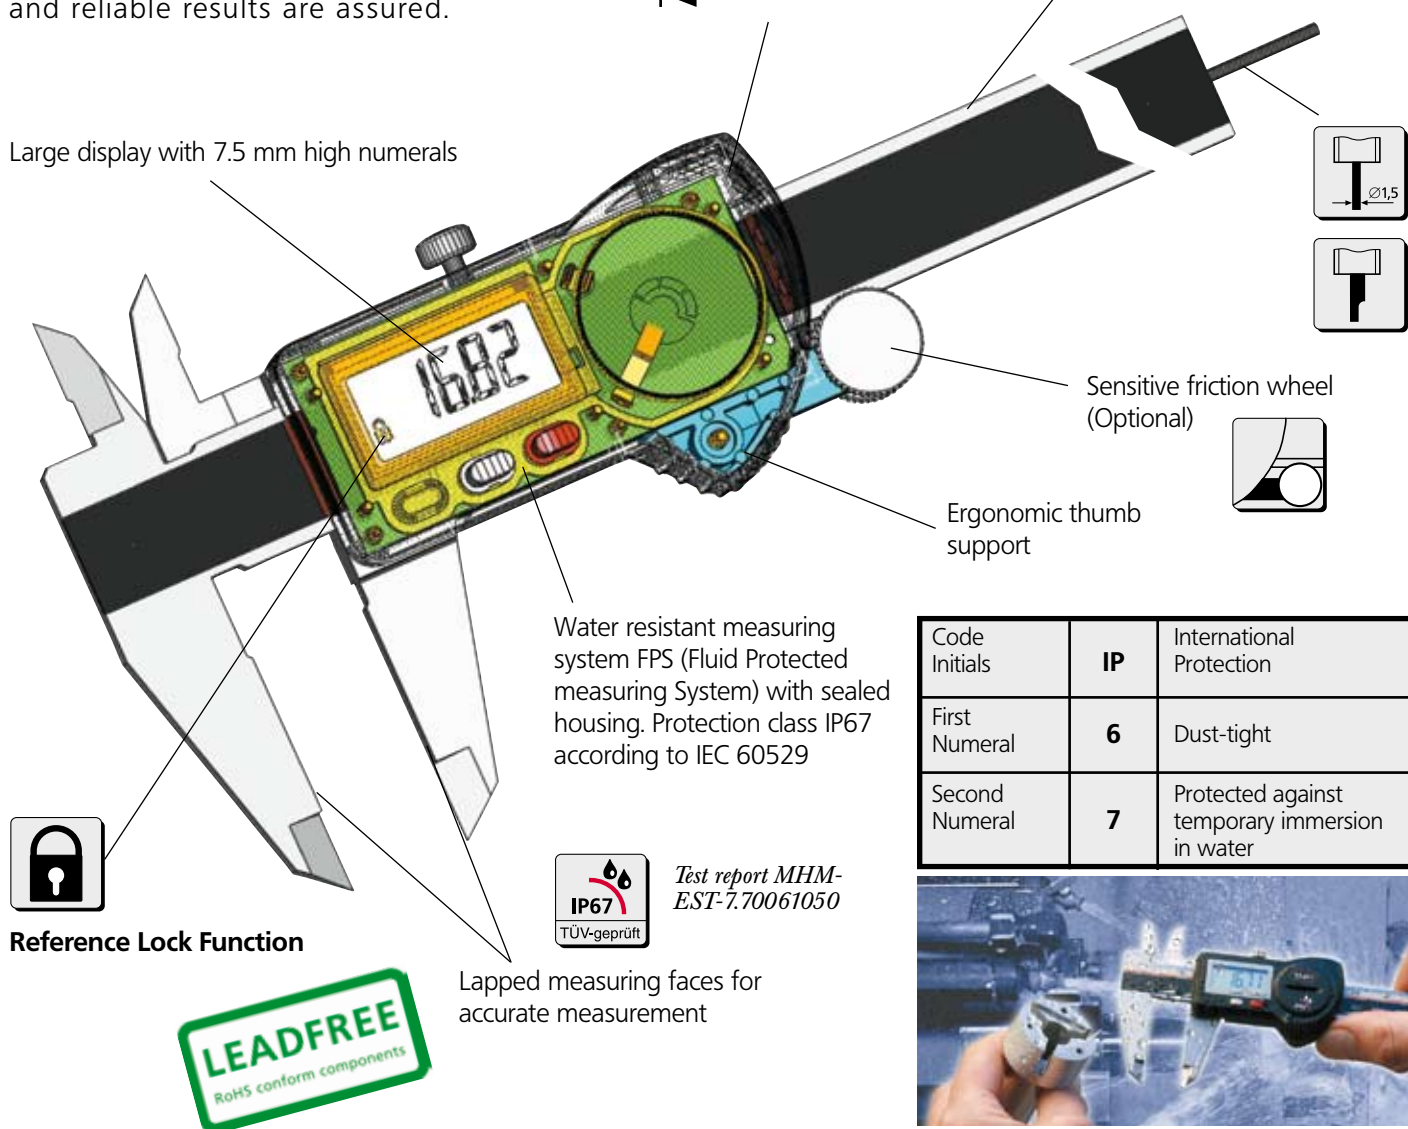

### Reference Lock Function

1. First set to zero

2. Lock-Function is activated

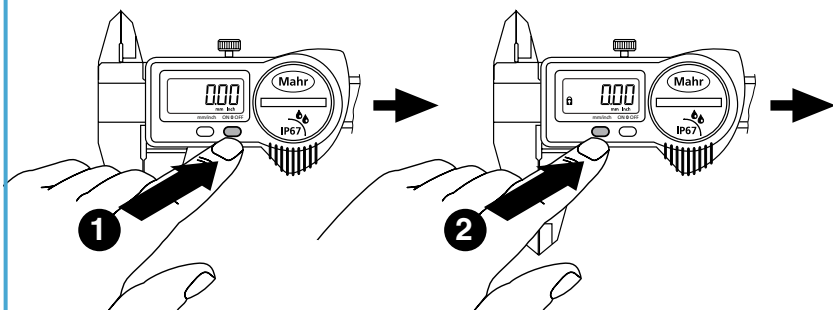

#### Advantages of the Reference Lock Function

- Zero position is secured
- Operating error is prevented
- Caliper is always ready for measurement



## Digital Caliper 16 EW according to protection class IP67



### Features

#### Functions:



ON/OFF  
0 (Zero setting)  
mm/inch  
Reference Lock  
Unlock


- Inductive waterproof measuring system FPS (Fluid Protected measuring System) with Reference Lock Function
- Dirt wipers are integrated in the slide
- Life of the battery ca. 2 years

- Max measuring speed 1.5 m/sec (60"/sec)
- High contrast Liquid Crystal Display with 7.5 mm high digits
- Lapped guide way
- Slide and beam made of hardened stainless steel

- Measuring blades for inside measurement
- Step measuring function
- Locking screw
- Supplied with: Case, battery, operating instructions

### Technical Data

Measuring range mm (inch)	Resolution mm/inch	Error limit G mm/inch	DIN 862	Depth rod 	Friction wheel 	Order no.
150 (6")	0.01/ .0005"	0.03/ .0015"	•	•	•	4102900
150 (6")	0.01/ .0005"	0.03/ .0015"	•	•	•	4102901
150 (6")	0.01/ .0005"	0.03/ .0015"	•	•	•	4102911
150 (6")	0.01/ .0005"	0.03/ .0015"	•	•	•	4102912
200 (8")	0.01/ .0005"	0.03/ .0015"	•	•	•	4102902
200 (8")	0.01/ .0005"	0.03/ .0015"	•	•	•	4102903
300 (12")	0.01/ .0005"	0.04/ .0016"	•	•	•	4102906
300 (12")	0.01/ .0005"	0.04/ .0016"	•	•	•	4102907

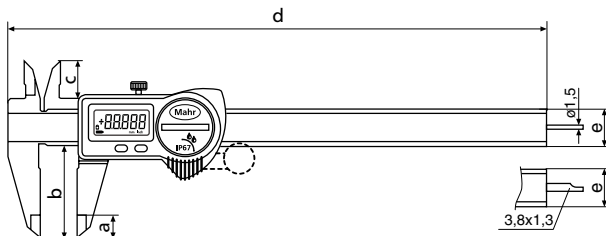


#### Dimensions

mm/ inch	a	b	c	d	e
150/ 6	10/ .4	40/ 1.6	16/ .6	233/ 9.2	16 x 3/ .6 x .12
200/ 8	10/ .4	40/ 1.6	16/ .6	285/ 11.2	16 x 3/ .6 x .12
300/ 12	14/ .5	64/ 2.5	18/ .7	388/ 15.2	16 x 4/ .6 x .15

### Accessories

	Order no.	
Depth Measuring Bridge	16 Em	4102020
Battery 3V, Type CR 2032		4102520

16 Em




## Digital Caliper 16 EX without data output


DIN  
862

### AUTO-ON Function


1. Measure

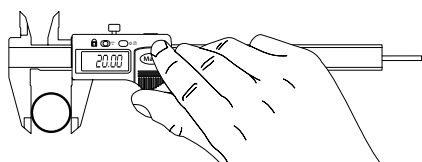

2. AUTO OFF (2 hours.)

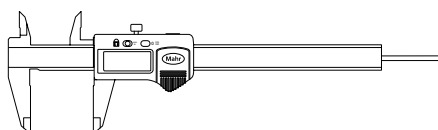

3. AUTO ON

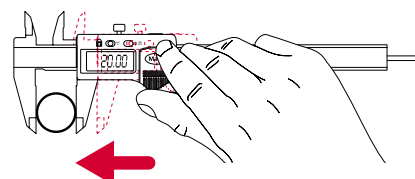

### Advantages of the AUTO-ON function

- Through movement of the slide the caliper is ready to measure
- The reference to the zero point is not lost

### Features

#### Functions:

- ON/OFF
- RESET (Zero setting)
- mm/inch
- Reference Lock/Unlock
- AUTO OFF/ON

- Capacitive measuring system with an energy saving function, life of the battery ca. 2 years
- Dirt wipers are integrated in the slide
- Max measuring speed 1.5 m/sec (60"/sec)

- High contrast Liquid Crystal Display with 8 mm high digits
- Slide and beam made of hardened stainless steel
- Measuring blades for inside measurement


- Step measuring function
- Locking screw
- Supplied with: Case, battery, operating instructions

### Technical Data

Measuring range mm (inch)	Resolution mm/inch	Error limit G mm/inch	DIN 862	Depth rod	Order no.
150 (6")	0.01/ .0005"	0.03/ .0015"	•	•	4102201
150 (6")	0.01/ .0005"	0.03/ .0015"	•	•	4102204

#### Dimensions

mm/ inch	a	b	c	d	e
150/ 6	10/ .4	40/ 1.6	16/ .6	233/ 9.2	16 x 3/ .6 x .12

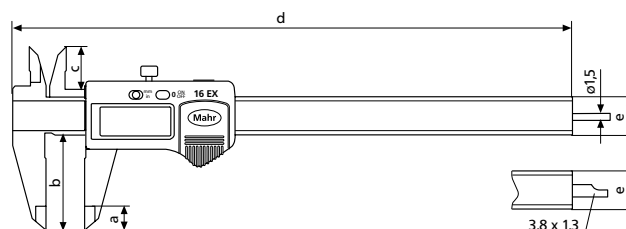

## Digital Calipers 16 EX / 16 EXC with data output



### Features

#### Functions:

ON/OFF  
RESET (Zero setting)  
mm/inch  
DATA (Data transmission via connection cable)

- Patented capacitive measuring system with an energy saving function, life of the battery approx. 2 years
- Dirt wipers are integrated in the slide

- Max measuring speed 1.5 m/sec (60"/sec)
- High contrast Liquid Crystal Display with 7.5 mm high digits
- Slide and beam made of hardened stainless steel


- Measuring blades for inside measurement
- Step measuring function
- Locking screw
- Supplied with: Case, battery, operating instructions

### Technical Data

Measuring range	Resolution	Error limit G	Depth rod	Data output	Order no.
mm (inch)	mm/inch	mm/inch			
16 EX 150 (6")	0.01/.0005"	0.03/.0015"	•	•	4102400
16 EX 150 (6")	0.01/.0005"	0.03/.0015"	•	•	4102403
16 EX 200 (8")	0.01/.0005"	0.03/.0015"	•	•	4102402
16 EX 300 (12")	0.01/.0005"	0.04/.0016"	•	•	4102360
16 EXC 150 (6")	0.01/.0005"	0.03/.0015"	•	•	4102824

#### Dimensions

mm/ inch	a	b	c	d	e
150/ 6	10/ .4	40/ 1.6	16/ .6	233/ 9.2	16 x 3/ .6 x .12
200/ 8	10/ .4	40/ 1.6	16/ .6	285/ 11.2	16 x 3/ .6 x .12
300/ 12	14/ .5	64/ 2.5	18/ .7	388/ 15.2	16 x 4/ .6 x .15

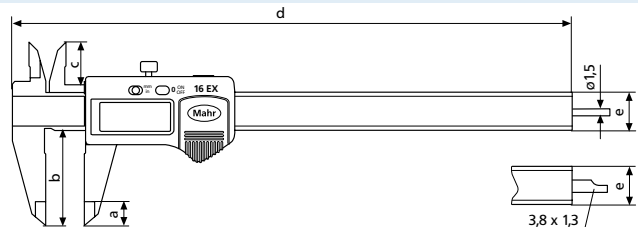


### Accessories


	Order no.
Depth Measuring Bridge	16 Em 4102020
Battery 3V, Type CR 2032	4102520
Data Connection Cable USB (2 m)	16 EXu 4102357
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411

Accessories for Data Processing see Chapter 11

16 Em



## Vernier Calipers 16 N, 16 FN, 16 GN, 16 DN with scale reading

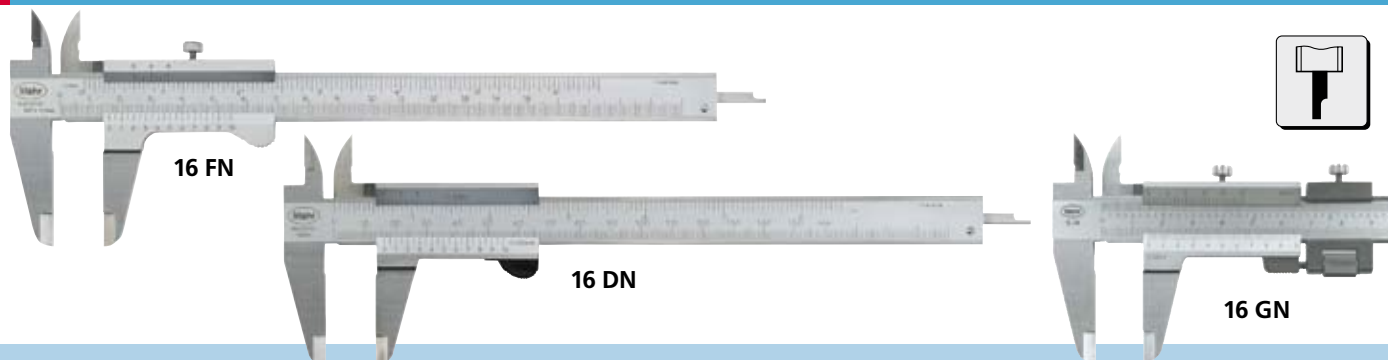

### Features

- Vernier and main scale have a satin chrome finish for glare free reading
- Slide and beam made of hardened stainless steel
- Raised guide ways for the protection of the scale
- Measuring blades for inside measurement
- Step measuring function
- Depth bar
- Locking screw or thumb clamp
- Supplied with: Plastic case and thread table


### Technical Data

	Measuring range		Readings		Error limit G		Order no.	Order no.	Remarks
	mm	(inch)	upper	lower	mm/inch	DIN 862	without fine adjustment	with fine adjustment	
16 FN	150			0.05	0.05	●	4100420		Locking screw above Locking screw above Thumb clamp Locking screw below
16 FN	150	(6")	1/128"	0.05	0.05/.002"	●	4100400		
16 DN	150	(6")	1/128"	0.05	0.05/.002"	●	4100600		
16 N	150	(6")	1/128"	0.05	0.05/.002"	●	4100500		
16 GN	150			0.02	0.04	●	4100650	4100660*	
16 GN	150	(6")	.001"	0.02	0.04/.0016"	●	4100670	4100680*	Locking screw above
16 FN	200			0.05	0.05	●	4100421		
16 FN	200	(8")	1/128"	0.05	0.05/.002"	●	4100401		
16 GN	200			0.02	0.05	●	4100651	4100661*	
16 GN	200	(8")	.001"	0.02	0.05/.002"	●	4100671	4100681*	
16 FN	300			0.05	0.05	●	4100422		Locking screw above
16 FN	300	(12")	1/128"	0.05	0.05/.002"	●	4100402		
16 GN	300			0.02	0.05	●	4100652	4100662*	
16 GN	300	(12")	.001"	0.02	0.05/.002"	●	4100672	4100682*	

\* Calipers with fine adjustment the measuring range is shortened by 20 mm / 1"

### Dimensions

mm/inch	a	b	c	d	e	f
150/ 6	10/4	40/1.5	16/6	228/9	16 x 3/6 x .12	3.8/.150
200/ 8	14/5	50/2.0	19/7.5	290/11	17 x 3.5/6 x .14	3.8/.150
300/12	16/6	64/2.5	23/9	404/16	20 x 4/8 x .15	4.8/.189

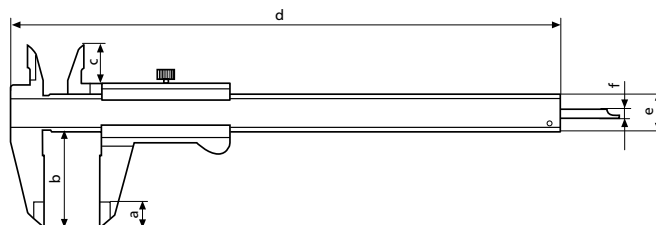

### Accessories

	Order no.	
Depth Measuring Bridge	16 Em 4102020	
Leather case for meas. range 150 mm	4100302	

## Vernier Caliper 16 U with circular scale




### Features

- Large, high contrast dial face
- Satin chrome finished line scale
- Shockproof movement
- Zero setting through rotating the dial face and locking screw
- Covered rack
- Slide and beam made of hardened stainless steel
- Measuring blades for inside measurement
- Step measuring function
- Locking screw
- Depth bar
- Supplied with: Plastic case
- Inch model is supplied with a black dial face

### Technical Data

Measuring range	Readings	Diameter of circular scale	1 Pointer-revolution	Dial face color	Error limit G	DIN 862	Order no.
150 mm	0.01 mm	34 mm	1 mm	white	0.03 mm	●	4107005
150 mm	0.02 mm	34 mm	2 mm	white	0.03 mm	●	4107107
6"	.001"	1.3"	.100"	black	.0012"		4107900

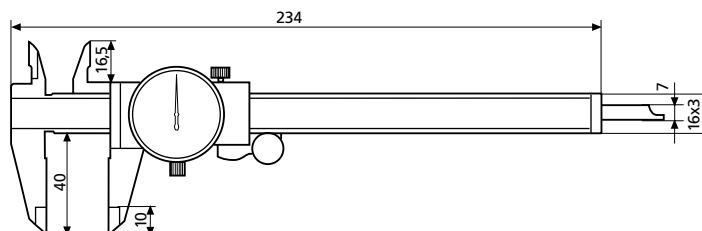

### Accessories


**Depth Measuring Bridge**  
Leather case for meas. range 150 mm

16 Em


Order no.

4102020  
4100302

16 Em



## Universal Caliper 16 EXV in set

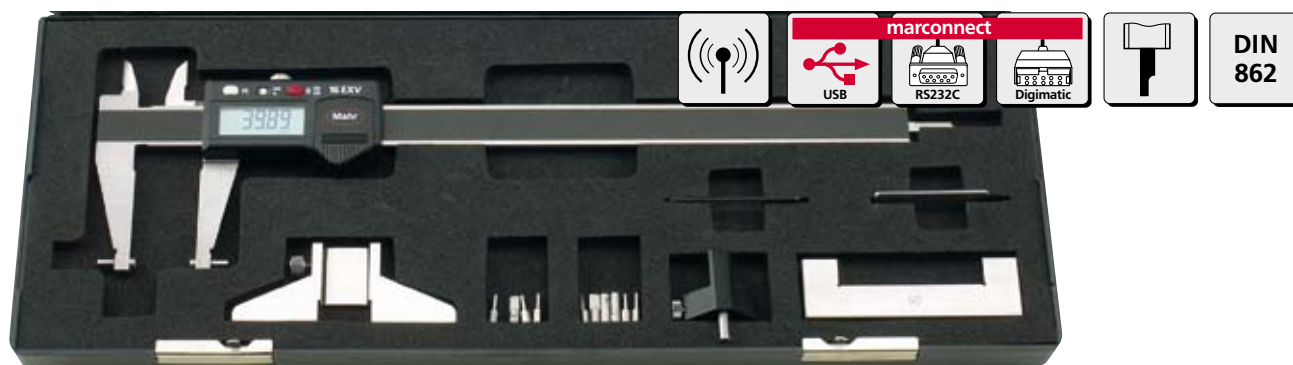

### Features

- Applicable as a standard caliper (fourfold measuring possibilities). When used in conjunction with the standard accessories it is also possible to measure recesses, grooves, etc. With additional accessories threads, bores, serrations etc. can be measured.
- Functions:**
  - ON/OFF
  - RESET (Zero setting)
  - DATA (Data transmission via connection cable)
  - PRESET (for entering a numerical value)
- Patented capacitive measuring system with an energy saving function, life of the battery approx. 2 years
- Dirt wipers are integrated in the slide
- MarConnect data output, choose alternatively USB  
OPTO RS232C  
Digimatic
- High contrast Liquid Crystal Display with 7.5 mm high digits
- Slide and beam made of hardened stainless steel
- Supplied with: Plastic case, standard accessories, battery, operating instructions


### Technical Data

Measuring range* mm	Resolution mm/ <i>inch</i>	Error limit <i>G</i> mm/ <i>inch</i>	Order no.
200	0.01/ <b>.0005"</b>	0.03/ <b>.0015"</b>	<b>4118800**</b>
200	0.01/ <b>.0005"</b>	0.03/ <b>.0015"</b>	<b>4118840***</b>

\* with accessories the measuring range may change

\*\* with standard accessories

\*\*\* without accessories

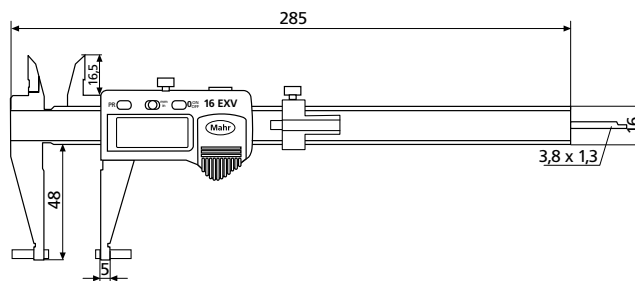






### Additional Accessories


Catalog no.	Description	Remarks	Required quantity	Order no.
16 Eei 4	Anvils for inside measurement	from dia. 8.5 mm	2	<b>4118816</b>
16 Eab	Mounting Attachment for 844Tg/Tr and 844 Tk		2	<b>4118819</b>
844 Tk	Ball Anvils	see page 10-10	2	
844 Tg/Tr	Thread Anvils	see page 10-14/10-12	1 + 1	
16 EXu	Data Connection Cable USB			<b>4102357</b>
16 EXr	Data Connection Cable Opto RS232C			<b>4102410</b>
16 EXd	Data Connection Cable Digimatic			<b>4102411</b>
	Battery 3V, Type CR 2032			<b>4102520</b>





## Universal Caliper 16 EXV in set

### Standard Accessories are included in the set


Catalog no.	Description	Order no.	Required quantity	
16 Em	Depth Measuring Bridge	4102020	1	
16 Eel	Setting Gage for inside measurement	4118817	1	
16 Ec	Measuring Force Device	4118818	1	
16 Eea 1	Anvils for outside measurements	4118810	2	
16 Eea 2	Anvils for outside measurements	4118811	2	
16 Eea 3	Anvils for outside measurements	4118812	2	
16 Eei 1	Anvils for inside measurement	4118813	2	
16 Eei 2	Anvils for inside measurement	4118814	2	
16 Eei 3	Anvils for inside measurement	4118815	2	
	Screws M2 x 8	4879602	2	


16 Eea1  up to dia. 175 mm

16 Eea2  up to dia. 175 mm



16 Eea3  up to dia. 175 mm

16 Eei1  from dia. 27 mm

16 Eei2  from dia. 39 mm


16 Eei3  from dia. 39 mm

### Additional Accessories



For further Universal-Measuring Instruments please refer to Chapter 10

## Digital Caliper 18 EX

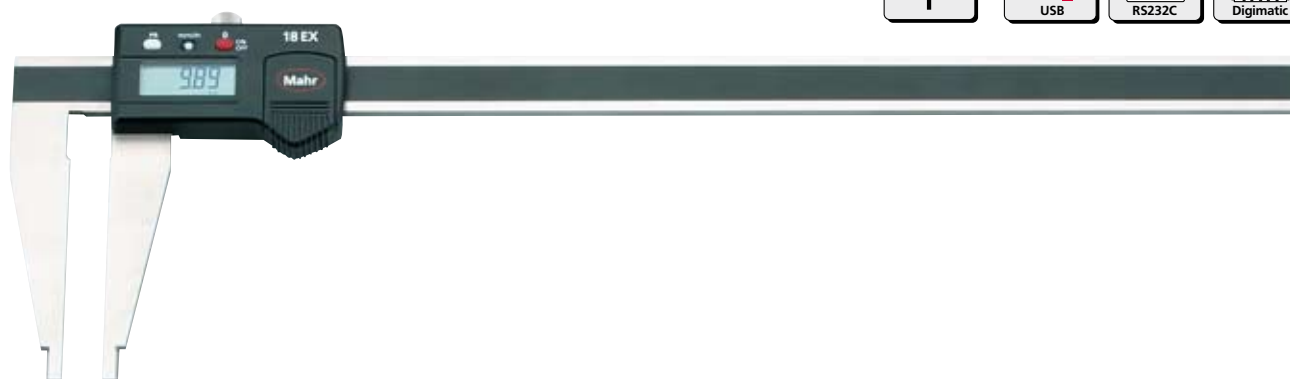

### Features

#### Functions:

ON/OFF  
RESET (Zero setting)  
mm/inch  
PRESET (for entering a numerical value)  
DATA (Data transmission via connection cable)


- Patented capacitive measuring system with an energy saving function, life of the battery approx. 2 years
- Dirt wipers are integrated in the slide
- Max measuring speed 1.5 m/sec (60"/sec)

- MarConnect data output, choose alternatively  
USB  
OPTO RS232C  
Digimatic
- High contrast Liquid Crystal Display with 7.5 mm / 12 mm high digits

- Slide and beam made of hardened stainless steel
- Rounded measuring faces for inside measurement
- Locking screw
- Supplied with:  
Case, battery, operating instructions

### Technical Data

Measuring range	Resolution	Error limit	Order no.
mm (inch)	mm/inch	G mm/inch	
300 (12")	0.01/ .0005"	0.04/ .0015"	4112701
600 (24")	0.01/ .0005"	0.05/ .0020"	4112711
1000 (40")	0.01/ .0005"	0.07/ .0025"	4112721

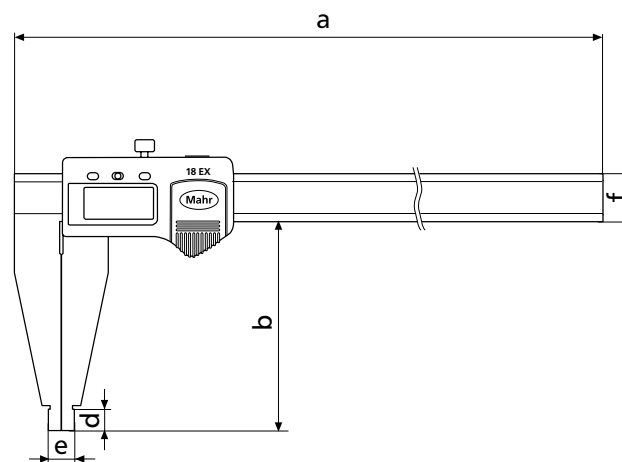

### Accessories

	Order no.
<b>Battery</b> 3V, Type CR 2032	4102520
<b>Data Connection Cable</b> USB (2 m)	16 EXu 4102357
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411
Accessories for Data Processing see Chapter 11	

#### Dimensions

mm/inch	a	b	d	e	f
300/ 12	410/ 16.4	90/ 3.5	10/ .4	10/ .4	19.6 x 4.5/ .70 x .18
600/ 24	750/ 29	125/ 5.0	20/ .8	20/ .8	24.6 x 5.5/ .96 x .22
1000/ 40	1165/ 45	150/ 6.0	20/ .8	20/ .8	29.6 x 6.0/ 1.1 x .25

## Digital Caliper 18 EX with measuring blades for outside measurement



### Features

#### Functions:

ON/OFF  
RESET (Zero setting)  
mm/inch  
PRESET (for entering a numerical value)  
DATA (Data transmission via connection cable)


- Patented capacitive measuring system with an energy saving function, life of the battery approx. 2 years
- Dirt wipers are integrated in the slide
- Max measuring speed 1.5 m/sec (60"/sec)

- MarConnect data output, choose alternatively  
USB  
OPTO RS232C  
Digimatic
- High contrast Liquid Crystal Display with 7.5 mm / 12 mm high digits

- Slide and beam made of hardened stainless steel
- Rounded measuring faces for inside measurement
- Locking screw
- Supplied with:  
Case, battery, operating instructions

### Technical Data

Measuring range	Resolution	Error limit	Order no.
mm (inch)	mm/inch	G mm/inch	
300 (12")	0.01/ .0005"	0.04/ .0015"	4112700
600 (24")	0.01/ .0005"	0.05/ .0020"	4112710
1000 (40")	0.01/ .0005"	0.07/ .0025"	4112720

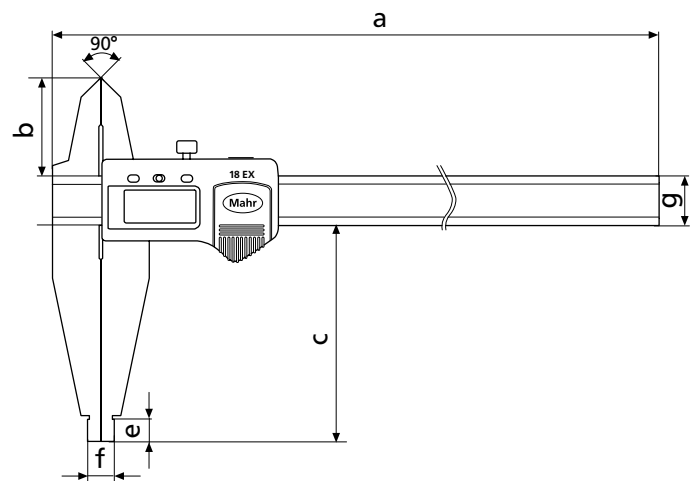

### Accessories


	Order no.
<b>Battery</b> 3V, Type CR 2032	4102520
<b>Data Connection Cable</b> USB (2 m)	16 EXu 4102357
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411

Accessories for Data Processing see Chapter 11

#### Dimensions

mm/inch	a	b	c	e	f	g
300/ 12	410/ 16.4	40/ 1.6	90/ 3.5	10/ .4	10/ .4	19.6 x 4.5/ .70 x .18
600/ 24	750/ 29	55/ 2.2	125/ 5.0	20/ .8	20/ .8	24.6 x 5.5/ .96 x .22
1000/ 40	1165/ 45	60/ 2.4	150/ 6.0	20/ .8	20/ .8	29.6 x 6.0/ 1.1 x .25

## Digital Caliper 18 ESA lightweight construction



### Features

#### Functions:


ON/OFF  
RESET (Zero setting)  
mm/inch  
HOLD (storage of measured values)  
DATA (Data transmission)

- Dirt wipers are integrated in the slide
- Max measuring speed 1.5 m/sec (60"/sec)
- Data output: Opto RS232C (only 300 mm version)
- High contrast Liquid Crystal Display with 6 mm or 10.5 mm high digits

- To reduce the overall weight the slide and beam are made from aluminum and are coated with a hard anodized surface coating (1100HV)
- Measuring faces are made of hardened stainless steel
- Prisma guide ways for a more smooth and even movement

- Measuring blades for outside measurement
- Rounded measuring faces for inside measurement
- Locking screw
- Supplied with: Case

### Technical Data


Measuring range mm (inch)	Resolution mm/inch	Error limit G mm/inch		Weight kg	Order no.
300 (12")	0.01/ .0005"	0.03/ .0015"	•	0.5	4112620
500 (20")	0.01/ .0005"	0.03/ .0015"	-	1.4	4112621
800 (32")	0.01/ .0005"	0.07/ .0025"	-	1.6	4112622
1000 (40")	0.01/ .0005"	0.08/ .0032"	-	1.8	4112623

#### Dimensions

mm	a	b	c	d	e	f	g
300	450.5/17.7	33/1.3	90/3.5	24.5/0.9	10/ .4	10/ .4	25/0.9
500	726/28.6	42/1.7	150/6.0	33.5/1.3	15/0.5	20/ .8	31.9/1.3
800	1006/39.6	42/1.7	150/6.0	33.5/1.3	15/0.5	20/ .8	31.9/1.3
1000	1026/40.3	42/1.7	150/6.0	33.5/1.3	15/0.5	20/ .8	31.9/1.3

### Accessories

	Order no.
<b>Battery</b> 3V, Type CR 2032	4102520
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	16 ESv 4102510
Accessories for Data Processing see Chapter 11	

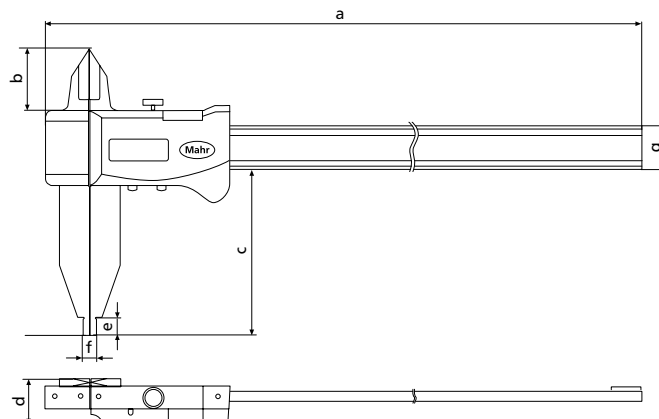

## Caliper 18 NA lightweight construction



### Features


- To reduce the overall weight the slide and beam are made from aluminum and are coated with a hard anodized surface coating (1100HV)
- Measuring faces are made of hardened stainless steel
- Prisma guide ways for a more smooth and even movement
- Measuring blades for outside measurement
- Rounded measuring faces for inside measurement
- Locking screw
- Supplied with: Case, over 1500 mm supplied in a cardboard box

### Technical Data

Measuring range mm	Readings upper mm	lower mm	Error limit G mm	Weight kg	Order no.
300	0.05	0.02	0.03	0.5	<b>4112300</b>
500	0.05	0.02	0.03	1.4	<b>4112301</b>
800	0.05	0.02	0.07	1.6	<b>4112302</b>
1000	0.05	0.02	0.08	1.75	<b>4112303</b>
1500	0.05	0.02	0.16	2.1	<b>4112304</b>
2000	0.05	0.02	0.16	2.5	<b>4112305</b>

### Dimensions

mm	a	b	c	d	e	f	g
300	450.5	33	90	17.5	10	10	25
500	726	42	150	20.7	15	20	31.9
800	1026	42	150	20.7	15	20	31.9
1000	1226	42	150	20.7	15	20	31.9
1500	1760	85	200	25	15	30	48
2000	2260	85	200	25	15	30	48

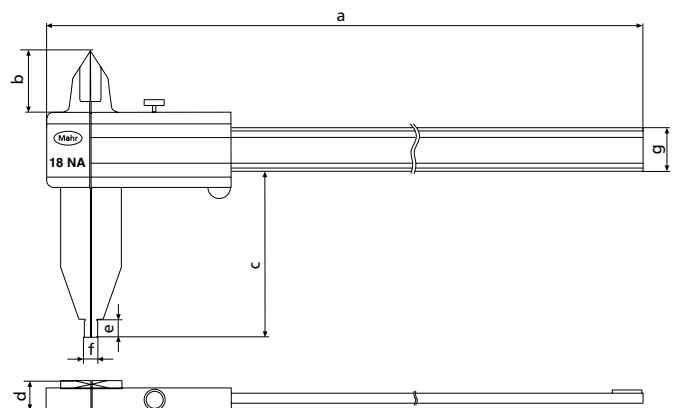



## Vernier Caliper 18 N




### Features

- Vernier and main scale have a satin chrome finish for glare free reading
- Slide and beam made of hardened stainless steel
- Rounded measuring faces for inside measurement
- Supplied with: up to 1000 mm delivered with a case, over 1000 mm individually packed
- Raised guide ways for the protection of the scale
- Locking screw

### Technical Data


Measuring range mm (inch)	Resolution upper	Resolution lower	Error limit G mm	Order no. without fine adjustment	Order no. with fine adjustment
200	0.02 mm	0.02 mm	0.05	<b>4112200</b>	
300	0.02 mm	0.02 mm	0.05	<b>4112201</b>	<b>4112220</b>
300 (12")	<b>.001"</b>	0.02 mm	0.05		<b>4112230</b>
500	0.02 mm	0.02 mm	0.06		<b>4112221</b>
500 (20")	<b>.001"</b>	0.02 mm	0.06		<b>4112231</b>
500	0.05 mm	0.05 mm	0.07	<b>4112210</b>	
800	0.02 mm	0.02 mm	0.08		<b>4112222</b>
800 (32")	<b>.001"</b>	0.02 mm	0.08		<b>4112232</b>
800	0.05 mm	0.05 mm	0.10	<b>4112211</b>	
1000	0.02 mm	0.02 mm	0.08		<b>4112223</b>
1000 (40")	<b>.001"</b>	0.02 mm	0.08		<b>4112233</b>
1000	0.05 mm	0.05 mm	0.12	<b>4112212</b>	
1500	0.02 mm	0.02 mm	0.10		<b>4112224</b>
1500 (60")	<b>.001"</b>	0.02 mm	0.10		<b>4112234</b>
1500	0.05 mm	0.05 mm	0.18	<b>4112213</b>	
2000	0.02 mm	0.02 mm	0.12		<b>4112225</b>
2000 (80")	<b>.001"</b>	0.02 mm	0.12		<b>4112235</b>
2000	0.05 mm	0.05 mm	0.22	<b>4112214</b>	

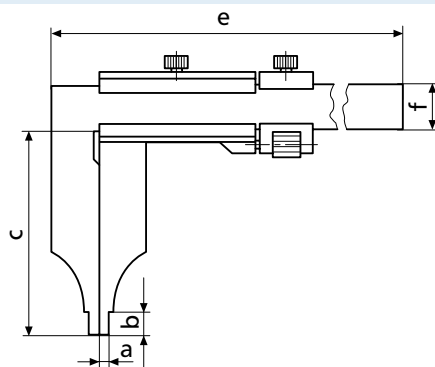

#### Dimensions

mm/inch	a	b	c	e	f
200/8	5/ .2	10/ .40	80/ 3.1	310/ 12	20 x 5/ .80 x .20
300/12	5/ .2	10/ .40	90/ 3.5	410/ 16	20 x 5/ .80 x .20
500/20	10/ .4	19/ .75	150/ 6.0	675/ 26	25 x 6/ 1.0 x .23
800/32	10/ .4	19/ .75	150/ 6.0	985/ 38	30 x 7/ 1.2 x .29
1000/40	10/ .4	19/ .75	150/ 6.0	1185/ 46	30 x 7/ 1.2 x .29
1500/60	15/ .6	19/ .75	200/ 8.0	1760/ 69	40 x 8/ 1.5 x .31
2000/80	15/ .6	19/ .75	200/ 8.0	2270/ 89	45 x 10/ 1.8 x .40

## Vernier Caliper 18 DN with measuring blades for outside measurement

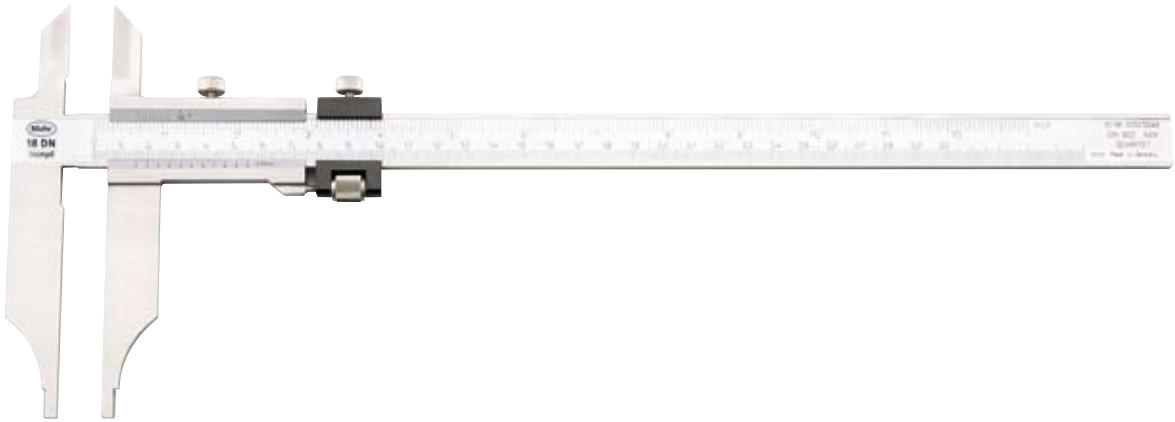


### Features

- Vernier and main scale have a satin chrome finish for glare free reading
- Slide and beam made of hardened stainless steel
- Rounded measuring faces for inside measurement
- Supplied with: up to 1000 mm delivered with a case, over 1000 mm individually packed
- Raised guide ways for the protection of the scale
- Locking screw

### Technical Data

Measuring range mm	Resolution upper mm	Resolution lower mm	Error limit G mm	Order no.	Remarks
200	0.05	0.05	0.05	<b>4113200</b>	without fine adjustment
300	0.05	0.05	0.05	<b>4113201</b>	
500	0.05	0.05	0.07	<b>4113202</b>	
800	0.05	0.05	0.10	<b>4113203</b>	
1000	0.05	0.05	0.12	<b>4113204</b>	
1500	0.05	0.05	0.18	<b>4113205</b>	
2000	0.05	0.05	0.22	<b>4113206</b>	
200	0.02	0.02	0.05	<b>4113300</b>	with fine adjustment
300	0.02	0.02	0.05	<b>4113301</b>	
500	0.02	0.02	0.06	<b>4113302</b>	
800	0.02	0.02	0.08	<b>4113303</b>	
1000	0.02	0.02	0.08	<b>4113304</b>	

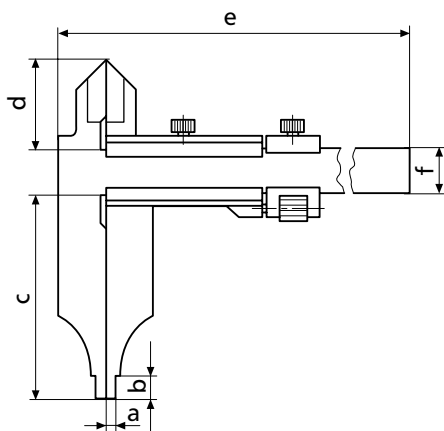

#### Dimensions mm

		a	b	c	d	e	f
<b>18 DN</b>	200 mm	5	10	80	40	310	20 x 5
	300 mm	5	10	90	40	410	20 x 5
	500 mm	10	19	150	60	675	25 x 6
	800 mm	10	19	150	65	985	30 x 7
	1000 mm	10	19	150	67	1185	30 x 7
	1500 mm	15	19	200	86	1760	40 x 8
	2000 mm	25	19	200	96	2270	45 x 10

## Digital Depth Gage 30 EW according to protection class IP67



### Features

#### Functions:

ON/OFF  
0 (Zero setting)  
mm/inch  
PRESET (for entering a numerical value)  
Reference Lock  
Unlock

- Inductive waterproof measuring system FPS (Fluid Protected measuring System) with Reference Lock Function
- Dirt wipers are integrated in the slide


- Life of the battery ca. 2 years
- Max measuring speed 1.5 m/sec (60"/sec)
- High contrast LCD with 7.5 mm high digits
- Lapped guide way

- Beam and cross beam are made of hardened stainless steel
- Locking screw
- Supplied with:  
Case, battery, operating instructions



### Technical Data

Measuring range	Resolution	Error limit	Order no.
mm (inch)	mm/inch	G mm/inch	
150 (6")	0.01/.0005"	0.03/.0015"	4126600
300 (12")	0.01/.0005"	0.04/.0020"	4126601
500 (20")	0.01/.0005"	0.05/.0020"	4126602

#### Depth measurement

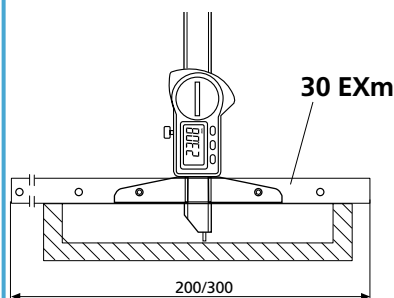

#### Distance measurement

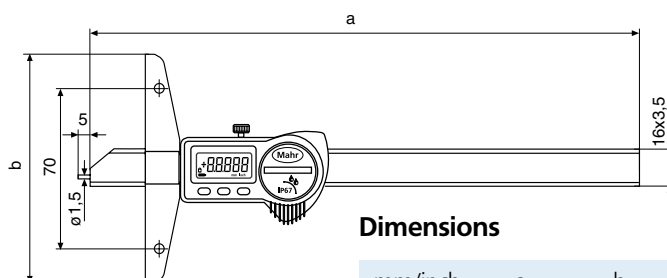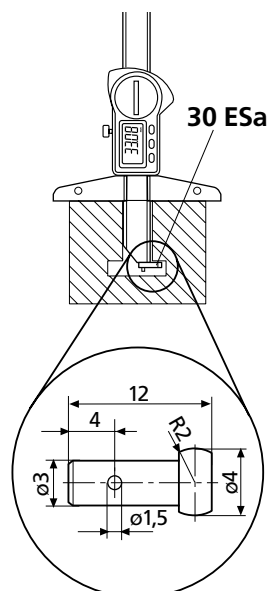

#### Dimensions

mm/inch	a	b
150/ 6	234/ 9.2	100/ 4
300/12	384/ 15.1	150/ 6
500/20	584/ 23	150/ 6

### Accessories

			Order no.
Battery 3V, Type CR 2032			4102520
Cross Beam Extension	200 mm	30 EXm	4126511
	300 mm	30 EXm	4126510
Anvil for distance measurement for fixing to measuring pin		30 ESa	4125611

## Digital Depth Gage 30 EX



### Features

#### Functions:

ON/OFF  
0 (Zero setting)  
mm/inch  
PRESET (entering numerical value)  
DATA (Data transmission via connection cable)

- Patented capacitive measuring system with an energy saving function, life of the battery ca. 2 years


- MarConnect data output, choose alternatively  
USB  
OPTO RS232C  
Digimatic
- Max measuring speed  
1.5 m/sec (60"/sec)

- High contrast LCD with 7.5 mm high digits
- Dirt wipers are integrated in the slide
- Supplied with:  
Case, battery, operating instructions



### Technical Data

Measuring range	Resolution	Error limit	Order no.
mm (inch)	mm/inch	G mm/inch	
150 (6")	0.01/.0005"	0.03/.0015"	4126500
300 (12")	0.01/.0005"	0.04/.0020"	4126501
500 (20")	0.01/.0005"	0.05/.0020"	4126502

#### Depth measurement

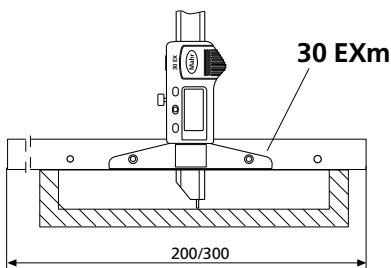

#### Distance measurement

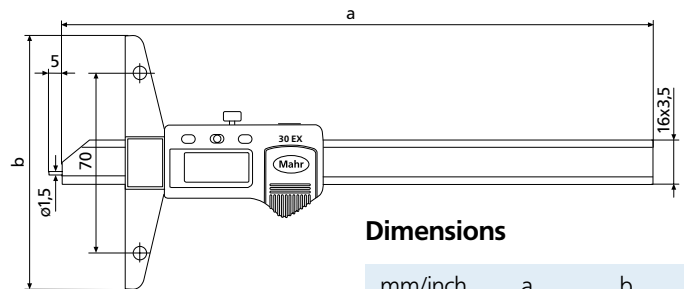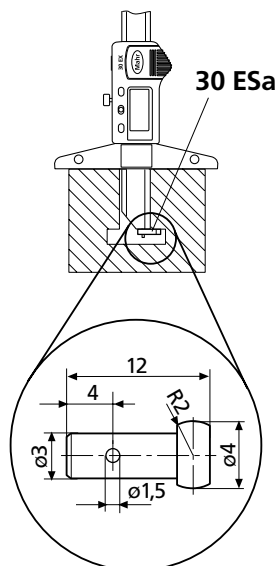

#### Dimensions

mm/inch	a	b
150/ 6	234/ 9.2	100/ 4
300/12	384/ 15.1	150/ 6
500/20	584/ 23	150/ 6

### Accessories

	Order no.
<b>Battery 3V</b> , Type CR 2032	4102520
<b>Data Connection Cable</b> USB (2 m)	16 EXu 4102357
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411
<b>Cross Beam Extension</b> 200 mm	30 EXm 4126511
300 mm	30 EXm 4126510
<b>Anvil</b> for distance measurement for fixing to measuring pin	30 ESa 4125611

Accessories for Data Processing see Chapter 11

## Digital Depth Gage 30 EXN



### Features

#### Functions:




ON/OFF  
0 (Zero setting)  
mm/inch  
Reversal of counting direction  
PRESET (for entering a numerical value)  
DATA (Data transmission via connection cable)

- MarConnect data output, choose alternatively  
USB  
OPTO RS232C  
Digimatic
- High contrast LCD with 7.5 mm high digits
- Dirt wipers are integrated in the slider

- Supplied with:  
Case, battery, anvils 30 ENT (1 mm), 902 and 903, operating instructions

### Technical Data




Measuring range	Resolution	Error limit	Order no.
mm (inch)	mm/inch	G mm/inch	
100 (4")	0.01/.0005"	0.03/.0015"	4126400

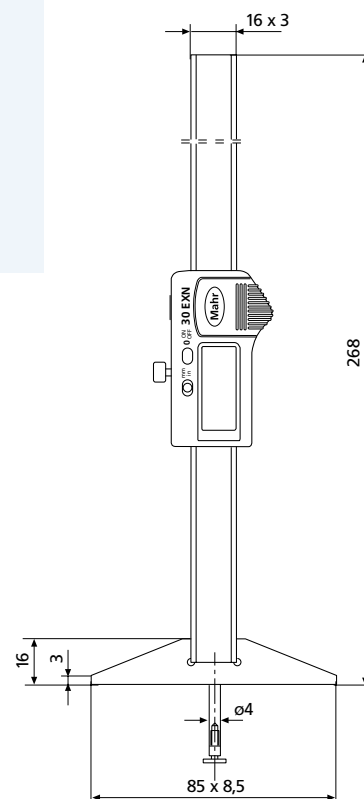

### Accessories


	Order no.
<b>Battery 3V</b> , Type CR 2032	4102520
<b>Data Connection Cable</b> USB (2 m)	16 EXu 4102357
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411
<b>Disc Type Anvil</b> 0.5 mm, hardened	30 ENT 4126310
<b>Disc Type Anvil</b> 1 mm, hardened	30 ENT 4882022

Accessories for Data Processing see Chapter 11





## Double Hook Depth Gages 30 EWD / 30 ND

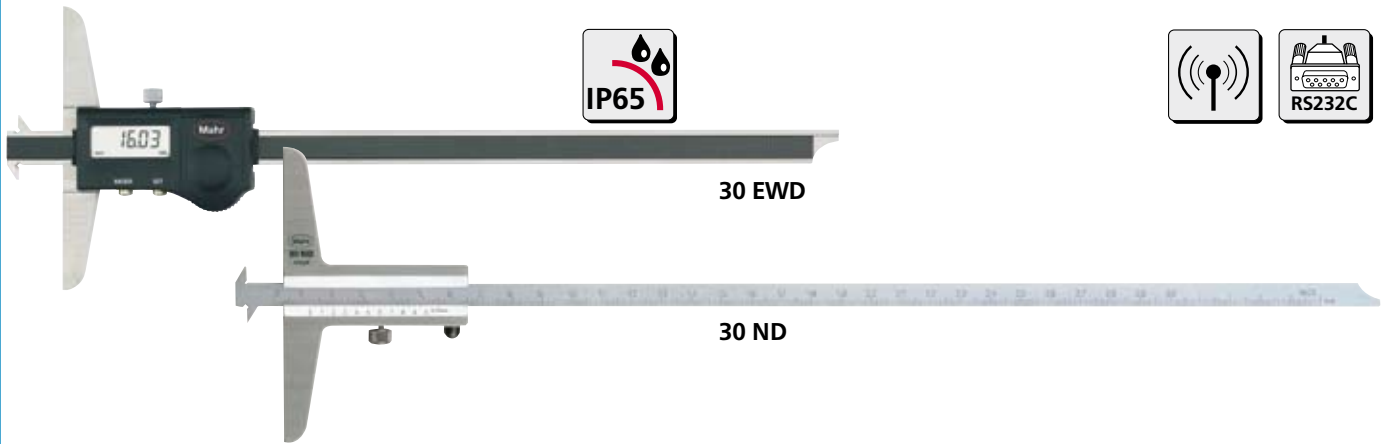

## Features 30 EWD

## Functions:

ON/OFF  
RESET (Zero setting)  
mm/inch  
HOLD (storage of measured values)  
DATA (Data transmission)

- Inductive measuring system with an energy saving function, battery life span ca. 2 years
- Max measuring speed 1.5 m/sec (60"/sec)
- Data output: Opto RS232C via data connection cable
- High contrast LCD with 6 mm high digits
- Slide, beam and cross beam are made of hardened stainless steel
- Locking screw
- Supplied with: Case, battery, operating instructions

## Features 30 ND

- Vernier and main scale have a satin chrome finish for glare free reading
- Reversible beam
- Locking screw
- Slide and beam made of hardened stainless steel
- Raised guide ways for the protection of the scale
- Supplied with: Case


## Technical Data

	Measuring range		Length of cross beam	Resolution	Vernier scale	Error limit <i>G</i>	Order no.
	mm	(inch)	mm/inch	mm/inch	mm	mm/inch	
30 EWD	200	(8")	100/ 3.9"	0.01/ .0005"		0.03/ .0015"	4126610
	300	(12")	150/ 5.9"	0.01/ .0005"		0.03/ .0015"	4126611
30 ND	200		100		0.05		4127410
	300		100		0.05		4127411


## Accessories for 30 EWD

	Order no.
Battery 3V, Type CR 2032	4102520
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9 pin	16 ESv 4102510
Accessories for Data Processing see Chapter 11	

30 EWD

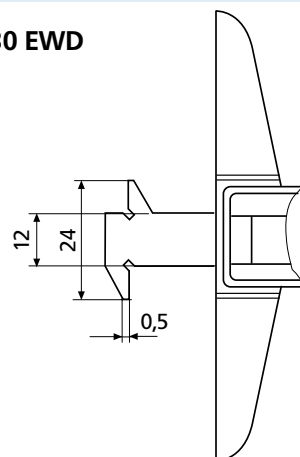


30 ND

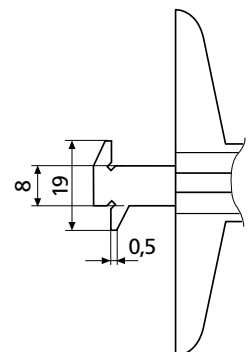

## Depth Gages 30 N / 30 NH

DIN  
862

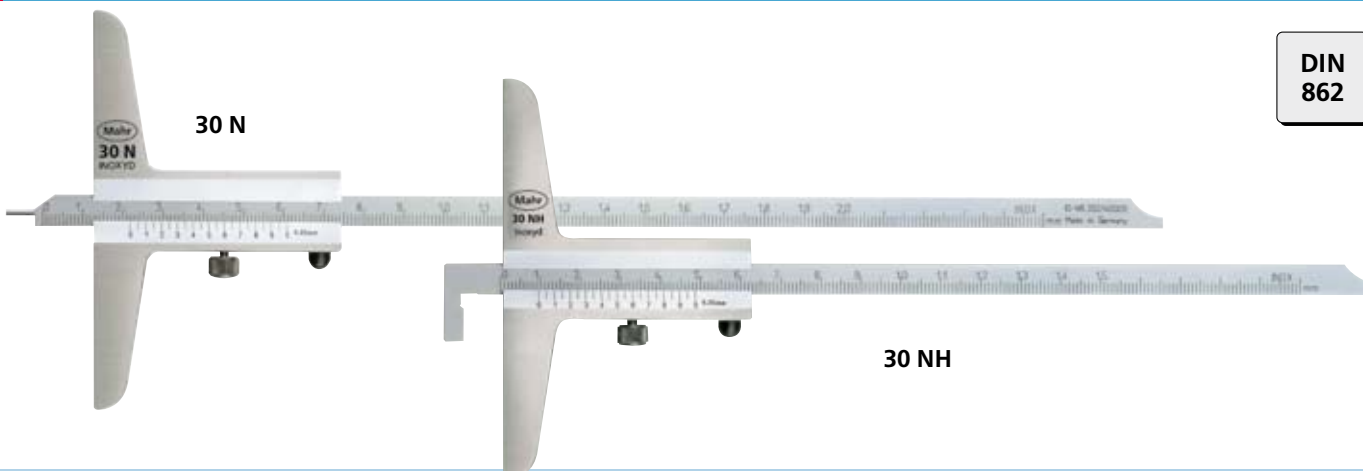


### Features

- Vernier and main scale have a satin chrome finish for glare free reading
- Slide, beam and cross beam are made of hardened stainless steel
- Raised guide ways for the protection of the scale
- Locking screw
- Supplied with: Case


### Technical Data

	Measuring range mm	Vernier scale mm	Error limit G mm	Order no.	Remarks
<b>30 N</b>	80	0.05	0.05	<b>4127200</b>	with hardened measuring pin, reversible beam
	150	0.05	0.05	<b>4127300</b>	
	200	0.05	0.05	<b>4127301</b>	
	300	0.05	0.05	<b>4127201</b>	
	500	0.05	0.07	<b>4127202</b>	
<b>30 NH</b>	150	0.05	0.05	<b>4127350</b>	with hook, reversible beam
	200	0.05	0.05	<b>4127351</b>	
	300	0.05	0.05	<b>4127352</b>	
	500	0.05	0.07	<b>4127353</b>	

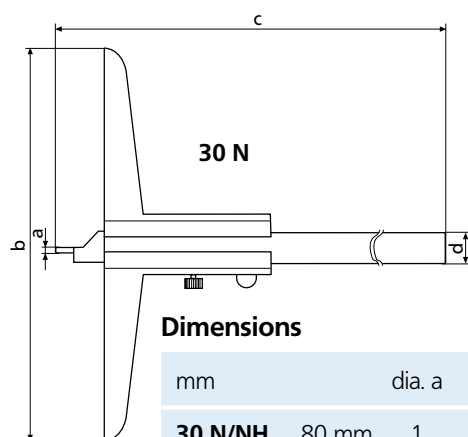

### Dimensions

mm		dia. a	b	c	d	e	f	g
<b>30 N/NH</b>	80 mm	1	50	140	8 x 3	-	-	-
	150 mm	1.5	100	235	8 x 3	20	5	3.5
	200 mm	1.5	100	285	8 x 3	20	5	3.5
	300 mm	2.0	150	390	12 x 4	28	10	4
	500 mm	2.0	150	590	12 x 4	28	10	4

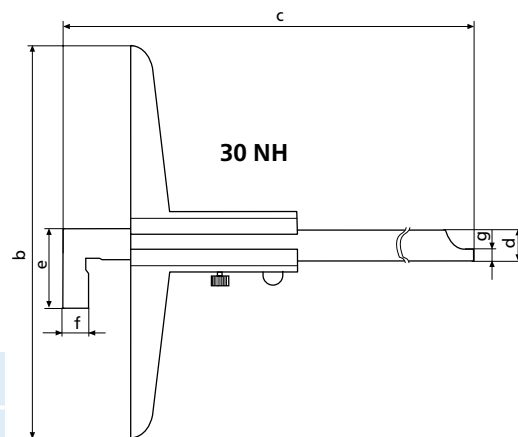

## Digital Linear Machine Scales 31 ES / 32 ES



31 ES




32 ES

## Features

## Functions:

- ON/OFF
- RESET (Zero setting)
- mm/inch
- HOLD (storage of measuring values)
- DATA (Data transmission via connection cable)
- Patented capacitive measuring system, life of the battery approx. 2 years
- Max measuring speed 1.5 m/sec (60"/sec)
- Data output: Opto RS232C via data connection cable
- High contrast LCD with 6 mm high digits
- Slide and beam are made of hardened stainless steel
- Supplied with: Battery and operating instructions

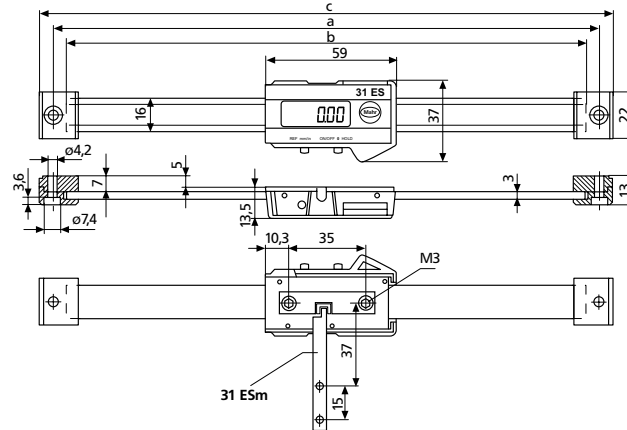

## Application

- For measuring travel on a machine (e.g. on an upright drilling machine, milling machine)

## Dimensions

mm		a	b	c
<b>31/32 ES</b>	100 mm	197	185	209
	150 mm	247	235	259
	200 mm	298	286	310


## Technical Data

	Measuring range mm (inch)	Resolution mm/inch	Error limit G mm/inch	Order no.
<b>31 ES</b> Horizontal display	100 (4")	0.01/ .0005"	0.02/ .0010"	<b>4102600</b>
	150 (6")	0.01/ .0005"	0.03/ .0015"	<b>4102601</b>
	200 (8")	0.01/ .0005"	0.03/ .0015"	<b>4102602</b>
<b>32 ES</b> Vertical display	100 (4")	0.01/ .0005"	0.02/ .0010"	<b>4102620</b>
	150 (6")	0.01/ .0005"	0.03/ .0015"	<b>4102621</b>
	200 (8")	0.01/ .0005"	0.03/ .0015"	<b>4102622</b>

## Accessories

	Order no.
<b>Drive-Type Device</b> for instruments with a resolution of 0.01mm	
<b>Battery</b> 3V, Type CR 2032	<b>31 ESm</b> <b>4102651</b>
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	<b>16 ESv</b> <b>4102510</b>

Accessories for Data Processing see Chapter 11

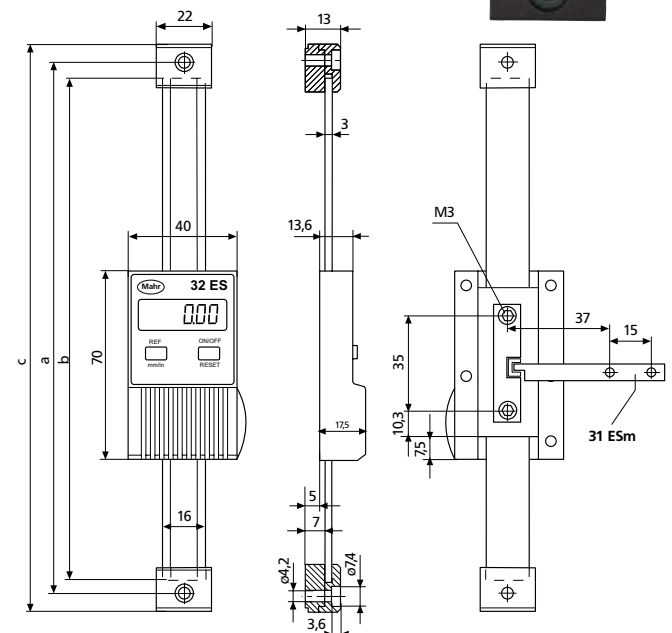

## DO YOU WANT TO AIM EVEN HIGHER? FOR THIS THERE IS DIGIMAR.



The latest information on DIGIMAR products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 204**

► | Mahr offers you the complete product program in order for you to obtain the most reliable solution for all your measuring tasks. Whether it's simply scribing a work piece or complex measurements in two dimensions - Digimar Height Measuring Instruments guarantee a maximum of both flexibility and quality. Our motorized Height Measuring Instruments Digimar 817 CLM and CX2 exceed all customer requirements; they are simple to operate, all the basic functions can be executed with a single key as well as offering a maximum of ease and accuracy.



## ► | Digimar. Height Measuring Instruments

<b>Overview</b>	
<b>Digimar Height Measuring Instruments</b>	<b>2- 2</b>
<b>Motorized Height Measuring Instruments</b>	
<b>Digimar 817 CLM Quick Height</b>	<b>2- 4</b>
High-End Height Measuring Instrument with 2D and Statistics function	
<b>Accessories for 817 CLM</b>	<b>2-13</b>
<b>Digimar CX2</b>	<b>2-16</b>
Height Measuring Instrument for the workshop and test labs	
<b>Accessories for CX2</b>	<b>2-19</b>
<b>Manual Height Measuring Instruments</b>	
<b>Digimar M 814 N / M 814 G</b>	<b>2-21</b>
With Cast Iron Base or Granite Table Plate	
<b>Accessories for Digimar M 814</b>	<b>2-22</b>
<b>Height Measuring and Scribing Instrument</b>	
<b>Digimar 814 S</b>	<b>2-23</b>















# Digimar. Height Measuring Instruments





## Overview

Digimar 817 CLM "Quick Height"



	Digimar 817 CLM "Quick Height"					
Catalog page	2-4	2-4	2-4	2-4	2-4	2-4
Measuring range mm/inch	0-350 / <b>0-14"</b>		0-600 / <b>0-24"</b>		0-1000 / <b>0-40"</b>	
Application range up to mm/inch	520 / <b>20.47"</b>		770 / <b>30.35"</b>		1170 / <b>46.06"</b>	
Measuring error* in µm	1.8+L/600 (L in mm)		1.8+L/600 (L in mm)		1.8+L/600 (L in mm)	
Quick Mode	●		●		●	
1-D 	●	●	●	●	●	●
2-D 	—	●	—	●	—	●
Motorized measuring carriage	●		●		●	
Scribing/markings work pieces 						
Bore diameter 	●		●		●	
Max-Min 	●		●		●	
Tolerance monitoring 	●		●		●	
Perpendicularity measurement 	●		●		●	
Straightness measurement 	●		●		●	
Angle calculation 			●		●	
Statistics 	—	●	—	●	—	●
Measuring programs 	40		40		40	
Air bearings	●		●		●	
Integrated USB memory 	●		●		●	
Interface	RS232		RS232		RS232	
USB printer interface 	●		●		●	
<b>Order no.</b>	<b>4429000</b>	<b>4429010</b>	<b>4429001</b>	<b>4429011</b>	<b>4429002</b>	<b>4429012</b>

\* with standard accessories

Digimar CX2			Digimar M 814 N		Digimar M 814 G		Digimar 814 S	
								
2-16	2-16	2-16	2-21	2-21	2-21	2-21	2-23	2-23
0-350 / <b>0-14"</b>	0-600 / <b>0-24"</b>	0-1000 / <b>0-40"</b>	0-320 / <b>0-12"</b>	0-620 / <b>0-24"</b>	0-320 / <b>0-12"</b>	0-620 / <b>0-24"</b>	0-350 / <b>0-14"</b>	0-600 / <b>0-24"</b>
685 / <b>26.97"</b>	935 / <b>36.81"</b>	1335 / <b>52.25"</b>	320 / <b>12.6"</b>	620 / <b>24.4"</b>	320 / <b>0-12.6"</b>	620 / <b>24.4"</b>	300 / <b>12"</b>	600 / <b>24"</b>
5+L/300 (L in mm)			20	30	20	30	30	30
•	•	•	•	•	•	•	•	•
•	•	•						
•		•	•		•		•	•
•	•	•	•		•		•	•
•	•	•	•		•		•	•
•	•	•	•		•		•	•
•	•	•						
1	1	1						
		•						
RS232			Opto RS232		Opto RS232		RS232, Digimatic, USB	
5320104	5320102	5320103	4426540	4426542	4426541	4426543	4123800	4123801

## Digimar 817 CLM Quick Height

► | The new Height Measuring Instrument **Digimar 817 CLM** with the innovative Quick Mode. Highly accurate rapid measurements, a wide range of measuring and evaluation possibilities and excellent operator comfort.

### The best solution for all measuring tasks



#### Fast measurement by Hand

Easy to operate due to the "Quick Mode", an innovative solution from Mahr (patent pending)



Ill. 1. Move the measuring carriage by hand in the direction of the object to be measured.



Ill. 2. The motor starts, the measurement procedure will automatically be performed.

**Comfort to operate all measurement functions with the function keys** due to the clearly defined symbols.




### Highest accuracy and reliability

- Extremely accurate incremental measuring system with double reader head system, insensitive to the contamination of dirt
- Robust guide column, made from stainless steel
- Measuring head in precision ball bearings guide
- Temperature compensation with an integrated temperature sensor



## Ergonomic operating and display unit

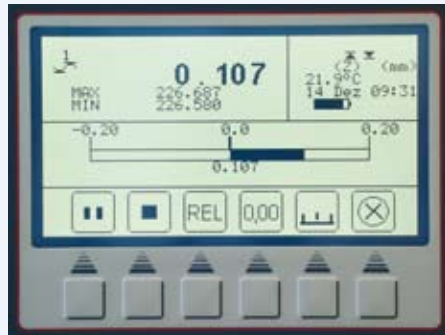


- Large, back-lit display
- Self-explanatory guided operation with icons



- The display unit can be positioned freely with the swivel arm


## Universal measurement possibilities

- Wide range of measurement functions in 1D or 2D (optional)
- Dynamic measurement functions with the analog display
- Automatic perpendicularity and straightness measurements (in conjunction with accessories)
- Automated measuring procedures (measurement programs)
- Auto function for chain measurements and distance measurements

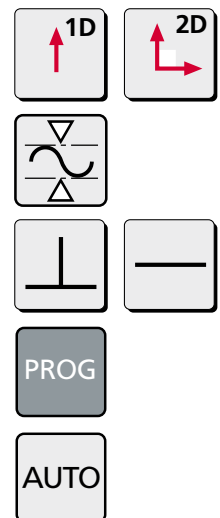

## Extensive evaluation possibilities

- Transmit data to a PC via RS232 or USB (with an adapter) for example into MS Excel via the MarCom-Software
- Print measured values, statistics, etc. via a USB printer
- Save measured values in the integrated USB memory (will be recognized by a PC as an interchangeable disc drive)
- Broad range of statistical evaluations are available (optional)

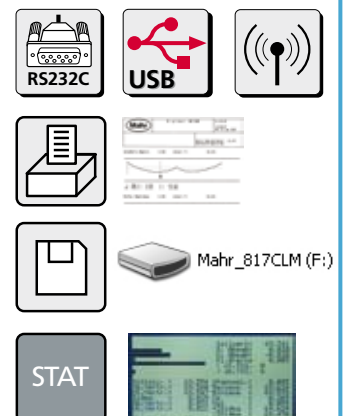

## Height Measuring Instrument Digimar 817 CLM



### Features

#### Measuring system

- Excellent accuracy and reliability due to the optical incremental measurement system with the double reader head
- Dynamic probing system enabling high repeatability
- Air bearings system for light and smooth movement
- Precise measuring head on stainless steel guideways
- Motorized measuring carriage simplifies measurement runs
- Probe constant remains after the instrument is switched off
- Integrated rechargeable battery with a long operating time span for mains independent measurement
- Temperature compensation with an integrated temperature sensor

#### Operating and display unit

- Large and clearly defined function keys
- Easy to read background lit graphic LCD-Display
- Operator guidance with self-explanatory icons / pictograms
- Operator prompts and menus are available in several different languages
- Possible to set additional zero points on a work piece
- RS232 and / or USB data output for further data processing
- Save measured data on the integrated USB memory
- USB interface to connect a compatible USB printer
- Additional measuring instruments with OptoRS232-interface can be connected
- Secure the future due to software update potential
- Automatic Stand-by mode / background lit display can be switched off after defined length of time to save power
- Selectable Auto-off function, without loss of measured values
- Supplied with:  
Height Measuring Instrument incl. operating and display unit, carrier 817h1, probe K6/51, setting block 817eb, operating instructions, mains power adapter, USB cable

### Technical Data



Measuring range	mm / <i>inch</i>	350 / <b>14"</b>	600 / <b>24"</b>	1000 / <b>40"</b>
Range of application	mm / <i>inch</i>	520 / <b>20.47"</b>	770 / <b>30.31"</b>	1170 / <b>46.06"</b>
Resolution	mm <i>inch</i>	0.01 / 0.005 / 0.001 / 0.0005 / 0.0001 <b>0.001" / 0.0005" / 0.0001" / 0.00005" / 0.00001"</b>		
Measuring error*	µm	(1.8+L/600). L in mm		
Repeatability	µm	0.5 (plane) 1 (bore)		
Perpendicularity error (elect. adjusted)	µm	frontal ≤5	frontal ≤6	frontal ≤10
Operating time of rechargeable battery	h	up to 16		
Measuring force	N	1.0 ±0.2		
Permissible relative air humidity	%	65 (non condensed)		
Working temperature	°C / °F	20 ±1 / 68 ±33.8		
Operating temperature	°C / °F	10 ... 40 / 50 ... 104		
3-point air cushion, height	µm	ca. 9		
Measuring system		incremental scale with optical reading		
Total height	mm / <i>inch</i>	741 / <b>29.17"</b>	985 / <b>38.78"</b>	1392 / <b>54.80"</b>
Base area (L x W)	mm / <i>inch</i>	240 x 250 / <b>9.45" x 9.84"</b>		
Weight	kg / lbs	25 / <b>55.15</b>	30 / <b>66.14</b>	35 / <b>77.16</b>
Order no. 1D		<b>4429000</b>	<b>4429001</b>	<b>4429002</b>
Order no. 2D / Stat		<b>4429010</b>	<b>4429011</b>	<b>4429012</b>

\* Surface base plate according to DIN 876/0 with standard accessories



## Height Measuring Instrument Digimar 817 CLM

### Operating and display unit

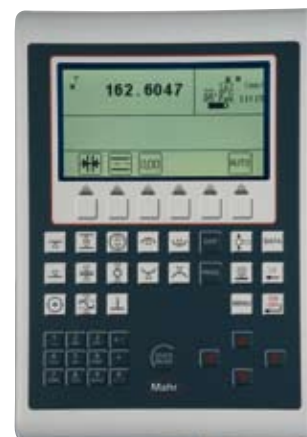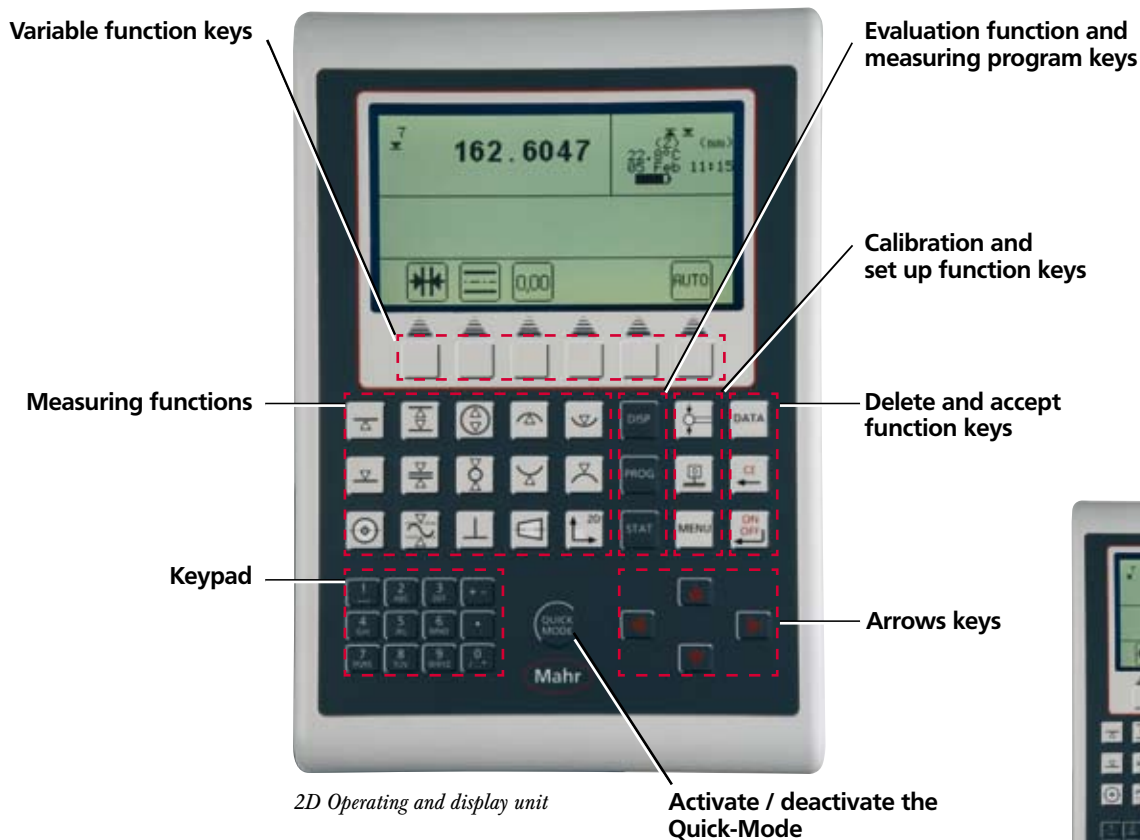


Operating and display unit		1D	2D / Stat
<b>Measurement</b>			
One dimensional (1D)		●	●
Two dimensional (2D)			●
Measuring programs (automatic run)		40	40
Perpendicularity / straightness measurement		●	●
Flatness / parallel deviation (Max, Min)		●	●
Roundness / run-out deviation (Max-Min)		●	●
<b>Evaluation</b>			
- Statistics			●
- Transmit measured values to a PC via RS232		●	●
- Print measured values and diagrams on a USB printer		●	●
- Print out statistical evaluation			●
- Save measured values on the integrated USB memory		●	●

## Height Measuring Instrument Digimar 817 CLM

### Measuring with the function keys

Comfortable 1D standard measuring functions with a semi automatic run

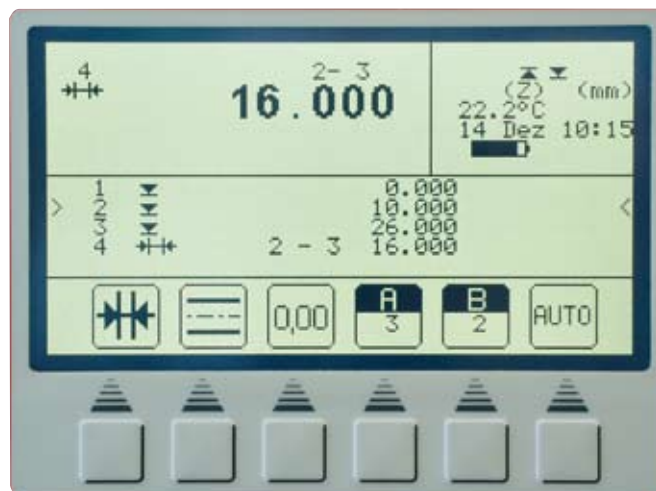

- Contacting a surface from above



- Contacting a surface from below



- Measuring a groove (center and width)



- Measuring a ledge (center and width)



- Measuring a bore (center and diameter)



- Contacting a bore from below



- Contacting a bore from above



- Measuring a shaft (center and diameter)



- Contacting a shaft from above




- Contacting a shaft from below



- Determining the center of a bore (with a taper probe)



- MAX-MIN Function

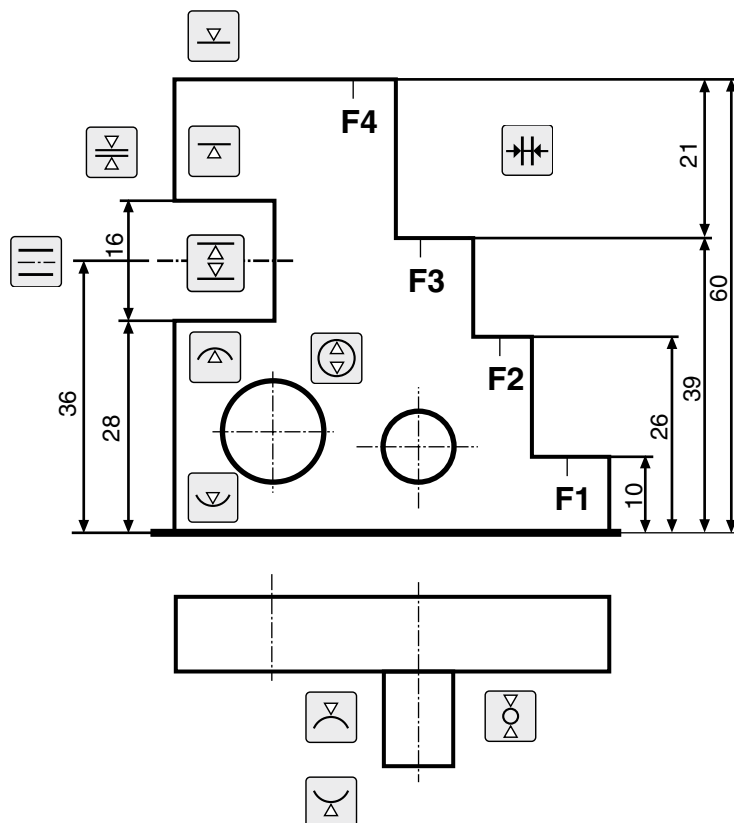

### Calculation functions



- Calculate the distance between 2 measured values



- Calculate the symmetry between 2 measured values



- Chain measurements and distance measurements F1 to F4



- Automatically set the zero point

## Height Measuring Instrument Digimar 817 CLM



### Measuring with Quick Mode

Ideal for fast and simple measurement



1. Move the measuring carriage by hand in the direction of the object to be measured.



2. The motor starts, the measurement procedure will automatically be performed.

### Measurement using the keypad (speed keys) on the base



**Ideal in conjunction with the air bearings for large work pieces.**

By using the keys that are integrated into the base; the operator can comfortably move the measuring carriage into the desired position and start a measurement. This eases measurement particularly when measuring large workpieces as these do not have to be moved into position. The operator can keep both hands on the measuring instrument (one hand on the key for the air bearing and other on the high-speed keys) and measure the workpiece in one run.





## Height Measuring Instrument Digimar 817 CLM



### Perpendicularity and Straightness Measurements

Only one measurement required to determine perpendicularity and straightness deviation.

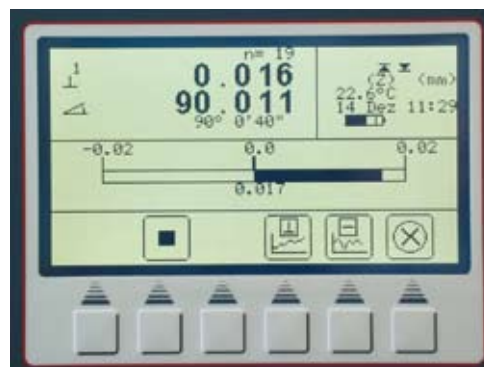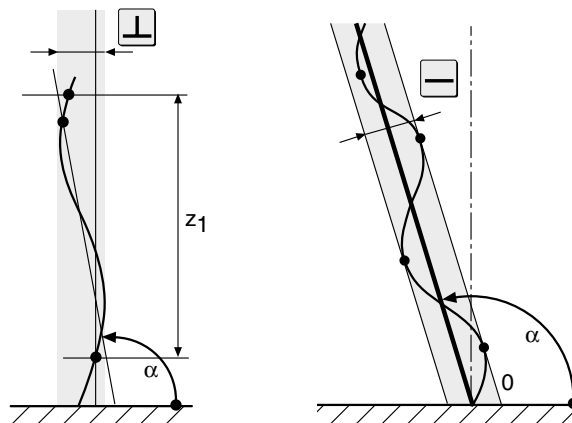

- Display shows the deviation of an angle (in degrees) and the deviation in mm (metric)
- The bar graph display shows the actual value, thus improving visualization

### Comprehensive evaluation possibilities

- Display on the screen




- Save the data in the USB memory



Mahr\_817CLM (F:)



- Print data via a USB printer

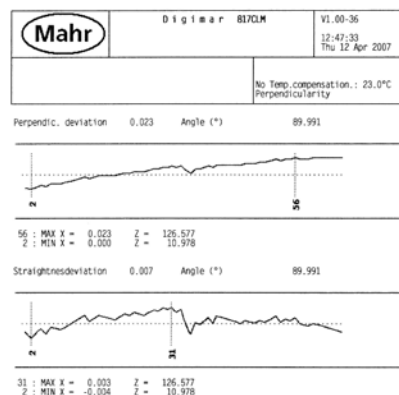


## Height Measuring Instrument Digimar 817 CLM




### Dynamic measuring functions


Only one measurement required to determine Maximum, Minimum and Maximum-Minimum.

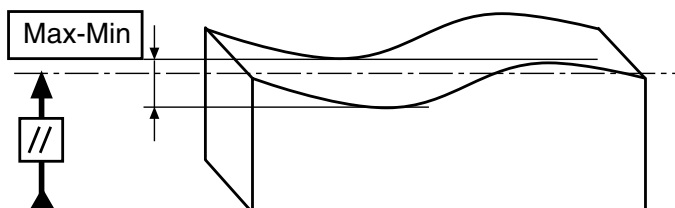

- Parallel deviation

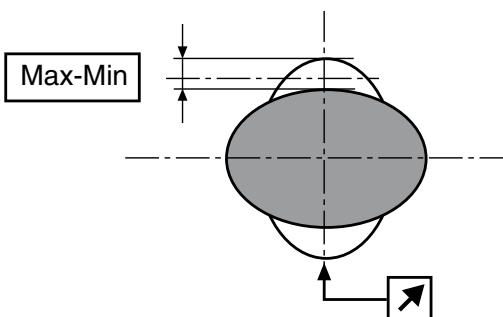

- Roundness deviation

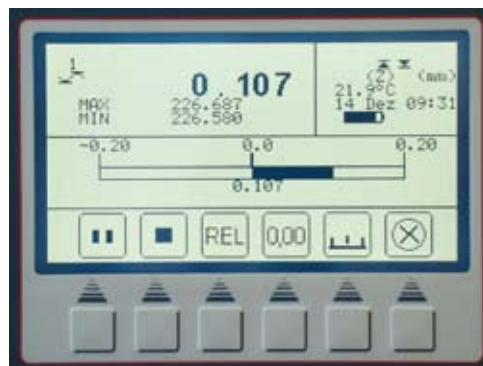

- MAX, MIN and MAX-MIN are displayed simultaneously
- The bar graph display shows the actual value, thus improving visualization

PROG

### Measuring program for repetitive measurements / serial components

Use the Teach-in mode to quickly devise a measuring program. Simply measure a work piece once; save this measurement and the measuring program is already created. The motorized carriage will travel automatically to the measuring position, the measuring function will start automatically. This greatly reduces the inspection time for a mini series consisting of only a few test pieces.

- Measuring programs in 1D and 2D
- Create measuring programs with the Teach-In-mode
- Simple programming and storage of up to 40 measuring programs, further measuring programs can be stored on a PC
- Tolerance monitoring during a measuring program
- Create production and inspection schedules
- Connection of additional hand measuring instruments with an Opto-RS232-interface is also available





## Height Measuring Instrument Digimar 817 CLM

### 2D Measure in the 2D mode\*

The most important 2D measurement functions can be conducted by pressing just one key.



- Determine an index circle




- Determine the distance and angle 2 elements



- Determine the distance and angle 3 elements





- Coordinate transformation

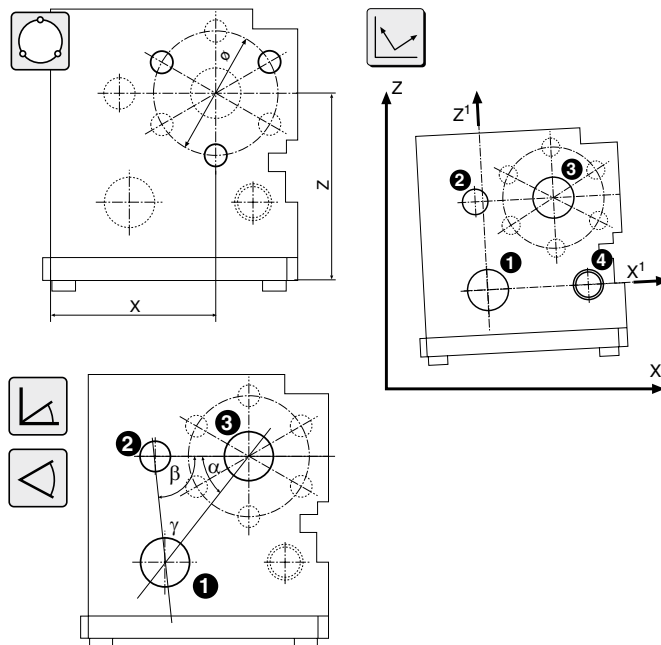

### STAT Statistical Evaluation\*

The operating unit has extensive and selective possibilities for statistical evaluation.

- Statistical evaluation of individual features
- Histograms
- Process control charts
- Pareto diagrams
- Creation of production and inspection schedules
- Evaluation based on stored measurement data
- Histograms, process control charts and Pareto diagrams can be directly printed on a USB printer

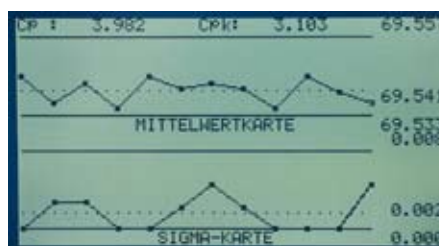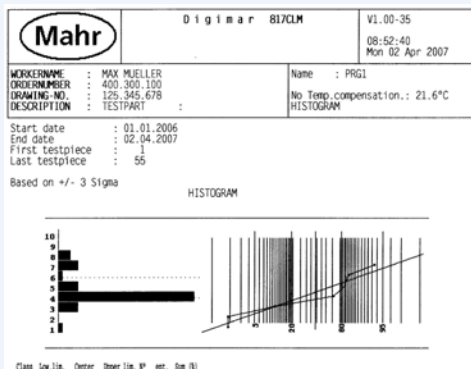

\* Only available with instruments that have a 2D / Stat. operating / display unit



## Height Measuring Instrument Digimar 817 CLM


### Accessories

#### Spherical probes


Catalog no.	Ball dia. D mm	Shaft length mm	Mount dia. mm	Order no.
K5/51	5	26.8	6	4429158
K6/51	6	24.2	6	4429254*
K4/30	4	31	8	7023813
K6/40	6	41	8	7023816
K10/60	10	62	8	7023810
K10/100	10	103	8	7023615

\* supplied with standard accessories


K 5/51




K 6/51




K 6/40




K 4/30



K 10/60




K 10/100




#### Special probes

Catalog no.	Description	Mount dia. mm	Order no.
S15/31,2	Disc probe	6	4429226
Z10/31,2	Cylindrical probe	6	4429227
Z10/60	Cylindrical probe	8	7023819
MKe 30	Taper probe	6	4429228
TMT 120	Spherical probe to measure recesses incl. carrier		4429221
KM 2	Probe M2 incl. styli 800 ts dia. 2 mm	6	4429256


S 15/31,2




MKe 30




Z 10/31,2




TMT 120



Z 10/60



KM 2



#### Setting blocks


Catalog no.	Description	Order no.
817 eb	Setting block	4429168*
EB I	Setting block for taper probe, with calibration certificate	7023827

\* supplied with standard accessories

817 eb



EB I



## Height Measuring Instrument Digimar 817 CLM

### Accessories

#### Carrier for probes and transducers


Catalog no.	Description	Shaft length mm	Mount dia. mm	Order no.
<b>817 h1</b>	Carrier for probes	27.5	6	<b>4429154*</b>
<b>817 h2</b>	Carrier for probes	100	6	<b>4429219</b>
<b>817 h3</b>	Carrier for Digital indicator / Incremental probes		8	<b>4429206</b>
<b>817 h4</b>	Carrier for probes		8	<b>4429220</b>

\* supplied with standard accessories


#### Transducers for measuring perpendicularity

Catalog no.		Order no.
<b>P1514 H</b>	Incremental probe, 12 mm incl. cable	<b>4426810</b>
<b>1086</b>	Digital indicator, 12.5 mm Resolution 0.001 / .00005"	<b>4337020</b>
<b>16 EXr</b>	Data cable for digital indicator 1086	<b>4102410</b>


817 h1



817 h3




P1514 H

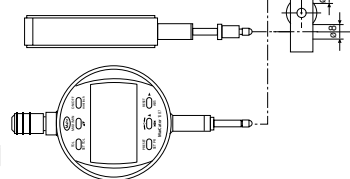


16 EXr

1086

817 h2




817 h4



#### Data connection cable

	Order no.
<b>Data cable</b> 817 CLM to MSP 2 / PC	<b>7024634</b>
<b>Adapter cable</b> RS232-USB for Digimar 817	<b>4102333</b>

Accessories for Data Processing see Chapter 11

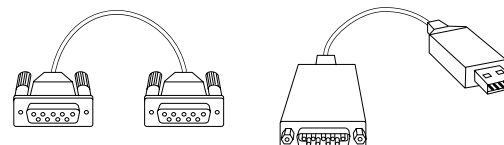

### Printer

#### HP-Deskjet 5940

- Standard connectivity: USB - compatible with USB 2.0 specifications, PictBridge
- Compatible operating systems: Microsoft® Windows® 98 SE, Me, 2000, XP (Home and Professional)
- Standard printer languages HP PCL 3 – GUI



HP 5940 Deskjet, Photo printer

Order no.

4429015

## Height Measuring Instrument Digimar 817 CLM

### Probe accessory sets

#### Probe set 817 ts1 consists of: 4429019

	Carrying case	4429020
<b>817 h2</b>	Carrier for probes	4429219
<b>S15/31,2</b>	Disc probe	4429226
<b>Z10/31,2</b>	Cylindrical probe	4429227
<b>MKe 30</b>	Taper probe	4429228
<b>TMT 120</b>	Spherical probe to measure recesses incl. carrier	4429221
<b>KM 2</b>	Probe M2 incl. for MarTest styli M2	4429256
<b>817 h4</b>	Carrier for probes	4429220
<b>K4/30</b>	Spherical probe	7023813
<b>K6/40</b>	Spherical probe	7023816
<b>K10/60</b>	Spherical probe	7023810
<b>K10/100</b>	Spherical probe	7023615




817 ts1

#### Probe set 817 ts2 consists of: 4429018


	Carrying case	4429020
<b>817 h2</b>	Carrier for probes	4429219
<b>S15/31,2</b>	Disc probe	4429226
<b>Z10/31,2</b>	Cylindrical probe	4429227
<b>MKe 30</b>	Taper probe	4429228
<b>TMT 120</b>	Spherical probe to measure recesses incl. carrier	4429221
<b>KM 2</b>	Probe M2 for MarTest styli M2	4429256

#### Universal probe set CXt2 consists of: 7034000


Case			3015925
Probe carrier			3015917
Measuring crook	Dimension d = 0.5 mm	Shaft length l = 78 mm	3015918
Probe pin /tip:	dia. d = 1.2 mm	l = 75 mm	3015919
		ls = 15.5 mm	
Taper probe	dia. d = 0–7.5 mm		3015920
Spherical probe	TC dia. dk = 3 mm	l = 24 mm	3022000
Spherical probe	TC dia. dk = 2 mm	l = 24 mm	3022001
Spherical probe	TC dia. dk = 1 mm	l = 24 mm	3022002
Extension M3 – M3	d = 4 mm	l = 20 mm	3015921
Extension M3 – M2.5	d = 4 mm	l = 20 mm	3015888

Measuring  
crook


Pin probe




Probe carrier




Taper probe



Spherical probe



Extension



## Height Measuring Instrument Digimar CX2



### Digimar CX2. 350 / 600 / 1000 mm (14" / 24" / 40")

The perfect partner, for use in workshop and inspection areas! Obtain your measurement results without complicated procedures; simple, fast and accurate! The Digital Height Measuring Instrument Digimar CX2 is your perfect partner for use in workshop and inspection areas.

### Features

#### Measuring System

- Extremely accurate due to the capacitive incremental measuring system
- Dynamic probing system enables high repeatability
- Precise measuring head
- Motorized measuring carriage simplifies the measuring task and minimizes the influence caused by the operator
- Switch between Absolute and Relative modes
- Probe constant remains even after switching off
- Battery operated air pump for both easy and smooth movement (CX2, 1000 mm/ 40")

#### Operating and Display Unit

- Large, easy to read operating buttons
- Easy to read Liquid Crystal Display
- RS232 data output for transmitting data for further data processing
- Interface for a Digital Indicator for conducting perpendicularity measurements
- Integrated rechargeable battery with a long operating time for mains independent measurements
- Auto-off function

### Technical Data

Measuring range	mm/ <i>inch</i>	350 / 14"	600 / 24"	1000 / 40"
Application range	mm/ <i>inch</i>	685 / 26.97"	935 / 36.81"	1335 / 52.25"
Resolution	mm <i>inch</i>		0.01 / 0.001 <b>0.0001" / 0.00005"</b>	
Measuring error* (U95)	µm		(5+L/300), L in mm	
Repeatability*	µm		2 (plane) 3 (bore)	
Perpendicularity error (electrically adjusted)	µm	≤9	≤15	≤25
Operating time between charges	h	up to 100	up to 100	up to 15
Measuring force	N		1.0 ±0.3	
Permissible relative air humidity	%		65 (non condensed)	
Working temperature	°C / °F		20 ±1 / 68 ±33.8	
Operating temperature	°C / °F		10 ... 40 / 50 ... 104	
3-Point air cushion, height	µm	—	—	Yes (ca. 3)
Measuring system			Incremental capacitive	
Total height	mm/ <i>inch</i>	741 / 29.17"	985 / 38.78"	1392 / 54.80"
Base area (L x W)	mm/ <i>inch</i>		240 x 250 / 9.45" x 9.84"	
Weight	kg/lbs	14 / 30.86	16 / 35.27	26 / 57.32
Order no.		5320104	5320102	5320103

\* Base plate GK 0 according to DIN 876 with Probe K10/50

## Height Measuring Instrument Digimar CX2

### Measuring Functions

#### 1D-Standard measurement functions in semi-automatic mode

Use the quick operating keys to rapidly obtain accurate results.



- Contacting a surface from above



- Contacting a surface from below



- Measuring a groove (center and width)



- Measuring a bore (center and diameter)



- Contacting a bore from below



- Contacting a shaft from above



- Contacting a bore from above





- Contacting a shaft from below



5

- Determining the center of a bore (with a taper probe)

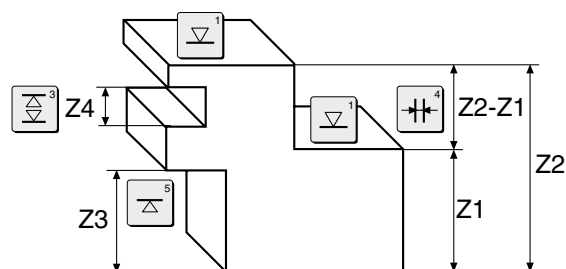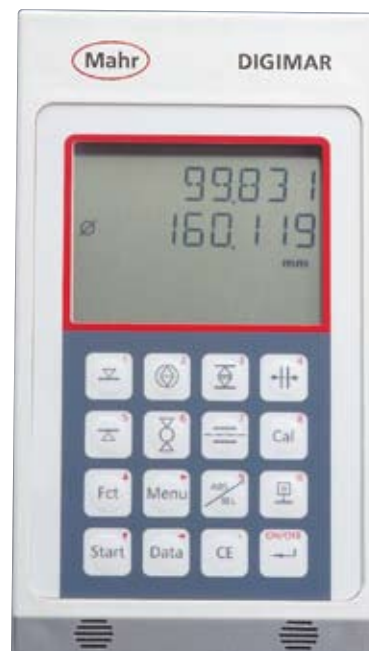


#### Calculation functions



- Calculate the distance between 2 measured values






- Calculate the symmetry between 2 measured values

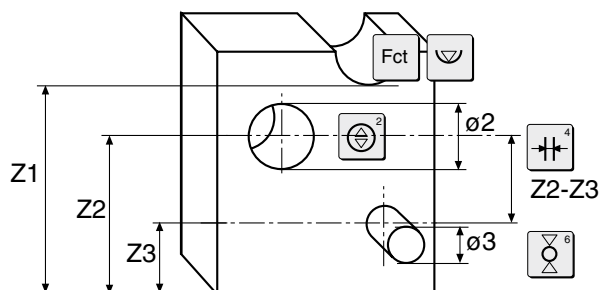

## Height Measuring Instrument Digimar CX2


### Perpendicularity Measurements

- Automatic and semi-automatic

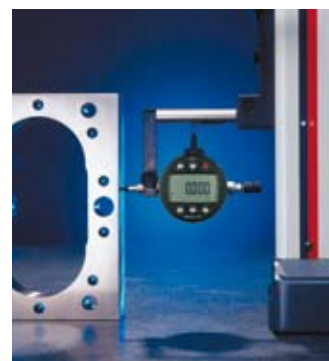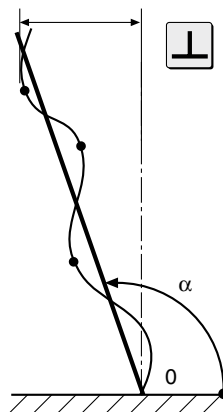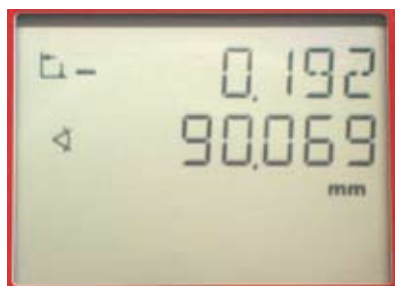


### Dynamic measurements

- Parallel deviation

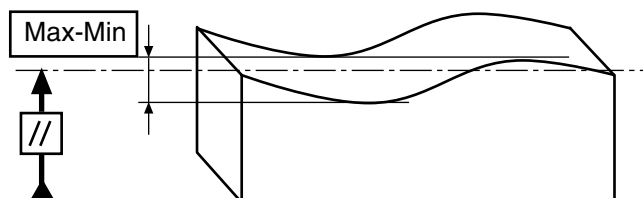


- Roundness deviation

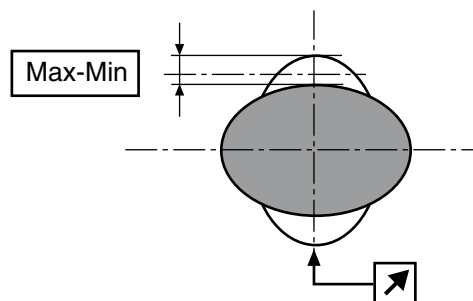

### Measuring program

With the Teach-in mode, measuring programs can be simply generated, for example a work piece can be measured; the results and operating steps can be immediately stored. The motorized measuring carriage travels to the measuring position and the measuring function will start automatically. This greatly reduces the inspection time for small component batches.

- Generate a Teach-In mode
- Simply program and store up to 20 features
- Monitoring tolerances via the measuring program
- The measuring program remains stored even when the CX2 is switched off.



*Tolerance monitoring via the measuring program*






## Accessories for Height Measuring Instrument Digimar CX2

### Spherical Probes


Catalog no.	dia. D mm	(inch)	A mm	(inch)	Order no.
817 CI-r	4	(.157")	90	(3.54")	4426498
K 4/72	4	(.157")	71	(2.78")	7023609
K 4/30	4	(.157")	30	(1.18")	7023813
K 6/40	6	(.236")	40	(1.57")	7023816
K 10/50	10	(.394")	50	(1.97")	7022620*
K 10/60	10	(.394")	60	(2.36")	7023810
K 10/100	10	(.394")	100	(3.94")	7023615

\* Standard accessories


817 CI-r



K 4/72



K 10/50



K 4/30 ... K 10/100




### Special Probes


Catalog no.	Description	Order no.
S 15/47,5	Disc probe	7023608
Z 10/60	Cylindrical probe	7023819
MKe 20	Taper probe	7023613
TMT 86	Spherical probe for measuring recesses	7023064
817 CI-sa	Probe with measuring pin	4426433
817 CI-am	Holder for Dial Indicators and Test Indicators styluses	4426434
801 te	Styli carbide tipped dia. 2 mm*	4309016
801 tr	Styli ruby dia. 2.5 mm*	4309088

\* for 817 CI-am


S 15/47,5




Z 10/60




MKe 20




801t




TMT 86



817 CI-am



817 CI-sa




### Carriers for Probes and Transducers


Catalog no.	Description	Order no.
Carrier 1	for probes	7022630*
Carrier 2	with a joint for a probe	7024010
Carrier 3	for a Digital Indicator or an Incremental Probe	7024086

\* Standard accessories


Carrier 1



Carrier 2



Carrier 3




### Setting Blocks


Catalog no.	Description	Order .
EB	Setting block	7024083*
EB I	Setting block for taper probe, with calibration certificate	7023827

\* Standard accessories

EB



EB I



## Accessories for Height Measuring Instrument Digimar CX2

### Probe accessory sets


<b>Probe set CXt1 consists of:</b>	<b>7024087</b>
Carrying case	<b>7023837</b>
<b>Carrier 2</b> with a joint for a probe	<b>7024010</b>
<b>S 15/47,5</b> Disc probe	<b>7023608</b>
<b>K 4/30</b> Spherical probe	<b>7023813</b>
<b>K 4/72</b> Spherical probe	<b>7023609</b>
<b>K 6/40</b> Spherical probe	<b>7023816</b>
<b>K 10/60</b> Spherical probe	<b>7023810</b>
<b>K 10/100</b> Spherical probe	<b>7023615</b>
<b>MKe 20</b> Spherical probe	<b>7023613</b>
<b>TMT 86</b> Spherical probe for recess measurement	<b>7023064</b>
<b>Z 10/60</b> Cylindrical probe	<b>7023819</b>




Universal probe set CXt2 consists of:			7034000
Case			3015925
Probe carrier			3015917
	Dimension	Shaft length	
Measuring crook	d = 0.5 mm	l = 78 mm	3015918
Probe with pin /tip:	dia. d = 1.2 mm	l = 75 mm	3015919
		ls = 15.5 mm	
Taper probe	dia. d = 0–7.5 mm		3015920
Spherical probe	TC-dia. dk = 3 mm	l = 24 mm	3022000
Spherical probe	TC-dia. dk = 2 mm	l = 24 mm	3022001
Spherical probe	TC-dia. dk = 1 mm	l = 24 mm	3022002
Extension M3 – M3	d = 4 mm	l = 20 mm	3015921
Extension M3 – M2.5	d = 4 mm	l = 20 mm	3015888




Measuring crook




Pin probe



Probe carrier




Taper probe




Spherical probe

Extension




### Accessory sets for checking perpendicularity and straightness

<b>Set CX2p2 consists of:</b>	<b>4426682</b>
<b>1086</b> Digital Indicator 12.5 mm	<b>4337020</b>
<b>Carrier 3</b> for Digital Indicators	<b>7024086</b>
<b>16 EXr</b> Connection cable	
1086 to CX 2	<b>4102410</b>

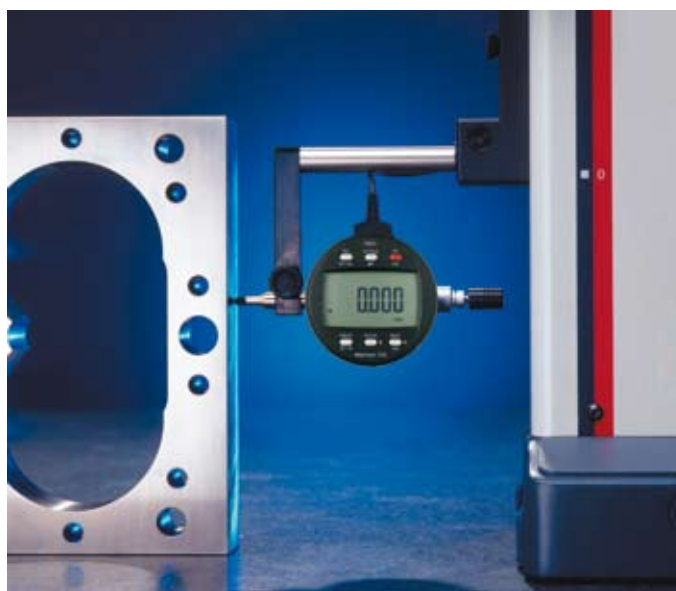

Checking perpendicularity with a 1086 Digital Indicator

## Height Measuring and Scribing Instrument Digimar 814 N / 814 G



814 N



814 G

### Applications

Ideal for measuring:

- Heights
- Center distances between bores and surfaces, widths of ledges, plus marking and scribing of work pieces

### Features

**814 N** With extra rugged, cast iron base with three-point support. To be used on base plates, machine beds and work piece surfaces.

**814 G** Table plate is made of fine grained black granite (green-stone) which is extremely hard and stable.


- High accuracy
- Incremental inductive measuring system
- Measuring head with an ball bush guide
- Resistance free measuring system
- Large, easy to read digital display
- Measuring system and display unit are incorporated in the measuring head
- Easy to operate due to the hand crank on the side of the measuring head, thus making height adjustment simple
- Constant measuring force; acting upwards or downwards as required
- Measuring head can be locked in position, ideal for scribing tasks
- With fine adjustment
- Data transmission via Opto RS232C interface
- Digital Preset
- Zero setting in any position
- MAX, MIN and MAX-MIN functions
- Enter tolerance limit for 1 characteristic
- Switch between mm/inch
- Mains independent due to being battery operated
- Universal application due to a broad range of accessories

### Technical Data


		814 N	814 G	814 N	814 G
Measuring range	mm/ <i>inch</i>	320 / <b>12.6"</b>		620 / <b>24.4"</b>	
Resolution	mm ( <i>inch</i> )		0.01 / 0.001 ( <b>0.0005" / 0.00005"</b> )		
Measuring error	μm	20 / <b>0.0008"</b>		30 / <b>0.0012"</b>	
Repeatability	μm		5 / <b>0.0002"</b>		
Perpendicularity error	μm	frontal 20 (300 mm)		frontal 30 (600 mm)	
Operating time of the battery	h		2000		
Measuring force	N		ca. 3		
Working temperature	°C/°F		20 ± 1 / 68 ± 33.8		
Operating temperature	°C/°F		5 ... 40 / 41 ... 104		
Measuring system			inductive		
Total height	mm/ <i>inch</i>	513 / <b>20.20"</b>	558 / <b>21.97"</b>	813 / <b>32.01"</b>	858 / <b>33.78"</b>
Cast iron base(L x W)	mm/ <i>inch</i>	205 x 175 / <b>8.07" x 6.89"</b>		205 x 175 / <b>8.07" x 6.89"</b>	
Granite plate (L x W)	mm/ <i>inch</i>		200 x 300 / <b>7.87" x 11.81"</b>		200 x 300 / <b>7.87" x 11.81"</b>
Grade of accuracy			1 DIN 876		1 DIN 876
Weight	kg/lbs	6.2 / <b>13.22</b>	14 / <b>30.86</b>	10.5 / <b>23.15</b>	18.3 / <b>35.27</b>
Order-no.		<b>4426540</b>	<b>4426541</b>	<b>4426542</b>	<b>4426543</b>

## Accessories for Height Measuring and Scribing Instrument Digimar 814 N / 814 G


				Order no.
<b>814 t</b>	Probe arm with joint for mounting probes, dial indicators, dial comparators, and test indicators. Length of mounting shank 150 mm (5.91") Mounting bore 8 mm (.315")			<b>4426510*</b>
<b>814 m</b>	Spherical probe To mount in probe arm 814 t	2 mm ball (.0787") 3 mm ball (.118") 4 mm ball (.157") 5 mm ball (.197") 6 mm ball (.236") 7 mm ball (.276") 8 mm ball (.315")	<b>4426525</b> <b>4426526</b> <b>4426512</b> <b>4426527</b> <b>4426511</b> <b>4426528</b> <b>4426509*</b>	
<b>814 s</b>	Disc probe for measuring heights, distances, surfaces and edges. Especially recommended for narrow shoulders, e.g. on centering edges.			<b>4426513</b>
<b>814 h</b>	Probe holder M 2.5 for mounting styli of dial indicators and dial comparators for special applications.			<b>4426514</b>
<b>814 a</b>	Scriber for scribing and marking of work pieces. Carbide tipped. To be mounted on the Probe arm 814 t			<b>4426515</b>
<b>814 kh</b>	Holder			<b>4426516</b>
<b>817 ks1</b>	Measuring taper	0 – 15 (0 - .591")	<b>4426071</b>	
<b>817 ks2</b>	Measuring taper	14 – 20 (.551" - .787")	<b>4426072</b>	
<b>817 ks3</b>	Measuring taper	18 – 24 (.709" - .945")	<b>4426073</b>	
<b>817 ks4</b>	Measuring taper	23 – 30 (.906" - 1.181")	<b>4426074</b>	
<b>814 u</b>	Two direction probe for measuring outside and inside diameters, width of ledges, recesses and slots. Actual ball diameter does not influence the results.	4 mm ball (.157")	<b>4426517</b>	
<b>814 ua</b>	Interchangeable probe arm for use in conjunction with the two direction probe 814 u	2 mm ball (.0787")	<b>4426518</b>	
<b>817 Cl-m</b>	Spherical probe	4 mm ball (.157")	<b>4426436</b>	
<b>817 Cl-am</b>	Holder with connection thread	M 2.5, M 1.6, M 1.4	<b>4426434</b>	
<b>817 Cl-sa</b>	Stylus with exchangeable measuring pin		<b>4426433</b>	
<b>817 Cl-p</b>	Stylus with parallel measuring faces Battery 3 V, type CR 2032		<b>4426435</b>	
	Dust cover	0–320 mm (0 - 12.60")	<b>4426616*</b>	
	Dust cover	0–620 mm (0 - 24.41")	<b>4426619*</b>	
<b>814 Nf</b>	Cast iron base		<b>4426506**</b>	
<b>814 Gf</b>	Table plate		<b>4426507**</b>	
<b>814 X</b>	Column with measuring head	320 mm (0 - 12.60")	<b>4426544</b>	
<b>814 X</b>	Column with measuring head	620 mm (0 - 24.41")	<b>4426545</b>	
<b>16 ESv</b>	Data connection cable Length 2 m / 6.56 ft	Opto RS232C	<b>4102510</b>	




814 t




814 m




814 s




814 h




814 a




814 kh



817 ks1




817 ks2  
817 ks3  
817 ks4




814 ua


814 u




817 Cl-m



817 Cl-am




817 Cl-sa



817 Cl-p

\* Scope of supply  
\*\* for upgrade

## Height Measuring and Scribing Instrument Digimar 814 S



### Application

- Scribing and marking of work pieces
- Measuring heights and distances




### Features

#### Functions:

- ON/OFF
- RESET (Zero setting)
- mm/inch
- Reversal of counting direction
- DATA (data transmission)
- PRESET (for entering a numerical value)
- Capacitive measuring system, life of battery approx. 2 years
- Max. measuring speed 1.5 m/s (60"/s)
- MarConnect Data output: choose either USB, OPTO RS232C, Digimatic
- High contrast Liquid Crystal Display with 12 mm high digits

- Sturdy heavy-duty base, easy to handle
- Hardened and lapped contact surface which produce both a smooth and even movement
- Slide and beam made of hardened stainless steel
- Hand crank for positioning and measuring
- Fine adjustment
- Locking screw
- Interchangeable scribe point, carbide tipped
- Scope of supply: Scribe point, cardboard box, battery and operating instructions

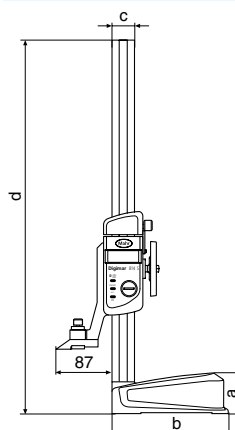

### Dimensions

mm	a	b	c	d
350	62	180 x 98	35 x 15	580
600	62	180 x 98	35 x 15	835


### Technical Data

Measuring range	Resolution	Error limit	Weight	Order no.
mm (inch)	mm/inch	mm/inch	kg/lbs	
350 (14")	0.01 / .0005"	0.04 / .0016"	7 / 15.43	4123800
600 (24")	0.01 / .0005"	0.05 / .0016"	8 / 17.64	4123801


### Accessories

	Order no.
Scribe Point, carbide tipped	27 ESh 4123710
Holder for test indicators	27 Sp 4123041
Battery 3V, type CR 2032	4102520
Data Connection Cable USB (2 m)	16 EXu 4102357
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411

#### 27 Sp



#### 27 ESh



## DOES EVERYTHING ROTATE AROUND PRECISION? NO PROBLEM WITH MICROMAR.



The latest information on MICROMAR products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 205**

► | Micrometers belong alongside calipers to the most frequently used hand measuring instruments. With their precision ground spindle, their carbide tipped measuring faces and their robust frame construction the modern micrometer from the Micromar series ensures maximum precision and a long working life. Our mechanical micrometers are extremely reliable and are easy to read due to the scales having a satin chrome finish, thus ensuring accuracy and user comfort. Our digital micrometers unite both the highly renowned mechanical precision from Mahr with most modern electronics. These digital micrometers offer simple operation with an error free reading as well as problem-free data of the determined parameters to an external evaluation instrument. Micromar 40 EW, the newest generation of waterproof digital micrometers ensures that even in the most difficult workshop conditions precise and reliable results are obtained. A speciality of Mahr is the micrometer with a dial comparator, with its built-in dial comparator, stationary anvil and constant measuring force they are particularly well suited for rapid measurements and highly precise serial measurements.



## ► | Micromar. Micrometers

### Overview

#### Micromar Micrometers

3- 2

### Micrometers

#### Micromar 40 EW / 40 EXL / 40 EWS / 40 EX / 40 EWV

3- 4

With a Digital Display

#### Micromar 40 A / 40 SH / 40 SD / 40 AG / 40 W

3-10

With Scales

#### Micromar 40 F / 40 T / 40 TS

3-14

With a Dial Comparator

#### Micromar 40 AB / 40 AS / 40 AR / 40 AW / 40 SM

3-17

With Special Measuring Faces

#### Micromar 40 Z

3-20

For measuring Gears and Threads

#### Accessories for Micrometers

3-22

### Inside Micrometers

#### Micromar 44 Cms / 44 F

3-23

Inside Micrometers with  
2-Point Contact

#### Micromar 44 A / 44 EX / 844 A

3-25

Self-Centering Inside Micrometers

### Depth Micrometers

#### Micromar 45 T

3-29

With a Line Scale (Vernier)

### Micrometer Heads

#### Micromar 46 EX / 46 / 46H


3-30

With Digital Display or Scales (Vernier)

# Micromar. Micrometer


## Overview

### Micromar - Design Features

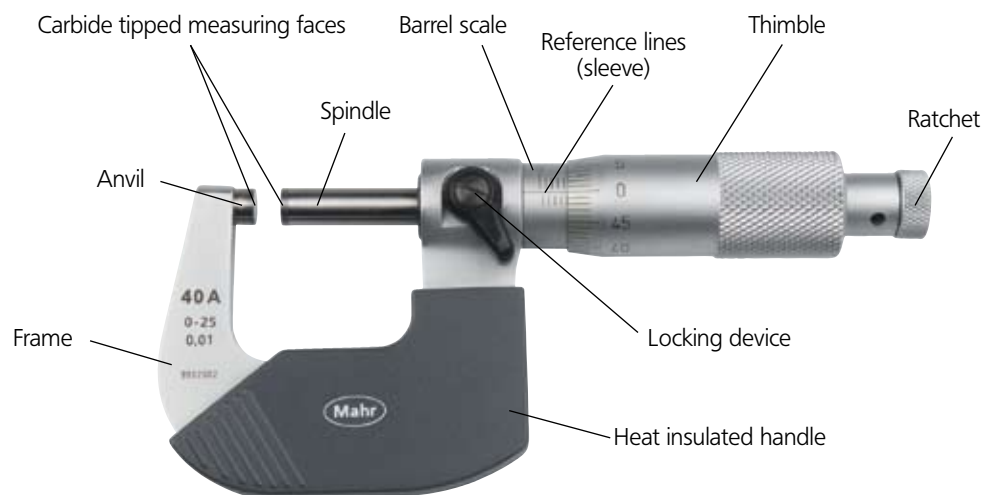

#### Reading example:

Micrometer with 0.01 mm-divisions



Sleeve	2.5
Thimble	0.28
Measuring result	2.78 mm

### Micromar - Types of Micrometers

**Mahr** - Micrometers are available with the following means of indication:

a) Digital Micrometer with digital display



b) Mechanical Micrometer with scale and dial



c) Mechanical Micrometer with scale



### Error limits G according to DIN 862

Measuring range mm	Error limit G µm	Measuring force N
0 - 25	4	5 - 10
25 - 50	4	5 - 10
50 - 75	5	5 - 10
75 - 100	5	5 - 10
100 - 125	6	5 - 10
125 - 150	6	5 - 10
150 - 175	7	5 - 10
175 - 200	7	5 - 10
200 - 225	8	5 - 10
225 - 250	8	5 - 10
250 - 275	9	5 - 10
275 - 300	9	5 - 10
300 - 325	10	5 - 10
325 - 350	10	5 - 10
350 - 375	11	5 - 10
375 - 400	11	5 - 10
400 - 425	12	5 - 10
425 - 450	12	5 - 10
450 - 475	13	5 - 10
475 - 500	13	5 - 10

## Micromar - Variations

a) Micrometer



b) Micrometer for inside dimensions







c) Micrometer for depth measurement



d) Micrometer Head



## Function keys of Digital Micrometers

Functions		Type		
		40 EW 40 EXL	40 EX 44 EX 40 EWS 40 EWW 46 EX	
PR	Enter a numerical value (Reference Setting)	•	•	
mm/in	Switch between mm/inch	•	•	
O/ABS	Set display to 0.000 mm / .0000"  for relative measurement / Set to a reference or preset value (PR)	•	•	
DATA	Data transmission   		• • •	

## Micromar. Micrometer

► | The new digital water proof Micrometer **Micromar 40 EW**. Even in the most difficult conditions precise and reliable results are obtained.



Water proof measuring system according to Protection class IP65



Code Initial	IP	International Protection
First Numeral	<b>6</b>	Dust-tight
Second Numeral	<b>5</b>	Protected against powerful water jets

Stainless steel, hardened spindle

Sturdy satin chrome steel frame

DIN 863-1

Highly precise measuring system, Patent pending

Ratchet is integrated in the thimble to enable one handed operation

Rapid drive

Large display with 7.5 mm high digits

ABS

**Absolute-Function:**  
Micrometer can be set in any position to 0.000 mm / .0000" without the reference to the Preset value being lost

Ergonomically formed and heat insulated steel handle

Operating buttons are made from **Ultradur®**, which has an excellent chemical resistance



## Digital Micrometer 40 EW and 40 EXL

40 EW



ABS

DIN  
863-1

40 EXL



### Features

#### Functions:

0 (Zero setting the display for Relative measurement)  
ABS (Switching between Relative and Absolute measurement)  
mm/inch  
PR (Reference setting)


- Capacitive measuring system, life of battery approx. 2 years
- High contrast Liquid Crystal Display with 7.5 mm high digits
- Stain chrome steel frame, heat insulated

- Spindle and anvil are carbide tipped
- Spindle is made of stainless steel, hardened throughout and ground
- Ratchet is integrated in the thimble

- Rapid drive
- Supplied with: Case, battery, operating instructions

### Technical Data

	Measuring range		Resolution	Error limit G	Spindle thread pitch	Order no.	Protection class
	mm	(inch)					
40 EW	0 - 25	(0 - 1")	0.001/ .00005"	4	0.635	4151700	IP65
40 EXL	0 - 25	(0 - 1")	0.001/ .00005"	4	0.635	4151600	IP40

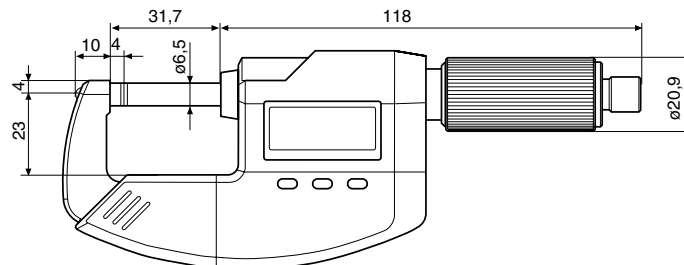

### Accessories

Order no.

Battery 3V, type CR 2032

4102520

## Digital Micrometer 40 EWS with sliding spindle



### Features

#### Functions:

0 (Zero setting the display for Relative measurement)  
ABS (Switching between Relative and Absolute measurement)  
mm/inch  
PR (Reference setting)


- Capacitive measuring system, life of battery approx. 2 years
- MarConnect data output, choose alternatively  
USB  
OPTO RS232C  
Digimatic

- High contrast Liquid Crystal Display with 7.5 mm high digits
- Stain chrome steel frame, heat insulated
- Spindle and anvil are carbide tipped

- Spindle is made of stainless steel, hardened throughout and ground
- Ratchet is integrated in the thimble
- Rapid drive
- Supplied with:  
Case, battery, operating instructions

### Technical Data

Measuring range		Resolution	Error limit G	Spindle thread pitch	Order no.
mm	(inch)	mm/inch	μm	mm	
0 - 25	(0 - 1")	0.001/ .00005"	4	0.635	4151720

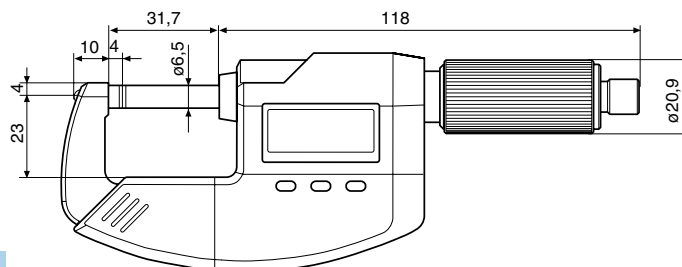

### Accessories

	Order no.
<b>Battery 3V</b> , type CR 2032	<b>4102520</b>
<b>Data Connection Cable</b> USB (2 m)	<b>16 EXu 4102357</b>
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	<b>16 EXr 4102410</b>
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	<b>16 EXd 4102411</b>



## Digital Micrometer 40 EX with data Output




### Features

#### Functions:

- 0 (Zero setting)
- ABS (Switching between Relative and Absolute measurement)
- mm/inch
- PRESET (enter a numerical value)
- DATA (Data transmission via connection cable)
- Capacitive measuring system, life of battery ca. 2 years
- MarConnect data output, choose alternatively USB
- OPTO RS232C
- Digimatic
- High contrast LCD with 7.5 mm high digits
- Lacquered steel frame, heat insulated
- Spindle and anvil are carbide tipped
- Spindle is made of stainless steel, hardened throughout and ground
- Ratchet is integrated in the thimble
- Rapid drive
- Supplied with: Case, battery, operating instructions and setting standard (from measuring range 25-50 mm)

### Technical Data

Measuring range		Resolution	Error limit	Spindle thread pitch	Order no.
mm	(inch)	mm/inch	G μm	mm	
0 - 25	(0 - 1")	0.001 / .00005"	4	0.635	<b>4150570</b>
25 - 50	(1 - 2")	0.001 / .00005"	4	0.635	<b>4150571</b>
50 - 75	(2 - 3")	0.001 / .00005"	5	0.635	<b>4150572</b>
75 - 100	(3 - 4")	0.001 / .00005"	5	0.635	<b>4150573</b>

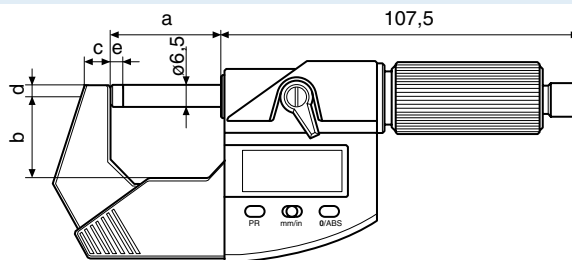

### Accessories

	Order no.
<b>Battery 3V</b> , type CR 2032	<b>4102520</b>
<b>Data Connection Cable</b> USB (2 m)	<b>16 EXu 4102357</b>
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	<b>16 EXr 4102410</b>
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	<b>16 EXd 4102411</b>

Accessories for Data Processing see Chapter 11

### Dimensions

Dimensions in mm	a	b	c	d	e
0 - 25 mm / 0-1"	31.5	24	6.5	4.5	3.5
25 - 50 mm / 1-2"	56.6	31.5	10	4.5	3.5
50 - 75 mm / 2-3"	82.5	44	10	4.5	3.5
75 - 100 mm / 3-4"	107.5	56.5	10	4.5	3.5

## Digital Micrometer Set 40 EXS

Application range	Order no	Remarks
0 - 100 mm (0 - 4")	<b>4150590</b>	Includes: wooden case, setting standards 25 mm, 50 mm and 75 mm



## Universal Digital Micrometer 40 EWW with sliding spindle



### Features

#### Functions:

0 (Zero setting the display for Relative measurement)  
 ABS (Switching from Relative to Absolute measurement)  
 mm/inch  
 PR (Reference Setting)

- Capacitive measuring system, life of battery ca. 2 years
- MarConnect data output, choose alternatively USB  
 OPTO RS232C  
 Digimatic

- High contrast Liquid Crystal Display with 7.5 mm high digits
- Satin chrome steel frame, heat insulated
- Mounting bore for interchangeable anvils


- Measuring spindle is hardened throughout and ground
- Ratchet integrated in the thimble
- Rapid drive
- Supplied with:  
 Case, battery and operating instructions

### Technical Data

Measuring range*	Resolution	Error limit**	Spindle thread pitch	Spindle dia.	Order no. without standard accessories	Order no. with standard accessories
mm	(inch)	G μm	mm	mm		
0 - 25	(0 - 1")	0.001/ .00005"	0.635	6.5	4151711	
0 - 25	(0 - 1")	0.001/ .00005"	0.635	6.5		4151710

\* with thread anvils the measuring range is reduced

\*\* with flat anvils over the full length of the anvils

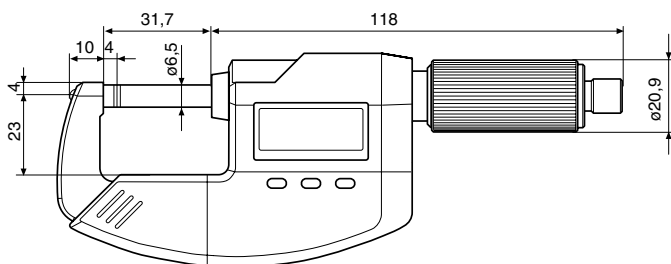

### Special Accessories

	Order no.
<b>Battery 3V</b> , type CR 2032	<b>4102520</b>
<b>Data Connection Cable</b> USB (2 m)	<b>16 EXu 4102357</b>
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	<b>16 EXr 4102410</b>
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	<b>16 EXd 4102411</b>

Accessories for Data Processing see Chapter 11

## Universal Digital Micrometer 40 EWW with sliding spindle


### Standard Accessories are included in the set

Catalog no.	Description	Order no.	Quantity required	
40 Efk	Flat anvils (reference)	4151771	1	
40 Efl	Flat anvils (sensitive)	4151761	1	
40 Eak	Anvils with reduced measuring faces (reference)	4151777	1	
40 Eal	Anvils with reduced measuring faces (sensitive)	4151767	1	
40 Etk	Disc type anvils (reference) d = 11.3 mm	4151772	1	
40 Etl	Disc type anvils (sensitive) d = 11.3 mm	4151762	1	
40 Erk	Spherical anvil	4151774	2	
40 Epk	Conical shaped anvil	4151773	2	
40 Esk	Wedge shaped anvil (blade)	4151775	2	

### Special Accessories

#### Thread anvils for pitch diameters

• Pair consists of a V-anvil and 1 blade

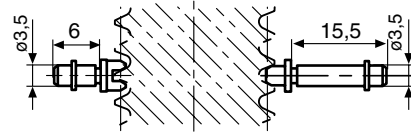

Metric thread (60°)			Whitworth thread (55°)			American UST thread (60°)		
Pitch	V-anvil	Blade	Pitch range	V-anvil	Blade	Pitch range	V-anvil	Blade
mm	Order no.	Order no.	TPI	Order no.	Order no.	TPI	Order no.	Order no.
0.5 - 0.7	4501000	4173700	40 - 32	4501007	4173743	40 - 32	4501018	4173815
0.7 - 1	4501001	4173701	32 - 24	4501008	4173744	32 - 24	4501019	4173816
1.25 - 2	4501002	4173702	24 - 18	4501009	4173745	24 - 18	4501020	4173817
2 - 3.5	4501003	4173703	18 - 14	4501010	4173746	18 - 14	4501021	4173818
			14 - 10	4501011	4173747	14 - 10	4501022	4173819
			10 - 7	4501012	4173748	10 - 7	4501023	4173820

## Micrometer 40 A

DIN  
863-1



### Features


- Chrome plated steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with: Case, setting standard (from measuring range 25-50 mm / 1-2"), operating instructions

### Technical Data

Measuring range	Readings	Error limit G	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 $\mu$ m	0.5 mm	<b>4134000</b>
25 - 50 mm	0.01 mm	4 $\mu$ m	0.5 mm	<b>4134001</b>
50 - 75 mm	0.01 mm	5 $\mu$ m	0.5 mm	<b>4134002</b>
75 - 100 mm	0.01 mm	5 $\mu$ m	0.5 mm	<b>4134003</b>
100 - 125 mm	0.01 mm	6 $\mu$ m	0.5 mm	<b>4134004</b>
125 - 150 mm	0.01 mm	6 $\mu$ m	0.5 mm	<b>4134005</b>
150 - 175 mm	0.01 mm	7 $\mu$ m	0.5 mm	<b>4134006</b>
175 - 200 mm	0.01 mm	7 $\mu$ m	0.5 mm	<b>4134007</b>
<b>0 - 1"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134900</b>
<b>1 - 2"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134901</b>
<b>2 - 3"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134902</b>
<b>3 - 4"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134903</b>
<b>4 - 5"</b>	<b>.0001"</b>	<b>.00024"</b>	<b>.025"</b>	<b>4134904</b>
<b>5 - 6"</b>	<b>.0001"</b>	<b>.00024"</b>	<b>.025"</b>	<b>4134905</b>
<b>6 - 7"</b>	<b>.0001"</b>	<b>.00028"</b>	<b>.025"</b>	<b>4134906</b>
<b>7 - 8"</b>	<b>.0001"</b>	<b>.00028"</b>	<b>.025"</b>	<b>4134907</b>

### Accessories

Stand, setting standards, etc. please refer to page 3-22

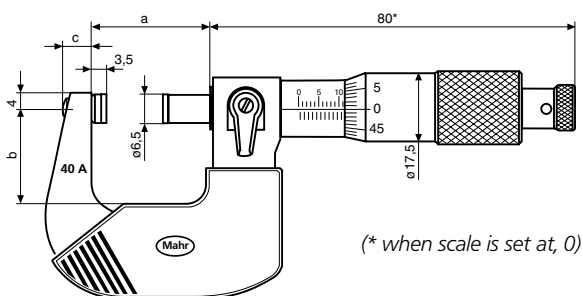

### Dimensions

Measuring range mm / inch	a mm	b mm	c mm
0 - 25 / 0-1"	31	25.5	7
25 - 50 / 1-2"	56	34.5	12
50 - 75 / 2-3"	81	47.5	12
75 - 100 / 3-4"	106	58.5	13
100 - 125 / 4-5"	131	71.5	13
125 - 150 / 5-6"	156	83.5	13
150 - 175 / 6-7"	182	95.5	13
175 - 200 / 7-8"	207	108.5	13

## Micrometer Sets 40 SA

Application range	Order no	Remarks
0-100 mm (4 Micrometers)	<b>4134050</b>	Incl. wooden case, setting standards 25 mm and 75 mm
100-200 mm (4 Micrometers)	<b>4134051</b>	Incl. wooden case, setting standards 125 mm and 175 mm
0-4" (4 Micrometers)	<b>4134960</b>	Incl. wooden case, setting standards 1" and 3"
4-8" (4 Micrometers)	<b>4134961</b>	Incl. wooden case, setting standards 5" and 7"



## Micrometer 40 SH / 40 SD with extra large thimble

DIN  
863-1



40 SH



40 SD

### Features


- Chrome plated steel frame
- Maximum stability
- Spindle and anvil made of hardened steel, carbide tipped measuring faces
- Spindle is made of stainless steel, hardened throughout and ground
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with: Case (measuring range 0 - 100 mm)

#### Only 40 SD:

- Reading error is reduced due to the 1 mm measuring span per rotation of the thimble

### Technical Data

	Measuring range	Readings	Error limit	Spindle thread pitch	Order no
	mm	mm	G μm	mm	
40 SH	0 - 25	0.01	4	0.5	4131000
	25 - 50	0.01	4	0.5	4131001
	50 - 75	0.01	5	0.5	4131002
	75 - 100	0.01	5	0.5	4131003
	100 - 125	0.01	6	0.5	4131004
	125 - 150	0.01	6	0.5	4131005
	150 - 175	0.01	7	0.5	4131006
	175 - 200	0.01	7	0.5	4131007
40 SD	0 - 25	0.01	4	1	4135000
	25 - 50	0.01	4	1	4135001
	50 - 75	0.01	5	1	4135002
	75 - 100	0.01	5	1	4135003

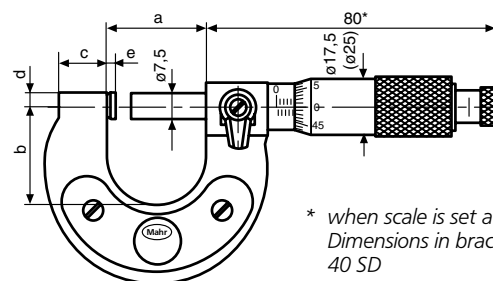

\* when scale is set at, 0  
Dimensions in brackets are for the 40 SD

### Dimensions

Measuring range	a	b	c	d	e
Dimensions in mm					
0 - 25	31	28	13	3.25	3
25 - 50	56	40	13	3.25	3
50 - 75	81	53	13	3.25	3
75 - 100	106	65	13	3.25	3
100 - 125	130	75.5	15	4	3.5
125 - 150	155	88	15	4	3.5
150 - 175	180	100.5	15	4	3.5
175 - 200	205	113	15	4	3.5

### Accessories

Stand, setting standards, etc. please refer to page 3-22

## Micrometer Sets 40 SSH

Application range	Order no.	Remarks
0-100 mm (4 Micrometers)	4133001	Incl. wooden case, setting standards 25 mm and 75 mm
100-200 mm (4 Micrometers)	4133005	Incl. wooden case, setting standards 125 mm and 175 mm
0-4" (4 Micrometers)	4133010	Incl. wooden case, setting standards 1" and 3"



## Micrometer 40 AG

DIN  
863-1



### Features

- Lacquered steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Ratchet is integrated in the thimble
- Locking device
- Supplied with:  
Case, setting standard

### Note:


All Micrometers with measuring ranges between 400 mm to 500 mm, the frame is made from a steel tube

### Technical Data

Measuring range mm	Readings mm	Error limit G μm	Spindle thread pitch mm	Order no.
200 - 225	0.01	8	0.5	4134500
225 - 250	0.01	8	0.5	4134501
250 - 275	0.01	9	0.5	4134502
275 - 300	0.01	9	0.5	4134503
300 - 325	0.01	10	0.5	4134504
325 - 350	0.01	10	0.5	4134505
350 - 375	0.01	11	0.5	4134506
375 - 400	0.01	11	0.5	4134507
400 - 425	0.01	12	0.5	4134508
425 - 450	0.01	12	0.5	4134509
450 - 475	0.01	13	0.5	4134510
475 - 500	0.01	13	0.5	4134511


### Dimensions

Dimensions in mm	a	b	c	d	e
200 - 225	242.5	121.5	25	5	12
225 - 250	267.5	134	25	5	12
250 - 275	317.5	159	25	5	25
275 - 300	317.5	159	25	5	12
300 - 325	342.5	171.5	25	5	12
325 - 350	367.5	184	25	5	12
350 - 375	392.5	196.5	25	5	12
375 - 400	417.5	209	25	5	12
400 - 425	442	223	25	5	12
425 - 450	467	236	25	5	12
450 - 475	492	248	25	5	12
475 - 500	517	259	25	5	12

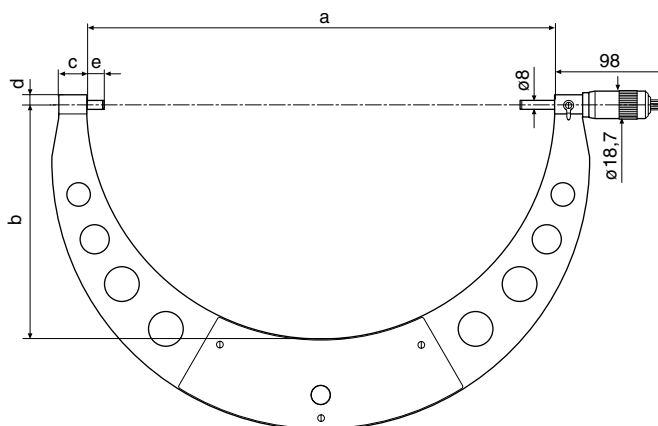



## Micrometer 40 W

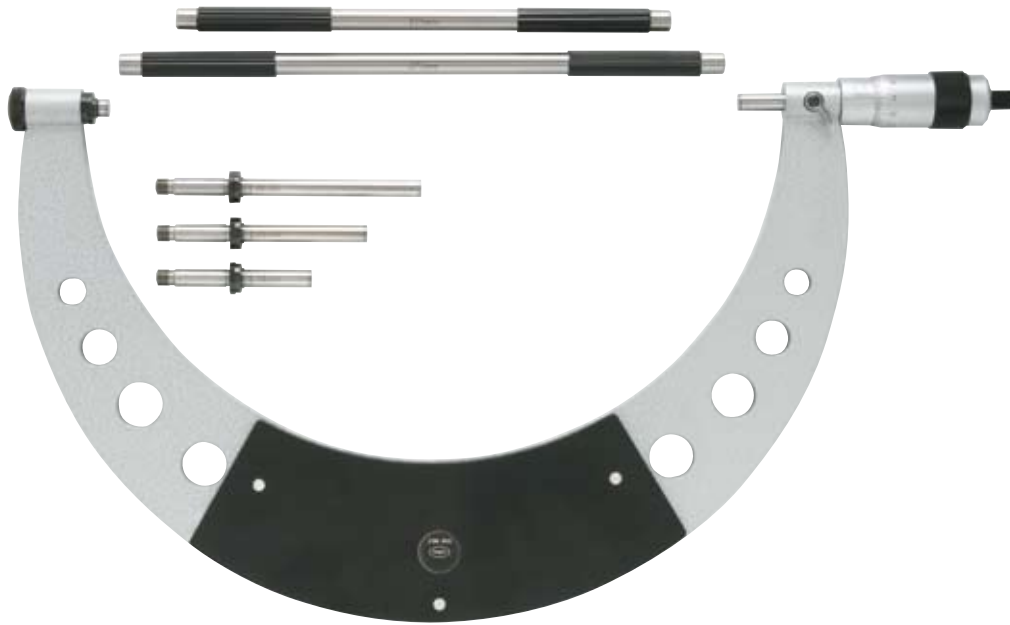

### Features

- Lacquered steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Ratchet is integrated in the thimble
- Exchangeable anvils
- Locking device
- Supplied with:  
Case, setting standards

### Note:

All Micrometers with measuring ranges from 400 mm up to 1000 mm, the frame is made from a steel tube


## Technical Data

Measuring range mm	Readings mm	Error limit G μm	Spindle thread pitch mm	Order no.
0 - 100	0.01	5	1	4137500
100 - 200	0.01	7	1	4137501
200 - 300	0.01	9	1	4137502
300 - 400	0.01	11	1	4137503
400 - 500	0.01	13	1	4137504
500 - 600	0.01	21	1	4137505
600 - 700	0.01	23	1	4137506
700 - 800	0.01	26	1	4137507
800 - 900	0.01	28	1	4137508
900 - 1000	0.01	30	1	4137509

### Dimensions

Dimensions in mm

	a	b
0 - 100	117.5	59
100 - 200	217.5	109
200 - 300	317.5	159
300 - 400	417.5	209
400 - 500	517.5	259
500 - 600	617.5	309
600 - 700	717.5	360
700 - 800	817.5	410
800 - 900	917.5	460
900 - 1000	1017.5	510

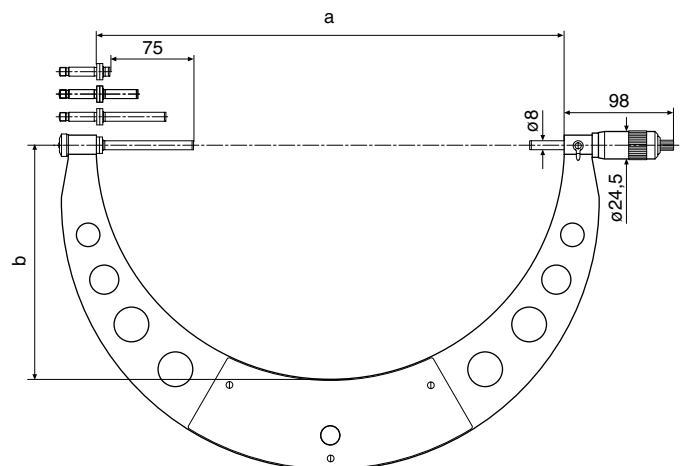

## Micrometer with integrated Dial Comparator 40 F / FC

DIN  
863-3



### Application

- For rapid measurements of diameters of cylindrical parts (shafts, bolts and shanks)
- Measurements of thickness and length
- Recommended for standard precision parts


### Features

- Chrome plated steel frame with heat insulators
- Maximum stability
- Retraction of the movable anvil and carbide-tipped measuring faces ensures maximum wear resistance
- Longer service life due to the ceramic measuring faces (40 FC)
- Measuring spindle made of stainless steel, hardened throughout and ground, lockable
- Scales with satin-chrome finish
- Constant measuring force
- Dial Comparator is integrated in frame
- Adjustable tolerance markers
- Supplied with: Case

### Technical Data

	Measuring range	Retraction	Measuring faces Flatness	Measuring faces Parallelism	Measuring force	Order no.	Remarks
40 F	0 - 25 mm	1 mm	$\leq 0.2 \mu\text{m}$	$\leq 1 \mu\text{m}$	9 N	<b>4150000</b>	
	25 - 50 mm	1 mm	$\leq 0.2 \mu\text{m}$	$\leq 1 \mu\text{m}$	9 N	<b>4150001</b>	
	0 - 1"	.04"	$\leq .00001"$	$\leq .00005"$	9 N	<b>4150900</b>	
	1 - 2"	.04"	$\leq .00001"$	$\leq .00005"$	9 N	<b>4150901</b>	
40 FC	0 - 25 mm	1 mm	$\leq 0.2 \mu\text{m}$	$\leq 1 \mu\text{m}$	9 N	<b>4150200</b>	Ceramic measuring faces
	25 - 50 mm	1 mm	$\leq 0.2 \mu\text{m}$	$\leq 1 \mu\text{m}$	9 N	<b>4150201</b>	

Micrometer			Dial Comparator		
Readings	Error limit $G_{me}$	Spindle thread pitch	Error limit $G_e$ (DIN 879)	Meas. range	Spindle thread pitch
0.01 mm .0001"	$\leq 2 \mu\text{m}$ $\leq .00008"$	0.5 mm .025"	$1 \mu\text{m}$ .00005"	$\pm 65 \mu\text{m}$ $\pm .0025"$	$1 \mu\text{m}$ .00005"

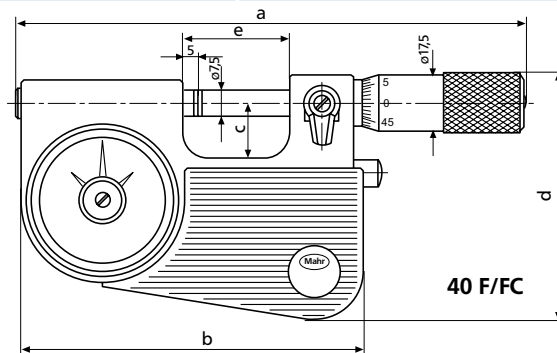

### Dimensions

Dimensions in mm		a*	b	c	d	e
40 F/FC	0-25 mm (0-1")	149	100	16	71	32
	25-50 mm (1-2")	174	125	30	85	56

\* in zero position

### Accessories

Stand, setting standards, etc. please refer to page 3-22

## Micrometer with Dial Comparator 40 T

DIN  
863-3



### Application

- For rapid measurements of diameters of cylindrical parts (shafts, bolts and shanks)
- Measurements of thickness and length
- Recommended for standard precision parts

### Features

- Rugged steel frame, heat insulated and chrome plated (up to measuring range 100 - 150 mm)
- Maximum stability
- Retraction of the movable anvil and carbide-tipped measuring faces ensures maximum wear resistance
- Measuring spindle made of stainless steel, hardened throughout and ground, lockable
- Scales with satin-chrome finish
- Constant measuring force
- Heat insulators
- Supplied with: Dial Comparator 1003, wooden case

### Technical Data

Measuring range	Retraction	Measuring faces Flatness	Measuring faces Parallelism	Measuring force	Order no.*
0 - 25 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	6.5 N	<b>4154000</b>
25 - 50 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	6.5 N	<b>4154001</b>
50 - 100 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	6.5 N	<b>4154002</b>
100 - 150 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	7.5 N	<b>4154003</b>
150 - 200 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	7.5 N	<b>4154004</b>

Micrometer			Dial Comparator <sup>+</sup>		
Readings	Error limit $G_{me}$	Spindle thread pitch	Error limit $G_e$ (DIN 879)	Meas. range	Spindle thread pitch
0.01 mm	$\leq 2 \mu\text{m}$	0.5 mm	1 $\mu\text{m}$	$\pm 50 \mu\text{m}$	1 $\mu\text{m}$

### Dimensions


Dimensions in mm	a**	b	c	d**	e
0 - 25	27	28	4	11	8
25 - 50	52	40	4	11	8
50 - 100	76	65	5.5	30	8
100 - 150	127	87	5.5	30	8
150 - 200	177	112	5.5	30	8

\* Alternative indicating instruments are available on request

\*\* in zero position

### Accessories

Stand, setting standards, etc. please refer to page 3-22

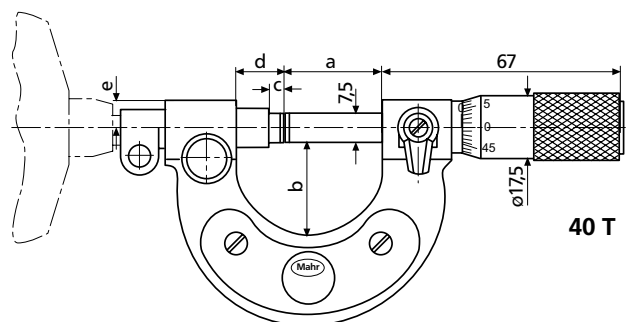

Indicating Snap Gage 840 F  
see page 9-8



## Precision Bench Micrometer 40 TS

DIN  
863-3



### Application

- For rapid measurements of diameters of cylindrical parts (shafts, bolts and shanks)
- Measurements of thickness and length
- Recommended for standard precision parts


### Features

- Rugged steel frame, can be tilted up to 45° in relation to the sturdy base
- Retraction of the movable anvil and carbide-tipped measuring faces ensures maximum wear resistance
- Height-adjustable stop
- Constant measuring force
- Measuring spindle made of stainless steel, hardened throughout and ground, lockable
- Scales with satin-chrome finish
- Supplied with:  
Dial Comparator 1003

### Technical Data

Measuring range	Retraction	Measuring faces Flatness	Measuring faces Parallelism	Measuring force	Order no.*	Order no wooden case
0 - 50 mm 0 - 2"	1.2 mm .045"	$\leq 0.2 \mu\text{m}$ $\leq .00001"$	$\leq 2 \mu\text{m}$ $\leq .00008"$	6.5 N 6.5 N	4154030 4154930	4154035 4154035

\* Alternative indicating instruments are available on request

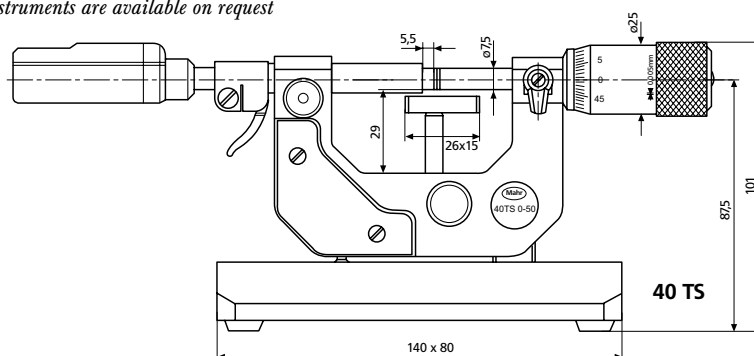

Indicating Thread Snap Gage  
852 TS see page 9-19



Micrometer			Dial Comparator 1003/1003Z		
Readings	Error limit $G_{me}$	Spindle thread pitch	Error limit $G_e$ (DIN 879)	Meas. range	Readings
0.01 mm .00025"	$\leq 2 \mu\text{m}$ $\leq .00008".025"$	0.5 mm	1 $\mu\text{m}$ .00005"	$\pm 50 \mu\text{m}$ $\pm .002"$	1 $\mu\text{m}$ .00005"

### Accessories


Stand, setting standards, etc. please refer to page 3-22

**Micrometer 40 AB** with reduced measuring faces
**DIN  
863-3**
**Features**

- For measuring recesses, grooves, etc.
- Chrome plated steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with: Case, setting standard (from measuring range 25 - 50 mm / 1 - 2"), operating instructions

**Technical Data**

Measuring range	Readings	Error limit $G$	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 $\mu\text{m}$	0.5 mm	<b>4134100</b>
25 - 50 mm	0.01 mm	4 $\mu\text{m}$	0.5 mm	<b>4134101</b>
50 - 75 mm	0.01 mm	5 $\mu\text{m}$	0.5 mm	<b>4134102</b>
75 - 100 mm	0.01 mm	5 $\mu\text{m}$	0.5 mm	<b>4134103</b>
<b>0 - 1"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134920</b>
<b>1 - 2"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134921</b>
<b>2 - 3"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134922</b>
<b>3 - 4"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134923</b>

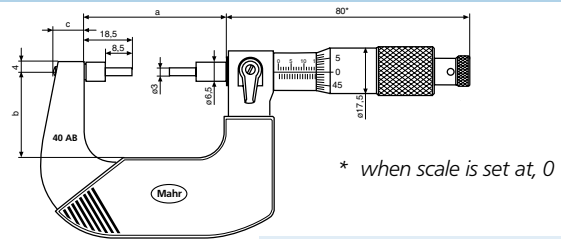


Dimensions in mm	a	b	c
0 - 25 mm / 0-1"	56	34.5	12
25 - 50 mm / 1-2"	81	47.5	12
50 - 75 mm / 2-3"	106	58.5	13
75 - 100 mm / 3-4"	131	71.5	13

**Micrometer 40 AS** with sliding spindle and measuring spades
**DIN  
863-3**
**Features**

- For measuring narrow recesses, grooves, etc.
- Chrome plated steel frame
- Spindle and anvil made of hardened steel
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Supplied with: Case, setting standard (from measuring range 25 - 50 mm / 1 - 2"), operating instructions

**Technical Data**

Measuring range	Readings	Error limit $G$	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 $\mu\text{m}$	0.5 mm	<b>4134200</b>
25 - 50 mm	0.01 mm	4 $\mu\text{m}$	0.5 mm	<b>4134201</b>
50 - 75 mm	0.01 mm	5 $\mu\text{m}$	0.5 mm	<b>4134202</b>
75 - 100 mm	0.01 mm	5 $\mu\text{m}$	0.5 mm	<b>4134203</b>
<b>0 - 1"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134930</b>
<b>1 - 2"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134931</b>
<b>2 - 3"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134932</b>
<b>3 - 4"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134933</b>

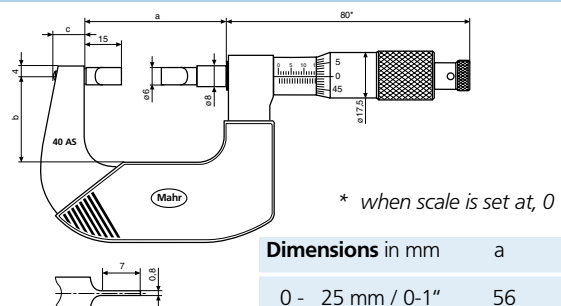

Dimensions in mm	a	b	c
0 - 25 mm / 0-1"	56	34.5	12
25 - 50 mm / 1-2"	81	47.5	12
50 - 75 mm / 2-3"	106	58.5	13
75 - 100 mm / 3-4"	131	71.5	13

## Micrometer 40 AR with spherical anvils



DIN  
863-3


### Features

- For measuring the wall thickness of a pipe, etc.
- Chrome plated steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with: Case, setting standard (from measuring range 25 - 50 mm / 1 - 2"), operating instructions

### Technical Data

Measuring range	Readings	Error limit G	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 $\mu$ m	0.5 mm	4134250
25 - 50 mm	0.01 mm	4 $\mu$ m	0.5 mm	4134251
0 - 1"	.0001"	.00016"	.025"	4134940
1 - 2"	.0001"	.00016"	.025"	4134941

Dimensions in mm	a	b	c
0 - 25 mm / 0-1"	31	25.5	7
25 - 50 mm / 1-2"	56	34.5	12

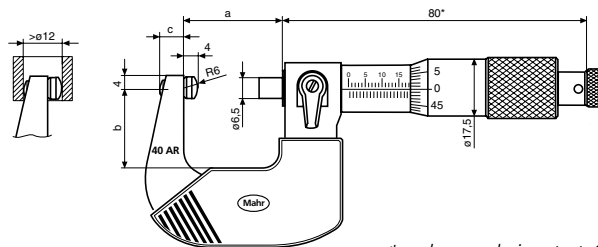

\* when scale is set at, 0

## Micrometer 40 AW with sliding spindle and disc-type anvils




### Features

- For measuring soft materials such as felt, rubber, cardboard, etc.
- Chrome plated steel frame
- Spindle and anvil made of hardened steel
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Supplied with: Case, setting standard (from measuring range 25 - 50 mm / 1 - 2"), operating instructions

### Technical Data

Measuring range	Readings	Error limit G	Parallelism	Flatness	Spindle thread pitch	Order no
0 - 25 mm	0.01 mm	8 $\mu$ m	5 $\mu$ m	2 $\mu$ m	0.5 mm	4134300
0 - 1"	.0001"	.0003"	.0002"	.001"	.025"	4134950

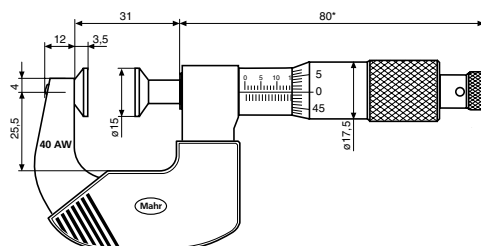

\* when scale is set at, 0



## Precision Micrometer 40 SM with disc-type anvils

DIN  
863-3



### Features


- Chrome plated steel frame
- Maximum stability
- Spindle is hardened through-out and ground
- Disc-type anvils are hardened and lapped
- Scale have a satin chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with:  
Case (measuring range 0 - 95 mm)

### Application

For measurements of

- Tooth spans  $W_k$  as of module 0.8 as indirect determination of tooth thickness on spur gears with straight and helical teeth

- Shoulders on shafts
- Undercut dimensions
- Registers
- Soft materials such as rubber, cardboard, felt, etc.




### Technical Data

Measuring range mm	Readings mm	Error limit G $\mu\text{m}$	Spindle thread pitch mm	Measuring faces Flatness $\mu\text{m}$	Parallelism $\mu\text{m}$	Order no.
0 - 20	0.01	4	0.5	$\leq 0.6$	$\leq 4$	4145000
20 - 45	0.01	4	0.5	$\leq 0.6$	$\leq 4$	4145001
45 - 70	0.01	5	0.5	$\leq 0.6$	$\leq 4$	4145002
70 - 95	0.01	5	0.5	$\leq 0.6$	$\leq 4$	4145003
95 - 120	0.01	6	0.5	$\leq 0.6$	$\leq 5$	4145004
120 - 145	0.01	6	0.5	$\leq 0.6$	$\leq 5$	4145005
145 - 170	0.01	7	0.5	$\leq 0.6$	$\leq 5$	4145006
170 - 195	0.01	7	0.5	$\leq 0.6$	$\leq 5$	4145007


### Dimensions

Dimensions in mm	a	b	c	d	e	f
0 - 20	31	28	13	3.25	4.5	25
20 - 45	56	40	13	3.25	4.5	25
45 - 70	81	53	13	3.25	4.5	25
70 - 95	106	65	13	3.25	4.5	25
95 - 120	130	75.5	15	4	4.5	30
120 - 145	155	88	15	4	4.5	30
145 - 170	180	100.5	15	4	4.5	30
170 - 195	205	113	15	4	4.5	30

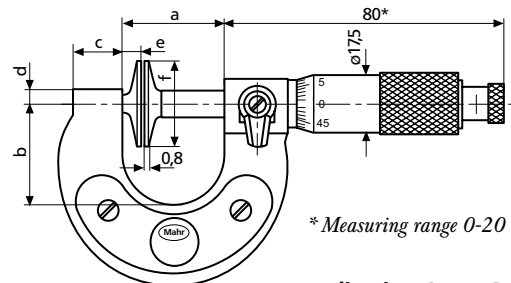

\* Measuring range 0-20 mm

Indicating Snap Gage 840 FM  
see page 9-14

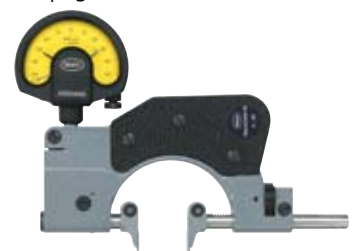

### Accessories

Stand, setting standards, etc. please refer to page 3-22

## Thread Micrometer 40 Z

DIN  
863-3



### Features


- For measuring pitch, root and outside diameters
- Rugged steel frame, heat insulated
- Spindle is hardened throughout, ground and is also provided with a locking device
- Adjustable anvil
- Both the spindle and anvil have a mounting bore for accommodating interchangeable anvils
- Flat end surface of the anvil shank rests on a hardened steel ball which is at the bottom of the mounting bore
- Scales have a satin-chrome finish

### Technical Data

Readings	0.01 mm
Mounting bores for anvils	3.5 mm
Spindle thread pitch	0.5 mm
Thimble dia.	17.5 mm
Accuracy	DIN 863

Measuring range mm	Error limit $G_{me}$	Order no.	Order no. wooden case
0 - 25*	4 $\mu m$	4170000	4170010
25 - 50	4 $\mu m$	4170001	4170011
50 - 75	5 $\mu m$	4170002	4170012
75 - 100	5 $\mu m$	4170003	4170013
100 - 125	6 $\mu m$	4170004	4170014
125 - 150	6 $\mu m$	4170005	4170015
150 - 175	7 $\mu m$	4170006	4170016
175 - 200	7 $\mu m$	4170007	4170017


\* Setting only with Thread Setting Plug Gages 715 E, when the interchangeable anvils span over several leads

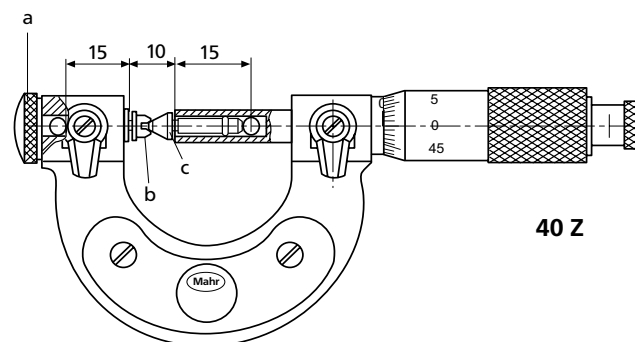

40 Z

a = Regulating range  $\pm 0.5$  mm  
b = V-anvil  
c = Tapered anvil

Indicating Thread Snap  
Gage 852 see page 9-18




Ball anvils see Page 9-23

### Accessories

#### Setting Standards 43 Z

For setting Thread Micrometers 40 Z.  
With point on one side and a V-groove on the other, both match the pitch angle of thread to be inspected.  
One setting standard is sufficient for two adjacent frame sizes.




Length mm	Accuracy $\pm \mu m$	Thread angle 60° Order no.	Thread angle 55° Order no.
25	4	4175000	4175100
50	4.5	4175001	4175101
75	4.5	4175002	4175102
100	4.5	4175003	4175103
125	5	4175004	4175104
150	5	4175005	4175105
175	5	4175006	4175106
200	5.5	4175630	4175636

## Interchangeable Anvils for Thread Micrometer 40 Z

For pitch, root and outside diameters. Hardened, wear-resistant special steel. With cylindrical mounting shank and retainer ring which ensures locking while permitting rotation in bore of spindle and anvil.

### For pitch diameters

Set consists of V-anvil and tapered anvil. For pitch range 0.2 - 0.45 mm V-anvil covers 3 thread leads. Therefore setting with Thread Setting Plug Gages 715 E, as opposed to Setting Standards 43 Z for other applications.




Metric thread (60°)			Whitworth thread (55°)			American UST thread (60°)		
Pitch mm	V-anvil Order no.	Tapered anvil Order no.	Pitch range TPI	V-anvil Order no.	Tapered anvil Order no.	Pitch range TPI	V-anvil Order no.	Tapered anvil Order no.
0.2	4173007	4173407	40 - 32	4173043	4173443	60 - 48	4173113	4173513
0.25	4173008	4173408	32 - 24	4173044	4173444	48 - 40	4173114	4173514
0.3	4173009	4173409	24 - 18	4173045	4173445	40 - 32	4173115	4173515
0.35	4173010	4173410	18 - 14	4173046	4173446	32 - 24	4173116	4173516
0.4	4173011	4173411	14 - 10	4173047	4173447	24 - 18	4173117	4173517
0.45	4173012	4173412	10 - 7	4173048	4173448	18 - 14	4173118	4173518
0.5 - 0.7	4173000	4173400	7 - 4.5	4173049	4173449	14 - 10	4173119	4173519
0.7 - 1	4173001	4173401	4.5 - 3	4173050	4173450	10 - 7	4173120	4173520
1.25 - 2	4173002	4173402	3 - 2.5	4179408	4179409	7 - 4.5	4173121	4173521
2 - 3.5	4173003	4173403				4.5 - 3	4173122	4173522
3.5 - 5	4173004	4173404						
5 - 7	4173005	4173405						
7 - 9	4173006	4173406						

### For pitch diameters

Set consists of V-anvil and tapered anvil. Shank length 15.5 mm

### For root diameters

Set consists of V-anvil and pointed anvil. Each pitch requires a separate V-anvil. Pointed anvil can be used for several pitches.



Trapezoid threads			Metric thread (60°)			Whitworth thread (55°) American UST thread (60°)		
Pitch mm	V-anvil Order no.	Tapered anvil Order no.	Pitch mm	V-anvil Order no.	Tapered anvil Order no.	Pitch range TPI	V-anvil Order no.	Tapered anvil Order no.
1	4173250	4173650	0.5	4173213	4173220	40	4173331	4173334
1.5	4173251	4173651	0.6	4173214		36	4173321	
2	4173252	4173652	0.7	4173215		32	4173332	
3	4173253	4173653	0.75	4173216		28	4173333	
4	4173254	4173654	0.8	4173217	4173224	26	4173335	4173341
5	4173255	4173655	0.9	4173218		24	4173336	
6	4173256	4173656	1	4173219		22	4173337	
7	4173257	4173657	1.25	4173221		20	4173338	
8	4173258	4173658	1.5	4173222	4173228	19	4173339	4173344
9	4173259	4173659	1.75	4173223		18	4173340	
10	4173260	4173660	2	4173225		16	4173342	
			2.5	4173226		14	4173343	4173348
			3	4173227	4173232	12	4173345	
			3.5	4173229		11	4173346	
			4	4173230		10	4173347	
			4.5	4173231	4173236	9	4173349	4173452
			5	4173233		8	4173350	
			5.5	4173234		7	4173451	
			6	4173235		6	4173453	
			7	4173237	4173240	5	4173454	4173456
			8	4173238		4.5	4173455	
			9	4173239		4	4173457	
						3.5	4173458	4173461
						3.25	4173459	
						3	4173460	

### For outside diameter


**Pair of Flat Anvils 40 Za**  
with flat measuring faces

Made of hardened steel

**Order no. 4173210**

Carbide tipped

**Order no. 4511190**

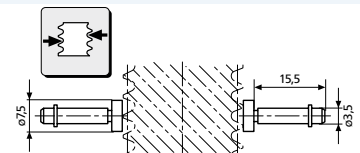

## Accessories for Micrometers



41 H

### Stand 41 H

- For mounting a micrometer
- Enables the user to use both hands to operate the micrometer and / or to insert a work piece
- Sturdy, heavy-duty base, hammer-dimple enamel finish
- Clamping jaws are rubber lined to protect micrometer, the clamping jaws can be tilted
- Both the clamping jaws and hinge are fixed in place with one screw

**Dimensions**  
(D x W x H)

130 x 100 x 90 mm


**Order no.**

**4158000**

### Ball shaped Anvil Attachment 40 k


- For measuring the thickness, for example: of pipe walls
- Slips over every anvil or the spindle with a dia. 7.5 mm
- Carbide ball, Ball dia.  $5 \pm 0.002$  mm

**Order no.** **4130099**



### Setting Standards 43 A

- For testing the basic setting of a micrometer
- Heat insulated handle
- Manufacturing tolerance js 2




### Thread Pin Gage 426 M in holder

- For determining the pitch diameter of external threads according to the three wire method
- Slips over every anvil or the spindle
- Pin gages are hardened and lapped



426 M



Length mm	Order no.	Length inch	Order no.
25	<b>4159400</b>	<b>1"</b>	<b>4159940</b>
50	<b>4159401</b>	<b>2"</b>	<b>4159941</b>
75	<b>4159402</b>	<b>3"</b>	<b>4159942</b>
100	<b>4159403</b>	<b>4"</b>	<b>4159943</b>
125	<b>4159404</b>	<b>5"</b>	<b>4159944</b>
150	<b>4159405</b>	<b>6"</b>	<b>4159945</b>
175	<b>4159406</b>	<b>7"</b>	<b>4159946</b>

### Wooden Cases for Micrometer

For measuring ranges over 100 mm the following wooden cases are available:

	<b>40 SH</b>	<b>40 SM</b>	<b>Order no.</b>
<b>Meas. range</b>	100-125	95-120	<b>4130064</b>
<b>mm</b>	125-150	120-145	<b>4130065</b>
	150-175	145-170	<b>4130066</b>
	175-200	170-195	<b>4130067</b>

<b>Pin gage dia.</b>	<b>Manufacturing tol.</b>	<b>Mounting hole</b>
0.17 - 5.05 mm	$\pm 0.5 \mu\text{m}$	dia. 6.5 mm / 7.5 mm

**Order no.** and further details see page 13-18

## Inside Micrometer 44 Cms Set



### Features

- Rigid, lightweight tubular construction
  - Spindle is hardened throughout and ground
  - Locking lever
  - Scales with satin-chrome finish
  - Carbide tipped spherical measuring faces
  - Interchangeable extensions 44 Cv with cylindrical gage rods that are spring-mounted in protective sleeves; for the extension of the measuring range
  - Protection sleeves have a satin chrome finish
- Span of error**  
Basic unit in combination with any of the extensions  
 $4 \mu\text{m} + 10 \times 10^{-6} \times l$   
( $l$  = length of the combination mm)

### Technical Data

Catalog no.	Measuring range mm	Meas. head 44 Cm Readings mm	Spindle thread pitch mm	Extensions 44 Cv length in mm	Order no.	Remarks
44 Cms1	100-150	0.01	0.5	25	<b>4168020</b>	incl. case
44 Cms2	100-300			25 / 50 / 100	<b>4168021</b>	incl. case
44 Cms3	100-500			25 / 50 / 100 / 200	<b>4168022</b>	incl. case
44 Cms4	100-900*			25 / 50 / 100 / 200 / 400	<b>4168023</b>	incl. case

\* up to 2500 mm can be achieved with 2 extensions: 44 Cv 800 mm

### Accessories

Individual Extensions 44 Cv			Inside Micrometer 44 Cm			
Length a mm	dia. b mm	Order no.	Measuring range mm	Reading mm	Spindle thread pitch mm	Order no.
25	15	4167030	100 - 125	0.01	0.5	4168001
50	15	4167031				
100	15	4167032				
200	15	4167033				
400	15	4167034				
800	22	4167035				
			Case for Inside Micrometer 44 Cm and extension sets Cvs1 or Cvs2			
			4168015			
			Wooden case for 2 extensions 44Cv 800 mm			
			4168016			

## Inside Micrometer 44 F

DIN  
863-4



### Features


- Rigid, lightweight tubular construction
- Spindle is hardened throughout and ground
- Measuring faces spherically lapped, one measuring face adjustable
- Scales with satin-chrome finish
- From measuring range 100-125 mm with heat insulators and a locking device
- Supplied with: Case

### Technical Data

Measuring range mm	Readings mm	Error limit $G$ $\mu\text{m}$	Spindle thread pitch mm	Order no.
30 - 40	0.01	4	0.5	<b>4163000</b>
40 - 50	0.01	4	0.5	<b>4163001</b>
50 - 70	0.01	5	0.5	<b>4163002</b>
70 - 100	0.01	5	0.5	<b>4163003</b>
100 - 125	0.01	6	0.5	<b>4163004</b>
125 - 150	0.01	6	0.5	<b>4163005</b>
150 - 175	0.01	7	0.5	<b>4163006</b>
175 - 200	0.01	7	0.5	<b>4163007</b>

### Dimensions

Meas. range in mm	a	b
30 - 70	7	12.5
70 - 100	7	13.5
100 - 200	8	20

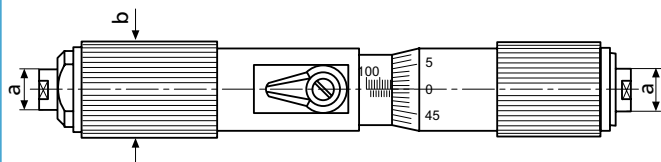

### Accessories

	Page
<b>Ring Gage 355 E</b> for testing the basic setting	13-17

Special wear resistant steel,  
hardened and lapped  
Dimensions according to DIN 2250 C  
Manufacturing tolerance in accordance to DIN 2250  
Uncertainty of the engraved actual dimension 1/2 IT1



**355 E**



## Self-Centering Inside Micrometer 44 A

DIN  
863-4



### Applications

- For measuring:
- through holes
  - blind holes
  - centering shoulders

### Features

- Scales with satin-chrome finish
- Spindle is hardened through-out and ground
- Rapid drive with integrated ratchet
- Self-centering measuring head consists of 3 laterally positioned anvils, each are offset at intervals of 120°
- Anvils from 12.5 mm are carbide tipped
- From 12.5 mm the anvils can be used to measure to the bottom of a bore
- From 40 mm all measuring heads are made from aluminum to reduce weight
- Supplied with:  
Case and operating instructions

### Technical Data

Measuring range mm	Readings mm	Error limit G * μm	Order no.
6 - 8	0.005	4	4190000
8 - 10	0.005	4	4190001
10 - 12.5	0.005	4	4190002
12.5 - 16	0.005	4	4190003
16 - 20	0.005	4	4190004
20 - 25	0.005	4	4190005
25 - 30	0.005	4	4190006
30 - 35	0.005	4	4190007
35 - 40	0.005	4	4190008
40 - 50	0.005	4	4190009
50 - 60	0.005	5	4190010
60 - 70	0.005	5	4190011
70 - 85	0.005	5	4190012
85 - 100	0.005	5	4190013
100 - 125	0.005	6	4190014
125 - 150	0.005	6	4190015
150 - 175	0.005	7	4190016
175 - 200	0.005	7	4190017

\* Over the full length of the anvils

## Self-Centering Inside Micrometer Sets 44 AS

Measuring range mm	Number of Micrometers 44 A	Ring gages dia. mm	Order no.
6 - 12.5 (.25 - .5")	3	8 / 10	4190050
12.5 - 25 (.5 - 1")	3	16 / 20	4190051
25 - 50 (1 - 2")	4	30 / 40	4190052
50 - 100 (2 - 4")	4	60 / 85	4190053

- Supplied with:  
Case and ring gage (includes a traceable calibration certificate for the ring gages)



## Digital Self-Centering Inside Micrometer 44 EX



### Application

- For measuring:
- through holes
  - blind holes
  - centering shoulders

### Features

#### Functions:

- 0 (Setting the display to zero for Relative measurement)
- ABS (Switching between Relative and Absolute measurement)
- mm/inch
- PR (Reference setting)

- Basic Instrument consists of: Basic Unit 44 EXg and Measuring Head 44 Ak

- Threaded connection for changing the measuring heads

- Self-Centering measuring head consists of 3 laterally positioned anvils, each are offset at intervals of 120°

- Anvils from 12.5 mm are carbide tipped

- From 12.5 mm the anvils can be used to measure to the bottom of a bore

- From 40 mm all measuring heads are made from aluminum to reduce weight

- Supplied with: Case, battery and operating instructions

### Technical Data

Measuring range mm	(inch)	Readings mm/inch	Error limit G* µm	Order no.
6 - 8	(.25 - .3125")	0.001 / .00005"	4	4191000
8 - 10	(.3125 - .4")	0.001 / .00005"	4	4191001
10 - 12.5	(.4 - .5")	0.001 / .00005"	4	4191002
12.5 - 16	(.5 - .625")	0.001 / .00005"	4	4191003
16 - 20	(.625 - .775")	0.001 / .00005"	4	4191004
20 - 25	(.775 - 1.0")	0.001 / .00005"	4	4191005
25 - 30	(1.0 - 1.2")	0.001 / .00005"	4	4191006
30 - 35	(1.2 - 1.4")	0.001 / .00005"	4	4191007
35 - 40	(1.4 - 1.6")	0.001 / .00005"	4	4191008
40 - 50	(1.6 - 2.0")	0.001 / .00005"	4	4191009
50 - 60	(2.0 - 2.35")	0.001 / .00005"	5	4191010
60 - 70	(2.35 - 2.75")	0.001 / .00005"	5	4191011
70 - 85	(2.75 - 3.35")	0.001 / .00005"	5	4191012
85 - 100	(3.35 - 4.0")	0.001 / .00005"	5	4191013
100 - 125	(4.0 - 4.9")	0.001 / .00005"	6	4191014
125 - 150	(4.9 - 5.9")	0.001 / .00005"	6	4191015
150 - 175	(5.9 - 6.9")	0.001 / .00005"	7	4191016
175 - 200	(6.9 - 7.9")	0.001 / .00005"	7	4191017

\* Over the full length of the anvils

## Digital Self-Centering Inside Micrometer Sets 44 EXS

Measuring range mm	(inch)	Number of measuring heads 44 Ak	Ring gages dia. mm	Order no.
6 - 12.5	(.25 - .5")	3	8 / 10	4191050
12.5 - 25	(.5 - 1")	3	16 / 20	4191051
25 - 50	(1 - 2")	4	30 / 40	4191052
50 - 100	(2 - 4")	4	60 / 85	4191053

- Supplied with:  
1 Basic Unit 44 EXg, Measuring Heads 44 Ak, case and ring gages (includes a traceable calibration certificate for the ring gages)



## Self-Centering Measuring Pistol 844 A



### Applications

For measuring:

- through holes
- blind holes
- centering shoulders

### Features

- Basic Instrument consists of: 844 Ag and Measuring Head 44 Ak
- Threaded connection for changing the measuring heads
- Self-Centering measuring head consists of 3 laterally positioned anvils, each are offset at intervals of 120°
- Anvils from 12.5 mm are carbide tipped
- From 12.5 mm the anvils can be used to measure to the bottom of a bore
- From 40 mm all measuring heads are made from aluminum to reduce weight
- Supplied with:  
Case and operating instructions

The following indicating instruments are recommended:

**Indicating instr.    Order no.**

MarCator 1086    **4337021**  
MarCator 1087    **4337061**

### Technical Data

Measuring range		Error limit G *	Order no.**
mm	(inch)		
6 - 8	(.25 - .3125")	3 / 0.00015	4487600
8 - 10	(.3125 - .4")	3 / 0.00015	4487601
10 - 12.5	(.4 - .5")	3 / 0.00015	4487602
12.5 - 16	(.5 - .625")	3 / 0.00015	4487603
16 - 20	(.625 - .775")	3 / 0.00015	4487604
20 - 25	(.775 - 1")	3 / 0.00015	4487605
25 - 30	(1.0" - 1.2")	3 / 0.00015	4487606
30 - 35	(1.2 - 1.4")	3 / 0.00015	4487607
35 - 40	(1.4 - 1.6")	3 / 0.00015	4487608
40 - 50	(1.6 - 2.0")	3 / 0.00015	4487609
50 - 60	(2.0 - 2.35")	4 / 0.00016	4487610
60 - 70	(2.35 - 2.75")	4 / 0.00016	4487611
70 - 85	(2.75 - 3.35")	4 / 0.00016	4487612
85 - 100	(3.35 - 4.0")	4 / 0.00016	4487613
100 - 125	(4.0 - 4.9")	5 / 0.0002	4487614
125 - 150	(4.9 - 5.9")	5 / 0.0002	4487615
150 - 175	(5.9 - 6.9")	6 / 0.00025	4487616
175 - 200	(6.9 - 7.9")	6 / 0.00025	4487617

## Self-Centering Measuring Pistol Set 844 AS

Measuring range	Number of measuring heads	Ring Gages	Order no. with Digital Indicator 1086	Order no.**
mm (inch)		dia. mm		
6 - 12.5 (.25 - .5")	3	8 / 10	4487660	4487650
12.5 - 25 (.5 - 1")	3	16 / 20	4487661	4487651
25 - 50 (1 - 2")	4	30 / 40	4487662	4487652
50 - 100 (2 - 4")	4	60 / 85	4487663	4487653

- Supplied with:  
1 Basic Instrument 844 Ag, Measuring Heads 44 Ak, case and ring gages (includes a traceable calibration certificate for the ring gages)

\* Indicator is not taken into consideration, over the full length of the anvils

\*\* Excludes indicator




## Accessories für 44 A, 44 EX, 844 A

### Measuring Heads 44 Ak for 44 EX and 844 A


- Self-centering measuring head consists of 3 laterally positioned anvils, each are offset at intervals of 120°
- Anvils from 12.5 mm are carbide tipped
- From 12.5 mm, anvils can be used to measure to the base of a bore
- From 40 mm all measuring heads are made from aluminum to reduce weight

Measuring range mm	(inch)	Order no.
6 - 8	(.25 - .3125")	4190030
8 - 10	(.3125 - .4")	4190031
10 - 12.5	(.4 - .5")	4190032
12.5 - 16	(.5 - .625")	4190033
16 - 20	(.625 - .775")	4190034
20 - 25	(.775 - 1.0")	4190035
25 - 30	(1.0 - 1.2")	4190036
30 - 35	(1.2 - 1.4")	4190037
35 - 40	(1.4 - 1.6")	4190038
40 - 50	(1.6 - 2.0")	4190039
50 - 60	(2.0 - 2.35")	4190040
60 - 70	(2.35 - 2.75")	4190041
70 - 85	(2.75 - 3.35")	4190042
85 - 100	(3.35 - 4.0")	4190043
100 - 125	(4.0 - 4.9")	4190044
125 - 150	(4.9 - 5.9")	4190045
150 - 175	(5.9 - 6.9")	4190046
175 - 200	(6.9 - 7.9")	4190047

Meas. range 6 - 12.5 mm



Meas. range 12.5 - 200 mm



#### Measuring range


mm	a	b	c	d
6 - 8	1.3	4.3	2	64
8 - 10	1.8	4.8	2	64
10 - 12.5	2	6	2.5	64
12.5 - 16	—	7	3	65
16 - 20	—	8.5	4	65
20 - 25	—	11	4	70
25 - 30	—	11	4	70
30 - 35	—	12	5	71
35 - 40	—	12	5	71
40 - 50	—	18	5	79
50 - 60	—	18	7	79
60 - 70	—	18	7	79
70 - 85	—	18	7	97
85 - 100	—	18	7	97
100 - 125	—	19	7	132
125 - 150	—	19	7	132
150 - 175	—	19	7	132
175 - 200	—	19	7	132

### Ring Gages 44 Ae

- Can be used for 2 consecutive measuring ranges
- Manufacturing tolerance in accordance to DIN 2250C
- Includes a traceable calibration certificate

dia. mm	Order no.	dia. mm	Order no.
8	4190300	40	4190305
10	4190301	60	4190306
16	4190302	85	4190307
20	4190303	125	4190308
30	4190304	175	4190309

### Basic Unit 44 EXg

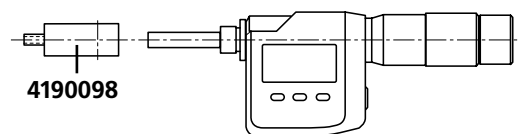


Threaded connection for changing the measuring heads.

Measuring range mm	(inch)	Order no.
6 - 12.5	(.25 - .5")	4190104
12.5 - 100*	(.5 - 4.0")	4190105
20 - 100	(.775 - 4.0")	4190101
100 - 200	(4.0 - 7.9")	4190102

\* Includes adaptor 4190098

### Basic Unit Measuring Pistol 844 Ag

Threaded connection for changing the measuring heads. Any indicating instrument with an 8 mm mounting shank can be used.




Measuring range mm	(inch)	Order no.
6 - 100*	(.25 - 4.0")	4487630
20 - 100	(.775 - 4.0")	4487631
100 - 200	(4.0 - 7.9")	4487632

\* Includes adaptor 4487410

### Depth Extension Rod 44 Av

Measuring range mm	(inch)	Length a mm	dia. b mm	Order no.
6 - 10	(.25 - .4")	75	5.8	4190090
10 - 20	(.4 - .775")	75	9.5	4190091
20 - 25	(.775 - 1")	150	19.0	4190092
25 - 200	(1 - 7.9")	150	22.0	4190093



## Depth Micrometer 45 T



### Applications

- Depth measurement
- Measuring the space between grooves and groove widths (in conjunction with a Disc anvil 45 Tm)



### Features


- Measuring spindle is hardened throughout and ground
- Hardened chrome plated cross beam, the contact surface is lapped
- Hardened anvil
- When using interchangeable extensions recalibrating the depth micrometer is not necessary
- Scales with satin-chrome finish
- Supplied with:  
Extensions 25 mm and 50 mm, case

### Technical Data

Total measuring range mm	Range of micrometer mm	Readings mm	Spindle thread pitch mm	Error limit with standard anvil $\mu\text{m}$	Extensions mm	Length tolerance of extensions $\mu\text{m}$	Order no.
0 - 100	25	0.01	0.5	$\leq 5 \mu\text{m}$	25/50	$\pm 1.5 \mu\text{m}$	<b>4180000</b>


*Standard depth measurements*

*With a standard anvil, if necessary with an extension*

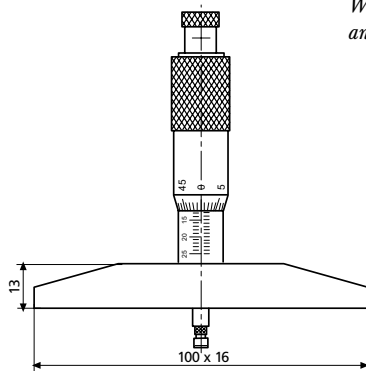

*Measuring the space between grooves and the widths of a groove*

*With disc anvil 45 Tm, if necessary with an extension*

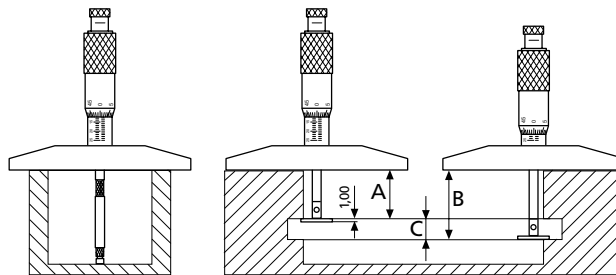

*Dimension A: Can be direct read of the thimble*

*Dimension B: The reading plus 1.00 mm (thickness of the disc anvil)*

*Dimension C:  
Dimension B minus Dimension A*

### Accessories

#### Disc anvil 45 Tm

for groove spacing and groove widths

Order no.

**4180011**

#### Extension 45 Tv

Length L

Length tolerance

25 mm

$\pm 1.5 \mu\text{m}$

**4180001**

50 mm


$\pm 1.5 \mu\text{m}$

**4180002**

100 mm

$\pm 1.5 \mu\text{m}$

**4180003**



## Digital Micrometer Head 46 EX



### Features


#### Functions:

- 0 (Zero setting)
- ABS (Switching between Relative and Absolute measurement)
- mm/inch
- PRESET (enter a numerical value)
- DATA (Data transmission via connection cable)
- Patented capacitive measuring system with an energy saving function, life of the battery approx. 2 years
- Ratchet with integrated coupler
- Supplied with:
  - Case, adaptor dia. 12 mm to 16 mm, end cap (in case ratchet stop is not required)
  - and operating instructions

### Technical Data

Measuring range mm (inch)	Readings mm/inch	Error limit $G_{me}$ $\mu m$	Measuring face	Mounting shaft mm	Order no.
0-25 (0-1")	0.001/ .00005"	4	flat	12	4184301
0-25 (0-1")	0.001/ .00005"	4	flat	12*	4184303
0-25 (0-1")	0.001/ .00005"	4	spherical	12	4184302
0-25 (0-1")	0.001/ .00005"	4	spherical	12*	4184304

\* with locking nut

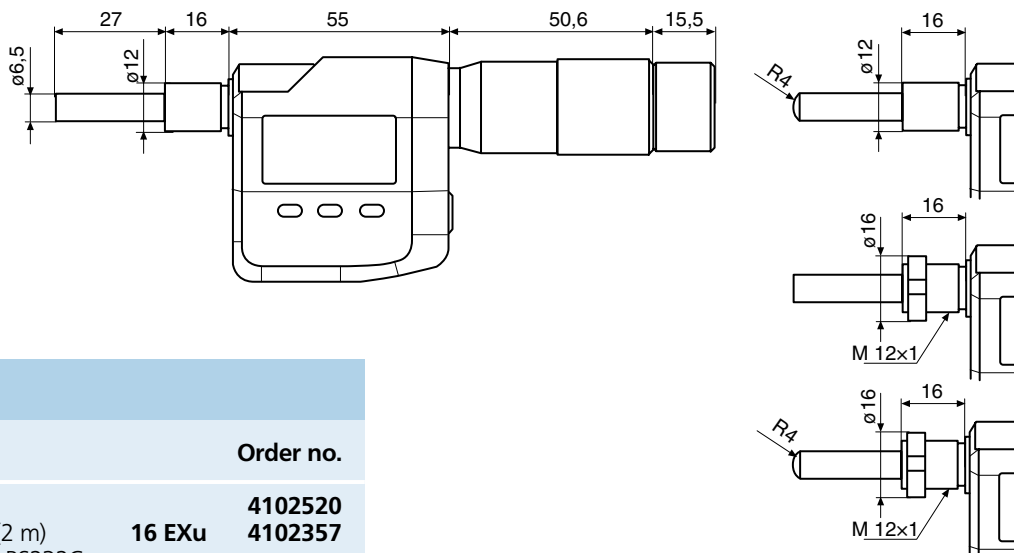

### Accessories

	Order no.
<b>Battery</b> 3V, type CR 2032	4102520
<b>Data Connection Cable</b> USB (2 m)	16 EXu 4102357
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411

Accessories for Data Processing see Chapter 11



## Micrometer Head 46



### Features


- Spindle is made of stainless steel, hardened throughout and ground
- Scales with satin-chrome finish

### Technical Data


Measuring range	Readings	Error limit	Spindle thread pitch	Spindle dia.	Order no.
mm	mm	$G_{me}$ μm	DIN 863 mm	mm	
<b>46</b> 0 - 6.5	0.01	3 ●	0.5	3.5	<b>4183021</b>
0 - 13	0.01	3 ●	0.5	5	<b>4183025</b>
0 - 25	0.01	3 ●	0.5	6.35	<b>4183030</b>
0 - 25*	0.01	3 ●	0.5	6.35	<b>4183024</b>
0 - 50	0.01	5 ●	0.5	7.5	<b>4183023</b>
<b>46 H</b> 0 - 25**	0.01	3 ●	0.5	7.5	<b>4184000</b>

\* with locking nut


\*\* with ratchet, carbide tipped




**4183021**  
Measuring range 0-6.5 mm

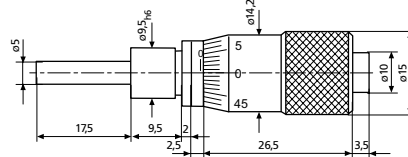


**4183025**  
Measuring range 0-13 mm

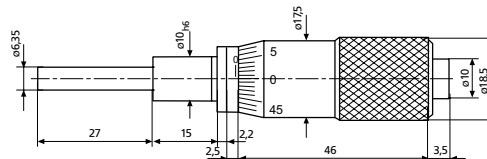


**4183030**  
Measuring range 0-25 mm

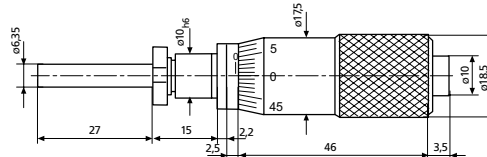

**4183024**  
Measuring range 0-25 mm  
with locking nut

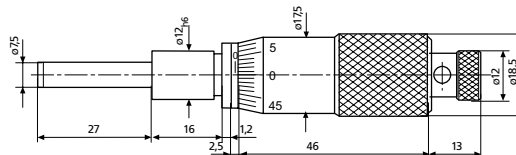

**4184000**  
Measuring range 0-25 mm  
carbide tipped

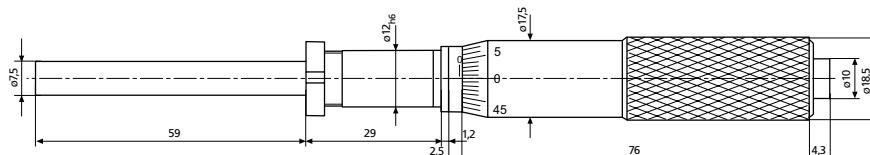

**4183023**  
Measuring range 0-50 mm

## YOUR MEASURING TASKS ARE SENSITIVE. **MARTEST IS HIGHLY SENSITIVE.**



The latest information on MARTEST products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 10407**

► | Since 1936 Mahr is one of the leading global producers of test indicators, we have achieved this with the continuous advancement of our products and with unrelenting commitment to produce high quality products that not only meet customer requirements but also exceed them. We have also increased research and development in order to satisfy the demands and requirements of the market, however our core philosophy is to offer our customer a highly accurate and simple solution for various measuring tasks. With the MarTest series of test indicators there is not just a broad product range but also a wide variety of accessories at your disposal. The sensitive computer-optimized shockproof mechanism of the test indicator ensures maximum security and precision. MarTest is ideal for use in workshop conditions due to the dial being sealed thus impervious to the penetration of liquids. | ◀

## ► | MarTest. Test Indicators and Touch Probes

### Test Indicators

#### Overview

Standard version

**MarTest 800 S / 800 SG / 800 SA / 800 SGA**

metric

4- 2

**MarTest 801 S1 / 801 S / 801 SG / 801 SGI**

inch

4- 4

With a higher resolution

**MarTest 800 SM / 800 SGM / 800 SGE**

metric

4- 5

**MarTest 801 SM / 801 SGM / 801 SGE**

inch

4- 5

With a longer styli

**MarTest 800 SL / 800 SGL / 800 SGB**

metric

4- 6

**MarTest 801 SL / 801 SGL**

inch

4- 6

Horizontal version

**MarTest 800 H**

metric

4- 7

**MarTest 801 H**

inch

4- 7

Vertical version

**MarTest 800 V / 800 VGM**

metric

4- 7

**MarTest 801 V / 801 VGM**

inch

4- 7

With a larger measuring range

**MarTest 800 SR / 800 SRM**

metric

4- 8

**MarTest 801 SR / 801 SRM**

inch

4- 8

#### Accessories

4- 8

### 3D Touch Probes

Water proof, with a Digital display

**MarTest 802 W**

4-12

Water proof, with an Analog display







**MarTest 802 EW**

4-13

# MarTest. Test Indicators

## Overview

### MarTest - Versions

		Measuring range	Dial style	Readings	<div>DIN 2270</div>	f <sub>ges</sub>	f <sub>e</sub>	f <sub>u</sub>	f <sub>t</sub>	f <sub>w</sub>
	Standard	metric								
	800 S	+/- 0.4 mm	0-40-0	0.01 mm	●	13 μm	10 μm	3 μm	5 μm	3 μm
	800 SG	+/- 0.4 mm	0-40-0	0.01 mm	●	13 μm	10 μm	3 μm	5 μm	3 μm
	800 SA	+/- 0.25 mm	0-25-0	0.01 mm		8 μm	5 μm	3 μm	5 μm	3 μm
	800 SGA	+/- 0.25 mm	0-25-0	0.01 mm		8 μm	5 μm	3 μm	5 μm	3 μm
	inch									
	801 S1	+/- .015"	0-15-0	.001"		.0005"	.0004"	.00012"	.0002"	.0002"
	801 S	+/- .015"	0-15-0	.0005"		.0005"	.0004"	.00012"	.0002"	.0002"
	801 SG	+/- .015"	0-15-0	.0005"		.0005"	.0004"	.00012"	.0002"	.0002"
801 SGI	+/- .015"	0-15-0	.001"		.0005"	.0004"	.00012"	.0002"	.0002"	
		(+/-0.30 mm)	(0-30-0)	(0.01 mm)						
	Extra Long Styli	metric								
	800 SL	+/- 0.25 mm	0-25-0	0.01 mm		13 μm	10 μm	5 μm	5 μm	3 μm
	800 SGL	+/- 0.25 mm	0-25-0	0.01 mm		13 μm	10 μm	5 μm	5 μm	3 μm
	800 SGB	+/- 0.5 mm	0-50-0	0.01 mm		13 μm	10 μm	4 μm	5 μm	3 μm
	inch									
	801 SL	+/- .010"	0-10-0	.0005"		.0005"	.0004"	.0002"	.0002"	.00012"
801 SGL	+/- .010"	0-10-0	.0005"		.0005"	.0004"	.0002"	.0002"	.00012"	
	Higher Resolution	metric								
	800 SM	+/- 0.1 mm	0-100-0	0.002 mm	●	4 μm	3 μm	2 μm	2 μm	1.5 μm
	800 SGM	+/- 0.1 mm	0-100-0	0.002 mm	●	4 μm	3 μm	2 μm	2 μm	1.5 μm
	800 SGE	+/- 0.07 mm	0-70-0	0.001 mm		4 μm	3 μm	2 μm	2 μm	1.5 μm
	inch									
	801 SM	+/- .004"	0-4-0	.0001"		.00016"	.00012"	.00008"	.00008"	.00006"
	801 SGM	+/- .004"	0-4-0	.0001"		.00016"	.00012"	.00008"	.00008"	.00006"
801 SGE	+/- .004"	0-4-0	.00005"		.00016"	.00012"	.00008"	.00008"	.00006"	
	Larger Measuring Range	metric								
	800 SR	+/- 0.8 mm	0-40-0	0.01 mm		14 μm	10 μm	4 μm	5 μm	3 μm
	800 SRM	+/- 0.2 mm	0-100-0	0.002 mm		5 μm	3 μm	3 μm	2 μm	1.5 μm
	inch									
	801 SR	+/- .030"	0-15-0	.0005"		.0005"	.0004"	.00016"	.0002"	.00012"
801 SRM	+/- .008"	0-4-0	.0001"		.0002"	.00012"	.00012"	.00008"	.00006"	
	Horizontal Models	metric								
	800 H	+/- 0.4 mm	0-40-0	0.01mm	●	13 μm	10 μm	3 μm	5 μm	3 μm
	inch									
801 H	+/- .015"	0-15-0	.0005"		.0005"	.0004"	.00012"	.0002"	.00012"	
	Vertical Models	metric								
	800 V	+/- 0.4 mm	0-40-0	0.01 mm	●	13 μm	10 μm	3 μm	5 μm	3 μm
	800 VGM	+/- 0.1 mm	0-100-0	0.002 mm	●	4 μm	3 μm	2 μm	2 μm	1.5 μm
	inch									
	801 V	+/- .015"	0-15-0	.0005"		.0005"	.0004"	.00012"	.0002"	.00012"
801 VGM	+/- .004"	0-4-0	.0001"		.00016"	.00012"	.00008"	.00008"	.00006"	
* Only available in North America, Canada and Mexico; includes holding bar and clamp										

\* Only available in North America, Canada and Mexico; includes holding bar and clamp

Length of  
Styli

Order no.

Order no.  
with kit\*

14.5 mm 4305200 2015309

14.5 mm 4307200 2015310

14.5 mm 4301200 2015343

14.5 mm 4301250 2015344

14.5 mm 4305960 2015317

14.5 mm 4305950 2015316

14.5 mm 4307950 2015318

14.5 mm 4307970 2015311

41.24 mm 4306200 2015312

41.24 mm 4306250 2015313

32.325 mm 4301300 2015346

41.24 mm 4306950 2015319

41.24 mm 4306960 2015320

14.5 mm 4308150 2015315

14.5 mm 4308200 2015314

9.155 mm 4308220 2015345

14.5 mm 4308960 2015321

14.5 mm 4308970 2015322

14.5 mm 4308985 2015323

14.5 mm 4307250 2015348

14.5 mm 4308250 2015349

14.5 mm 4307960 2015350

14.5 mm 4308980 2015351

14.5 mm 4303200 2015328

14.5 mm 4303950 2015324


14.5 mm 4302200 2015327

14.5 mm 4302250 2015347

14.5 mm 4302950 2015325

14.5 mm 4302960 2015326

## Metrological characteristics

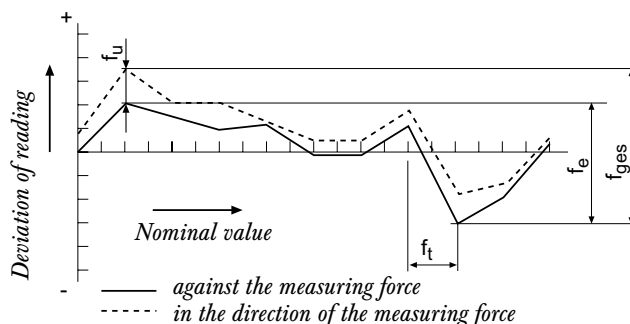



## Design features of MarTest Test Indicators

**SHOCK  
PROOF**



### Mechanism

- Shockproof
- Anti magnetic
- Movement bearings are jeweled with 8 precious stones
- Automatic matching to sensing direction, thus ensuring error-free reading

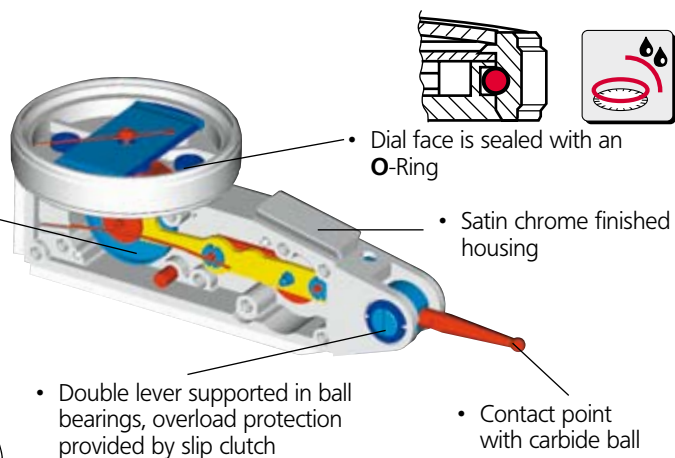

## MarTest - Applications

Concentricity of a shaft



Concentricity of a sleeve



Centering of a bore



Aligning a surface




Testing parallelism





## MarTest standard versions

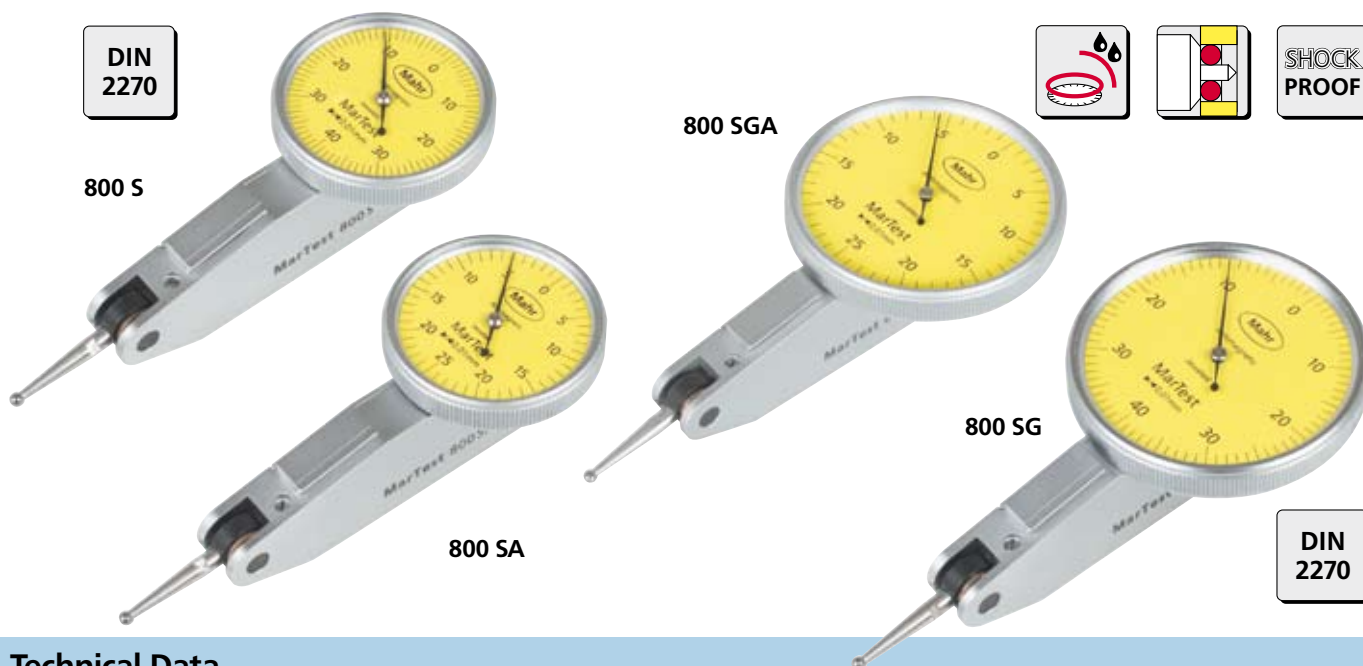


## Technical Data

	Measuring range	Readings	Dial dia.	Measuring force	Length of styli	Order no.	Order no. with kit
800 S	± 0.4 mm	0.01 mm	27.5 mm	0.15 N	14.5 mm	4305200	2015309
800 SG	± 0.4 mm	0.01 mm	38 mm	0.15 N	14.5 mm	4307200	2015310
800 SA	± 0.25 mm	0.01 mm	27.5 mm	0.1 N	14.5 mm	4301200	2015343
800 SGA	± 0.25 mm	0.01 mm	38 mm	0.1 N	14.5 mm	4301250	2015344
801 S1	± .015"	.001"	1.1"	0.15 N	14.5 mm	4305960	2015317
801 S	± .015"	.0005"	1.1"	0.15 N	14.5 mm	4305950	2015316
801 SG	± .015"	.0005"	1.5"	0.15 N	14.5 mm	4307950	2015318
801 SGI	± .015" (± 0.3 mm)	.0005" (0.01 mm)	1.5"	0.15 N	14.5 mm	4307970	2015311


### Supplied with:

Plastic storage case, spanner for changing the styli, styli dia. 2 mm, mounting shaft 800 a8 (for metric versions), mounting shaft 800 a6 (800 SA, 800 SGA), mounting shaft 800 a3/8 (for inch versions)


801 S1





801 S



801 SG



801 SGI

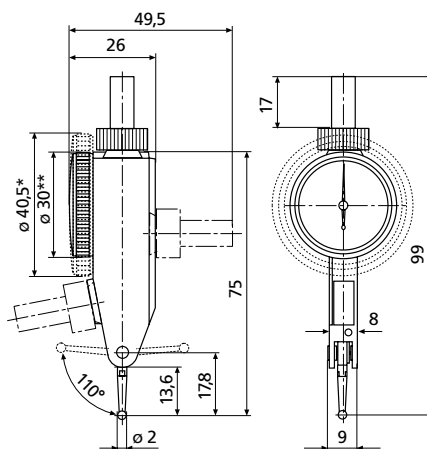


\* 800 SG, 800 SGA, 801 SG, 801 SGI

\*\* 800 S, 800 SA, 801 S1, 801 S



**MarTest** with resolution 0.002 mm/0.001 mm for higher accuracy

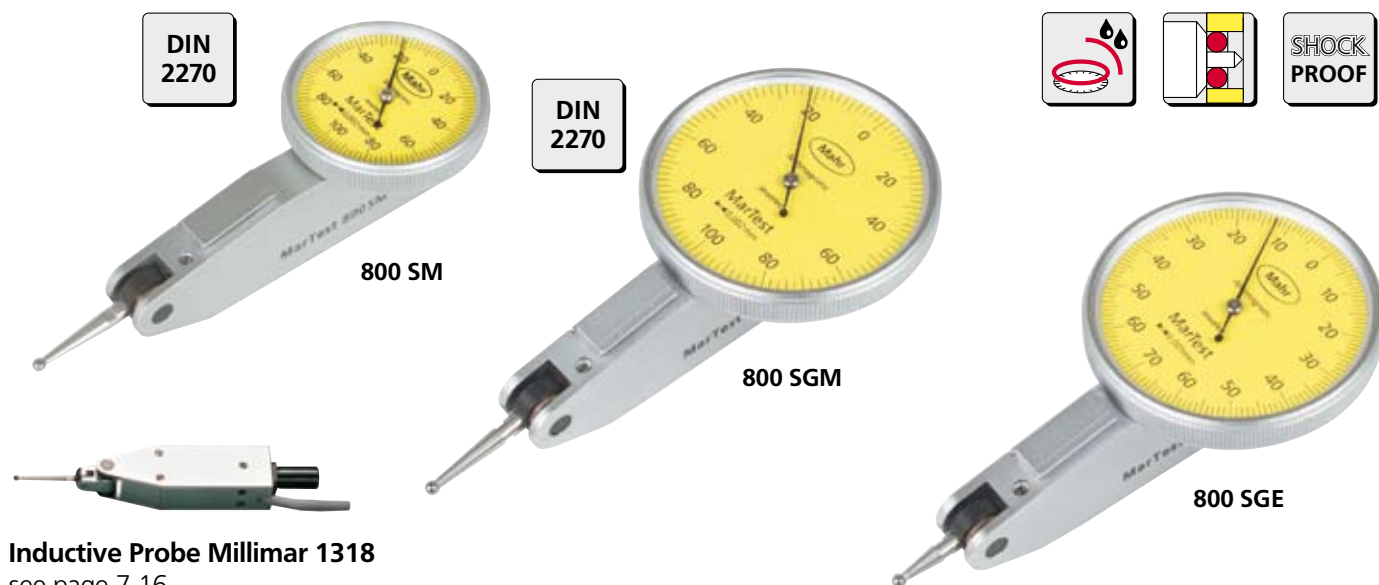

**Inductive Probe Millimar 1318**

see page 7-16


## Technical Data

	Measuring range	Readings	Dial dia.	Measuring force	Length of styli	Order no.	Order no. with kit
<b>800 SM</b>	± 0.1 mm	0.002 mm	27.5 mm	0.15 N	14.5 mm	<b>4308150</b>	<b>2015315</b>
<b>800 SGM</b>	± 0.1 mm	0.002 mm	38 mm	0.15 N	14.5 mm	<b>4308200</b>	<b>2015314</b>
<b>800 SGE</b>	± 0.07 mm	0.001 mm	38 mm	0.2 N	14.5 mm	<b>4308220</b>	<b>2015345</b>
<b>801 SM</b>	± .004"	.0001"	1.1"	0.15 N	14.5 mm	<b>4308960</b>	<b>2015321</b>
<b>801 SGM</b>	± .004"	.0001"	1.5"	0.15 N	14.5 mm	<b>4308970</b>	<b>2015322</b>
<b>801 SGE</b>	± .004"	.00005"	1.5"	0.15 N	14.5 mm	<b>4308985</b>	<b>2015323</b>


*Supplied with:*

*Plastic storage case, spanner for changing the styli, styli dia. 2 mm, mounting shaft 800 a8 (for metric versions), mounting shaft 800 a3/8 (for inch versions)*



**801 SM**



**801 SGM**



**801 SGE**

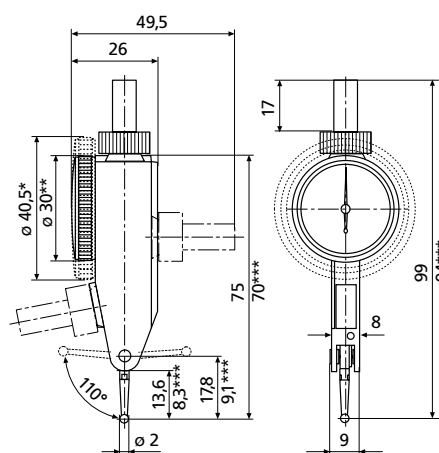

\* 800 SGM, 800 SGE, 801 SGM, 801 SGE

\*\* 800 SM, 801 SM

\*\*\* 800 SGE

**MarTest** with extra long styli for measuring in even difficult to access positions




### Technical Data

	Measuring range	Readings	Dial dia.	Measuring force	Length of styli	Order no.	Order no. with kit
<b>800 SL</b>	± 0.25 mm	0.01 mm	27.5 mm	0.07 N	41.24 mm	<b>4306200</b>	<b>2015312</b>
<b>800 SGL</b>	± 0.25 mm	0.01 mm	38 mm	0.07 N	41.24 mm	<b>4306250</b>	<b>2015313</b>
<b>800 SGB</b>	± 0.5 mm	0.01 mm	38 mm	0.07 N	32.3 mm	<b>4301300</b>	<b>2015346</b>
<b>801 SL</b>	± .010"	.0005"	1.1"	0.07 N	41.24 mm	<b>4306950</b>	<b>2015319</b>
<b>801 SGL</b>	± .010"	.0005"	1.5"	0.07 N	41.24 mm	<b>4306960</b>	<b>2015320</b>



*Supplied with:*

*Plastic storage case, spanner for changing the styli, styli dia. 2 mm, mounting shaft 800 a8 (for metric versions), mounting shaft 800 a6 (800 SGB), mounting shaft 800 a3/8 (for inch versions)*

**801 SL**



**801 SGL**


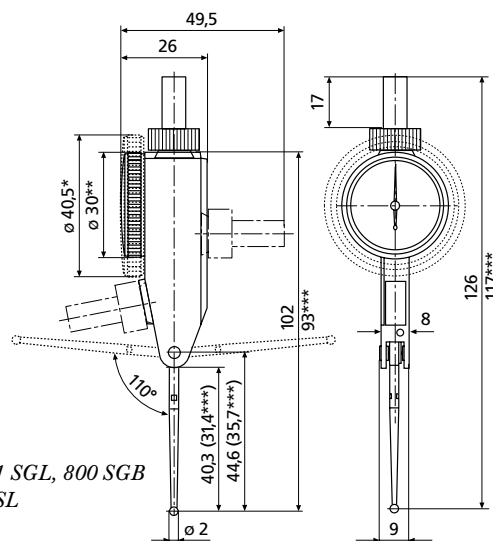



\* 800 SGL, 801 SGL, 800 SGB

\*\* 800 SL, 801 SL

\*\*\* 800 SGB

**MarTest** styli can positioned horizontally to the dial face



**SHOCK  
PROOF**

## Technical Data

	Measuring range	Readings	Dial dia.	Measuring force	Length of styli	Order no.	Order no. with kit
<b>800 H</b>	± 0.4 mm	0.01 mm	27.5 mm	0.25 N	14.5 mm	<b>4303200</b>	<b>2015328</b>
<b>801 H</b>	± .015"	.0005"	1.1"	0.25 N	14.5 mm	<b>4303950</b>	<b>2015324</b>

Supplied with:

Plastic storage case, spanner for changing the styli, styli dia. 2 mm, mounting shaft 800 a8 (for metric versions), mounting shaft 800 a3/8 (for inch versions)

**MarTest** vertical model





**800 V**

**DIN  
2270**




**800 VGM**

**DIN  
2270**

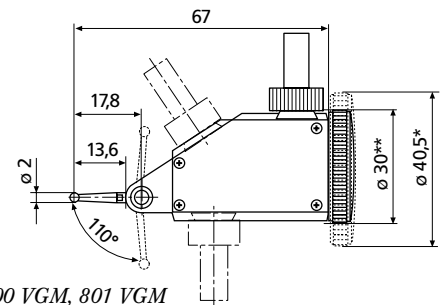

\* 800 VGM, 801 VGM

\*\* 800 V, 801 V



**SHOCK  
PROOF**

## Technical Data

	Measuring range	Readings	Dial dia.	Measuring force	Length of styli	Order no.	Order no. with kit
<b>800 V</b>	± 0.4 mm	0.01 mm	27.5 mm	0.2 N	14.5 mm	<b>4302200</b>	<b>2015327</b>
<b>800 VGM</b>	± 0.1 mm	0.002 mm	38 mm	0.25 N	14.5 mm	<b>4302250</b>	<b>2015347</b>
<b>801 V</b>	± .015"	.0005"	1.1"	0.2 N	14.5 mm	<b>4302950</b>	<b>2015325</b>
<b>801 VGM</b>	± .004"	.0001"	1.5"	0.25 N	14.5 mm	<b>4302960</b>	<b>2015326</b>

Supplied with:



Plastic storage case, spanner for changing the styli, styli dia. 2 mm, mounting shaft 800 a8 (for metric versions), mounting shaft 800 a3/8 (for inch versions)

## MarTest with larger measuring range



800 SRM

800 SR/SRM

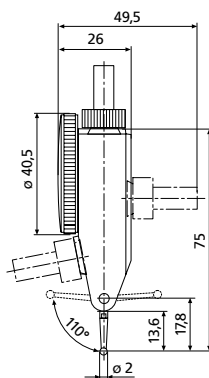

## Technical Data


	Measuring range	Readings	Dial dia.	Measuring force	Length of styli	Order no.	Order no. with kit
800 SR	± 0.8 mm	0.01 mm	38 mm	0.15 N	14.5 mm	4307250	2015348
800 SRM	± 0.2 mm	0.002 mm	38 mm	0.15 N	14.5 mm	4308250	2015349
801 SR	± .030"	.0005"	1.5"	0.15 N	14.5 mm	4307960	2015350
801 SRM	± .008"	.0001"	1.5"	0.15 N	14.5 mm	4308980	2015351

Supplied with:

Plastic storage case, spanner for changing the styli, styli dia. 2 mm, mounting shaft 800 a8 (for metric versions), mounting shaft 800 a3/8 (for inch versions)

## MarTest - Accessories

Styluses  
with ruby  
contact point



Styluses  
with carbide  
contact point



Spanner for changing  
the styluses 4305868




Model	Stylus-length <i>l</i>	Styluses				Ruby contact point	
		Carbide contact point	d			d	
		Cat.-no.	dia. 1 mm	dia. 2 mm	dia. 3 mm	Cat.-no.	dia. 2 mm
800 S/801 S1/801 S 800 SG/801 SG 800 SA 800 SGA 800 SM/801 SM 800 SGM/801 SGM 801 SGE 800 SR/801 SR 800 SRM/801 SRM 800 H/801 H 800 V/801 V 800 VGM/801 VGM	14.5 mm	800 ts	4305870	4305850	4305871	800 tsr	4309051
800 SGE	9.1 mm	800 te	4308851	4308850	4308852	800 ter	4309050
800 SL/801 SL 800 SGL/801 SGL	41.24 mm	800 tl	4306851	4306850	4306853	800 tlr	4309053
800 SGB	32.3 mm	800 tb	4301851	4301850	4301852	800 tbr	4309052

## Martest - Accessories

### Mounting shaft for dovetail

Mounting shaft	dia. d mm	Order no.
800 a8	8	4305865
800 a6	6	4301865
800 a4	4	4305885
800 a1/4	1/4"	4305895
800 a3/8	3/8"	4305875



### Stand 801 p



- With swivel holder
- Base with V-groove 140°
- Total height 150 mm
- Mounting bore dia. 4 and 8 mm
- Column dia. 8 mm
- Base surface 65 x 40 mm

Order no. 4309090

Indicator not included.

### Centering support rods 801 v

- For aligning and centering work pieces on machine tools
- Swivel mounting clamp and fine adjustment
- Stainless steel rods

Mounting bore dia. 8 mm  
Swivel range of mounting clamp 180°

Order no. 4309070




### Leveling Table TE-20

Cuts set-up time 60% or more for many height gage measurements.

- The leveling table, TE-20, permits you to quickly bring the surface of a part into alignment with a surface plate in both planes. Completely eliminates shimming. Saves so much time that, used only occasionally, it will pay for itself in two weeks.
- The top plate is stress-relieved steel providing about 67 square inches of work area. It is drilled and tapped for fixtures. Fine pitch screws and large knobs assure precisely controlled adjustments. Works with any type of height gage.
- Operation is simple. Height gage readings are taken at edges of the surface to be aligned. Each plate, independently adjustable at right angles to the other, is angled as required for precise alignment.  
Flatness = .025 mm / .001"




Typical checks which require careful positioning of work because rest surface is not sufficiently parallel to other work surfaces. Leveling Table compensates for error quickly, drastically reduces set-up time.

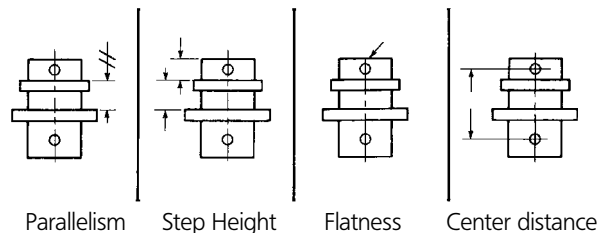

Adjustment	Top Plate	Bottom Plate
Total	± 1° 30'	± 1° 30'


## Martest - Accessories

### Holder 800 h

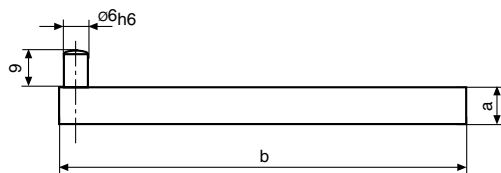

	Dimensions		Order no.
	a	b	
800 h1	9x9	100	4305888
800 h2	1/4" x 1/2"	4"	4305889


### Universal clamp 800 k

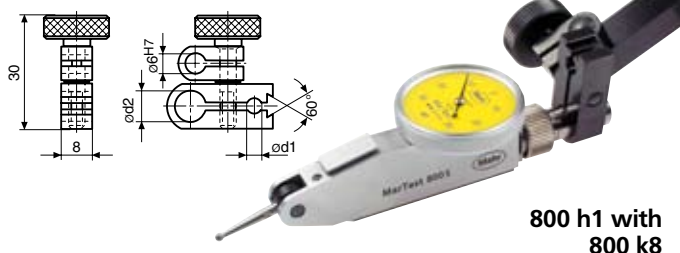

	Dimensions		Order no.
	dia. d1	dia. d2	
800 k8	4	8	4305891
800 k3/8	5/32"	3/8"	4305892


Indicator not included.

### Universal centering support frame 800 b Order no. 4305893

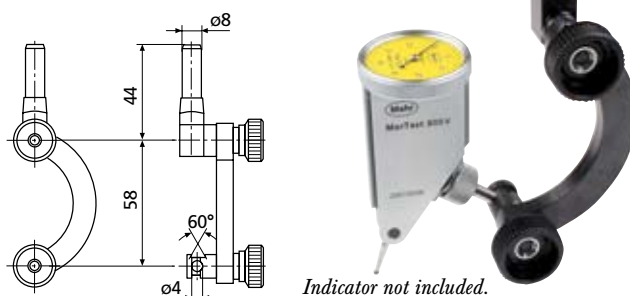

Indicator not included.

### Universal holder with dovetail clamp

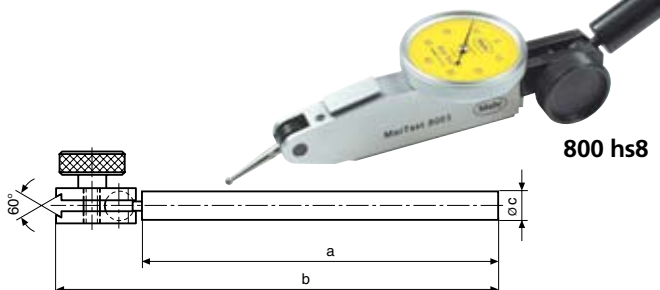


	Dimensions		Order no.
	a	b	
800 hs8	100	124	4305886
800 hs3/8	4"	5"	4305887

Indicator not included.


### Ball Clamp

- Dovetail and ball for indicator mounting and omni-directional orientation

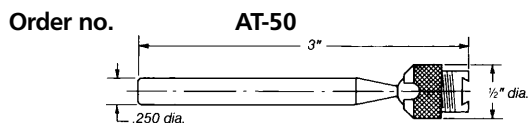

### Jig Borer Attachment


- Furnished with two rods and clamp for fast machine mounting

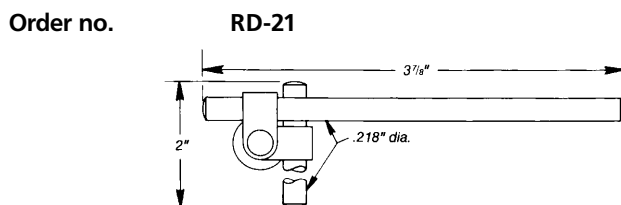

### Swivel Clamp

- Normally furnished with MarTest models. Allows indicator to be mounted on most indicator stands and fixtures


Order no. CP-2199



### Double-jointed Clamp

- Reaches up to 127 mm / 5" with easy positioning for many applications including milling machine and Jig Borers


Order no. AT-100

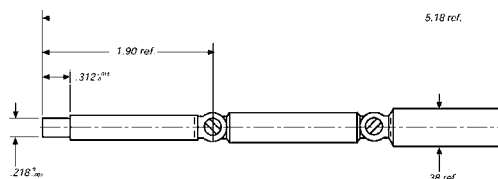

### Holding Bar

- Normally furnished with MarTest models. Three-inch length provides ample reach for most applications

Order no. HB-2157

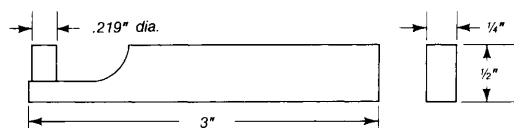



## Martest - Accessories

### Test Stand 1492B

- Use with any MarTest Indicator - Support arms stepped at one end (.218in dia.) for Swivel Clamp (CP-2199).
- Accommodates Vertical and Horizontal lug back mounts for AGD type Indicators.
- Bases have powerful "ON/OFF" permanent magnets which hold from any of four faces - three sides or bottom.



*Indicator not included.*

Base Dimensions W x L x H		Main Post		Support Arm		Order no.
mm	(inch)	Length mm/inch	Diameter mm/inch	Length mm/inch	Diameter mm/inch	
60 x 48 x 59	(2.4" x 1.9" x 2.2")	178/ 7"	10/ .47"	165/ 6.5"	9.9/ .39"	1492B-5
60 x 48 x 59	(2.4" x 1.9" x 2.2")	178/ 7"	10/ .47"	149/ 5.9"	9.9/ .39"	1492B-10
114 x 48 x 59	(4.5" x 1.9" x 2.2")	401/ 15.8"	20/ .79"	200/ 7.9"	14/ .55"	1492B-15

*Measurements are mm/inch. All models furnished with post clamp and indicator mounting clamp.  
Style 1492B-10 has fine adjustment on post clamp.*

### Transfer Stand 2300

- Fine adjustment conveniently located in base.
- Three-point base pads improve accuracy.
- Contoured shape facilitates movement.
- Use with any Testmaster Indicator - stud accommodates Swivel Clamp (CP-2199).
- EHE-2048 Gage head requires a CP-116 Clamp.



*Indicator not included.*

Base Dimensions W x L x H		Column (dia. x H)	Maximum vertical capacity	Reach (base to contact point)	Mounting stud dia.	Order no.
mm	(inch)	mm/inch	mm/inch	mm/inch	mm/inch	
76 x 110 x 45	(3 x 4.375 x 1.75")	25 x 430/ .995 x 17"	457/ 18"	approx. 86/ 3.375"	5.55/ .218"	2300

## Mechanical 3D-Touch Probe 802 W



### Applications

Can be used on milling and EDM machines to

- determine the zero position on a work piece
- determine the center of a bore
- determine and correct the position of a work piece

and for measurement of

- lengths
- depths

### Features



- High accuracy and linearity
  - suitable for measuring work pieces
  - measurement over the entire working range is possible
- Can be controlled independently of a machine tool
- Easy to read display
- Large working range in all axis (X, Y, Z) prevents damage to the stylus by contacting errors
- Shock and Water proof, ideal for the use on a machine with a tool changer
- Compact metal housing and long probe arm

### Technical Data


	Repeatability in zero position unidirectional	Readings	Dial dia.	Mounting shaft dia.	Order no.
802W	$\pm 0.01 \text{ mm}$	0.01 mm	50 mm	16 mm	4304310
802 WZ	$\pm .0004''$	.001"	2.0"	3/4"	4304315

### Accessories

Styli	dia. d mm	l mm	Working range x,y (mm) z (mm)	Order no.
802Wts	4	44.8	10 7.5	4304330
802Wtk	3	32.6	13 7.5	4304331
802Wtl	6	71.1	19 7.5	4304332

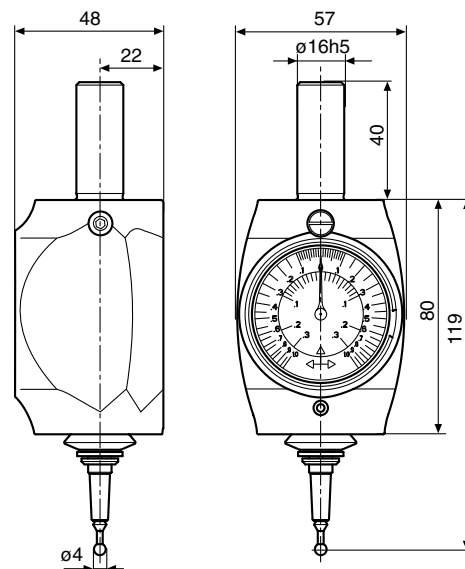

## Digital 3D-Touch Probe 802 EW



### Applications

Can be used on milling and EDM machines to

- determine the zero position on a work piece
- determine the center of a bore
- determine and correct the position of a work piece

and for measurement of

- lengths
- depths

### Features

- High accuracy and linearity
  - suitable for measuring work pieces
  - measurement over the entire working range is possible
- Can be controlled independently of a machine tool
- Easy to read display due to the combination of:
  - a progressive analog display (bar graph) for dynamic path information
  - a digital display for accurate reading
- Large working range (6 mm) in all axis (X, Y, Z) prevents damage to the stylus by contacting errors
- Shock and water proof; ideal for the use on a machine with a tool changer
- Compact metal housing and long probe arm



### Technical Data

	Working range X, Y, Z-Axis unidirectional	Repeatability in zero position display	Resolution of digital	Display range	Mounting shaft dia.*	Order no.
802 EW	-2 to 4 mm	$\pm 0.005$ mm	0.005 mm	$\pm 2$ mm	16 mm	4304300
802 EWZ	.0787" to .157"	$\pm .0001$ "	.0001"	$\pm .0787$ "	3/4"	4304305

\* Further mounting shafts are available on request

### Accessories

Styli	dia. d mm	l mm	Order no.
802 EWt	4	31	4304320

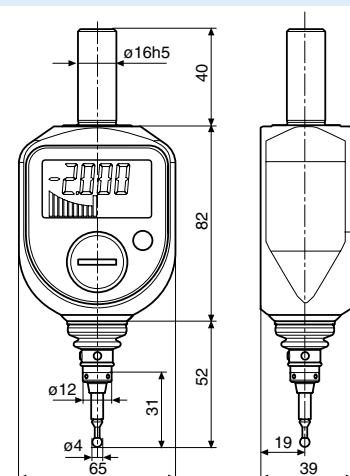

## THEY POINT YOU IN THE RIGHT DIRECTION. **MARCATOR DIAL INDICATORS.**



The latest information on MARCATOR products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 206**

► | Dial indicators due to their versatility rank as the most frequently applied transducer, just like our MarCator series. Our mechanical dial indicators have precision gears and pinions for a maximum accuracy. They are also available in shock and waterproof versions. Our digital indicator range contains highly precise electronic measuring systems, which make measuring functions possible yet without the loss of an analog display. With the simple operation, the large display that can be read error free and the possibility of a rapid and simple transmission of all your measurement results thus meeting all requirements of a modern measuring instrument.



## ► | MarCator. Dial and Digital Indicators

### ANSI/AGD Dial Indicators

#### Overview

5- 2

#### Dial Indicators ANSI/AGD Groups 0, 1, 2, 3, 4

5- 7

#### Single Revolution Dial Indicator

5-13

#### Long Range and Extra Long Range Dial Indicator

5-15

#### Wetproof Dial Indicator Series WC & WP

5-17

#### Perpendicular Dial Indicator

5-19

#### Accessories for ANSI/AGD Dial Indicators

5-21

#### Dial Indicators - Testing and Calibration Products

5-25

#### Contact Points for ANSI/AGD Dial Indicators

5-27

### DIN Style Precision Dial Indicators

#### Overview

5-28

#### MarCator 803 A / 803 / 803 W / 803 B / 803 Z

5-30

#### Small Dial Indicators

#### MarCator 810 A / 810 AT / 810 S / 810 SW /

5-32

#### 810 SB / 810 AZ

#### Standard versions

#### MarCator 810 AU / 810 AX / 810 V / 810 AG

5-34

#### Special versions

### Digital Indicators (Long Range)

#### Overview

5-36

#### MarCator 1075 / 1080 / 1081

5-38

#### Standard versions with digital display

#### MarCator $\mu$ Max $\mu$ m XL

5-40

#### With tolerance function

#### MarCator 1086 / 1086 W / 1086 Z

5-42

#### With integrated tolerance functions

#### MarCator 1087 / 1087 / Z

5-46

#### With combined digital and analog display

#### MarCator 1088 / 1088 W

5-48

#### With background lit display

#### MarCator 1087 B

5-50

#### For 2-point inside measurement

#### Accessories for MarCator 1086 / 1087 / 1088

5-51

#### Contact Points and Accessories for Dial / Digital Indicators, Mechanical / Digital Comparators & Probes

5-52

# MarCator ANSI/AGD Dial Indicators

## Overview

### Dial Indicators Selection Guide

Grad	Range per Rev.	Total Range	Dial Style w/o Rev	Dial Style with Rev	Order number	
					w/o Rev Counter	with Rev Counter
Group 0						
.0001"	.004"	.010"	0-2-0	—	A1/2Q	
.0001"	.010"	.025"	0-5-0	—	A2I	
.0005"	.020"	.050"	0-10-0	—	A3Q	
.001"	.040"	.100"	0-20-0	—	A6Q	
.002 mm	.100	.250	0-5-0	—	N1/2O	
.005 mm	.500	1.25	0-25-0	—	N3I	
.010 mm	1.00	2.50	0-50-0	—	N6I	
Group 1						
.0001"	.010"	.025"	0-5-0	0-10	12I	12I-RC
.00025"	.010"	.025"	0-5-0	0-10	12Q	12Q-RC
.00025"	.020"	.050"	0-10-0	0-20	B3K	B3K-RC
.0005"	.020"	.050"	0-10-0	0-20	B3Q	B3Q-RC
.0005"	.030"	.075"	0-15-0	0-30	B5M	B5M-RC
.0005"	.040"	.100"	0-20-0	0-40	B6K	B6K-RC
.0005"	.050"	.125"	0-25-0	0-50	B7I	B7I-RC
.001"	.020"	.050"	0-10-0	0-20	B3W	B3W-RC
.001"	.040"	.100"	0-20-0	0-40	B6Q	B6Q-RC
.001"	.050"	.125"	0-25-0	0-50	B7O	B7O-RC
.001"	.100"	.250"	0-50-0	0-100	B8I	B8I-RC
.002 mm	.200	.500	0-10-0	0-20	O1I	O1I-RC
.005 mm	.500	1.25	0-25-0	0-50	O3I	O3I-RC
.010 mm	1.00	2.50	0-50-0	0-100	O6I	O6I-RC
.025 mm	2.50	6.25	0-125-0	0-250	O8I	O8I-RC
Group 2						
.00005"	.004"	.010"	0-2-0	0-4	C1/2K	C1/2K-RC
.0001"	.008"	.020"	0-4-0	0-8	C1K	C1K-RC
.0001"	.010"	.025"	0-5-0	0-10	2015781	2014761
.00025"	.010"	.025"	0-5-0	0-10	2015782	2014791
.00025"	.020"	.050"	0-10-0	0-20	2015783	2014808
.0005"	.020"	.050"	0-10-0	0-20	2015784	2014810
.0005"	.030"	.075"	0-15-0	0-30	2015786	2014811
.0005"	.040"	.100"	0-20-0	0-40	2015787	2014812
.0005"	.050"	.125"	0-25-0	0-50	2015790	2014814
.001"	.020"	.050"	0-10-0	0-20	2015785	2014809
.001"	.040"	.100"	0-20-0	0-40	2015789	2014813
.001"	.050"	.125"	0-25-0	0-50	2015791	2014815
.001"	.100"	.250"	0-50-0	0-100	2015792	2011049
.001 mm	.100	.250	0-5-0	0-10	P1/2I	P1/2I-RC
.002 mm	.200	.500	0-10-0	0-20	P1I	P1I-RC
.005 mm	.500	1.25	0-25-0	0-50	2015793	2014817
.010 mm	1.00	2.50	0-50-0	0-100	2015794	2014818
.020 mm	2.00	5.00	0-100-0	0-200	2015795	2014819
1 Rev						
.0005"	—	.040"	—	—	2014793	
.001"	—	.080"	—	—	2014792	
.010 mm	—	1.00	—	—	2014795	
.020 mm	—	2.00	—	—	2014794	
.010 mm	—	1.00	—	—	2014797	
.020 mm	—	2.00	—	—	2014796	



					Order number	
Grad	Range per Rev.	Total Range	Dial Style w/o Rev	Dial Style with Rev	w/o Rev Counter	with Rev Counter
Group 3						
.0001"	.008"	.020"	0-4-0	0-8	D1K	D1K-RC
.0001"	.010"	.025"	0-5-0	0-10	32I	32I-RC
.00025"	.010"	.025"	0-5-0	0-10	32Q	32Q-RC
.00025"	.020"	.050"	0-10-0	0-20	D3K	D3K-RC
.00025"	.030"	.075"	0-15-0	0-30	D5G	D5G-RC
.0005"	.020"	.050"	0-10-0	0-20	D3Q	D3Q-RC
.0005"	.030"	.075"	0-15-0	0-30	D5M	D5M-RC
.0005"	.040"	.100"	0-20-0	0-40	D6K	D6K-RC
.0005"	.050"	.125"	0-25-0	0-50	D7I	D7I-RC
.001"	.020"	.050"	0-10-0	0-20	D3W	D3W-RC
.001"	.040"	.100"	0-20-0	0-40	D6Q	D6Q-RC
.001"	.050"	.125"	0-25-0	0-50	D7O	D7O-RC
.001"	.100"	.250"	0-50-0	0-100	D8I	D8I-RC
.002 mm	.200	.500	0-10-0	0-20	Q1I	Q1I-RC
.005 mm	.500	1.25	0-25-0	0-50	Q3I	Q3I-RC
.010 mm	1.00	2.50	0-50-0	0-100	Q6I	Q6I-RC
.020 mm	2.00	5.00	0-100-0	0-200	Q8I	Q8I-RC
Group 4						
.0001"	.008"	.020"	0-4-0	0-8	E1K	E1K-RC
.0001"	.010"	.025"	0-5-0	0-10	42I	42I-RC
.00025"	.020"	.050"	0-10-0	0-20	E3K	E3K-RC
.00025"	.030"	.075"	0-15-0	0-30	E5G	E5G-RC
.0005"	.020"	.050"	0-10-0	0-20	E3Q	E3Q-RC
.0005"	.030"	.075"	0-15-0	0-30	E5M	E5M-RC
.0005"	.050"	.125"	0-25-0	0-50	E7I	E7I-RC
.001"	.020"	.050"	0-10-0	0-20	E3W	E3W-RC
.001"	.050"	.125"	0-25-0	0-50	E7O	E7O-RC
.001"	.100"	.250"	0-50-0	0-100	E8I	E8I-RC
.002 mm	.200	.500	0-10-0	0-20	R1I	R1I-RC
.005 mm	.500	1.25	0-25-0	0-50	R3I	R3I-RC
.010 mm	1.00	2.50	0-50-0	0-100	R6I	R6I-RC
.020 mm	2.00	5.00	0-100-0	0-200	R8I	R8I-RC
Long Range						
.0001"	.010"	.500"	—	0-10		42IQ
.001"	.100"	.500"	—	0-100		2014699
.001"	.100"	1.00"	—	0-100		2014698
.001"	.100"	1.00"	—	0-100		D8IS
.001"	.100"	2.00"	—	0-100		D8IT
.001"	.100"	3.00"	—	0-100		E8IU
.010"	1.00"	1.00"	—	0-1000		2014816
.010 mm	1.00	25.00	—	0-100		SP6IS
.010 mm	1.00	25.00	—	0-100		SQ6IS
.025 mm	2.50	50.00	—	0-25		Q8IT
.025 mm	2.50	75.00	—	0-25		R8IU

## Dial Indicators per ANSI/AGD

### Features

#### You get more with Mahr Federal Dial Indicators

- Proven for the most demanding applications
- Superior design and serviceability
- Unmatched customer and technical support
- Catalog and customized styles
- Full range of accessories to suit virtually every need
- Unit construction, removable movement . . . saves repair/cleaning time and maintenance costs
- Hardened gears and stainless steel racks provide lasting protection against indicator failure due to shock or wear
- Jeweled bearings resist friction, add to longer indicator life
- Skeletonized, hobbled gears for more sensitive response, superior indicator accuracy with minimal hysteresis error
- Soft-tinted dials (green, inch, or yellow, metric) minimize eye strain
- Special steel alloy, balanced dial hand affords no-shift, precise reading
- Controlled rack and pinion mesh eliminates slope for precise response and reading
- Smooth-adjusting bezels for easy setup
- Positive pressure pull-back spring . . . less maintenance
- Compliance with ANSI/AGD dimensional and accuracy specifications
- Many models employ stainless steel stem for added durability

### How to Order

#### How to Order Your Dial Indicator and Accessories

1. Select the type of Indicator you require. Check the specialize types as well as regular ANSI/AGD models.
2. Choose the Model best suited to the magnification, range and viewing needs of your job.
3. Accessories. These are important because they greatly increase the speed, efficiency and convenience of obtaining desired results. A wide selection of Mahr Federal dial indicator accessories are shown in this catalog.
4. Options. You are not restricted to the normally furnished equipment mentioned above. A wide choice of optionally available points, backs or dial arrangements can be specified at little or no extra cost. We maintain the most extensive stock of indicators and gages for dimensional measurement available anywhere. Items which are in stock are normally shipped within five working days. If you need them sooner, inquire when ordering. We can often make next-day deliveries. Understandably, some of the items in this catalog are not always in stock or are special order items, which take a little longer to ship.

**If you need help** in determining what Indicators right for your application, just ask us. Contact Mahr Federal:

**1-800-333-4243**

One of our experienced professionals will give you courteous, professional advice that can save you time and money.

#### Replacement indicators

Although Mahr Federal dial indicators are known for their lifetime service, it is not uncommon to change an indicator back, contact point, dial or to even add an accessory to suit your latest application.

**When ordering a replacement dial indicator for a specific application, always verify the configuration of the indicator. Ordering a replacement using the standard model number shown on your indicator may not provide you with the configuration or accessories you desire.**



## Dial Indicators per ANSI/AGD


### Selecting a Dial Indicator

Since modern manufacturing involves a wide range of tolerances, choosing a dial indicator might be difficult, especially since the number of indicators available is so vast. The following guidelines were prepared to assist you in selecting the right model for your application.

Consider four characteristics when selecting a dial indicator:

- **Minimum Graduation Value** — value of the smallest graduations marked on the dial. From several different values available from Mahr Federal, select the one which is closest to 10% of the tolerance spread of the work you are measuring. This assures that the tolerance will span about ten divisions of the dial.
- **Size** — represents the bezel diameter. Make your selection on the basis of space available for the indicator and the distance from which it will be viewed. The Indicator photograph shown on the first page of each ANSI/AGD Group is full scale. Simply place the page which illustrates the Indicator at the expected viewing distance, and choose the size that offers you the best readability and is the proper size for your fixture. Mahr Federal's "C" size bezels (ANSI/AGD Group 2), which have a diameter of 2-1/4", are the most popular.
- **Range per Revolution** — represents the distance the spindle travels with one complete revolution of the dial hand. From the dials available in the size and minimum graduation value you chose, select the range per revolution which allows the tolerance spread to occupy 1/10 to 1/4 of the dial.
- **Total Range** — the maximum distance over which the indicator spindle can travel. Usually, this represents 2-1/2 revolutions of the hand, which is adequate for most needs. Sometimes, however, this may not be adequate for your application and a special total range may be necessary.

*If your tolerance spread is .006" ( $\pm .003$ "), then, the most suitable minimum graduation value is .0005".*

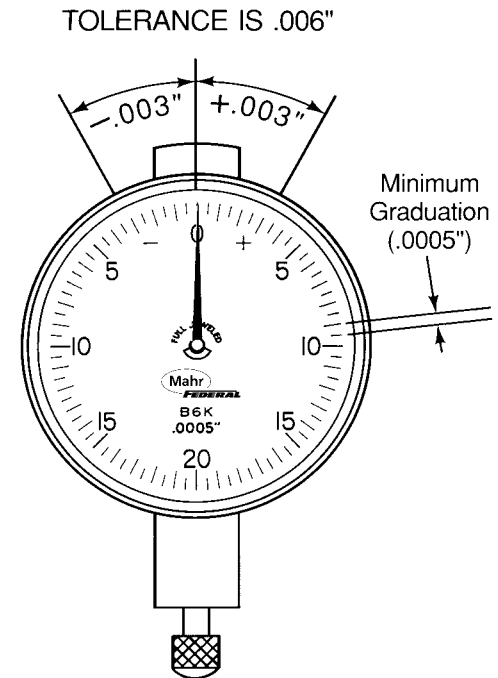

*Your tolerance spread is .006". You have chosen an ANSI/AGD Group 2 (Mahr Federal "C" Size) dial with a minimum graduation value of .0005". Mahr Federal offers four indicator types in this size and minimum graduation value. Of these, type C5M has a range per revolution of .030" which is about midway between your tolerance extremes.*

*You selected a C5M indicator. Your total range, however, needs to be at least .200" so the spindle can clear the lip of your part. But, the longest range available in the C5M indicator you need is only .075". Special ranges up to .400" are available for this indicator type. Select the closest range for your application (for Model C5M, you would select .250").*

*If the range you need is not listed under the "Special Ranges" category, contact Mahr Federal. Chances are we can supply the range you need.*

Copies of the current ANSI Standard for Dial Indicators (ANSI B89.1.1 0-1987) are available from:

The American Society of Mechanical Engineers  
ASME Order Desk  
22 Law Drive  
Fairfield, NJ 07007  
(973)882-1167


## Dial Indicators per ANSI/AGD

### Dial Types

#### 1. Balanced (+) on right.

Normally furnished on all Group 0, 1, 3 and 4 ANSI/AGD indicators only, unless otherwise specified. Indicates an increasing value when contact is depressed as in comparison type O.D. snap and bench thickness gages.

**Note:** If Revolution Counter models are ordered, counter dial numbered counterclockwise.




#### 2. Balanced (+) on left.

Indicates decreasing values when contact is depressed as in comparison bore\* and depth gages.

**Note:** With Revolution Counter models, counter dial numbered clockwise.


\* Will vary as dictated by motion transfer design.



#### 3. Continuous clockwise.

Normally furnished on Long and Extra Long Range Indicators, unless otherwise specified. Indicates an increasing value when contact is depressed as in direct-reading thickness gages.


**Note:** With Revolution Counter models, counter dial numbered counterclockwise.



#### 4. Continuous counterclockwise.

Indicates a decreasing value when contact is depressed as in direct reading slot, recess or hole depth measurements.

**Note:** If Revolution Counter models are ordered, counter dial numbered clockwise



## Dial Indicators per ANSI/AGD Group 0 - Mahr Federal Series A and N

Where available space prohibits the use of a larger dial indicator.



### Technical Data

#### Mahr Federal Series A (inch)


Dial: approx. 1.250" dia. with soft-green tint

Measuring range	Graduation value	Dial style	Range per revolution	Accuracy	Order no.
.010"	.0001"	0-2-0	.004"	±.0001"	A1/2Q
.025"	.0001"	0-5-0	.010"	±.0001"	A2I
.050"	.0005"	0-10-0	.020"	±.0005"	A3Q
.100"	.001"	0-20-0	.040"	±.001"	A6Q

#### Mahr Federal Series N (Metric – mm)

Dial: approx. 32 mm dia. with soft-yellow tint


Measuring range	Graduation value	Dial style	Range per revolution	Accuracy	Order no.
0.250	0.002	0-5-0	0.100	±0.002 mm	N1/2Q
1.250	0.005	0-25-0	0.500	±0.005 mm	N3I
2.500	0.010	0-50-0	1.00	±0.010 mm	N6I

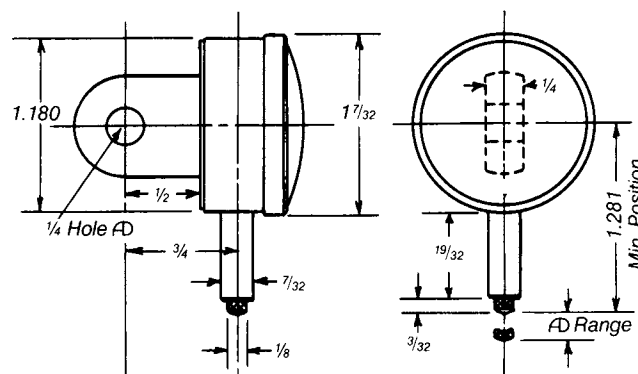

Backs can be rotated 90° and 180°

## Dial Indicators per ANSI/AGD Group 0 - Mahr Federal Series A and N


### Mahr Federal Series A




A1/2Q



A2I



A3Q




A6Q


- Normally furnished: balanced dial with + on right; centered vertical lug back; regular contact point, .09" radiused, .093" long.

- Optional dials: balanced with + on left; continuous clockwise; continuous counter-clockwise. Order by part number and specify dial style desired.


### Mahr Federal Series N



N1/2O



N3I




N6I

- For other dial styles or special requirements, call Mahr Federal.


### Backs for ANSI Group 0 - Series A and N

Vertical (Centered) Lug Back is normally furnished and included in price of Indicator. Back can be rotated 90° for horizontal lug mounting.




Vertical Lug (Centered)  
BK-37

A	B	C	D
1/2	11/16	1/4	1/4




Adjustable  
BK-45

A	B	C	D
1/8	3/8	8-32	1/4




Screw Type  
BK-88

A	B	C
1/2	11/16	1/4-28



Post  
BK-38

A	B	C
5/16	7/32	1/16




Flat  
BK-32

Split Bushing, BU-112 Fits Stem (.218" I.D. x .375" O.D.), .500" long.



### Points for ANSI Group 0 - Series A and N


Regular PT-43  
normally furnished




Dim. A	Style
--------	-------

3/32"	PT-43
1/4"	PT-204
3/8"	PT-205
1/2"	PT-207
5/8"	PT-208
3/4"	PT-209
7/8"	PT-210
1"	PT-211


Taper  
PT-119



Button  
PT-118



Flat  
AL-61





## Dial Indicators per ANSI/AGD Group 1 - Mahr Federal Series B and O



### Technical Data

#### Mahr Federal Series B (inch)

Dial: approx. 1.750" dia. with soft-green tint

Measuring range	Graduation value	Dial style w/o Rev Counter	Dial style with Rev Counter	Range per revolution	Accuracy	Order no. w/o Rev Counter	Order no. with Rev Counter
.025"	.0001"	0-5-0	0-10	.010"	±.0001"	12I	12I-RC
.025"	.00025"	0-5-0	0-10	.010"	±.00025"	12Q	12Q-RC
.050"	.00025"	0-10-0	0-20	.020"	±.00025"	B3K	B3K-RC
.050"	.0005"	0-10-0	0-20	.020"	±.0005"	B3Q	B3Q-RC
.075"	.0005"	0-15-0	0-30	.030"	±.0005"	B5M	B5M-RC
.100"	.0005"	0-20-0	0-40	.040"	±.0005"	B6K	B6K-RC
.125"	.0005"	0-25-0	0-50	.050"	±.0005"	B7I	B7I-RC
.050"	.001"	0-10-0	0-20	.020"	±.001"	B3W	B3W-RC
.100"	.001"	0-20-0	0-40	.040"	±.001"	B6Q	B6Q-RC
.125"	.001"	0-25-0	0-50	.050"	±.001"	B7O	B7O-RC
.250"	.001"	0-50-0	0-100	.100"	±.001"	B8I	B8I-RC

#### Mahr Federal Series O (Metric, mm)


Dial: approx. 45 mm dia. with yellow tint

Measuring range	Graduation value	Dial style w/o Rev Counter	Dial style with Rev Counter	Range per revolution	Accuracy	Order no. w/o Rev Counter	Order no. with Rev Counter
0.500	0.002	0-10-0	0-20	0.200	±0.004	O1I	O1I-RC
1.250	0.005	0-25-0	0-50	0.500	±0.005	O3I	O3I-RC
2.500	0.010	0-50-0	0-100	1.000	±0.010	O6I	O6I-RC
6.250	0.025	0-125-0	0-250	2.500	±0.025	O8I	O8I-RC

### Dimensions

ANSI / AGD Group	Mahr Federal Styles	A mm/inch	B mm/inch	C mm/inch	D mm/inch	E mm/inch
1	B/O	42.86/ 1.688"	41.28/ 1.625"	38.10/ 1.5"	15.88/ .625"	8.73/ .344"
2	C/P	57.15/ 2.25"	50.80/ 2"	52.39/ 2.063"	18.26/ .719"	8.73/ .344"

These indicators are normally furnished with continuous dial (with R.C.) or + on right balance dial (w/o R.C.), lug back and .18" by .250" long contact.

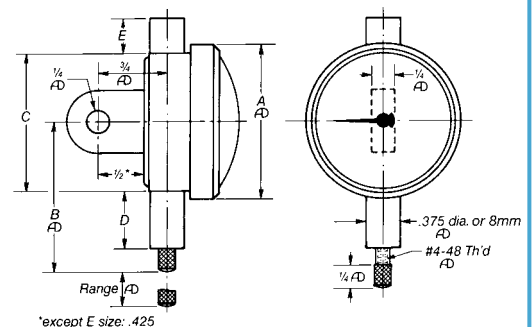

## Dial Indicators per ANSI/AGD Group 2 - Mahr Federal Series C and P



### Ordering Information

In addition to the information provided below, see pages 5-4 & 5-5 for complete instructions on ordering your dial indicators and accessories.

[www.mahr.com](http://www.mahr.com)

### Technical Data

#### Mahr Federal Series C (inch)

Dial: approx. .250" dia. with soft-green tint

Measuring range	Graduation value	Dial style w/o Rev Counter	Dial style with Rev Counter	Range per revolution	Accuracy	Order no. w/o Rev Counter	Order no. with Rev Counter	OLD Order no.
.020"	.0001"	0-4-0	0-8	.008"	±.0001"	C1K	C1K-RC	C1K
.025"	.0001"	0-5-0	0-10	.010"	±.0001"	2015781	2014761	C2I/22I
.025"	.00025"	0-5-0	0-10	.010"	±.00025"	2015782	2014791	C2Q/22Q
.050"	.00025"	0-10-0	0-20	.020"	±.00025"	2015783	2014808	C3K/23K
.050"	.0005"	0-10-0	0-20	.020"	±.0005"	2015784	2014810	C3Q/23Q
.075"	.0005"	0-15-0	0-30	.030"	±.0005"	2015786	2014811	C5M/25M
.100"	.0005"	0-20-0	0-40	.040"	±.0005"	2015787	2014812	C6K/26K
.125"	.0005"	0-25-0	0-50	.050"	±.0005"	2015790	2014814	C7I/27I
.050"	.001"	0-10-0	0-20	.020"	±.001"	2015785	2014809	C3W/23W
.100"	.001"	0-20-0	0-40	.040"	±.001"	2015789	2014813	C6Q/26Q
.125"	.001"	0-25-0	0-50	.050"	±.001"	2015791	2014815	C7O/27O
.250"	.001"	0-50-0	0-100	.100"	±.001"	2015792	2011049	C8I/28IN

#### Super Sensitive Type (Inch)

.010"	.00005"	0-2-0	0-4	.004"	±.0001"	C1/2K	C1/2K-RC	C1/2K
-------	---------	-------	-----	-------	---------	-------	----------	-------

#### Mahr Federal Series P (Metric, mm)

Dial: approx. 57 mm dia. with soft-yellow tint

Measuring range	Graduation value	Dial style w/o Rev Counter	Dial style with Rev Counter	Range per revolution	Accuracy	Order no. w/o Rev Counter	Order no. with Rev Counter	OLD Order no.
0.500	0.002	0-10-0	0-20	0.200	±0.002	P1I	P1I-RC	P1I/21IN
1.250	0.005	0-25-0	0-50	0.500	±0.005	2015793	2014817	P3I/23I
2.500	0.010	0-50-0	0-100	1.000	±0.010	2015794	2014818	P6I/26I
5.000	0.020	0-100-0	0-200	2.000	±0.020	2015795	2014819	P8I/28IM

#### Super Sensitive Type (Metric – mm)

0.250	0.001	0-5-0	0-10	0.100	±0.002	P1/2I	P1/2I-RC	P1/2I
-------	-------	-------	------	-------	--------	-------	----------	-------

These indicators are normally furnished with continuous dial (with R.C.) or + on right balance dial (w/o R.C.), lug back, .18" by .250" long contact and tolerance hands\*.

\* tolerance hands not supplied on C1K, C1/2K, P1I & P1/2I.

### Accessories

- Contact Points - see page 5-27 and 5-22
- Backs and Mounting Brackets - see pages 5-21 and 5-22
- Accessories - see pages 5-23 and 5-24

## Dial Indicators per ANSI/AGD Group 3 - Mahr Federal Series D and Q

Recommended for larger gages  
and greater visibility.



### Ordering Information

In addition to the information provided below, see pages 5-4 & 5-5 for complete instructions on ordering your dial indicators and accessories.

[www.mahr.com](http://www.mahr.com)

### Technical Data

#### Mahr Federal Series D (inch)

Dial: approx. 2.750" dia. with soft-green tint

Measuring range	Graduation value	Dial style w/o Rev Counter	Dial style with Rev Counter	Range per revolution	Accuracy	Order no. w/o Rev Counter	Order no. with Rev Counter
.020"	.0001"	0-4-0	0-8	.008"	±.0001"	D1K	D1K-RC
.025"	.0001"	0-5-0	0-10	.010"	±.0001"	32I	32I-RC
.025"	.00025"	0-5-0	0-10	.010"	±.00025"	32Q	32Q-RC
.050"	.00025"	0-10-0	0-20	.020"	±.00025"	D3K	D3K-RC
.075"	.00025"	0-15-0	0-30	.030"	±.00025"	D5G	D5G-RC
.050"	.0005"	0-10-0	0-20	.020"	±.0005"	D3Q	D3Q-RC
.075"	.0005"	0-15-0	0-30	.030"	±.0005"	D5M	D5M-RC
.100"	.0005"	0-20-0	0-40	.040"	±.0005"	D6K	D6K-RC
.125"	.0005"	0-25-0	0-50	.050"	±.0005"	D7I	D7I-RC
.050"	.001"	0-10-0	0-20	.020"	±.001"	D3W	D3W-RC
.100"	.001"	0-20-0	0-40	.040"	±.001"	D6Q	D6Q-RC
.125"	.001"	0-25-0	0-50	.050"	±.001"	D7O	D7O-RC
.250"	.001"	0-50-0	0-100	.100"	±.001"	D8I	D8I-RC

#### Mahr Federal Series Q (Metric – mm)

Dial: approx. 70 mm dia. with soft-yellow tint

Measuring range	Graduation value	Dial style w/o Rev Counter	Dial style with Rev Counter	Range per revolution	Accuracy	Order no. w/o Rev Counter	Order no. with Rev Counter
0.500	0.002	0-10-0	0-20	0.200	±0.002	Q1I	Q1I-RC
1.250	0.005	0-25-0	0-50	0.500	±0.005	Q3I	Q3I-RC
2.500	0.010	0-50-0	0-100	1.000	±0.020	Q6I	Q6I-RC
5.000	0.020	0-100-0	0-200	2.000	±0.020	Q8I	Q8I-RC

*These indicators are normally furnished with continuous dial (with R.C.) or + on right balance dial (w/o R.C.), lug back, and .18" by .250" long contact.*

### Accessories

- Contact Points - see pages 5-27 and 5-22
- Backs and Mounting Brackets - see pages 5-21 and 5-22
- Accessories - see pages 5-23 and 5-24

## Dial Indicators per ANSI/AGD Group 4 - Mahr Federal Series E and R



### Technical Data

#### Mahr Federal Series E (inch)

Dial: approx. 3.625" dia. with soft-green tint

Measuring range	Graduation value	Dial style w/o Rev Counter	Dial style with Rev Counter	Range per revolution	Accuracy	Order no. w/o Rev Counter	Order no. with Rev Counter
.020"	.0001"	0-4-0	0-8	.008"	$\pm 0001"$	E1K	E1K-RC
.025"	.0001"	0-5-0	0-10	.010"	$\pm 0001"$	42I	42I-RC
.050"	.00025"	0-10-0	0-20	.020"	$\pm 00025"$	E3K	E3K-RC
.075"	.00025"	0-15-0	0-30	.030"	$\pm 00025"$	E5G	E5G-RC
.050"	.0005"	0-10-0	0-20	.020"	$\pm 0005"$	E3Q	E3Q-RC
.075"	.0005"	0-15-0	0-30	.030"	$\pm 0005"$	E5M	E5M-RC
.125"	.0005"	0-25-0	0-50	.050"	$\pm 0005"$	E7I	E7I-RC
.050"	.001"	0-10-0	0-20	.020"	$\pm 001"$	E3W	E3W-RC
.125"	.001"	0-25-0	0-50	.050"	$\pm 001"$	E7O	E7O-RC
.250"	.001"	0-50-0	0-100	.100"	$\pm 001"$	E8I	E8I-RC

#### Mahr Federal Series R (Metric, mm)


Dial: approx. 92 mm dia. with yellow tint

Measuring range	Graduation value	Dial style w/o Rev Counter	Dial style with Rev Counter	Range per revolution	Accuracy	Order no. w/o Rev Counter	Order no. with Rev Counter
0.500	0.002	0-10-0	0-20	0.200	$\pm 0.002$	R1I	R1I-RC
1.250	0.005	0-25-0	0-50	0.500	$\pm 0.005$	R3I	R3I-RC
2.500	0.010	0-50-0	0-100	1.000	$\pm 0.010$	R6I	R6I-RC
5.000	0.020	0-100-0	0-200	2.000	$\pm 0.020$	R8I	R8I-RC

### Dimensions

ANSI / AGD Group	Mahr Federal Styles	A mm/inch	B mm/inch	C mm/inch	D mm/inch	E mm/inch
3	D/Q	69.85/ 2.75"	53.98/ 2.125"	65.09/ 2.563"	15.88/ .625"	8.73/ .344"
4	E/R	92.08/ 3.625"	65.09/ 2.563"	87.31/ 3.438"	15.88/ .625"	8.73/ .344"

These indicators are normally furnished with continuous dial (with R.C.) or + on right balance dial (w/o R.C.), lug back and .18" by .250" long contact.

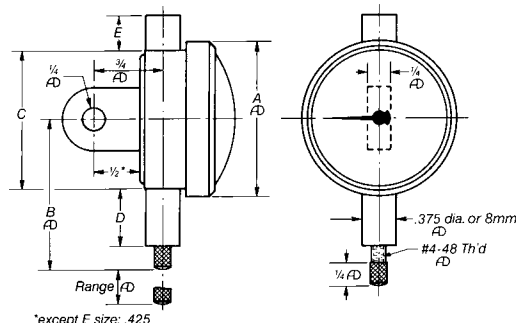

\*except E size: .425

## Easy Reading, Single Revolution Dial Indicator



### Easy reading

A practical solution for inspectors and machine operators who need to eliminate the potential for indicator misreadings. No matter how far out of tolerance a part may be, the needle of a one revolution indicator will always stay in the red, non-read zone — no passing zero again — no reading errors.

- No limited contact travel
- Shockproof "Following Movement" always keeps the hand within a single revolution.
- Alternate contact points, backs and other accessories are optionally available.
- Metric dials are yellow
- One-piece case design
- Inserted precision bearings
- Available in ANSI/AGD Group 2 size

### Technical Data

Measuring range	Graduation value	Stem diameter	Model no.	Order no.
2 mm	0.02 mm	.375"	P1RN-200	2014794
1 mm	0.01 mm	.375"	P1RN-100	2014795
2 mm	0.02 mm	8 mm	M1RN-200	2014796
1 mm	0.01 mm	8 mm	M1RN-100	2014797
.080"	.001"	.375"	C1RN-80	2014792
.040"	.0005"	.375"	C1RN-40	2014793

## High Performance, Value Dial Indicators per ANSI/AGD Group 2

### Features

- A well thought-out design, the use of high-quality components and materials as well as the precision engineered mechanism guarantee the outstanding quality of these indicators.
- The concentric "Speed Read" pointer (on 1.0" and .500" models) allows easy and safe reading of this Dial Indicator
- Spindle and stem are made of resistant stainless steel.  
Supplied with: Lug Back and Tolerance Hands



2016002



2016003

### Technical Data


Measuring Range	Graduation value	Stem diameter	Dial style	Range per Rev.	Rev. Counter	Order no.
.025"	.0001"	.375"	0-10	.010"	Standard	2016003
.250"	.001"	.375"	0-100	.100"	Standard	2016005
.500"	.001"	.375"	0-100	.100"	Speed read	2016004
1.00"	.001"	.375"	0-100	.100"	Speed read	2016002

### Accessories

- Contact Points - see page 5-27

## Dial Styles for ANSI/AGD Groups 1 thru 4 Balanced Dials

### Mahr Federal Series B thru E

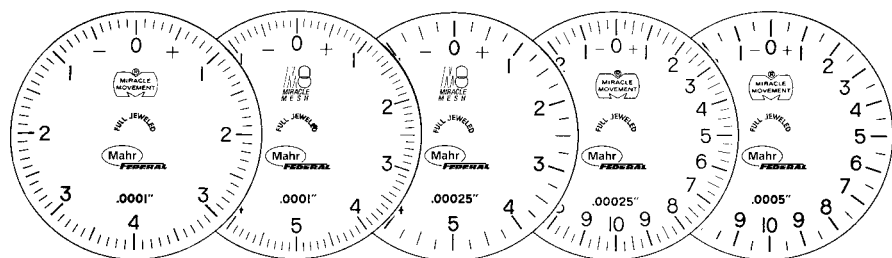


**C1K**  
**D1K**  
**E1K**

**12I**  
**2015781**  
**32I**  
**42I**

**12Q**  
**2015782**  
**32Q**

**B3K**  
**2015783**  
**D3K**  
**E3K**

**B3Q**  
**2015784**  
**D3Q**  
**E3Q**

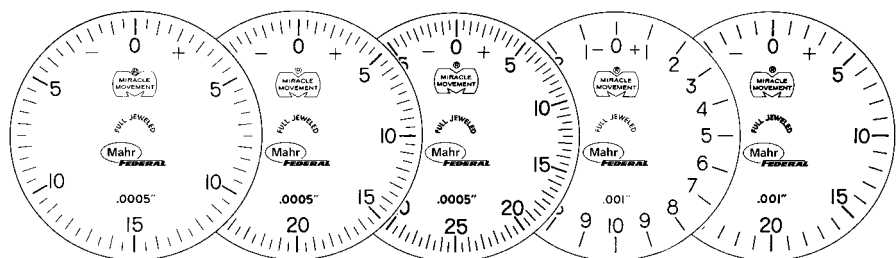


**B5M**  
**2015786**  
**D5M**  
**E5M**

**B6K**  
**2015787**  
**D6K**

**B7I**  
**2015790**  
**D7I**  
**E7I**

**B3W**  
**2015785**  
**D3W**  
**E3W**

**B6Q**  
**2015789**  
**D6Q**

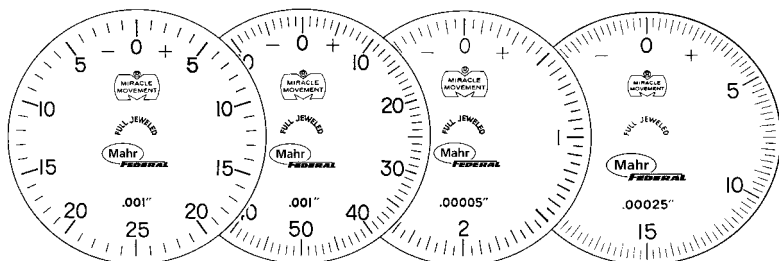


**B7O**  
**2015791**  
**D7O**  
**E7O**

**B8I**  
**2015792**  
**D8I**  
**E8I**

**C1/2K**

**D5G**  
**E5G**

### Mahr Federal Series O thru R

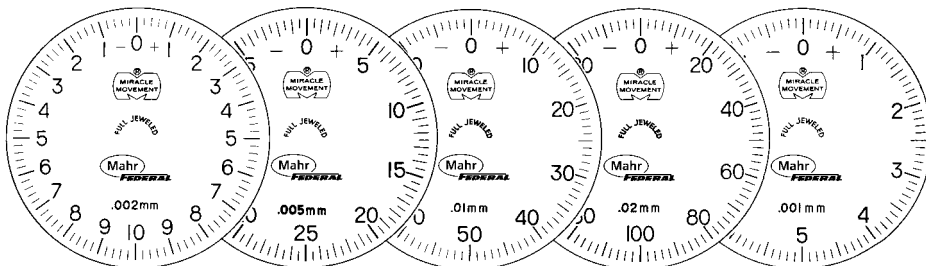

**O1I**  
**21IN**  
**Q1I**  
**R1I**

**O3I**  
**2015793**  
**Q3I**  
**R3I**

**O6I**  
**2015794**  
**Q6I**  
**R6I**

**Q8I**  
**2015795**  
**R8I**

**P1/2I**

Indicator O8I is not illustrated: Dial style is 0-125-0, minimum graduation is .025 mm

### Features

- Normally furnished: dial as illustrated; centered vertical lug back; regular contact point, .18" radiused, 1/4" long.
- Optional Dials: balanced dial with + on left; continuous clockwise; continuous counter-clockwise. (Order by part number and specify dial style desired.)
- Revolution Counters available, please specify when ordering. Includes continuous dial unless otherwise specified.
- For other dial styles or special requirements - call Mahr Federal.
- Indicator dimensions are located on pages containing individual ANSI/AGD descriptions.

### Accessories

- Contact Points - see page 5-27 and 5-22
- Backs and Mounting Brackets - see pages 5-21 and 5-22
- Accessories - see pages 5-23 and 5-24

### Ordering Information

In addition to the information provided above, see pages 5-4 & 5-5 for complete instructions on ordering your dial indicators and accessories.

[www.mahr.com](http://www.mahr.com)



## Long Range and Extra Long Range Indicators



### Technical Data

#### Long Range/Extra Long Range (Inch)

Dial: soft-green tint

Measuring range	Graduation value	Dial style	Range per revolution	Accuracy	ANSI/AGD	Model no.	Order no.
.500"	.0001"	0-10	.010"	.0001"	4	42IQ	42IQ **
.500"	.001"	0-100	.100"	.001"	2	28IQN	2014699
1.000"	.001"	0-100	.100"	.001"	2	28ISN	2014698
1.000"	.001"	0-100	.100"	.001"	3	D3K	D8IS
1.000"	.010"	0-1000	1.000"	.010"	2	29I	2014816
<b>Extra Long Range</b>							
2.000"	.001"	0-100	.100"	.001"***	3	D8IT	
3.000"	.001"	0-100	.100"	.001"***	4	E8IU	

\* for first 2-1/2 revolutions only.

\*\* hysteresis = 0.0002" for full range

\*\*\* for first 1 inch of travel.

#### Long Range/Extra Long Range (Metric)

Dial: yellow tint


Measuring range	Graduation value	Dial style	Range per revolution	Accuracy	ANSI/AGD	Model no.	Order no.
25.000	0.010	0-100	1.000	.020	2	SP6IS	
25.000	0.010	0-100	1.000	.020	3	SQ6IS	
<b>Extra Long Range</b>							
50.000	0.025	0-25	2.500	.025****	3	Q8IT	
75.000	0.025	0-25	2.500	.025****	4	R8IU	

\*\*\*\* for first 25 mm of travel.


## Dial Styles for Long Range and Extra Long Range Indicators




28IQN, 28ISN & D8IS




29I




D8IT & E8IU



Q8IT & R8IU



SP6IS & SQ6IS

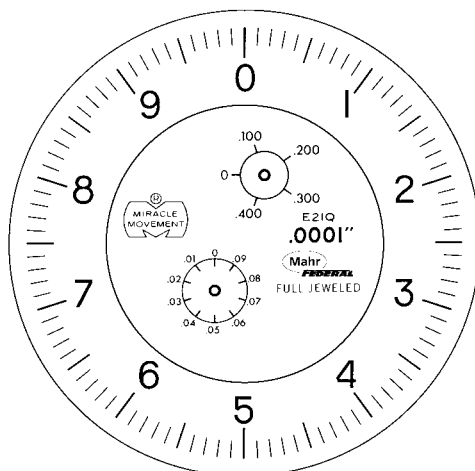

42IQ

### Features

- Normally furnished: continuous clockwise dial; centered vertical lug back; regular contact point, .18" radius, .250" long.
- Long Range Models: include (1) revolution counter (except C9I without revolution counter). Extra Long Range Models: include (2) revolution counters.
- For other dial styles or special requirements - call Mahr Federal.
- Indicator dimensions are located on pages containing individual ANSI/AGD descriptions.

### Accessories

- Contact Points - see page 5-27 and 5-22
- Backs and Mounting Brackets - see pages 5-21 and 5-22
- Accessories - see pages 5-23 and 5-24

## Dial Indicator Modifications & Specials

Available to meet specific requirements.

- Special Ranges
- Restricted Hand Travel
- Special Dials
- High Temperature
- Special Contact Points
- 8 mm Stem Diameters Special Lengths
- Specified Contact Load
- Counter-clockwise Movement
- Special Stem Lengths
- Push-Down Action
- Special Ratio Movement
- Threaded Stems

## Ordering Information

In addition to the information provided above, see pages 5-4 & 5-5 for complete instructions on ordering your dial indicators and accessories.

[www.mahr.com](http://www.mahr.com)

## Series WC and WP Wetproof Dial Indicators

Splashproof protection  
from coolant, oil, or other  
contaminant's.



### Technical Data

#### Series WC and WP Wetproof Dial Indicators (Inch)


Dial: approx. 2-1/4" dia. with soft-green tint

Measuring range	Graduation value	Dial style	Range per revolution	Accuracy	Order no.
.025"	.0001"	0-10	.010"	.0001"	W22I
.050"	.00025"	0-20	.020"	.00025"	WC3K
.050"	.0005"	0-20	.020"	.0005"	WC3Q
.075"	.0005"	0-30	.030"	.0005"	WC5M
.100"	.0005"	0-40	.040"	.0005"	WC6K
.125"	.0005"	0-50	.050"	.0005"	WC7I
.250"	.001"	0-100	.100"	.001"	WC8I
1.000"	.001"	0-100	.100"	.001"	WC8IS

#### Series WC and WP Wetproof Dial Indicators (Metric)



Dial: approx. 57 mm dia. with soft-yellow tint

Measuring range	Graduation value	Dial style	Range per revolution	Accuracy	Order no.
0.500	0.002	0-20	0.200	0.002	WP1I
1.250	0.005	0-50	0.500	0.005	WP3I
2.500	0.010	0-100	1.000	0.010	WP6I

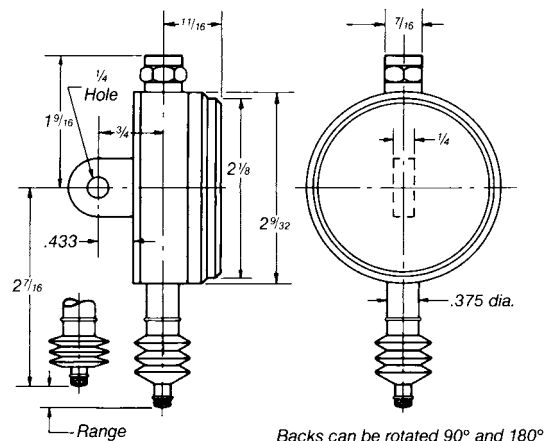

## Dial Styles for WC and WP Wetproof Dial Indicators


### Series WC indicators

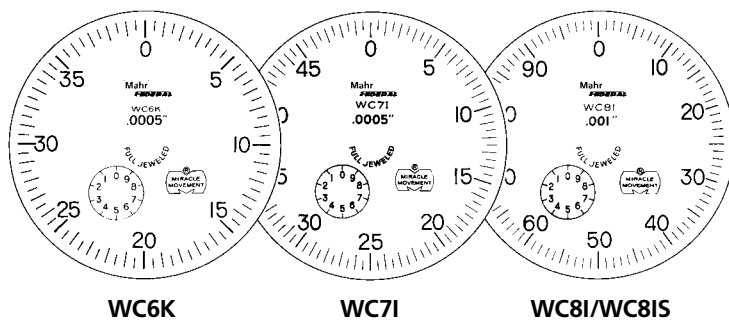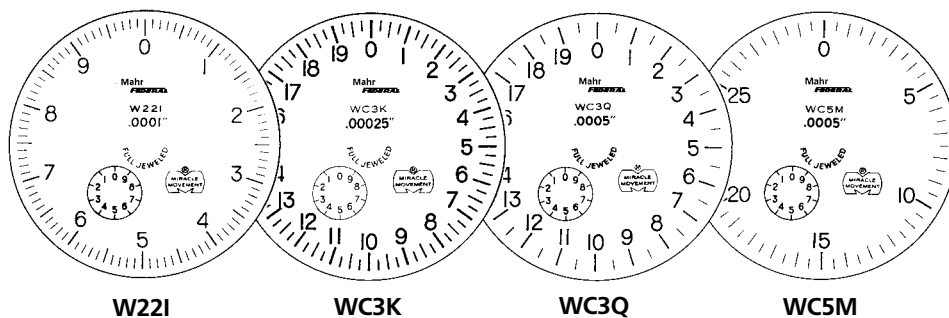

### Features

- Normally furnished: continuous clockwise dial with revolution counter; BK-63 centered vertical lug back; regular contact point, .18" radiused, .625" long
- Optional Dials: continuous counter-clockwise with revolution counter; balanced outer dial with + on right or left. Order by dial type and specify dial style desired.
- For other dial styles or special requirements - call Mahr Federal.

### Series WP indicators

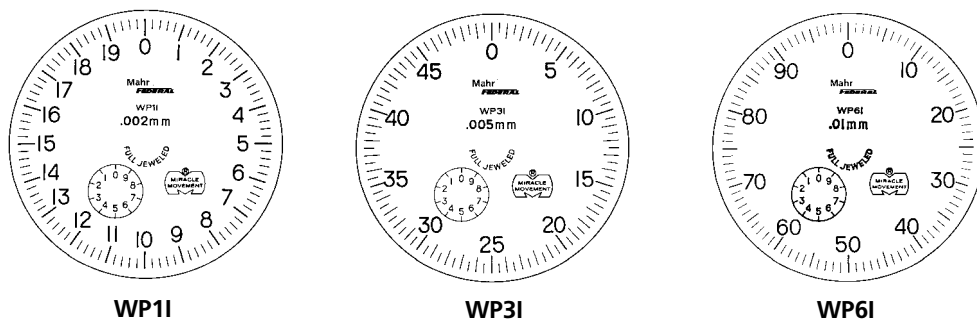

### Accessories

- Contact Points - see page 5-27 and 5-22
- Accessories - see pages 5-23 and 5-24


### Ordering Information

In addition to the information provided above, see pages 5-4 & 5-5 for complete instructions on ordering your dial indicators and accessories.


[www.mahr.com](http://www.mahr.com)

### Backs for Wetproof Dial Indicators


Vertical (centered) lug back is normally furnished and included in price of indicator. Back can be rotated 90° for horizontal lug mounting.



**BK-90**  
Post Back



**BK-68**  
Adjustable Back



**BK-97**  
Flat Back

## Perpendicular Dial Indicators

Provides improved readability where other style indicators cannot be used.



### Technical Data

#### Series F, G, J, V (Inch)


Dial: soft-green tint

Measuring range	Graduation value	Dial style	Range per revolution	Accuracy	Gear type	Dial Dia. (approx.)	Order no.
.008"	.0001"	0-4-0	.008"	.0001"	crown	2-1/4"	J1K
.040"	.0005"	0-20-0	.040"	.0005"	crown	2-1/4"	J6K
.100"	.0005"	0-12-0	.025"	.0005"	spiral	2-1/4"	G40
.100"	.001"	0-50-0	.100"	.001"	crown	2-1/4"	J8I
.100"	.001"	0-50-0	.100"	.001"	crown	1-11/16"	V8I
.200"	.001"	0-50-0	.100"	.001"	spiral	1-23/32"	F8I
.200"	.001"	0-50-0	.100"	.001"	spiral	2-1/4"	G8I


#### Series I, W (Metric)

Dial: yellow tint

Measuring range	Graduation value	Dial style	Range per revolution	Accuracy	Gear type	Dial Dia. (approx.)	Order no.
0.200	0.002	0-10-0	0.200	0.002	crown	57	W1I
1.000	0.010	0-50-0	1.000	0.010	crown	57	W6I
2.500	0.025	0-125-0	2.500	0.025	crown	57	W8I
2.500	0.025	0-125-0	2.500	0.025	crown	43	I8I

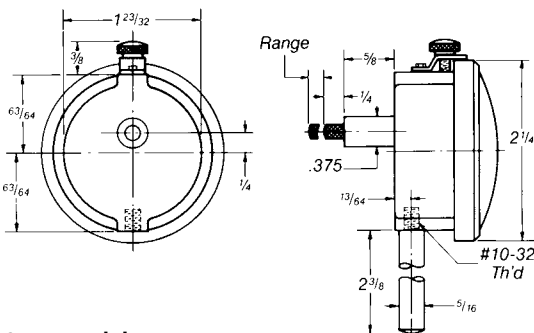


J & W Models

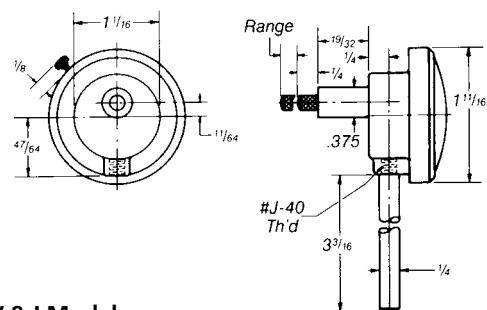


V & I Models

## Dial Styles for Perpendicular Indicators


### Series J, G, V, F




J1K




J6K



G40



J81 & G81




V81 & F81


### Features

- Normally furnished: balanced dial with + on right; mounting rod (see dimension drawings); regular contact point, .18" radiused, .250" long.
- Threaded stem versions available as an option; AD-59 (.5622 long x .500" O.D. for "J & W" styles), 3/8-32 internally threaded bushings and AD-60 (.687" long x .500" O.D. for "G & F" Models) purchased separately. Bushings also available separately.
- For other dial styles or special requirements - call Mahr Federal.


### Series W, I



W11



W61



W81 & I81


### Accessories

- Contact Points - see page 5-27 and 5-22
- Accessories - see pages 5-23 and 5-24


### Ordering Information

In addition to the information provided above, see pages 5-4 & 5-5 for complete instructions on ordering your dial indicators and accessories.


[www.mahr.com](http://www.mahr.com)

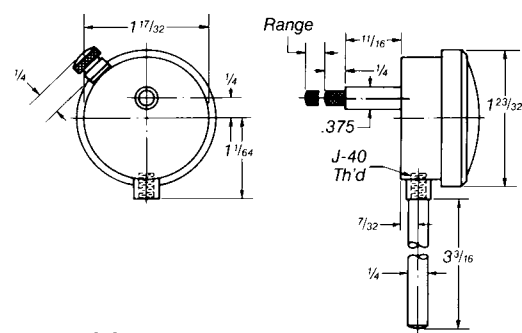

F81 Model



G Models






## Backs for ANSI/AGD Group 1, 2, 3, and 4 Dial Indicators

### Vertical Lug


(centered) normally furnished




\*27/64" for E/R size

### Horizontal Lug

(centered)



### Post




### Features


- Backs shown are for ANSI/AGD Groups 1,2,3,4, Long Range and Extra Long Range Indicators. Backs for ANSI/AGD Group 0 Indicators - see page 5-8. Backs for Wetproof Indicators - see page 5-18.
- To order - specify Back Order Number (from table below).
- Backs for ANSI/AGD Group 1 (Series B/O) Indicators can be repositioned 180°. Backs for ANSI/AGD Group 4 (Series E/R) Indicators can be repositioned 90° and 180°.
- For Special Backs - call Mahr Federal.

### Vertical Lug


(offset) Left face of lug is on centerline of back



### Screw Type




### Adjustable



\*7/8" for B/O size; no flats

### Flat




## Ordering Numbers

	ANSI/AGD			
	Group 1 Series B/O	Group 2 Series C/P	Group 3 Series D/Q	Group 4 Series E/R
Vertical Lug, Centered	BK-1600	BK-383	BK-431	BK-3
Vertical Lug, Offset	BK-1601	BK-2168	BK-545	BK-4
Horizontal Lug, Centered	BK-19	BK-400	BK-109	BK-3
Flat	BK-1660	BK-470	BK-473	BK-5
Post	BK-1634	BK-2093	BK-664	BK-17
Screw	BK-1661	BK-692	BK-177	BK-16
Adjustable	BK-1633	BK-531	BK-10	BK-18

## Adjustable Mounting Brackets

### Features

- Allows fast, positive indicator adjustments
- Ideal for permanent indicator mounting to fixtures
- Rack Back included with all Brackets
- Sizes for ANSI/AGD Groups 1 and 2

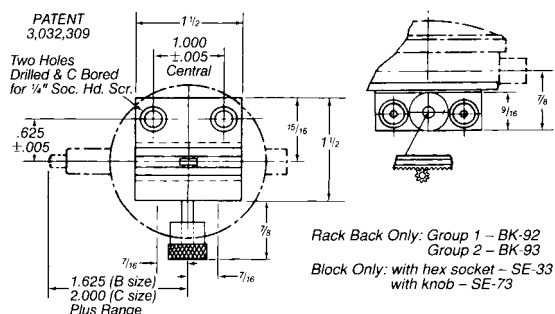

### Order Numbers


Mahr Federal Indicator	Used with	Order no.
Group 1	hex socket adjust	<b>AT-27</b>
Group 1	adjusting knob	<b>AT-115</b>
Group 2	hex socket adjust	<b>AT-28</b>
Group 2	adjusting knob	<b>AT-116</b>

## Universal Mounting Base


### Features

- Allows mounting indicator to custom fixtures
- Uses lug back to mount indicator
- Accommodates all size indicators

Order no. **BA-1051**

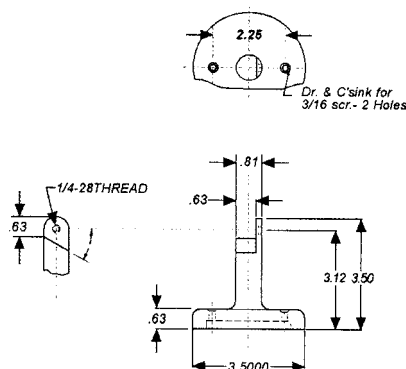

## Added flexibility for your Mahr Federal Dial Indicators

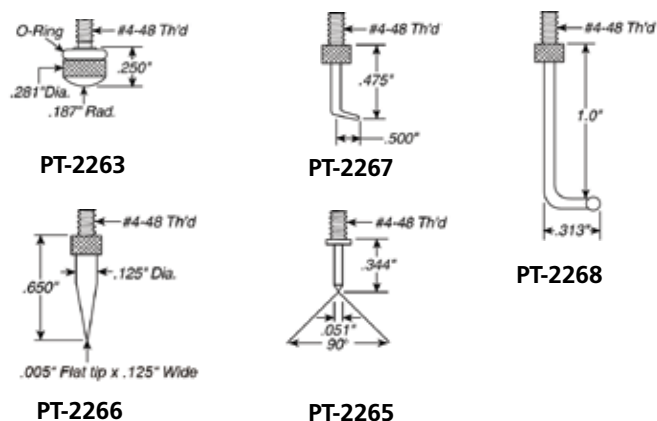

### Description

### Order no.

Shock Absorbing Contact. "O" ring over threads provides a barrier between metal surface and stem, minimizing damage if point is pushed in with excessive force.

**PT-2263**

Chisel Point Contact for checking small slots. Furnished with a small lock nut for positioning on the indicator.

**PT-2266**

Small Offset Point Contact. Small tip, .010" radius, permits checking narrow recesses. Furnished with a lock nut for indicator positioning.

**PT-2267**

Needle Contact for checking into small areas. Correct length for use as a replacement on Mahr Federal 65P-40 depth gage.

**PT-2265**

Right Angle Contact with a .093" diameter ball for checking hard-to-reach grooves. Right angle allows checking to bottom or to top of a groove when used with a push down action Indicator. Its 1" length makes it long enough to be used with Mahr Federal 75P-50 Series Depth Gages.

**PT-2268**

Contact Thread Adapter, Adapts M2.5 thread to 4-48 thread (.375" length)

**AD-185**

4-48 to M2.5 Threaded Adapter

**2236519**

### Features

- Innovative Contact Points make your indicators more versatile.
- Minimize point damage with a shock absorbing contact, without the need for a cushion gear.
- Needle point perfect for checking small areas – etchings, pits and more.
- Chisel point easily adapts to small slots or screw heads.
- Small offset point for narrow recesses – grooves, holes and under ledges.
- Right angle point makes hard to reach grooves easily accessible.

## Indicator Accessories

### Weights

Used with ANSI/AGD type and long range indicators. Applies constant pressure throughout indicator range. To order specify requirement.



### Protective Housing

For ANSI/AGD Group 2 indicators. Opens at rear so indicator can be mounted by its back. Mounts to indicator stem using a .687" O.D. bushing (not included). Order **HG-100** for Indicator models with ranges up to 6.35 mm /.250", **HG-101** for ranges of 6.35 mm /.250" to 25 mm /1". Recommended bushings: **BU-111** split bushing, or **AD-87** split collet. See next page.



### Magnetic Maximum Hand

For ANSI/AGD Groups 2 and 3 indicators having plain dials. Accurately indicates maximum reading. Easy to reset. Order **2014804** (Group 2, snap-on bezel), **2011341** (Group 3, screw-on bezel).

Styles for Groups 1 and 4 indicators available on special order; consult Mahr Federal Customer Resource Center.



### Range Limiting Caps

Used with ANSI/AGD type indicators. Adjustable thru 9.52 mm /.375" to limit range to any desired amount. Order **CS-123**.



### Lifting Levers - CAM Type.


Used with ANSI/AGD type and long range indicators.



Use with Indicator Type	Order no. Left Hand	Order no. Right Hand
ANSI/AGD Group 1*	<b>LR-46</b>	<b>LR-47</b>
ANSI/AGD Group 2*	<b>LR-48</b>	<b>LR-49</b>
ANSI/AGD Group 3*	<b>LR-50</b>	<b>LR-51</b>
ANSI/AGD Group 4*	<b>LR-68</b>	<b>LR-69</b>
Federal Models D8IT & Q8IT	<b>LR-115</b>	
Ox-Bow Lifting Lever	<b>LR-40</b>	

\* Up to 25 mm /1" range

### Ox-Bow Lifting Lever - Type LR-40



### Tolerance Hands

Used with ANSI/AGD, long range and some Perpendicular indicators. Furnished integrally with split bezel. Easily replaces regular bezel.



Use with Indicator Type	Order no. Snap-on Bezel	Order no. Screw-type Bezel
ANSI/AGD Group 1	<b>HD-128</b>	<b>HD-59</b>
ANSI/AGD Group 2	<b>BZ-2503</b>	<b>HD-57</b>
ANSI/AGD Group 4		<b>HD-53</b>

### Electronic Probe Adapter

Permits using electronic probes with many Mahr Federal dial indicators. Order **AD-138**.



## Indicator Accessories

### Hole Attachments

For ANSI/AGD type and perpendicular indicators with .375" diameter stems. For measuring internal surfaces.

Order

**AT-7293**, 47.50 mm/ 1.87" long

**AT-7294**, 25 mm /1" long.



### Split Collet

For .375" diameter stem indicators. Six-finger grip permits easy, secure indicator adjustment. Requires 1/2-32 threaded hole. O.D. is 17.45 mm/ .687". Can be used with protective housings, page 5-23. Order **AD-87**. For 1/2-32 tap, order **V-892**.



### Brake Attachment

For ANSI/AGD indicators with .001" graduations. Requires indicator modification for assembly. Range limited to 6.35 mm/ .250" for Group 1 indicators; and to 12 mm/ .500" for Group 2 indicators. Order

**AT-A-7** stem mount,

**AT-81** dust cap mount.



### Threaded Bushing

For ANSI/AGD indicators with 5/16-32 threaded stems (an available option from Mahr Federal). Permits conventional stem mounting of indicator in gages and fixtures.

Order **AD-62**, .625" long, .500" O.D., 5/16-32 internal thread. Threaded bushings for perpendicular indicators, see page 5-19.



### Auxiliary Plungers

For extending reach of all ANSI/AGD type and perpendicular indicators with .375" diameter stems and ranges up to 6.35 mm/ .250" range.

Attaches to indicator stem by integral split collet. Body is 12 mm/ .500" O.D.

Order **AT-25**, 57 mm/ 2.25" long,

**AT-26**, 104 mm/ 4" long.

Special lengths available.

Replacement contact,

**PT-184**, 8-32 thread.



### Dust Guard

For ANSI/AGD perpendicular indicators with .375" diameter stems. Recommended for ranges of 7.62 mm/ .300" or less. Oil resistant to protect spindle and bushing from dust, mist and contaminant's.

Order **GU-2**.

For sealed indicators, see Wetproof models, page 5-17.



### Split Bushings

Fits all ANSI/AGD type and perpendicular indicators. Permits safe, non-cramping stem mounting.

Order **BU-94** without counterbore, **BU-80** with counterbore, .375" stem hole x .500" O.D.,

**BU-111** for use with protective housings (.375" stem hole x .687" O.D.), **BU-112** (.218" stem hole x .375" O.D.), **BU-197** with shoulder, **4310103** without shoulder. (8 mm stem hole x .375" O.D.)



### Right Angle Attachments

For ANSI/AGD type and perpendicular indicators (.375" diameter stems). For making measurements at right angle to spindle movement. Order **A-9**, regular type with flat spring hinge; for ranges up to 3.05 mm/ .120".

Replacement spring: **SP-56**.

Order **AT-24**, long range type with pivot-type bearing; for ranges up to 9.50 mm/ .375".



## Indicator Calibrator with Digital Readout

### Features

#### Model 400B-50

- A precision, benchtop instrument, providing a convenient means for calibrating a wide variety of precision measuring instruments, including dial indicators, test indicators, AirProbes®, electronic gage heads, or any other device that magnifies the linear displacement of a contact point or measuring spindle – user selectable for either inch or metric units.
- Two calibration stations provide high magnification and long range in a single unit. Incorporated within the micrometer-style control is a rotary encoder which senses the amount of movement and displays the actual displacement on a digital readout.
- Digital readout consists of six high visibility, LED digits and operator-accessible controls for inch/metric units, range selection, zero reset, and polarity/direction.



400B-50 Indicator Calibrator with Digital Readout

### Technical Data

	Range	Minimum Graduation	Accuracy	<ul style="list-style-type: none"><li>• Normally furnished: <b>AM-178</b> Arm Assembly; <b>AT-119</b> Mounting Clamp for .375" /9.5 mm dia. stems and probes; <b>BU-112</b> Bushing (.218" I.D. to .375" O.D.). <b>BU-197</b> Bushing (8 mm I.D. to .375" O.D.). <b>AT-117</b> Adaptor for holding gage blocks.</li><li>• Also Available: <b>AT-120</b> Adaptor for test indicators with long contacts. <b>AT-122</b> Adaptor for test indicators with short contacts. <b>AT-121</b> Adaptor for AGD type indicators with lug backs.</li></ul>
<b>Inch</b>				
High mag. station	<b>.100"</b>	<b>.00001"</b>	<b>±20μ"</b>	
Low mag. station	<b>.500"</b>	<b>.00005"</b>	<b>±50μ"</b>	
<b>Metric (mm)</b>				
High mag. station	2.5	0.0001	±0.4 μm	
Low mag. station	12.5	0.0005	±1.5 μm	
Display Output	6-digit, 7-segment LED RS-232			
Power	115Vac/60Hz/220Vac/50Hz-switchable			
Dimensions Calibrator (approx.)	330 x 200 x 285 mm h /13 x 8 x 11.25" h			
Readout Unit	170 x 125 x 80 mm h /6.625 x 5 x 3.25" h			
Weight Calibrator (approx.)	11.8 kg /26 lb.			
Readout Unit	0.8 kg /1.75 lb			

### Upgrade Kit

#### EKT-1204

A kit is available to upgrade Models 400B-5 and 400B-25 Universal Calibrators to digital readout units with RS-232 output. The kit consists of a precision micrometer style controller with a digital encoder, which replaces the mechanical head, plus a digital readout unit.

## Dial Indicator Calibrator

### Features

#### 400B-3 and 400B-4 Shop-floor Calibrators

- For checking dial indicators (both ANSI/AGD and perpendicular styles) and other transducers.
- Large micrometer wheel has widely spaced graduations for easy setting and reading.
- Adjustable crosshair provides on-the-mark setting.
- Tungsten carbide anvil for maximum wear resistance.
- Indicator clamped in-line with micrometer spindle.



**400B-3**  
Dial Indicator Calibrator

### Technical Data

	Range	Minimum Graduation	Accuracy	Order no.
<b>Metric (mm)</b>	0-25	0.002	within 0.001*	<b>400B-4</b>
<b>Inch</b>	<b>0-1.000"</b>	<b>.0001"</b>	<b>within .000050"</b>	<b>400B-3</b>

\* Accuracy calibration as specified in Federal Specification GGG-105B.

- Normally furnished:  
**BU-112** Bushing (.218" I.D. to .375" O.D.)  
**AD-58** Bushing (.275" I.D. to .375" O.D.)  
**BU-197** Bushing (8 mm I.D. to .375" O.D.)

## Universal Calibrator

### Features

#### Model 400B-5 and 400B-25

- Highest accuracy calibrator for precise monitoring of any gaging transducer— mechanical Indicator, air probe, or electronic gage head.
- Two calibrating stations: one for high magnification transducers and one for long range (up to 12.5 mm/ .500").
- Easy to use: fine adjustment; large bi-directional reading micrometer head; carbide reference anvils; adjustable viewing angle.
- Furnished in a fitted wooden storage case.



**400B-5**  
Universal Calibrator

### Technical Data

	Range	Minimum Graduation	Accuracy	Order no.
<b>Metric (mm)</b>	2.5 12.5	0.0002 0.001	±0.4 μm ±0.8 μm	<b>400B-25</b>
<b>Inch</b>	<b>.100"</b> <b>.500"</b>	<b>.000010"</b> <b>.000050"</b>	<b>±20 μ"</b> <b>±30 μ"</b>	<b>400B-5</b>


- Normally furnished:  
**AM-178** Arm Assembly;  
**AT-119** Mounting Clamp for 9.5 mm / .375" dia. stems and probes;  
**BU-112** Bushing (.218" I.D. to .375" O.D.);  
**BU-197** Bushing (8 mm I.D. to .375" O.D.);  
**AT-117** Adaptor for holding gage blocks.
- Also Available:  
**AT-120** Adaptor for test indicators with long contacts  
**AT-122** Adaptor for test indicators with short contacts  
**AT-121** Adaptor for AGD type Indicators with lug backs



## Contact Points

Used with ANSI/AGD Groups 1,2,3,4 Long Range Wetproof Perpendicular and Maxµm® Indicators. Points for ANSI Group 0 Indicators - see page 5-8. For Special Points - call Mahr Federal. See pages 5-52 & 5-53 for additional Metric Contact Points.

### Regular



### Hardened Steel (inch)

Dimension A	Order no.	Dimension A	Order no.
1/8"	PT-225	1-5/8"	PT-235
1/4"	PT-223*	1-3/4"	PT-241
3/8"	PT-563	1-7/8"	PT-100
1/2"	PT-14	2"	PT-51
5/8"	PT-564**	2-1/8"	PT-243
3/4"	PT-31	2-1/4"	PT-696
7/8"	PT-201	2-3/8"	PT-101
1"	PT-232	2-1/2"	PT-245
1-1/8"	PT-305	2-5/8"	PT-102
1-1/4"	PT-565	2-3/4"	PT-566
1-3/8"	PT-239	2-7/8"	PT-247
1-1/2"	PT-50	3"	PT-155

### Hardened Steel (Metric\*\*\*)

Dimension A	Order no.	Dimension A	Order no.
6 mm	EPT-1037-W1	15 mm	EPT-1037-W3
10 mm	EPT-1037-W2	20 mm	EPT-1037-W4
12 mm	EPT-1037-W6	25 mm	EPT-1037-W5

**Tungsten Carbide**  
1/4" PT-35 **Set of 8 Steel** 1/8" to 1" PT-116


**Diamond**  
1/4" PT-317 **Set of 24 Steel** 1/8" to 3" PT-115

\* PT-223 normally furnished with all Indicators

\*\* PT-564 normally furnished with all Wetproof Indicators

\*\*\* All Metric Points have M2.5 thread


### Tapered



### Hardened Steel (inch) Tungsten Carbide (inch)

Dimension A	Order no.	Dimension A	Order no.
3/16"	PT-233	7/16"	PT-181
7/16"	PT-229	3/4"	PT-182
1"	PT-253	1"	PT-183
1-7/16"	PT-230		
2"	PT-231		

### Flat End




### Hardened Steel (inch)

Dimension A	Order no.	Dimension A	Order no.
1/8"	AL-19	6 mm	EAL-1016-W1
1/4"	AL-673	10 mm	EAL-1016-W2
3/8"	AL-20	15 mm	EAL-1016-W3
1/2"	AL-21	20 mm	EAL-1016-W4
5/8"	AL-22	25 mm	EAL-1016-W5
3/4"	AL-23		
7/8"	AL-24		
1"	AL-25		

### Tungsten Carbide

1/4" AL-51  
Set of 8 Steel  
1/8" to 1" AL-55


### Button



### Hardened Steel (inch)

Dim. A	Dim. B	Order no.	Dim. A	Dim. B	Order no.
.375"	.250"	PT-227	.375"	.250"	PT-120
.500"	.375"	PT-619			

### Wide Face



### Hardened Steel (inch)

Dim. A	Dim. B	Order no.	Dim. A	Dim. B	Order no.
.356"	.250"	AL-502	9.04	6.35	EAL-1020-W1
.500"	.375"	AL-1510	12.7	9.5	EAL-1020-W2
.615"	.500"	AL-520	15.6	12.7	EAL-1020-W3
.731"	.625"	AL-44	18.6	15.9	EAL-1020-W4


### Tungsten Carbide (inch)

.356" .250" AL-1730 **Set of 8 Steel (Metric\*\*\*)** 9.04 6.35 EAL-1021

### Extra Wide Face

### Hardened Steel





Order no. AL-291







# MarCator Dial Indicators (DIN style)



## Overview

### Precision Small Dial Indicators


Model	803 A	805 A	803 S	803 SW
				
Range	3 mm	5 mm	3 mm	3 mm
Readings	0.01 mm	0.01 mm	0.01 mm	0.01 mm
Dial style	0-50	0-100	0-50	0-50
Standard for metrological characteristics	DIN 878	DIN 878	DIN 878	DIN 878
(NEW) DIN 878:2006				(OLD) DIN 878:1983
Limit value for the error of measurement of the reading at	Measuring range	$f_e$	10 $\mu\text{m}$	12 $\mu\text{m}$
	1 revolution	-	9 $\mu\text{m}$	10 $\mu\text{m}$
	1/2 revolution	-	8 $\mu\text{m}$	9 $\mu\text{m}$
	1/10 revolution	$f_t$	5 $\mu\text{m}$	8 $\mu\text{m}$
Limit value for	Repeatability	$f_w$	3 $\mu\text{m}$	5 $\mu\text{m}$
Limit value for	Hysteresis	$f_u$	3 $\mu\text{m}$	3 $\mu\text{m}$
Shockproof				●
Order no.	4324050	4324060	4324000	4326000







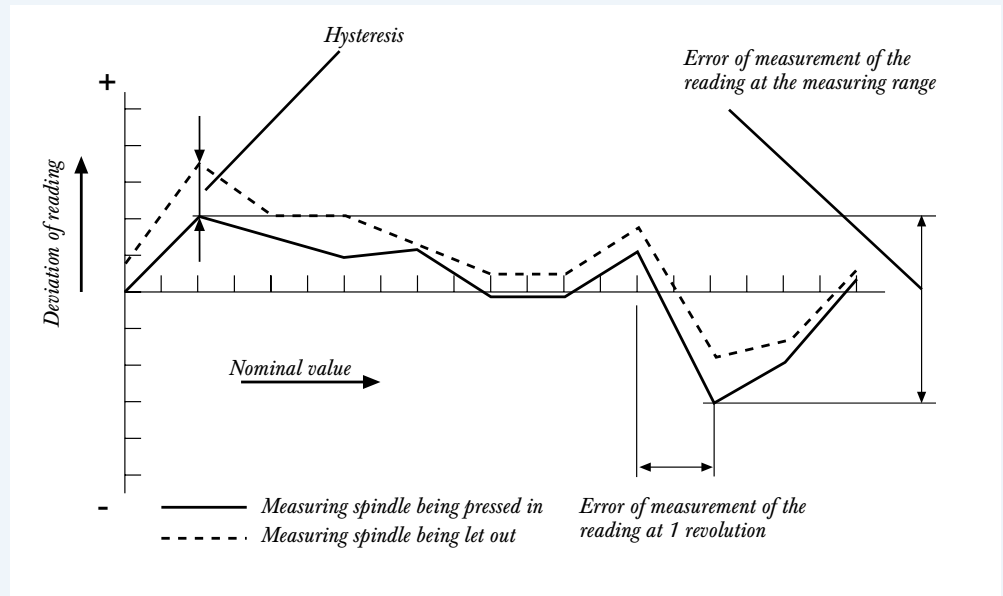

### Precision Dial Indicators

Model	810 A	810 AT	810 S	810 SW
				
Range	10 mm	10 mm	10 mm	10 mm
Readings	0.01	0.01	0.01	0.01
Dial style	0-100	0-100	0-100	0-100
Standard for metrological characteristics	DIN 878	DIN 878	DIN 878	DIN 878
(NEW) DIN 878:2006				(OLD) DIN 878:1983
Limit value for the error of measurement of the reading at	revolution	$f_e$	15 $\mu\text{m}$	15 $\mu\text{m}$
	1 revolution	-	10 $\mu\text{m}$	10 $\mu\text{m}$
	1/2 revolution	-	9 $\mu\text{m}$	9 $\mu\text{m}$
	1/10 revolution	$f_t$	5 $\mu\text{m}$	5 $\mu\text{m}$
Limit value for	Repeatability	$f_w$	3 $\mu\text{m}$	3 $\mu\text{m}$
Limit value for	Hysteresis	$f_u$	3 $\mu\text{m}$	3 $\mu\text{m}$
Shockproof				●
Order no.	4311050	4311060	4311000	4315000

803 SB	803 AZ
	
0.4 mm ( $\pm 0.2$ )	<b>.120"</b>
0.01 mm	<b>.0005"</b>
0-20-0	0-20
DIN 878	Factory standard
7 $\mu\text{m}$	<b>.0004"</b>
5 $\mu\text{m}$	<b>.0002"</b>
3 $\mu\text{m}$	<b>.00012"</b>
3 $\mu\text{m}$	<b>.00012"</b>
●	
<b>4324250</b>	<b>4324900</b>

## Metrological characteristics



810 SB	810 SM	810 SRM	810 AZ	810 AU	810 AX	810 AG	810 V
							
0.8 mm ( $\pm 0.4$ )	1 mm	10 mm	<b>.400"</b>	10 mm	10 mm	10 mm	40 mm
0.01	0.001	0.001	<b>.0005"</b>	0.01	0.1	0.01	0.01
0-40-0	0-100	0-100	0-45	100-0	0-10	0-100	0-100
DIN 878	Factory standard	Factory standard	Factory standard	Factory standard	Factory standard	Factory standard	Factory standard
7 $\mu\text{m}$	3 $\mu\text{m}$	10 $\mu\text{m}$	<b>.0005"</b>	14 $\mu\text{m}$ 10 $\mu\text{m}$ 9 $\mu\text{m}$	35 $\mu\text{m}$	14 $\mu\text{m}$	25 $\mu\text{m}$
5 $\mu\text{m}$	1 $\mu\text{m}$	3 $\mu\text{m}$	<b>.0002"</b>	5 $\mu\text{m}$	25 $\mu\text{m}$	5 $\mu\text{m}$	5 $\mu\text{m}$
3 $\mu\text{m}$	1 $\mu\text{m}$	3 $\mu\text{m}$	<b>.00012"</b>	3 $\mu\text{m}$	15 $\mu\text{m}$	3 $\mu\text{m}$	3 $\mu\text{m}$
3 $\mu\text{m}$	1.5 $\mu\text{m}$	3 $\mu\text{m}$	<b>.00012"</b>	3 $\mu\text{m}$	15 $\mu\text{m}$	5 $\mu\text{m}$	6 $\mu\text{m}$
●	●	●					●
<b>4317000</b>	<b>4311070</b>	<b>4311080</b>	<b>4311900</b>	<b>4329050</b>	<b>4331000</b>	<b>4322000</b>	<b>4321110</b>

## Precision Small Dial Indicators 803 / 805 DIN style



803 A



805 A



803 S

SHOCK  
PROOF

### Features

#### Small Dial Indicator 803 A

Standard version

- High precision gears and pinions
- Lifter protection cap on the upper end of the measuring spindle
- Adjustable tolerance markers
- Chrome-plated housing

#### Small Dial Indicator 805 A

Standard version

- High precision gears and pinions
- Lifter protection cap on the upper end of the measuring spindle
- Adjustable tolerance markers
- Chrome-plated housing

#### Small Dial Indicator 803 S

Shockproof version

- High precision gears and pinions
- Lifter protection cap on the upper end of the measuring spindle
- Adjustable tolerance markers
- Chrome-plated housing

All indicators delivered in plastic case

### Technical Data

	Range	Readings	Dial face dia.	Overtravel	Mounting shank dia.	Measuring force	Accuracy	Order no.
	mm	mm	mm	mm	mm	N	DIN 878	
803 A	3	0.01	34	0.1	8h6	0.7 - 1.1	●	4324050
805 A	5	0.01	34	0.1	8h6	0.7 - 1.1	●	4324060
803 S	3	0.01	34	0.1	8h6	0.7 - 1.1	●	4324000
803 SW	3	0.01	34	0.1	8h6	0.7 - 1.6	●	4326000
803 SB	0.4 (±0.2)	0.01	34	4.5	8h6	1	●	4324250
803 AZ	.120"	.0005"	1.4"	.008"	8h6	0.7 - 1.1		4324900

## Precision Small Dial Indicators 803 / 805 DIN style



803 SW



803 SB



803 AZ

## Features

**Small Dial Indicator 803 SW**

Waterproof and oil proof

Design features identical to 803 S, with the following exceptions:

- Hermetically sealed upper protective measuring spindle cap as well as bezel and transparent dial cover; sealed with O-rings
- Measuring spindle sealed with rubber sleeve, thus preventing contamination by liquids and impurities

**Dial Indicator 803 SB**

with limited measuring range

Design features identical to 803 S, with the following exceptions:

- Limited measuring range (0.4 mm) for error-free readings
- Large overtravel (approx. 4.5 mm), for easier insertion of test items in measuring devices
- Hermetically sealed upper protective measuring spindle cap

**Small Dial Indicator 803 AZ**

Inch version

Design features identical to 803 A, with the following exception:


- The scope of supply includes an Adapter Bush 940 for adapting mounting shank 8h6 mm to inch bore .375"

## Dimensions according to DIN EN ISO 463

mm	a	b	c	d	e	f	g
<b>803 A</b>	ø 40	20.6	6.8	ø 37	83	15.5	8
<b>805 A</b>	ø 40	20.6	6.8	ø 37	83	15.5	8
<b>803 S</b>	ø 40	20.6	6.8	ø 37	80	15	5.5
<b>803 SW</b>	ø 44	21.6	7.1	ø 37	86	15	11
<b>803 SB</b>	ø 40	20.6	6.8	ø 37	83	15.5	8
<b>803 AZ</b>	ø 40	20.6	6.8	ø 37	83	15.5	8


## Accessories

	Order no.	
<b>Adapter Bush</b> for adapting mounting shank 8h6 mm to inch bore .375"	940	4310103
<b>Splash Guard Cover</b> for bezel dia. 40 mm	956	4373021
<b>Mounting Lugs</b>		
Bore perpendicular to mounting shank	966	4375020
Bore parallel to mounting shank	967	4375021

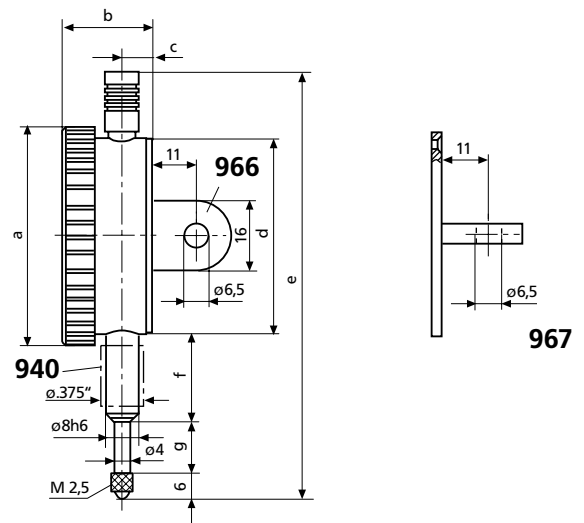

Shown with Mounting Lug

## Precision Dial Indicators 810 DIN style

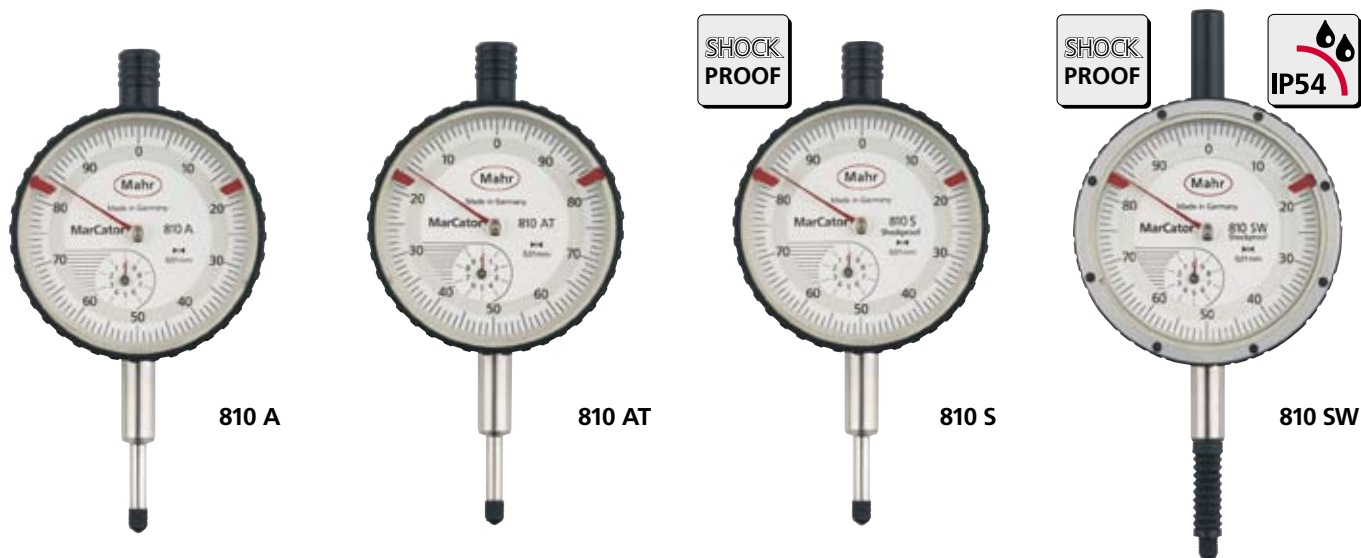

### Features

#### Dial Indicator 810 A

Standard version

- High precision gears and pinions
- Lifter protection cap on the upper end of the measuring spindle
- Adjustable tolerance markers
- Chrome-plated housing

#### Dial Indicator 810 AT

for depth measurement

- Design features identical to 810 A, with the following exception:
- Scale of the dial face is counter-clockwise

#### Dial Indicator 810 S

Shockproof

- High precision gears and pinions
- Lifter protection cap on the upper end of the measuring spindle
- Adjustable tolerance markers
- Chrome-plated housing

#### Dial Indicator 810 SW

Waterproof and oil proof

- Design features identical to 810 S, with the following exceptions:
- Measuring spindle sealed with rubber sleeve, thus preventing contamination by liquids and impurities
  - Hermetically sealed protective measuring spindle cap

All indicators delivered in plastic case

### Technical Data


	Range	Readings	Dial face dia.	Overtravel	Mounting shank dia.	Measuring force	Accuracy	Order no.
	mm	mm	mm	mm	mm	N	DIN 878	
<b>810 A</b>	10	0.01	50	0.1	8h6	0.7 - 1.3	●	<b>4311050</b>
<b>810 AT</b>	10	0.01	50	0.1	8h6	0.7 - 1.3	●	<b>4311060</b>
<b>810 S</b>	10	0.01	50	0.1	8h6	0.8 - 1.3	●	<b>4311000</b>
<b>810 SW</b>	10	0.01	50	0.1	8h6	0.9 - 1.5	●	<b>4315000</b>
<b>810 SB</b>	0.8 (±0.4)	0.01	50	9	8h6	0.9	●	<b>4317000</b>
<b>810 SM</b>	1	0.001	50	4	8h6	1.3 - 1.8		<b>4311070</b>
<b>810 SRM</b>	5	0.001	50	0.1	8h6	1.5 - 2		<b>4311080</b>
<b>810 AZ</b>	.400"	.0005"	2"	.004"	8h6	0.9 - 1.5		<b>4311900</b>

### Accessories

	Order no.		Order no.
<b>Adapter Bush</b> for adapting mounting shank 8h6 mm to inch bore .375"	<b>940</b>	<b>Mounting Lug</b>	
<b>Splash Guard Cover</b> for bezel dia. 58 mm	<b>955</b>	Bore perpendicular to mounting shank	<b>961</b>
	<b>4310103</b>	Bore parallel to mounting shank	<b>962</b>
	<b>4373020</b>		<b>4375010</b>
			<b>4375011</b>



## Precision Dial Indicators 810 DIN style

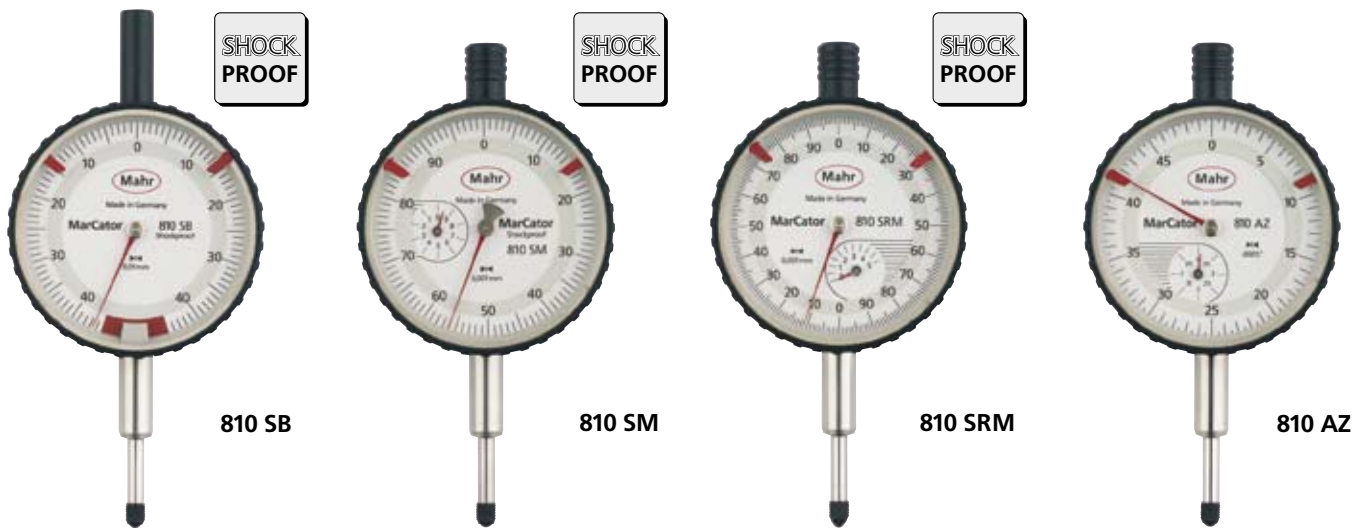

### Features

#### Dial Indicator 810 SB

with limited measuring range

Design features identical to 810 S, with the following exceptions:

- Limited measuring range (0.8 mm) for error-free readings
- Large overtravel (approx. 9 mm) for easier insertion of test items in measuring devices
- Hermetically sealed protective measuring spindle cap

#### Dial Indicator 810 SM

Shockproof with reading 0.001 mm

- Precise mechanism with a combined gear lever transmission
- High accuracy with a minimum span of error
- Lifter protection cap on the upper end of the measuring spindle
- Adjustable tolerance markers
- Chrome-plated housing

#### Dial Indicator 810 SRM

Shockproof with reading 0.001 mm

- High precision gears and pinions
- Lifter protection cap on the upper end of the measuring spindle
- Adjustable tolerance markers
- Chrome-plated housing

#### Dial Indicator 810 AZ


Inch version

Design features are identical to 810 A, with the following exception:

- The scope of supply includes an Adapter Bush 940 for adapting mounting shank 8h6 mm to inch bore .375"

### Dimensions according to DIN EN ISO 463

mm	a	b	c	d	e	f	g
<b>810 A/AT</b>	ø 58	23	7.5	52	112	21	16
<b>810 S</b>	ø 58	23	7.5	52	111.5	22	15
<b>810 SW</b>	ø 61	24.15	7.9	52	127.6	22	22.1
<b>810 SB</b>	ø 58	23	7.5	52	120	22	15
<b>810 SM</b>	ø 58	25	8.5	52	111.5	22	15
<b>810 SRM</b>	ø 58	23	7.5	52	111.5	22	15
<b>810 AZ</b>	ø 58	23	7.5	52	111.5	22	15

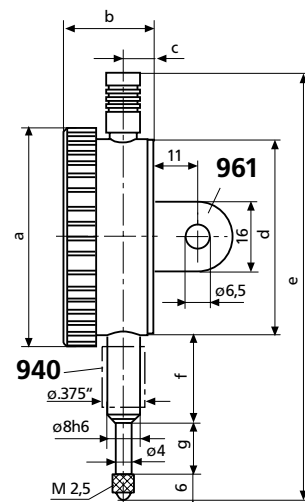


Shown with Mounting Lug


## Precision Dial Indicators 810



810 AU

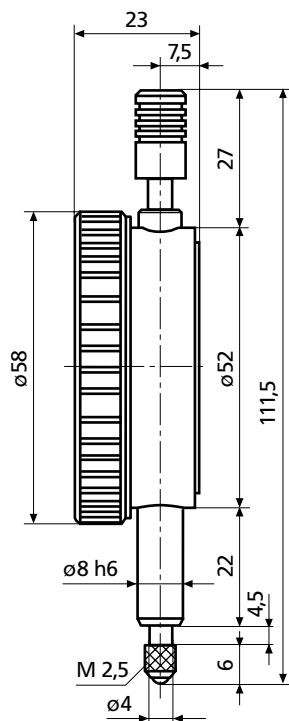

810 AX

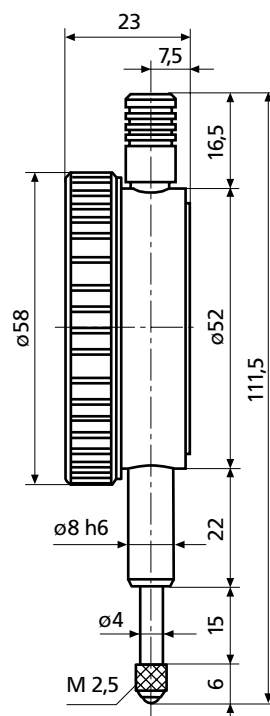

### Features

#### Dial Indicator 810 AU

with a reversed measuring force direction

- Chrome-plated housing
- Adjustable tolerance markers
- Scale on the dial increases counter clockwise (+ on left)
- Measuring force acting towards the top
- Delivered in plastic case

#### Dial Indicator 810 AX




with reading 0.1 mm

- Constant measuring force
- Chrome-plated housing
- Adjustable tolerance markers
- 1 pointer movement on 10 mm
- Delivered in plastic case

### Technical Data

	Range	Readings	Dial face dia.	Overtravel	Mounting shank dia.	Measuring force	Order no.
	mm	mm	mm	mm	mm	N	
<b>810 AU</b>	10	0.01	50	0.1	8h6	1 - 1.8	<b>4329050</b>
<b>810 AX</b>	10	0.1	50	0.5	8h6	0.9 - 1.3	<b>4331000</b>
<b>810 V</b>	40	0.01	50	0.3	8h6	0.9 - 2.0	<b>4321110</b>
<b>810 AG</b>	10	0.01	108	0.1	8h6	1.3 - 2.2	<b>4322000</b>

## Precision Dial Indicators 810

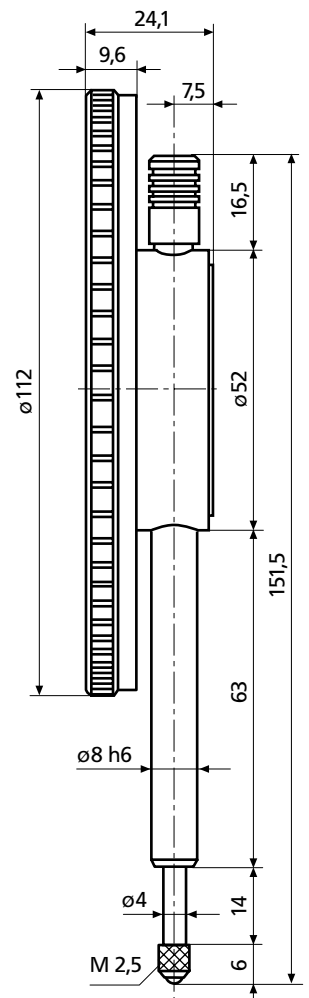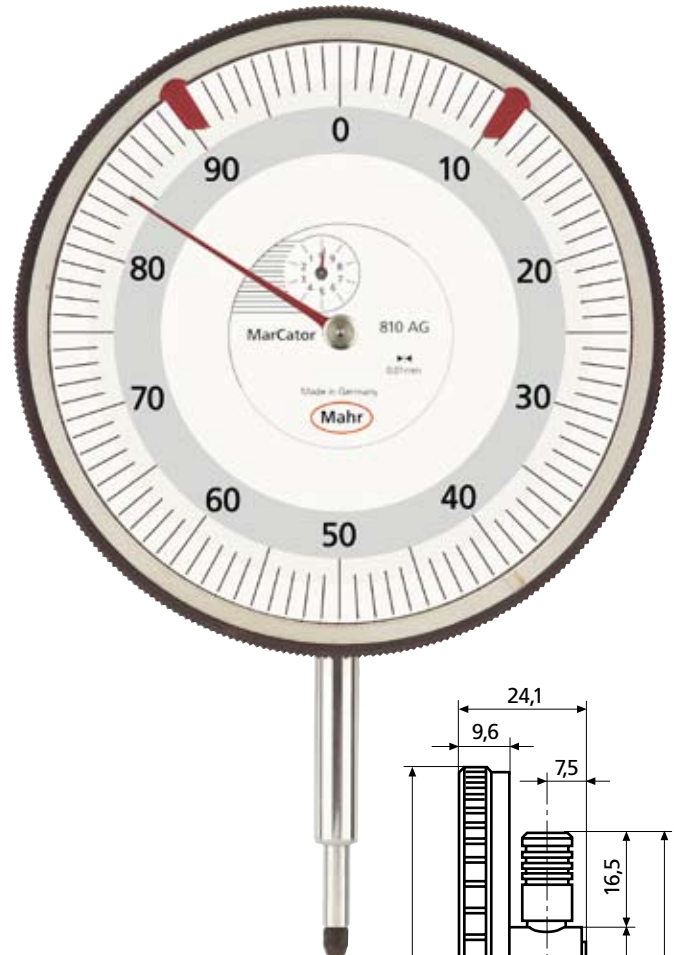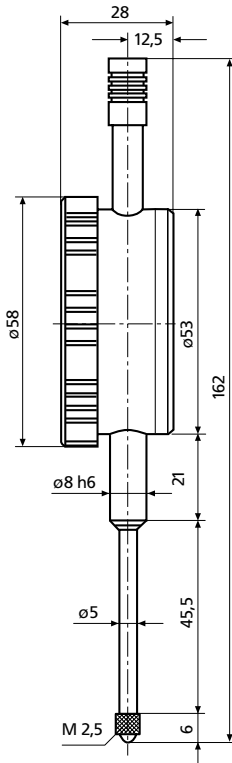

### Features

#### Long Range Dial Indicator 810 V

with larger measuring range

- Range 40 mm
- Strengthened measuring spindle (5 mm)
- Raising of measuring spindle via lifting cap
- Adjustable tolerance markers
- Shockproof movement
- Delivered in folded box

#### Extra large Dial Indicator 810 AG

with dial face dia. 108 mm

- Ideal for long reading distance and in bad light conditions
- Plastic outer ring
- Delivered in folded box

### Accessories

**Adapter Bush** for adapting mounting shank 8h6 mm to inch bore .375"

940 4310103

**Splash Guard Cover** for dia. 58 mm

955 4373020











**Mounting Lug** to mount on mounting shank of all versions

963 4375002

# MarCator. Digital Indicators (Long range)

## Overview

### Functions of Digital Indicators

		1075	1080	1081	μMaxμmXLI
					
Catalog page		5 - 38	5 - 38	5 - 38	5 - 40
Measuring ranges	metric / <i>inch</i>	12.5 mm / <i>.5"</i>	12.5 mm / <i>.5"</i>	12.5 mm / <i>.5"</i>	12.5 mm / <i>.5"</i> 25 mm / <i>1"</i>
Resolution	metric <i>inch</i> metric <i>inch</i> metric <i>inch</i> metric <i>inch</i> metric <i>inch</i> metric <i>inch</i> metric <i>inch</i>	0.01 mm <i>.0005"</i>	0.005 mm <i>.0001"</i>	0.001 mm <i>.00005"</i>	0.0005 mm <i>.00002"</i> 0.001 mm <i>.00005"</i> 0.002 mm <i>.0001"</i> 0.005 mm <i>.0002"</i> 0.01 mm <i>.0005"</i> 0.02 mm <i>.001"</i>
Mounting shank		8h6	8h6	8h6	8h6 / <i>3/8"</i>
Protection class	IP class acc. to IEC 60529				
<b>Functions:</b>					
ON/OFF		•	•	•	•
Set display to zero		•	•	•	•
Switch between mm/inch		•	•	•	•
Reversal of counting direction		•	•	•	•
Enter numerical value - PRESET		•	•	•	•
Data		•	•	•	•
ABS/REL-switchable					
Tolerance display					•
Dynamic measuring functions	MIN, MAX MAX-MIN (TIR)				
Search for reversal point	START/STOP				
Factor can be set / adjusted					
Analog display					
Switch the analog value					
Key lock function	LOC			•	•
Data output:	USB Digimatic Opto RS232C	• • •	• • •	• • •	• • •
Control output:					

\* only measuring ranges 12.5 and 25 mm

1888

## Digital Indicators 1075 / 1080 / 1081



1075



1080



1081

### Features

#### Functions:

ON/OFF  
0 (Set display to zero)  
mm/inch  
Reversal of counting direction  
PRESET (for entering a numerical value)  
DATA (data transmission with a data connection cable)  
LOCK-Function: keys can be blocked, only applies to 1081

- Capacitive measuring system, life of battery approx. 2 years
- Max measuring speed 1.5 m/sec (60"/sec)
- MarConnect Data output: choose either USB  
OPTO RS232C  
Digimatic
- High contrast Liquid Crystal Display with 8.5 / 10 mm high digits
- Operating temperature 10-40°C
- Class of protection IP51 according to IEC 60529

Scope of supply:  
Battery,  
Operating instructions

### Technical Data

Measuring range mm (inch)	Resolution mm/inch	Span of error G *	Measuring force N	Weight g	Order no.
1075 12.5 (.5")	0.01 / .0005"	0.025	0.6 - 1	120	4336400
1080 12.5 (.5")	0.005 / .0001"	0.015	0.6 - 1	120	4336500
1081 12.5 (.5")	0.001 / .00005"	0.005	0.5 - 1.1	120	4336350


\* in any zero point



## Digital Indicators 1075 / 1080 / 1081

### Technical Data

- 1 Protection cap for lifter
- 2 Measuring spindle lifter
- 3 Display
- 4 Operating buttons
- 5 Mounting shank
- 6 Measuring spindle
- 7 Contact point 901
- 8 Data output
- 9 Battery compartment

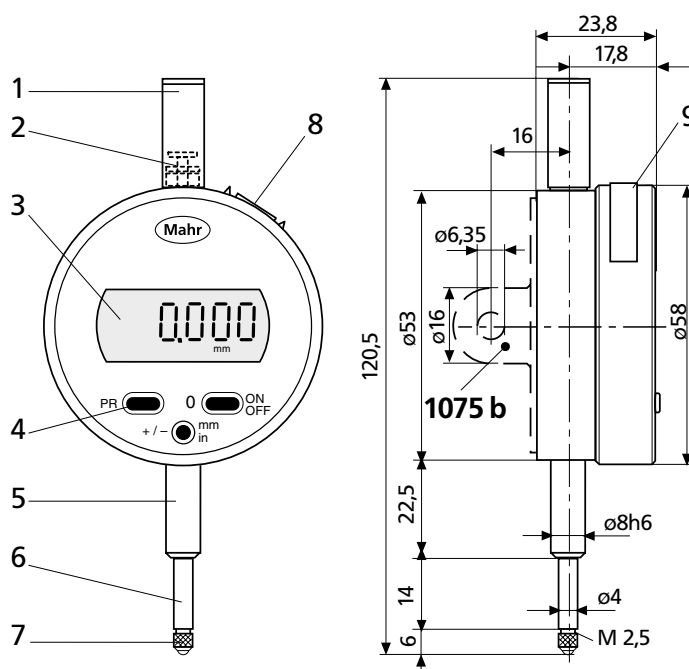

*Shown with Mounting Lug*

### Accessories

	Order no.	Additional Accessories	Page
<b>Battery 3V</b> , Type CR 2032	<b>4102520</b>	<b>Contact Points</b>	<b>901-913</b> 5-52
<b>Data Connection Cable</b> USB (2 m)	<b>16 EXu 4102357</b>	<b>Special Holder</b>	<b>941</b> 5-53
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	<b>16 EXr 4102410</b>	<b>Sensor Lever</b>	<b>943</b> 5-53
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	<b>16 EXd 4102411</b>	Accessories for Data Processing see Chapter 11	
<b>Adapter bush</b> for adapting mounting shank 8h6 mm to inch bore .375"	<b>940 4310103</b>		
<b>Lug back</b>	<b>1075 b 4336565</b>		

## μMaxμm® XL Digital Indicators



XLT



XLI



XLI-57B-15

### Features

The μMaxμm XL Series offers all the benefits of Federal's μMaxμm Indicators and is designed for convenience, ease of use, dependability and rugged shop floor handling ... plus:


- Long measuring ranges of 12.5 mm / .5", 25 mm / 1", 50 mm / 2" and 100 mm / 4".
- XLT incorporates switchable resolution.
- The XL never loses zero, even when powered down.
- Features easy to use controls.
- Preset capabilities for direct dimension readout.
- Unilateral tolerances.
- Go/no-go display for foolproof operation.
- Large digital/analog dual display for fast, accurate readings.
- Two-format data output, serial or Digimatic, is compatible with most data collection devices.
- World version furnished with metric stem sizes and contact threads.
- Versions also available for deadweight applications with compressible materials.
- Special ratio and lockout versions also available.
- Ask about our optional XLS versions for special custom configurations and lock out of various user and set up functions

### Accessories

Order no.

Right hand Lifting Lever,  
Left hand Lifting Lever

ELR-1092  
ELR-1093

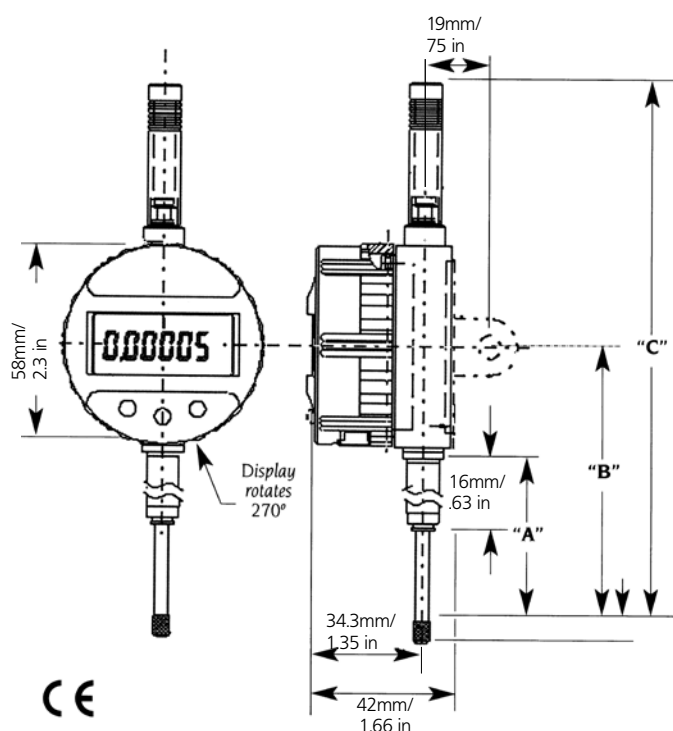

### XLI Models & XLT Models

Range mm/ <i>inch</i>	"A" mm/ <i>inch</i>	"B" mm/ <i>inch</i>	"C" mm/ <i>inch</i>
12 / <b>.5"</b>	35.1 / <b>1.38"</b>	68.6 / <b>2.7"</b>	128.27 / <b>5.05"</b>
25 / <b>1"</b>	47.5 / <b>1.87"</b>	81.3 / <b>3.2"</b>	153.7 / <b>6.05"</b>
50 / <b>2"</b>	72.64 / <b>2.86"</b>	153 / <b>6"</b>	275.6 / <b>10.85"</b>
100 / <b>4"</b>	123 / <b>4.88"</b>	253 / <b>9.97"</b>	427 / <b>16.8"</b>

## μMaxμm® XL Digital Indicators

### Ordering Information

μMaxμm XL Indicators		<b>XLI-</b>	<b>X</b>		<b>X</b>	<b>0</b>	<b>0</b>	<b>X</b>
Model Number:								
Model	Range	Stem Diameter / Length	Code	Ratio	Code	Back	Code	
U.S. version	<b>0.5"</b>	<b>.375" / 0.63"</b>	1	1:1	0	Flat Back ( <b>EBK-1020</b> )	0	
U.S. version	<b>1.0"</b>	<b>.375" / 0.63"</b>	2			Lug ( <b>BK-183</b> ) vert/horiz	1	
World version	12.5 mm	8 mm / 16 mm	3	4/5	1	Adjustable ( <b>BK-531</b> )	2	
World version	25 mm	8 mm / 16 mm	4			Post ( <b>BK-2930</b> )	3	
World version	25 mm	8 mm / No spring	5*			Screw ( <b>BK-692</b> )	4	
						Adaptor back for 75B Gage ( <b>EPL-1914</b> )	5	
						Rack Back ( <b>BK-93</b> )		

\* Deadload Model (used with weights)

**Examples:** **XLI-10001** is a μMaxμm XL with 0.5" range, .375" stem diameter, 0.63" / 16 mm stem length, and a Lug Back.

μMaxμm XLT Indicators*		<b>XLT-</b>	<b>X</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>X</b>
Model Number:							
Version	Range	Stem Diameter / Length	Accuracy	Code	Back	Code	
World	50 mm	8 mm / 15 mm	High: 8 μm/. <b>.00032"</b>	1	Flat Back ( <b>EBK-1020</b> )	0	
World	50 mm	8 mm / 15 mm	Std: 20 μm/. <b>.0008"</b>	2	Lug ( <b>BK-383</b> )	1	
World	100 mm	8 mm / 15 mm	High: 9 μm/. <b>.00036"</b>	3	Adjustable ( <b>BK-531</b> )	2	
World	100 mm	8 mm / 15 mm	Std: 20 μm/. <b>.0008"</b>	4	Post ( <b>BK-2093</b> )	3	
					Screw ( <b>BK-692</b> )	4	

For additional contact points see pages 5-22, 5-27, 5-52 & 5-53

XLT Models include 3/8" bushing and M2.5 thread contact. Adaptor AD-185 provided when selecting a 4-48 threaded Contact Point

### Technical Data

Model no.	Range mm/ <i>inch</i>	Resolution mm/ <i>inch</i>	Accuracy mm/ <i>inch</i>	Gage Force	Weight
XLI Resolution Fixed	12.7/ <b>.50"</b>	0.0005/ <b>.00002"</b> 0.001/ <b>.00005"</b> 0.002/ <b>.0001"</b>	0.005/ <b>.0002"</b>	0.8 N / <b>3-4 oz.</b>	200 g / <b>7 oz.</b>
	25.4/ <b>1.0"</b>	0.005/ <b>.0002"</b> 0.01/ <b>.0005"</b> 0.02/ <b>.001"</b>			
XLT Standard Accuracy Resolution Selectable	50/ <b>2.0"</b>	0.01/ <b>.0005"</b> 0.02/ <b>.001"</b> 0.05/ <b>.002"</b>	0.02/ <b>.0008"</b>	0.8 - 1 N / <b>7 - 11 oz.</b>	200 g / <b>10 oz.</b>
	100/ <b>4.0"</b>	0.1/ <b>.005"</b>		2.3 - 4 N / <b>8 - 14 oz.</b>	340 g / <b>12 oz.</b>
XLT High Accuracy Resolution Selectable	50/ <b>2.0"</b>	0.001/ <b>.00005"</b> 0.002/ <b>.0001"</b> 0.005/ <b>.0002"</b>	0.008/ <b>.00032"</b>	0.8 - 1 N / <b>7 - 11 oz.</b>	200 g / <b>10 oz.</b>
	100/ <b>4.0"</b>	0.01/ <b>.0005"</b> 0.02/ <b>.001"</b> 0.05/ <b>.002"</b> 0.1/ <b>.005"</b>	0.009/ <b>.00036"</b>	2.3 - 4 N / <b>8 - 14 oz.</b>	340 g / <b>12 oz.</b>

### XL Common Specification Values

Output	Serial BCD, 13 digits, 52 bits; ASCII encoded 2400 baud asynchronous stream.
Spindle Velocity	60 in/sec (1.5m/sec) Maximum
Operating Temps	40° to 105° F / 5° to 40° C
Storage Temps	- 40° to 140° F / -20° to 60° C
Repeatability	± 1 least significant digit
Battery life	12 months normal use or 4000 hours. (May vary with "Auto Power Down Option")


# MarCator 1086

► | The new Digital Indicator **MarCator** 1086. With the large display and the integrated tolerance function, your measurement results are clearly visual. | ◀


## Clear display

### Tolerance indication with the displayed value

Displayed is the actual measured value and the tolerance zone position

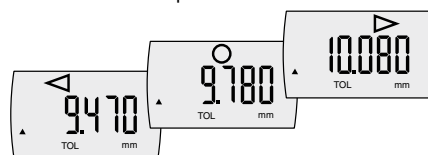

**Tolerance indication without the value in the display.** In and Out of tolerance will be indicated in the display as a symbol.

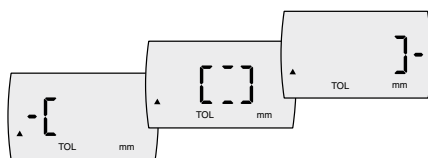

### IP Protection class IP54 (optional)

- Protection cap is sealed
- Rubber bellows for the measuring spindle
- Sealed battery compartment



Code Initial	IP	International Protection
First Numeral	5	Dust protected
Second Numeral	4	Protection against splash water in all directions

## Universal Data-Interface



### • USB

No interface box is required! Simple and inexpensive way to set up a multiple measuring instruments via a USB hub



### • Digimatic

To connect a Digimatic compatible evaluation instrument



### • Mahr Opto RS232C


For direct connection to a COM port on a PC



### Absolute function:

Digital Indicator can be set in any position to 0.000 without losing the reference to the preset value.

## Error free operation - Lock function



**Lock function:** This prevents unintentional activation of an operating button. Either all the operating buttons or only certain individual buttons can be locked. If a locked operating button is pressed the "LOC" symbol will appear in the display.

## Digital Indicators MarCator 1086 / 1086 Z, Resolution 0.01 mm / .0005"




## Features

## Functions:

- ON/OFF
- RESET (Set display to zero)
- mm/inch
- Reversal of the counting direction
- PRESET (Allows the entry of any value using set buttons)
- TOL (Enter tolerance limit values)
- ABS (Display can be set to zero, without losing the reference to the Preset value)
- <0> (Tolerance GO / NO GO display mode)
- DATA (when connected with a data connection cable)
- Factor (adjustable)
- Individual buttons can be locked
- Operating and display unit (bezel) can be rotated through 280°
- High contrast LCD with 11 mm high digits
- Inductive measuring system, battery life approx. 2000 hrs.
- Maximum measuring speed 1.5 m/s (60"/s)
- Lifter protection cap on the measuring spindle
- MarConnect data output: choose either USB, OPTO RS232C, Digimatic
- Operating temperature 10 - 40°C
- Class of protection IP42 in accordance to IEC 60529

Supplied with:  
Battery, operating instructions

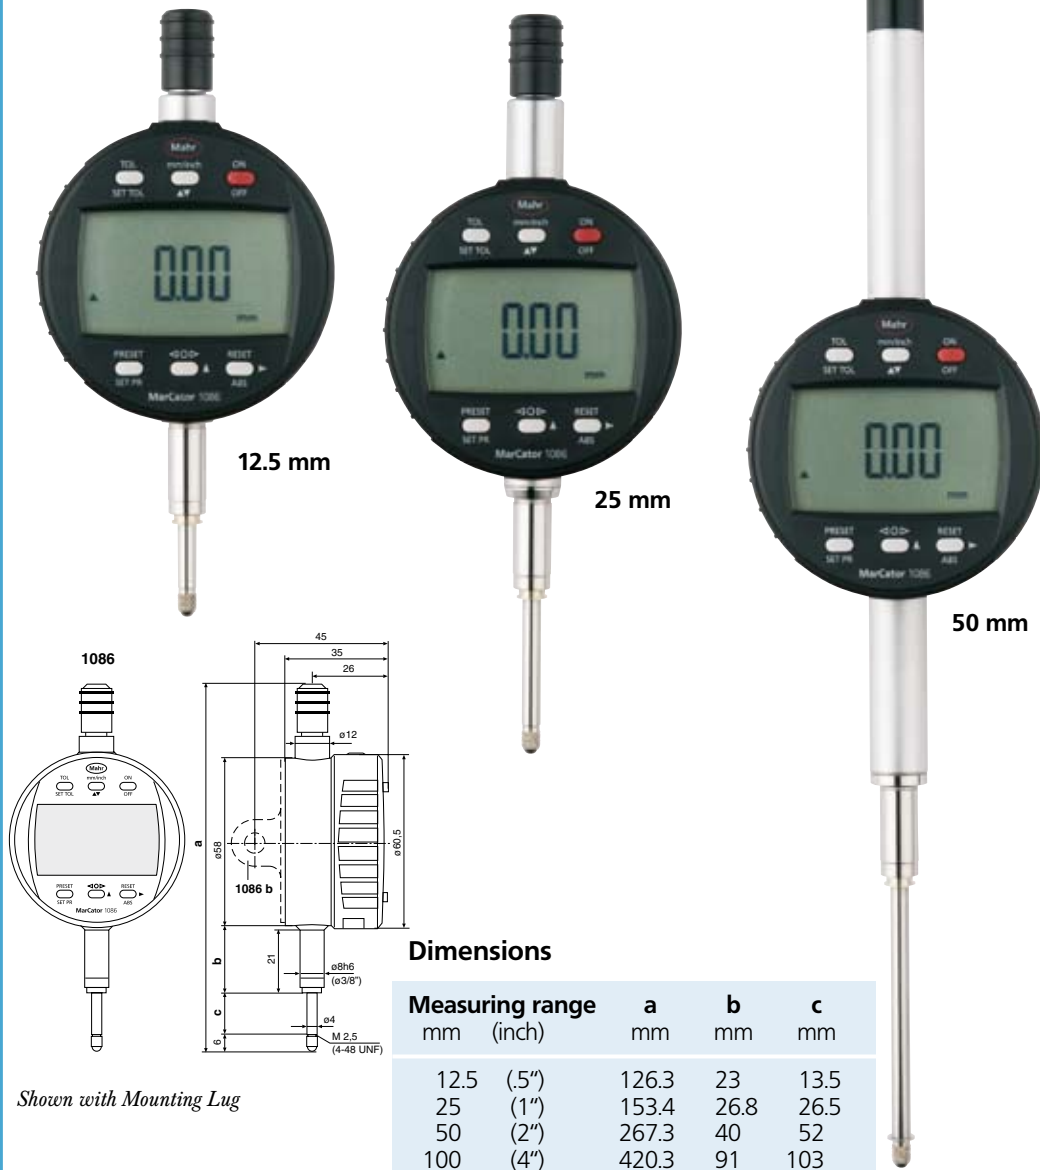

## Technical Data

Measuring range	Resolution	Span of error*	Repeatability	Measuring force	Weight	Mounting shank	Order no.
mm (inch)	mm/inch	mm	mm	N	g	dia.	
12.5 (.5")	0.01/.0005"	0.02	0.01	0.65 - 0.90	130	8h6	4337030
25 (1")	0.01/.0005"	0.02	0.01	0.65 - 1.15	140	8h6	4337031
50 (2")	0.01/.0005"	0.02	0.01	1.25 - 2.70	190	8h6	4337032
100 (4")	0.01/.0005"	0.02	0.01	1.60 - 3.50	235	8h6	4337033
12.5 (.5")	0.01/.0005"	0.02	0.01	0.65 - 0.90	150	3/8"	4337055
25 (1")	0.01/.0005"	0.02	0.01	0.65 - 1.15	160	3/8"	4337056

\* in any zero point

## Digital Indicators MarCator 1086 / 1086 Z, Resolution 0.001 mm / .00005"




12.5 mm



25 mm



50 mm

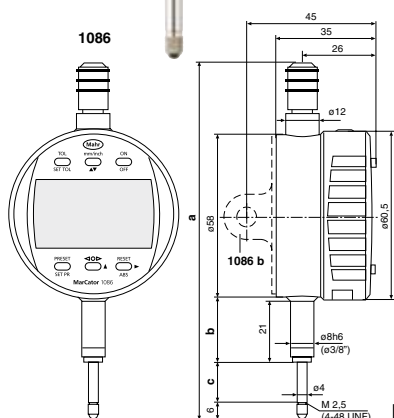

Dimensions

Measuring range		a	b	c
mm	(inch)	mm	mm	mm
12.5	(.5")	126.3	23	13.5
25	(1")	153.4	26.8	26.5
50	(2")	267.3	40	52
100	(4")	420.3	91	103

Shown with Mounting Lug

### Features

#### Functions:

- ON/OFF
- RESET (Set display to zero)
- mm/inch
- Reversal of the counting direction
- PRESET (Allows the entry of any value using set buttons)
- TOL (Enter tolerance limit values)
- ABS (Display can be set to zero, without losing the reference to the Preset value)
- <0> (Tolerance GO / NO GO display mode)
- DATA (when connected with a data connection cable)
- Factor (adjustable)
- Individual buttons can be locked
- Operating and display unit (bezel) can be rotated through 280°
- High contrast LCD with 11 mm high digits
- Inductive measuring system, battery life approx. 2000 hrs.
- Maximum measuring speed 1.5 m/s (60"/s)
- Lifter protection cap on the measuring spindle
- MarConnect data output: choose either  
USB  
OPTO RS232C  
Digimatic
- Operating temperature 10 - 40°C
- Class of protection IP42 in accordance to IEC 60529

Supplied with:  
Battery, operating instructions

### Technical Data

Measuring range	Resolution	Span of error*	Repeatability	Measuring force	Weight	Mounting shank	Order no.
mm (inch)	mm/inch	mm	mm	N	g	dia.	
12.5 (.5")	0.001/.00005"	0.005	0.002	0.65 - 0.90	130	8h6	4337020
25 (1")	0.001/.00005"	0.005	0.002	0.65 - 1.15	140	8h6	4337021
50 (2")	0.001/.00005"	0.006	0.002	1.25 - 2.70	190	8h6	4337022
100 (4")	0.001/.00005"	0.008	0.002	1.60 - 3.50	235	8h6	4337023
12.5 (.5")	0.001/.00005"	0.005	0.002	0.65 - 0.90	150	3/8"	4337050
25 (1")	0.001/.00005"	0.005	0.002	0.65 - 1.15	160	3/8"	4337051

\* in any zero point




## Digital Indicators MarCator 1086 W, Water proof version



12.5 mm



25 mm

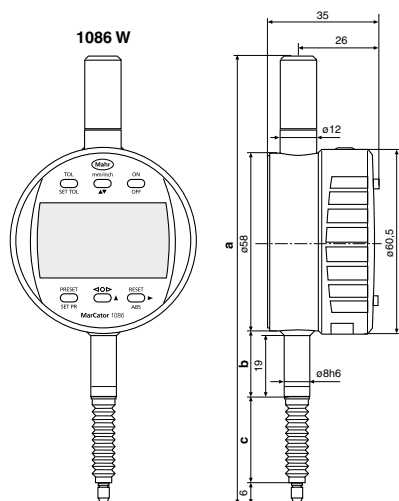

## Dimensions

Measuring range		a	b	c
mm	(inch)	mm	mm	mm
12.5	(.5")	144.3	23	28.6
25	(1")	193.2	26.8	50

## Features

## Functions:

- ON/OFF
- RESET (Set display to zero)
- mm/inch
- Reversal of the counting direction
- PRESET (Allows the entry of any value using set buttons)
- TOL (Enter tolerance limit values)
- ABS (Display can be set to zero, without losing the reference to the Preset value)
- <0> (Tolerance GO / NO GO display mode)
- DATA (when connected with a data connection cable)
- Factor (adjustable)
- Individual buttons can be locked
- Operating and display unit (bezel) can be rotated through 280°
- High contrast LCD with 11 mm high digits
- Inductive measuring system, battery life approx. 2000 hrs.
- Maximum measuring speed 1.5 m/s (60"/s)
- Sealed protection cap
- Measuring spindle is sealed with a rubber bellows, thus preventing contamination by liquids and impurities
- MarConnect data output: choose either  
USB  
OPTO RS232C  
Digimatic
- Operating temperature 10 - 40°C
- Class of protection IP54 in accordance to IEC 60529

Supplied with:  
Battery, operating instructions

## Technical Data

Measuring range	Resolution	Span of error*	Repeatability	Measuring force	Weight	Mounting shank	Order no.
mm (inch)	mm/inch	mm	mm	N	g	dia.	
12.5 (.5")	0.01/.0005"	0.005	0.002	0.65 - 1.40	135	8h6	4337040
25 (1")	0.001/.00005"	0.005	0.002	1.00 - 2.25	145	8h6	4337041
12.5 (.5")	0.01/.0005"	0.02	0.01	0.65 - 1.40	135	8h6	4337045
25 (1")	0.01/.0005"	0.02	0.01	1.00 - 2.25	145	8h6	4337046


\* in any zero point

## MarCator 1087

► | The new Digital Indicator **MarCator** 1087. The multi-functional Digital Indicator with a combined analog and digital display; plus tolerance and dynamic measuring functions. | ◀

### Dynamic measuring functions


- **MAX-MIN**-Function ideal for testing flatness and concentricity
- **MAX** and / or **MIN** for searching the reversal point

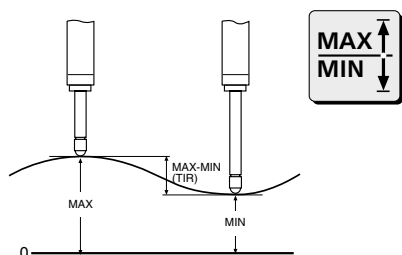


### Clear display

#### Tolerance indication

The integrated bar graph visualizes the tolerance deviation. The out of tolerance; whether above the upper or below the lower tolerance limit is represented by arrows shown in the display.

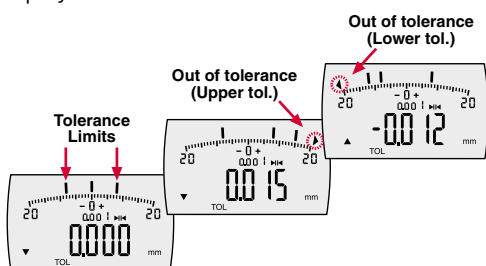

### Universal Data-Interface



#### • USB

No interface box is required! Simple and inexpensive way to set up a multiple measuring instruments via a USB hub



#### • Digimatic

To connect a Digimatic compatible evaluation instrument



#### • Mahr Opto RS232C

For direct connection to a COM port on a PC




### ABS

#### Absolute function:

Digital Indicator can be set in any position to 0.000 without losing the reference to the preset value.

### Error free operation - Lock function



**Lock function:** This prevents unintentional activation of an operating button. Either all the operating buttons or only certain individual buttons can be locked. If a locked operating button is pressed the "LOC" symbol will appear in the display.

### Factor is adjustable

a symbol with appear in the display


Example of application:  
- Chamfer Gage



## Digital Indicators MarCator 1087 / 1087 Z, with analog display



12.5 mm

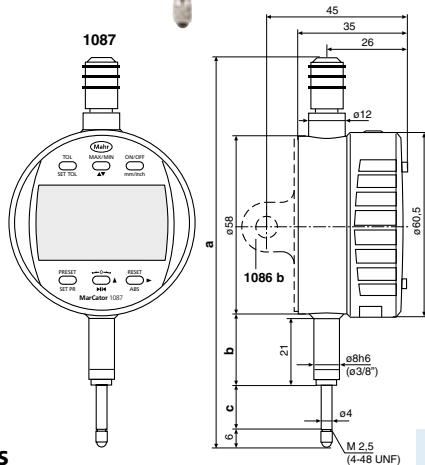Shown with  
Mounting Lug

## Dimensions

Measuring range mm (inch)	a mm	b mm	c mm
12.5 (.5")	126.3	23	13.5
25 (1")	153.4	26.8	26.5



25 mm

## Analog display

Readings mm / inch	Display range mm / inch
0.001 / .00005"	± 0.02 / ± .001"
0.002 / .0001"	± 0.04 / ± .002"
0.004 / .0005"	± 0.08 / ± .01"
0.01 / .001"	± 0.2 / ± .02"

## Features

## Functions:

- ON/OFF
- RESET (Set display to zero)
- mm/inch
- Reversal of the counting direction
- PRESET (Allows the entry of any value using set buttons)
- TOL (Enter tolerance limit values)
- MAX/MIN memory, ideal for searching the reversal point
- TIR (MAX-MIN) ideal for testing concentricity and flatness
- ABS (Display can be set to zero, without losing the reference to the Preset value)
- 0 (Set the analog display to zero)
- DATA (when connected with a data connection cable)
- Factor (adjustable)
- Individual buttons can be locked
- Operating and display unit (bezel) can be rotated through 280°
- High contrast LCD with 8.5 mm high digits
- Inductive measuring system, battery life approx. 2000 hrs.
- Maximum measuring speed 1.5 m/s (60"/s)
- MarConnect data output: choose either
  - USB
  - OPTO RS232C
  - Digimatic
- Operating temperature 10 - 40°C
- Class of protection IP42 in accordance to IEC 60529

Supplied with:  
Battery, operating instructions

## Technical Data

Measuring range mm (inch)	Resolution mm/inch	Span of error* mm	Repeatability mm	Measuring force N	Weight g	Mounting shank dia.	Order no.
12.5 (.5")	0.001 / .00005"	0.005	0.002	0.65 - 0.90	140	8h6	4337060
25 (1")	0.001 / .00005"	0.005	0.002	0.65 - 1.15	150	8h6	4337061
12.5 (.5")	0.001 / .00005"	0.005	0.002	0.65 - 0.90	150	3/8"	4337070
25 (1")	0.001 / .00005"	0.005	0.002	0.65 - 1.15	160	3/8"	4337071

\* in any zero point

# MarCator 1088

► | The new Digital Indicator **MarCator** 1088. Tolerance monitoring is simplified with the changing of the color in the background lit display. | ◀

## Dynamic measuring functions

- MAX-MIN memory: ideal for testing flatness and concentricity
- MAX-MIN memory: for searching the reversal point

**Tolerance function:** clearly visual tolerance excess due to the change of color in the background lit display.



## Universal Data-Interface



- **USB**  
No interface box is required! Simple and inexpensive way to set up a multiple measuring instruments via a USB hub



- **Digimatic**  
To connect a Digimatic compatible evaluation instrument



- **Mahr Opto RS232C**  
For direct connection to a COM port on a PC



- **Control output**  
can be connected to a SPS



- **Absolute function:**  
Digital Indicator can be set in any position to 0.000 without losing the reference to the preset value.


**Protection class IP54** according to IEC 60529. Especially suited for use in a manufacturing environment (except measuring range 50 mm)



Code Initial	IP	International Protection
First Numeral	5	Dust protected
Second Numeral	4	Protection against splash water in all directions



## Analog display




**Readings**  
(switchable)  
mm / inch

**Display range**  
mm / inch

0.001 / .00005"  
0.002 / .00001"  
0.005 / .0005"  
0.01 / .0001"

± 0.030 / ± .0015"  
± 0.060 / ± .0030"  
± 0.150 / ± .0150"  
± 0.30 / ± .0150"


## Digital Indicators MarCator 1088 / 1088 W, with analog display

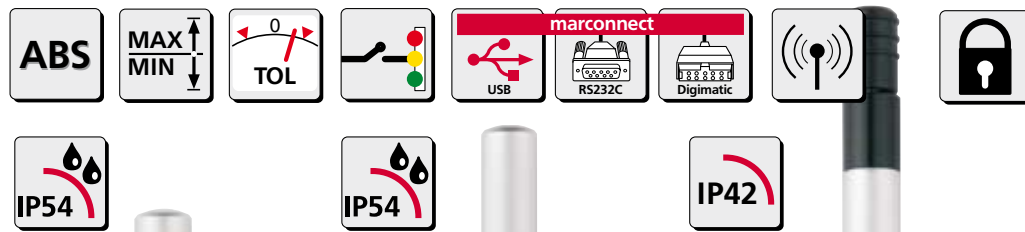

## Features

## Functions:

- ON/OFF
- RESET (set digital and analog displays to zero)
- 0 - (set the analog display to zero)
- PRESET (enter any numerical values)
- DATA (data transmission)
- mm/inch-switchable
- Reversal of counting direction (switch value in digital display)
- MAX-MIN memory, ideal for searching the reversal point
- MAX-MIN memory, ideal for testing flatness and concentricity
- TOL (Enter tolerance limit values)
- LOCK: operating functions can be blocked via PC-Software
- Power supply via the main power adapter
- MarConnect data output USB, OPTO RS232C, or Digimatic
- Can be remotely operated via the interface (Opto RS232C)
- Control output compatible to Dial Comparators with limit contacts
- Operating and display unit (bezel) can be rotated 280°
- Class of protection IP54 in accordance to IEC 60529
- Operating temperature 5 - 40°C
- High contrast backlit LCD with 6.5 mm high digits
- Analog display with 4 mm pointer ensures better visual recognition, ideal when checking concentricity or flatness as well as searching for the reversal point when measuring bores
- Supplied with: Mains adapter, rubber bellows, operating instructions

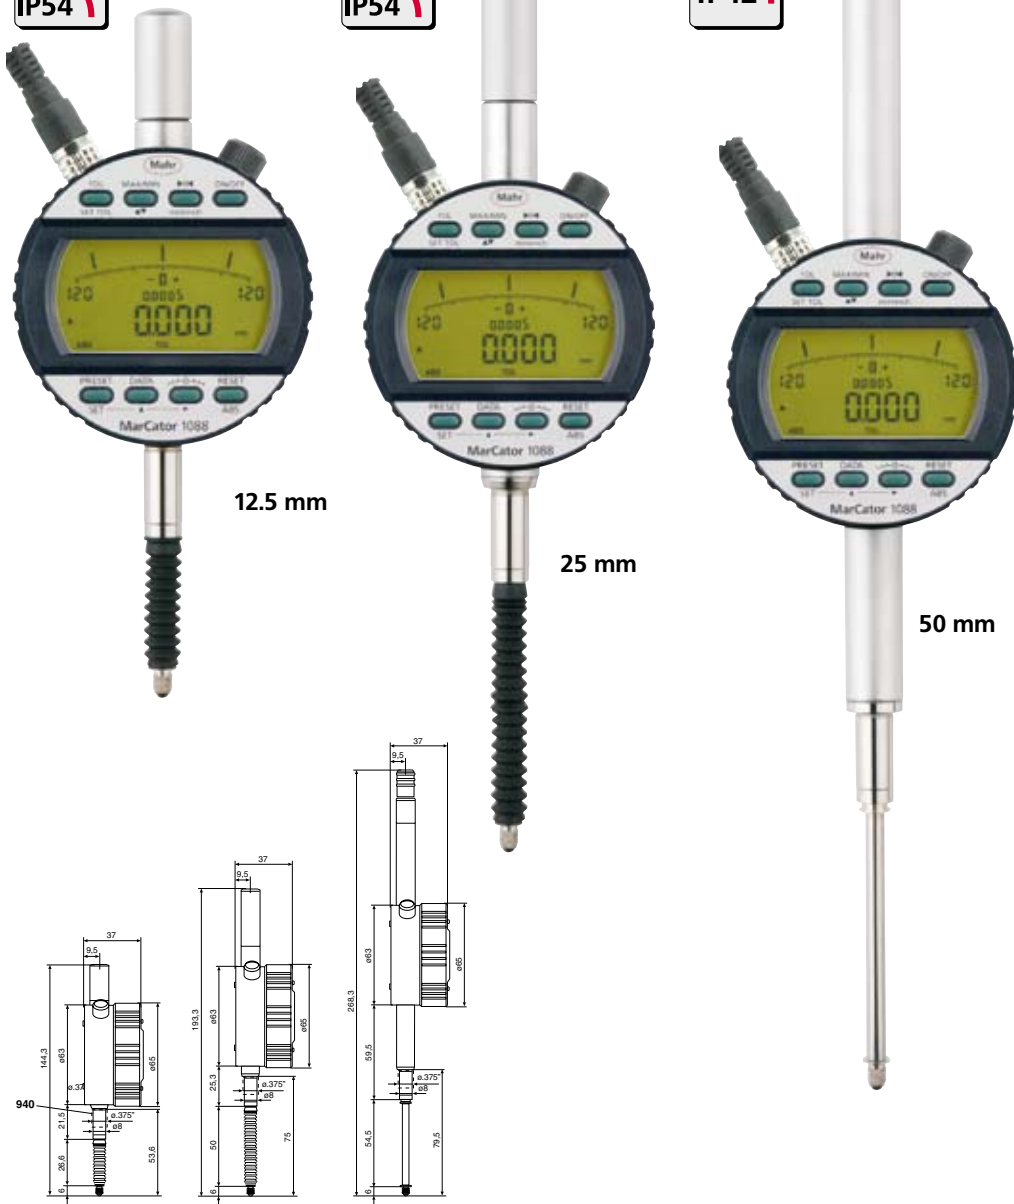

## Technical Data

Measuring range mm (inch)	Resolution mm/inch	Meas. force N	Span of error* mm	Protection class	Mounting shank dia.	Order no. 230 V	Order no. 115 V
12.5 (.5")	0.001 / .00005"	0.65 - 0.9	0.005	IP54	8h6	4337000	4337010
25 (1")	0.001 / .00005"	0.65 - 1.15	0.005	IP54	8h6	4337001	4337011
50 (2")	0.001 / .00005"	1.25 - 2.7	0.008	IP42	8h6	4337002	4337012


\* in any zero point



## Digital Indicator MarCator 1087 B for 2 point inside measurement




12.5 mm

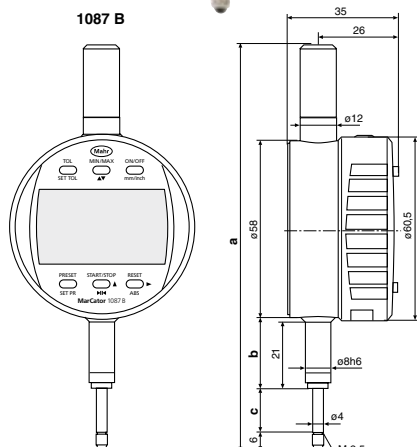

### Dimensions

Measuring range	a	b	c
mm (inch)	mm	mm	mm
12.5 (.5")	131	23	13.5

### Example of application

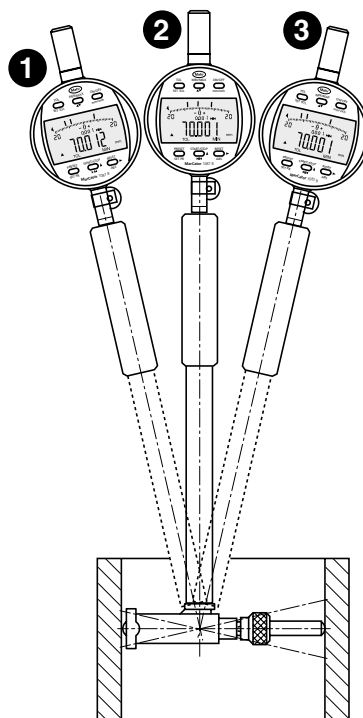

With a 2 point inside measuring instrument the point of reversal is automatically determined through rocking back and forth. The actual value is detected and stored by the MIN function and indicated in the display (3).

### Features

#### Functions:

- ON/OFF
- RESET (Set the display to zero) mm/inch
- Reversal of the counting direction
- PRESET (Allows the entry of any value using set buttons)
- TOL (Enter tolerance limit values)
- START/STOP for searching the reversal point
- MAX/MIN memory, ideal for searching the reversal point
- ABS (Display can be set to zero, without losing the reference to the Preset value)
- 0 (Set analog display to zero)
- DATA (when connected with a data connection cable)
- Factor (adjustable)
- Individual keys can be locked
- Operating and display unit (bezel) can be rotated 280°
- High contrast LCD with 8.5 mm high digits
- Inductive measuring system, battery life approx. 2000 hrs.
- Maximum measuring speed 1.5 m/s (60"/s)
- Sealed protection cap
- MarConnect data output: choose either USB, OPTO RS232C, Digimatic
- Operating temperature 10 - 40°C
- Class of protection IP42 in accordance to IEC 60529

Supplied with:  
Battery, operating instructions

### Analog display

Readings  
mm / inch

Display range  
mm / inch

0.001 / .00005"  
0.002 / .0001"  
0.004 / .0005"  
0.01 / .001"

± 0.02 / ± .001"  
± 0.04 / ± .002"  
± 0.08 / ± .01"  
± 0.2 / ± .02"

### Technical Data

Measuring range	Resolution	Span of error*	Repeatability	Measuring force	Weight	Mounting shank dia.	Order no.
mm (inch)	mm/inch	mm	mm	N	g		
12.5 (.5")	0.001 / .00005"	0.005	0.002	0.65 - 0.90	140	8h6	4337062

\* in any zero point



## Accessories for MarCator 1086, 1087 and 1088

### Accessories for MarCator 1086 and 1087

	Order no.
<b>Battery 3V</b> , Type CR 2450	<b>4884464</b>
<b>Data Connection Cable</b> USB (2 m)	<b>16 EXu 4102357</b>
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	<b>16 EXr 4102410</b>
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	<b>16 EXd 4102411</b>
<b>Mounting Lug</b>	<b>1086 b 4337421</b>


### Accessories for MarCator 1088

	Order no.
<b>Data Connection Cable</b> USB (2 m)	<b>2000 usb 4346023</b>
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D jack 9-pin	<b>2000 r 4346020</b>
<b>Data Connection Cable</b> Digimatic (2 m), Flat plug 10-pin	<b>2000 d 4346021</b>
<b>Cable</b> to connect control output to an SPS	<b>2000 sps 4346031</b>
<b>Mounting Lug</b>	<b>1085 b 4336310</b>
<b>Control Instrument</b> for remote control button operation	<b>2000 sg 4346035</b>


### Accessories for MarCator 1086, 1087 and 1088

	Order no.
<b>Cable Release</b> for measuring ranges 12.5 and 25 mm	<b>1085 a 4336311</b>
<b>Pneumatic Lifter</b> for measuring ranges 12.5 and 25 mm	<b>1082 p 4336237</b>
<b>Pneumatic Lifter</b> for measuring ranges 50 and 100 mm	<b>1082 p 4336230</b>
<b>Additional Accessories</b>	<b>Page</b>
<b>Contact Points</b>	<b>901-913 5-52</b>
<b>Special Holder</b>	<b>941 5-53</b>
<b>Sensor Lever</b>	<b>943 5-53</b>


Accessories for Data Processing see Chapter 11

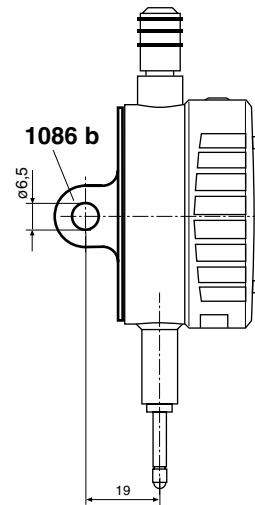


**1085 a**



**1082 p (12,5/25)**



**1082 p (50/100)**



## Contact Points and Accessories for Dial Indicators, Dial Comparators and Probes

### Standard Contact Points 901

Ball dia. 3 mm

Catalog no.		Order no.
901	with steel ball	4360001
901 H	with carbide ball	4360002
901 R	with ruby ball	4360003

### Spherical Contact Points 902

### Flat Contact Points 903

902 Steel	902 H Carbide contact face	903 Steel	903 H Carbide tipped
Length mm	Order no.	Order no.	Order no.
4	4360007	—	—
6	4360009	—	—
8	4360010	4360040	4360101
10	4360011	4360041	4360102
12	4360012	4360042	4360103
15	4360013	4360043	4360104
20	4360014	4360044	4360105
25	4360015	4360045	4360106
30	4360016	4360046	4360107
35	4360017	4360047	4360110
40	4360019	4360049	4360108
45	4360026	4360050	4360111
50	4360018	4360048	—
55	4360031	4360079	4360109
65	4360035		
75	4360020		
85	4360036		
95	4360029		

### Ball Contact Point 906 H


with carbide ball. accuracy ball dia. 0/-6µm

Ball dia. d mm	l mm	Order no.	Ball dia. d mm	l mm	Order no.
1	8.5	4360150	5.5	9	4360161
1.25	8.5	4360151	6	9	4360162
1.5	8.5	4360152	6.35 (1/4")	9	4360163
1.75	8.5	4360153	6.5	10	4360164
2	8.5	4360154	7	10	4360165
2.5	8.5	4360155	7.5	11	4360166
3	8.5	4360156	8	11	4360167
3.5	8.5	4360157	8.5	12	4360168
4	8.5	4360158	9	12	4360169
4.5	8.5	4360159	10	13	4360170
5	9	4360160			

### Contact Rollers 909


Concentricity error 3 µm

	Order no.
Cylindrical Roller	909 A 4360220
Radiused Roller, R = 5 mm	909 B 4360221

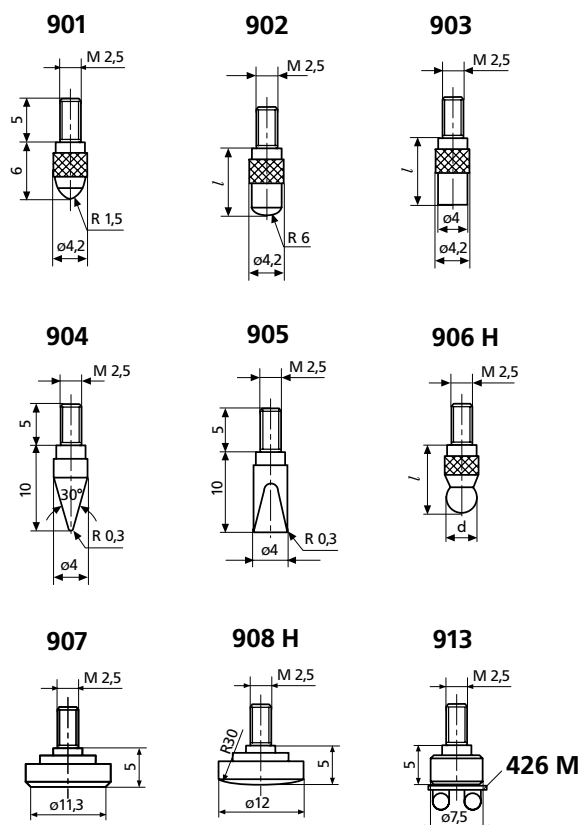

### Special Contact Points

	Order no.
Conical Contact Points, Steel	904 4360130
Carbide tipped	904 H 4360131
Wedge Shaped Contact Points, Steel	905 4360140
Carbide tipped	905 H 4360141
Flat Contact Points, Steel, A = 1 cm²	907 4360200
Carbide tipped, dia. 7 mm	907 H 4360201
Spherical Contact Points, Steel	908 4360210
Carbide tipped	908 H 4360211
Flat Contact Point, for mounting Pin Gage Holder 426 M for measuring threads using three-wire method	913 4360400



## Contact Points and Accessories for Dial Indicators, Dial Comparators and Probes

### Measuring Attachment 910 H

	Order no.
with parallel adjustable carbide blades	<b>910 H 4360230</b>

### Pin Contact Point 911

dia. 1 mm, flat

Length $l$ mm	Order no.	Length $l$ mm	Order no.
15	<b>4360280</b>	35	<b>4360284</b>
20	<b>4360281</b>	40	<b>4360285</b>
25	<b>4360282</b>	50	<b>4360286</b>
30	<b>4360283</b>		

### Pin Contact Point 911 H

	Order no.
Carbide tipped, dia 1 mm, flat	<b>911 H1 4360240</b>
Carbide tipped, dia 1.5 mm, flat	<b>911 H2 4360241</b>

### Measuring Spindle Extensions 912

Length $l$ mm	Order no.	Length $l$ mm	Order no.
10	<b>4360250</b>	35	<b>4360254</b>
15	<b>4360251</b>	50	<b>4360255</b>
20	<b>4360252</b>	75	<b>4360256</b>
25	<b>4360253</b>	100	<b>4360257</b>

### Special Holder 941

For all types of measuring equipment  
For placing a dial indicator at a certain distance or angle  
Travel of the measuring spindle 3 mm  
Contact Point 901 (interchangeable)

#### Straight Holder 941 G








Mounting shank length $l_1$ mm	Order no.
25	<b>4365000</b>
50	<b>4365001</b>
75	<b>4365002</b>

#### Angular Holder 941 W


Order no.	$l_2$ mm	Order no.	$l_2$ mm	Order no.	$l_2$ mm
Angle $\alpha=45^\circ$		Angle $\alpha=60^\circ$		Angle $\alpha=90^\circ$	
<b>4365010</b>	53.7	<b>4365020</b>	49.3	<b>4365030</b>	34.5
<b>4365011</b>		<b>4365021</b>		<b>4365031</b>	
<b>4365012</b>		<b>4365022</b>		<b>4365032</b>	

### Sensor Level 943

Order no.
For testing concentricity in bore holes as well as difficult to reach outside diameters To be inserted in a measuring stand with a lifting device Contact Point 901 interchangeable Travel $\pm 1$ mm
<b>4367000</b>



Transmission error with the 941 W  
max. 1%;  
for travel 3 mm = 0.03 mm

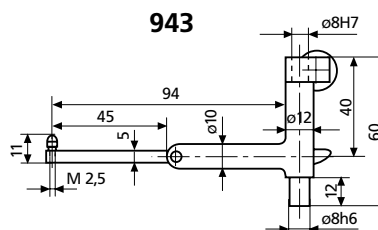

## SIMPLE, ACCURATE AND INEXPENSIVE MEASUREMENT. MILLIMESS DIAL COMPARATORS.



The latest information on MILLIMESS products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 207**

► | Millimess is the "classic" amongst all measuring instrument. For over 60 years the Millimess series of dial comparators has been synonymous with both high precision and extreme robustness. Both maximum accuracy and a minimal reversal span error are obtained through the levers, gears and pinions being supported with jeweled bearings and that the measuring spindle running in a ball bush guide. Millimess is therefore particularly suitable for measuring tasks where the accuracy and the reversal span of a conventional dial indicator are not sufficient. Further advantages of Millimess are the simple handling, the easy reading as well as the movement being absolute shockproof. With a digital comparator with an inductive measuring system combined with most modern state of the art digital technology readings as small as  $0.2 \mu\text{m}/10 \mu\text{inch}$  are realized. The practical control functions (for example tolerance monitoring or the storage of measuring values for dynamic measurements), the combined analog and digital display as well as the easy to use data transmission rounds off the complete Millimess spectrum.

## ► | Millimess. Digital and Dial Comparators

### Inductive Digital Comparators

#### Overview

6- 2

#### Millimess 2100

With background lit digital and analog display

6- 4

#### Millimess 2000 / 2001

With digital and analog display

6- 5

#### μMaxμm

With digital display

6- 7

#### Maxμm ///

With digital and analog display, probe

6-10

### Mechanical Dial Comparators

#### Overview

6-14

#### Millimess 1000 A / 1000B / 1000 Z

With large dial

6-17

#### Millimess 1002 / 1003 / 1003 XL / 1004 / 1010 / 1050

Standard versions

6-18

#### Millimess 1100 / 1103 N / 1104 N / 1110 N / 1150 N

Electrical Comparator and Mechanical Dial Comparator with limit contacts






6-20



# Millimes. Digital Comparators (Short range)

## Overview

### Inductive Digital Comparators

	2100	2000	2001	μMaxμm	Maxμm III
					
Catalog page	6 - 3	6 - 5	6 - 5	6 - 7	6 - 10
Measuring range	2.8 mm	1.8 mm	1.8 mm	2 mm	2 mm / 3.98 mm
Resolution	mm / inch 0.0005 / .00002" 0.001 / .00005" 0.005 / .0002" 0.01 / .0005"	mm / inch 0.0002 / .00001" 0.0005 / .00002" 0.001 / .00005"	mm / inch 0.0002 / .00001" 0.0005 / .00002" 0.001 / .00005"	mm / inch 0.0005 / .00002" 0.001 / .00005" 0.002 / .0001" 0.005 / .0002" 0.010 / .0005" 0.020 / .001"	mm / inch 0.0005 / .00002" 0.001 / .00005" 0.001 / .0001" 0.005 / .0005"

### Functions:

ON/OFF	•	•	•	•	
Zero set the display	•	•	•	•	•
Zero set the analog display	•	•	•		
Switch between mm/inch	•	•	•	•	•
Reversal of counting direction	•	•	•	•	•
Entering a numerical value					
Preset	•	•	•	•	
Data key	•				
Data via control instrument 2000sg	•	•	•		
ABS/REL-switchable	•	•	•	•	
Tolerance display	•		•	•	•
Dynamic meas. functions	•		•		•
Min. Max. Max-Min (Tir)					
Resolution switchable	•	•	•	•	•
Analog display	•	•	•	•	•
Analog value switchable		•	•	•	•
Lock key function	•		•	Optional	Optional
Data output					
USB	•	•	•		•
Digimatic	•	•	•	•	•
Opto RS232C	•	•	•		•
Control output	•		•		
Protection class	IP54	IP54	IP54	IP54	IP54



# Millimess. Digital Comparator

► | The new Inductive Digital Comparator **Millimess** 2100. Tolerance monitoring is simplified with the color change in the background lit display. | ◀

## Dynamic measuring functions:

- MAX / MIN for example, finding the reversal point
- MAX - MIN storing values for example when testing concentricity and flatness



## Tolerance function:

clearly visual tolerance excess due to the change of color in the background lit display.



Code Initial	IP	International Protection
First Numeral	5	Dust protected
Second Numeral	4	Protection against splash water in all directions




Especially suited for use in a manufacturing environment. Waterproof **protection class IP54** according to IEC 60529




## Universal SPS Interface

The choice is yours:  
**MarConnect** Data output, choose between USB, Digimatic or RS232C





**Control output** can be connected to a SPS



## ABS System

Linearized, inductive **absolute measuring system**. Reference point is not lost when the instrument is switched off.

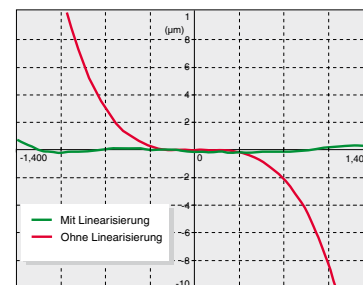

**High precision** rotary stroke bearings for a longer service life and higher capacity

## Inductive Digital Comparator Millimes 2100 with background lit display



### Features

#### Functions:

ON/OFF  
RESET (zero setting the digital and analog displays)  
- 0 - (set the analog display to zero)  
PRESET ( enter any numerical values)  
DATA (data transmission)  
mm/inch-switchable  
Reversal of counting direction  
RANGE (switch the meas. range and resolution)  
ABS (reference to elect. zero point)  
MAX / MIN memory, e.g. ideal to search for the reversal point  
MAX-MIN e.g. testing concentricity and flatness

TOL (entering tolerance)  
LOCK: operating functions can be blocked via PC-Software

- Linearized inductive absolute measuring system
- Measurement electronic is compensated for temperature
- Power supply via the main power adapter
- MarConnect data output: choose either  
USB  
OPTO RS232C  
Digimatic

- Dial Comparator can be remotely operated via the interface (Opto RS232C)
- Control output compatible to Dial Comparators with limit contacts
- Operating and display unit (bezel) can be rotated through 280°
- Measuring force spring is interchangeable
- Lower stop is adjustable
- Protection class IP54 according to IEC 60529

- Operating temperature 5 - 40°C
- High contrast background lit LCD with 6.5 mm high digits
- Analog display has a 4 mm long pointer which ensures better visual perception, ideal when checking concentricity and flatness and also to search for the reversal point when measuring bores
- Supplied with:  
Mains adapter, rubber bellows and spanner for preliminary stroke setting

### Technical Data

Measuring ranges switchable mm ( <i>inch</i> )	Resolution switchable mm/ <i>inch</i>	Display range of the analog display mm ( <i>inch</i> )	Span of error* G within ±0.8 mm ±1.4 mm	Over-travel mm	Meas. force N	Order no. 230 V	Order no. 115 V
±1.0 (.04")	0.0005 /.00002"	± 0.015 (.0006")					
	0.001 /.00005"	± 0.030 (.0015")					
±1.4 (.55")	0.005 /.0002"	± 0.150 (.0060")	1 µm 2 µm	1.8	0.7 - 0.9	4346200	4346201**
	0.01 /.0005"	± 0.300 (.0150")					

\* 1 digit in any zero position

\*\* Includes Adapter Bush 940

## Inductive Digital Comparators 2000 / 2001



2000



2001



### Features

#### Extramess 2000

##### Functions:

- ON/OFF
- RESET (Set the digital and analog display to zero)
- 0 - (Set analog display to zero)
- PRESET (enter any numerical values)
- mm/inch switchable
- Reversal of counting direction
- RANGE (Switch the meas. range and resolution)
- ABS (reference to electrical zero point)
- Charge status of the battery is indicated
- Linearized inductive absolute measuring system
- Power supply via either the integrated rechargeable batteries (40 hrs.) or via the mains power adapter
- Rate measuring values are actualized 20 values/sec.
- MarConnect data output: choose either
  - USB
  - OPTO RS232C
  - Digimatic

- Comparator can be remotely operated via the interface
- High contrast LCD with 6.5 mm high digits. Analog display has a 4 mm long pointer for better visual perception, ideal when checking concentricity and flatness as well as search for the reversal point when measuring bores
- Operating and display unit (bezel) can be rotated 280°
- Measuring force spring is interchangeable
- Lower stop is adjustable
- Protection class IP54
- Operating temperature 5 - 40°C
- Supplied with:
  - Mains adapter, rubber bellows and spanner for preliminary stroke setting

#### Extramess 2001

Features are identical to Extramess 2000, in addition:

- MAX / MIN memory, e.g. ideal to search for the reversal point
- MAX-MIN e.g. testing concentricity and flatness
- TOL (entering tolerance)

- Factor can be set / adjusted
- Control output compatible to Dial Comparators with limit contacts
- Supplied with:
  - Mains adapter, rubber bellows and spanner for preliminary stroke setting

- Block individual operating functions via Software (see accessories)

### Technical Data


	Measuring ranges switchable mm (inch)	Resolution and readings mm/inch	Display range of analog display mm (inch)	Span of error* G μm	Over-travel mm	Meas. force N	Order no. 230 V	Order no. 115 V
<b>2000</b>	1.8 (.07")	0.001/ .00005"	± 0.030 (.0015")	0.6	2.4			
	1.8 (.07")	0.0005/ .00002"	± 0.015 (.0006")	0.6	2.4	0.7 - 0.9	<b>4346000</b>	<b>4346900 **</b>
	0.8 (.031")	0.0002/ .00001"	± 0.006 (.0003")	0.3	2.9			
<b>2001</b>	1.8 (.07")	0.001/ .00005"	± 0.030 (.0015")	0.6	2.4			
	1.8 (.07")	0.0005/ .00002"	± 0.015 (.0006")	0.6	2.4	0.7 - 0.9	<b>4346100</b>	<b>4346910 **</b>
	0.8 (.031")	0.0002/ .00001"	± 0.006 (.0003")	0.3	2.9			

\* 1 digit in any zero position

\*\* Includes Adapter Bush 940

## Inductive Digital Comparators 2100 / 2000 / 2001

- 1 Operating buttons
- 2 Display
- 3 Mounting shank
- 4 Measuring spindle
- 5 Contact point 901H
- 6 Connection or mains power supply
- 7 Data output
- 8 Rotatable operating and display unit (bezel)

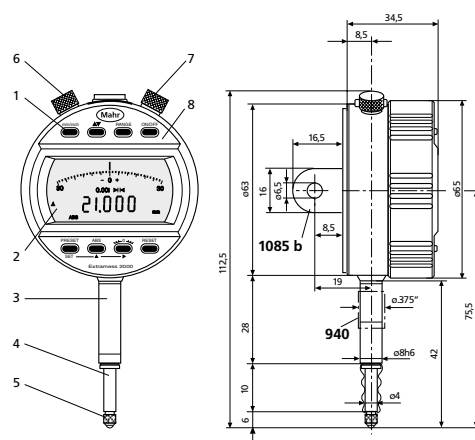

*Shown with  
Mounting Lug*

## Control Instrument 2000sg



## Features

- Remote control buttons:  
RESET  
PRESET  
RANGE\*
- DATA-button for data transmission, optionally via foot switch
- Power is supplied by the Extramess
- Connect to the Extramess with the built-in control cable

- Data can be transferred to a PC with an optional data cable
- Splash waterproof according to IP54

**Order no. 4346035**

\* Function is limited when used in conjunction with the 2100

## Accessories

<b>Data Connection Cable</b> USB (2 m)	<b>2000 usb</b>	<b>4346023</b>
<b>Data Connection Cable</b>		
Opto RS232C (2 m), SUB-D jack 9-pin	<b>2000 r</b>	<b>4346020</b>
<b>Data Connection Cable</b> Digimatic (2 m), flat plug 10-pin	<b>2000 d</b>	<b>4346021</b>
<b>Cable</b> to connect control output to an SPS	<b>2000 sps</b>	<b>4346031</b>

## Measuring Force Springs




0.25 N	4346050
0.5 N	4346051
0.75 N	4882284
1.0 N	4346052
1.5 N	4346053
2 N	4346054
2.5 N	4346055

<b>Manual Lifter with cable release</b>	<b>2000 h</b>	<b>4346010</b>
<b>Pneumatic Lifter</b>	<b>2000 p</b>	<b>4346011</b>
<b>Measuring Force Adjuster</b>	<b>2000 m</b>	<b>4346012</b>
<b>Mounting Lug</b> Horizontal/Vertical	<b>1085 b</b>	<b>4336310</b>
<b>Adapter Bush</b> for adapting mounting shank 8h6 mm to inch bore .375"	<b>940</b>	<b>4310103</b>

## Additional Accessories

<b>Contact Points</b>	<b>901-913</b>	5-52
<b>Special Holder</b>	<b>941</b>	5-53

Accessories for Data Processing see Chapter 11

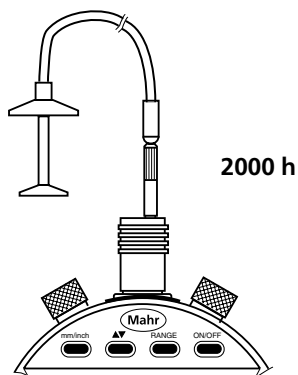

## Inductive Digital Comparator $\mu$ Max $\mu$ m®




The most valuable electronic indicator for high production measurements.

### Features

- Inch/Metric – operator selectable with switchable Inch resolution.
- Normal/Reverse Sensing
- Preset capabilities
- Optional Calibration Lockout feature.
- "Absolute" Transducer – no overspeed errors or constant re-zeroing. Federal's unique transducer always remembers its location – even when power is off.
- High resolution digital readout and analog bar graph – digital display shows deviation from zero or a preset value.
- Lightweight, contamination resistant – ruggedly built to withstand hard use – gasketed case, crystal and stem assemblies resist fluid contamination.
- Calibratable – if ever needed – values remembered even after battery change.
- Data output – 2 popular formats – 7-pin recessed connector
- Auto power down – provides extremely low battery consumption, assuring long life from readily available commercial batteries.
- Unilateral Tolerances.
- Go/NoGo Display Feature.
- Increased resolution (0.0005 mm / 20  $\mu$ inch) for today's demanding tolerances


#### Mode A:

Actual value + graphic display of tolerance



#### Mode B:

Go- No Go display




### Technical Data

#### Dimensions

mm/inch	A	B	C
	11.7 / .46"	24.1 / .95"	53.6 / 2.11"
	38 / 1.50"	57.2 / 2.25"	86.6 / 3.41"

For Contact Points please refer to pages 5-22, 5-27, 5-52 & 5-53.

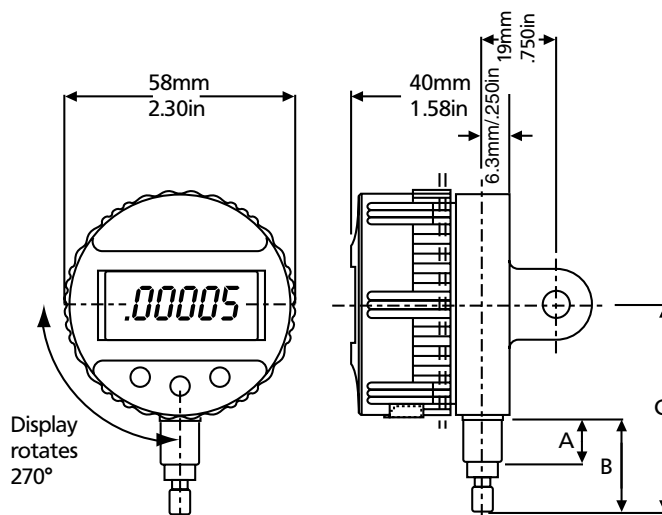



## Inductive Digital Comparator $\mu$ Max $\mu$ m®

### Technical Data


#### Range and Resolution

	Standard Units		High Resolution Units		
Display	Range	Resolution	Accuracy % of Digital Range	Resolution	Accuracy % of Digital Range
Inch	± .040"	.00005" / .0001" / .0005" / .0002" / .001"	± .5% over ± .040" ± .25 % over ± .020"	.00002" plus same as standard	± .5 % over ± .040" ± .25 % over ± .020"
Metric	± 1.0 mm	0.001 / 0.002 / 0.005 / 0.010 / 0.020 mm	± .5% over ± 1.00 mm ± .25 % over ± 0.50 mm	0.0005 mm plus same as standard	± .5 % over ± 1.00 mm ± .25 % over ± 0.50 mm

#### Specifications

Spindle Range	<b>- .050" to + .060"</b> (-1.28 mm to + 1.5 mm)
Repeatability	$\pm 1$ digit
Contact Point	(Normally furnished — PT-223) for .375" dia. stem, .250" long, radiused tip, 4-48 thread; (EPT-1037-W1) for 8 mm dia. stem, 6 mm long, radiused tip, M2.5 mm thread
Gaging Force	85-112 g/3-4 oz. (at center of spindle travel) Other gaging forces available — call Technical Assistance
Power	3 volt lithium coin cell (2 per unit, consumer type, CR 2450) Mahr Federal Model Number: <b>EBY-1018</b>
Battery Life	nine months normal usage or 3000 hours
Weight	approx. 170 g / 6 oz.
Display	Rotates through 270°
Operating Temperature	4° ... 50°C / 50° ... 130° F

#### Perpendicular $\mu$ Max $\mu$ m

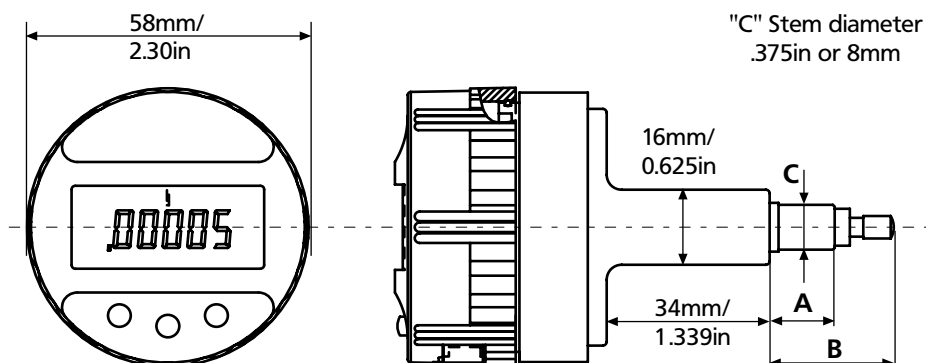

#### Dimensions mm/inch

A	B
11.7 / <b>.46"</b>	24.1 / <b>.95"</b>
38 / <b>1.50"</b>	57.2 / <b>2.25"</b>



# Inductive Digital Comparator $\mu$ Max $\mu$ m®

## Ordering Information

$\mu$ Max $\mu$ m Model Number:

<div> <div>EDI-</div> <div>X</div> <div>X</div> <div>X</div> <div>0</div> <div>X</div> </div>									
Style	Range	Resolution	Code	Ratio	Code	Stem dia./L**	Code	Back	Code
Standard	$\pm 1$ mm / $\pm .040''$	.001 mm / 50 $\mu$ inch	1	1:1	0	.375" / .46"	1	Perpendicular (no back)	0
High Resolution	$\pm 1$ mm / $\pm .040''$	.0005 mm / 20 $\mu$ inch	2	4/5	1	.375" / 1.5"	2	Lug (EBK-1010)	1
Standard Perpendicular	$\pm 1$ mm / $\pm .040''$	.001 mm / 50 $\mu$ inch	3	Calibration Lockout, 1:1	2*	8 mm / .46"	3	Flat (EBK-1018)	2
High Resolution Perpendicular	$\pm 1$ mm / $\pm .040''$	.0005 mm / 20 $\mu$ inch	4	Calibration Lockout, 4/5	3*	8 mm / 1.5"	4		

\* Requires Calibration Access Key, EKY-1024 (sold seperately)

\*\* Diameter / Length

Note. Ask about our **EDS-X** models for special Setup Mode Lockout, MM/INCH Button Lockout, Calibration Lockout, Disable Sleep Mode and more

## Accessories

	Order no.
Lug Back (Horizontal / Vertical)	<b>EBK-1010</b>
Flat Back	<b>EBK-1018</b>
Post Back	<b>EBK-1012</b>
Screw Back	<b>EBK-1013</b>
Back for Adjustable Mounting Brackets like AT-28 and AT-116 (slide sold separately)	<b>EBK-1014</b>
Adjustable Back (.5" slot x 1/4 - 20 thread)	<b>EBK-1016</b>
Mating Connector (7 pin)	<b>ECN-1720</b>
Output Cable to Digimatic	<b>2001025</b>
Serial output cable to DB-9 pin	<b>SCB-4</b>
Dust Cover	<b>ECV-1307-W2</b>
Calibration Access Key	<b>EKY-1024</b>
Spring — for lighter gaging force: 35 g / 1.2 oz.	<b>SP-351</b>


## Maxum® /// Digital Comparator

### Features

- Features both digital display for accuracy and readability and unique fan analog display for trend and change
- User configurable in inch / metric units, normal / reverse sensing, resolution, analog scale, and tolerance setup & display
- Dynamic Capabilities: Min, Max, TIR, Hold, Reset
- Absolute Transducers - no overspeed errors. . . . no missed counts. . . . no missed readings
- Auto power down - provides extremely low battery consumption, assuring long life from readily available commercial batteries
- Data output - 3 formats - Maxum, serial, or digimatic
- Both integral and remote readout versions available
- Easily used on Snap Gages, Bore Gages, Comparator Stands, and Fixture Gages
- Special options available: setup mode or calibration lockout, remote external power, 4:5 ratio, 12 o'clock mounted integral transducer, integral vertical or horizontal lug back, 1.5, 2.0 or 3.0 inch stem length, and more. . . .
- IP54 protection
- Easy to select, order and operate!



### Technical Data

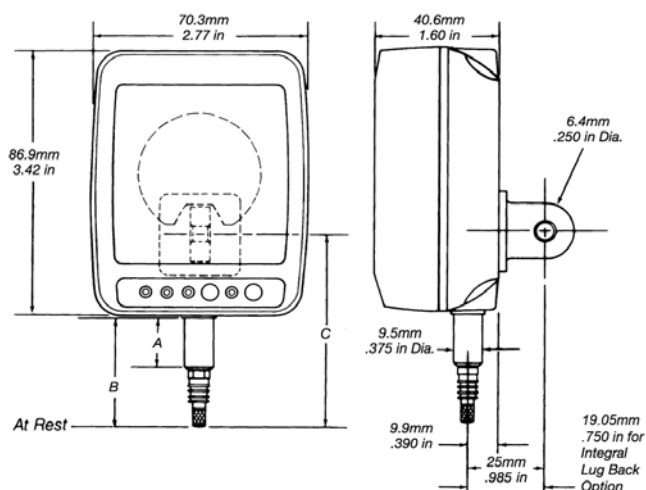

For short range indicators – Standard Stem Length  
( $\pm 1.0$  mm/  $\pm .040$ " range indicators)

A	B	C
17 mm/ <b>.670"</b>	36 mm/ <b>1.42"</b>	63.5 mm/ <b>2.50"</b>

For long range indicators – Standard Stem Length  
( $\pm 1.99$  mm/  $\pm .100$ " range indicators)

22 mm/ <b>.87"</b>	47 mm/ <b>1.84"</b>	73 mm/ <b>2.87"</b>
--------------------	---------------------	---------------------

For both short and long range indicators –  
Long Stem Lengths


38 mm/ <b>1.5"</b>	57 mm/ <b>2.25"</b>	84.6 mm/ <b>3.33"</b>
51 mm/ <b>2**</b>	70 mm/ <b>2.75"</b>	97.3 mm/ <b>3.83"</b>
76 mm/ <b>3**</b>	95 mm/ <b>3.75"</b>	123 mm/ <b>4.83"</b>

\* Special Order Lengths

Easily designed into your applications . . . full-size Maxum® Indicator and accessories, tracing templates or CAD files available on request.

## Maxµm® III Digital Comparator

## Technical Data

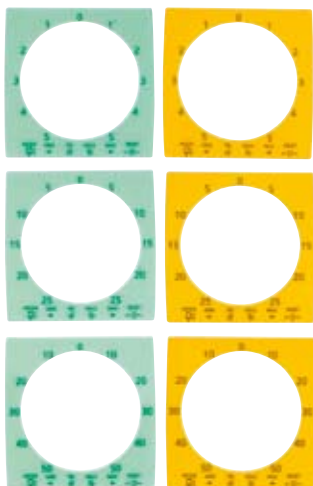

Description	Short Range	Long Range		
Digital range				
Standard	±1.00 mm/ <b>±.040"</b>	±1.99 mm/ <b>±.100"</b>		
Reduced	±0.199 mm/ <b>±.0199"</b>	None		
Digital resolution	0.005 mm/ <b>.0005"</b>	0.005 mm/ <b>.0005"</b>		
Switchable	0.001 mm/ <b>.0001"</b>	0.001 mm/ <b>.0001"</b>		
	0.001 mm/ <b>.00005"</b>			
	0.0005 mm/ <b>.00002"</b>			
Analog range	5 or 25 or 50	25 or 50		
Analog resolution	0.01 mm/ <b>.001"</b>	0.01 mm/ <b>.001"</b>		
Switchable	0.005 mm/ <b>.0005"</b>	0.005 mm/ <b>.0005"</b>		
	0.001 mm/ <b>.0001"</b>			
Total spindle travel	3.04 mm/ <b>.120"</b>	6.35 mm/ <b>.250"</b>		
Pre-Travel*	0.3 mm/ <b>.010"</b>	1.06 mm/ <b>.020"</b>		
Over-Travel*	0.8 mm/ <b>.030"</b>	1.31 mm/ <b>.030"</b>		
Accuracy				
Standard range	0.5% of Total Range	0.35% of Total Range		
Reduced range	0.25% of Total Range	N/A		
Repeatability	±One Least Digit	±One Least Digit		
Gaging force	3 - 4 oz / 85 - 112 grams, preloaded			
Operation temperature	10° to 55°C / 50° to 130°F			
Storage temperature	-20° to 65°C / -4° to 149°F			
IP Rating	54			
Weight	approx. 385 g / 13.6 oz.			
Battery life	approx. 4000 hours			
Power	3.0 volt Lithium battery (type CR123A or equivalent) Mahr Federal Order Number: <b>2239138</b>			
Contact point	(Normally furnished — PT-223) for 0.375" dia. Stem, <b>0.250"</b> long, radiused tip, 4-48 thread; (EPT-1037-W1) for 8 mm dia. stem, 6 mm long, radiused tip, M2.5 thread.			
Stem length mm / <i>inch</i>	Stem diameter	Data output	Order no. Short range	Order no. long range
17 mm/ <b>0.670"</b>	<b>0.375"</b>	No Output	<b>2033101</b>	<b>2033102**</b>
38 mm/ <b>1.50"</b>	<b>0.375"</b>		<b>2033103</b>	<b>2033104</b>
17 mm/ <b>0.670"</b>	8 mm		<b>2033105</b>	<b>2033106**</b>
38 mm/ <b>1.50"</b>	8 mm	Digital Output 6 pin (D, E1)	<b>2033107</b>	<b>2033108</b>
17 mm/ <b>0.670"</b>	<b>0.375"</b>		<b>2033111</b>	<b>2033112**</b>
38 mm/ <b>1.50"</b>	<b>0.375"</b>		<b>2033113</b>	<b>2033114</b>
17 mm/ <b>0.670"</b>	8 mm		<b>2033115</b>	<b>2033116**</b>
38 mm/ <b>1.50"</b>	8 mm		<b>2033117</b>	<b>2033118</b>
17 mm/ <b>0.670"</b>	<b>0.375"</b>	Digital Output with Hold / Reset 10 pin (E2)	<b>2033121</b>	<b>2033122**</b>
38 mm/ <b>1.50"</b>	<b>0.375"</b>		<b>2033123</b>	<b>2033124</b>
17 mm/ <b>0.670"</b>	8 mm		<b>2033125</b>	<b>2033126**</b>
38 mm/ <b>1.50"</b>	8 mm		<b>2033127</b>	<b>2033128</b>

\* dependent on standard or reduced range selected. Standard range shown.

\*\* Long Range Indicator Stem Length is 0.870" / 22 mm

## Maxum® III Digital Comparator

### Technical Data

#### Maxum® III Remote Indicating Unit\*

##### Order no.

No Digital Output Port  
Digital Output -6 pin (D, E1)  
Digital Output with Hold & Reset -10 pin (E2)

**2033001**  
**2033011**  
**2033021**

\* Maxum® III Remote Indicating Units are NOT compatible with traditional Remote Transducer models EAS-XXXX.



#### Maxum® III Digital Transducer<sup>①</sup>

##### Digital Transducers

##### Short Range

##### Long Range

Range	±1.00 mm/ <b>±.040"</b>	±1.99 mm/ <b>±.100"</b>
Total Spindle Travel	3.04 mm/ <b>.120"</b>	6.35 mm/ <b>.250"</b>
Pre-Travel**	0.3 mm/ <b>.010"</b>	0.5 mm/ <b>.020"</b>
Over-Travel**	0.8 mm/ <b>.030"</b>	

Gaging Force 3-4 oz / 85-112 grams, preloaded  
Operation Temperature 10° to 55°C/50° to 130°F  
Storage Temperature -20° to 65°C/-4° to 149°F

Contact Point (Normally furnished — PT-223) for **0.375"** dia. Stem, **0.250"** long, radiused tip, 4-48 thread; (EPT-1037-W1) for 8mm dia. Stem, 6mm long, radiused tip, M2.5 thread.

\*\* dependent on standard or reduced range selected. Standard range shown.

Transducer Type	Stem Length	Stem Diameter	Order no. Short Range	Order no. Long Range
Canister	17 mm/ <b>0.670"</b>	<b>0.375"</b>	<b>2033091</b>	<b>2033092<sup>②</sup></b>
Canister	38 mm/ <b>1.50"</b>	<b>0.375"</b>	<b>2033093</b>	<b>2033094</b>
Canister	17 mm/ <b>0.670"</b>	8.0 mm	<b>2033095</b>	<b>2033096<sup>②</sup></b>
Canister	38 mm/ <b>1.50"</b>	8.0 mm	<b>2033097</b>	<b>2033098</b>
Pencil	Body Diameter = <b>0.375"</b>		<b>2033099</b>	—

① Digital Transducer models 203309X require an adaptor cable for use with traditional DEI-XXXXXX Maxum and Maxum Plus Indicating Units.

② Long Range Indicator Stem Length is 0.870" / 22 mm.  
See Adaptor Cable selections as follows:


##### Adaptor Cables

##### Order no.

For DEI with 6 pin split connector  
For DEI with 8 pin round connector

**2239080**  
**2239081**

- Maxum® and Maxum Plus Transducers are available as Replacement Parts. Refer to Part Price List for Part Numbers and Pricing.
- Maxum III Remote Indicating units sold separately from Digital Transducer.
- Any Digital Transducer may be used with a Maxum III Remote Indicating unit.
- For English or Metric Contact Points visit pages 5-22, 5-27 and 5-52 thru 5-53.
- For alternate cable lengths or extension cables - call Mahr Federal's Technical Assistance Group.
- For special indicator options - call Mahr Federal's Technical Assistance Group.



Pencil




Canister

# Maxµm® III Digital Comparator

## Accessories

### For Integral Maxµm® Indicators




#### Lifting Levers<sup>1)</sup>

Furnished with washer and longer contact point. Left Hand (shown)

**Order no.** EAS-1903\*

Right Hand (not shown)

**Order no.** EAS-1904




#### Right Angle Attachments

**Lever Type** (not shown)  
(± .187" maximum range)

**Order Model** EAT-1034-W1

**Spring Type** (shown)  
(± .060" maximum range)

**Order Model** EAT-1035-W1




#### Auxiliary Plunger

3" long, .500" O.D.

**Order no.**

EAS-1912



#### Hole Attachments

**Short Lever** (shown)  
(1.0" pivot to contact)

**Order Model** EAT-1032-W1

**Long Lever** (not shown)  
(1.87" pivot to contact)

**Order Model** EAT-1033-W1

<sup>1)</sup> (For use on .670" stem length only,  
DEI-XX1X1)

\* Not for (±.100" / 1.99 mm




#### Ox-Bow Lifting Lever

**Order no.**

LR-40

\* Other Accessories shown are for .375" stem models. Equivalent types are available for most Maxµm models having 8mm stems. Adaptor Bushing (BU-197) may also allow 8mm stem indicators to be used with the above accessories. Full size Maxµm Indicator and accessories tracing templates are available on request.


### Backs for Maxµm® Indicators and Remote Indicating Units (Supplied with mounting screws)



#### Lug Back (.250" hole)

Mounts horizontally or vertically.


**Order no.** EBK-1006



#### Adjustable Slide Back

(.500" slot, 1/4-20 thread)

**Order no.** EBK-1007



#### Rack Back

Fits SE-33 (shown) and SE-73.  
Adjustable Mounting Block (not shown).

**Order no.**


EBK-1005

#### Replacement Screws

2-56 x .218"

**Order no.**

ESW-1252




**Rack Bracket** (Shown mounted to SE-33 Adjustable Mounting Block.)

SE-33 and SE-73 Adjustable Mounting Blocks are available separately. SE-33 is supplied with hex-screw adjust. SE-73 is supplied with knob adjust.

**Order Model** EAD-1007-W1 (.375" I.D.)


**Order Model** EAD-1007-W2 (8 mm I.D.)



#### Square Bracket

(1/4-20 mounting thread)

**Order Model** AAD-67



#### T Bracket

Flange mounted.

**Order Model** AAD-91

\* Mounting Brackets shown are for .375" stem models. Equivalent types are available for most Maxµm models having 8 mm stems. Adaptor Bushing (BU-197) may also allow 8 mm stem indicators to be used with the above accessories. Full size Maxµm Indicator and accessories tracing templates are available on request.

### Other Maxµm Accessories

### Order no.

Data Output Cables for Maxµm III

Serial Cable (6 pin to db9 pinF PC)

2239036

Serial Cable (10 pin to db9 pinF PC)

2239038

Digimatic Cable (6 pin to std 10 pin)

2239035

Digimatic Cable (10 pin to std 10 pin)

2239037

Send Data Footswitch used with Serial Cables above.

300-50

Mating Connectors — Maxµm III Models

For 6 pin data output type (D, E1)

ECN-1521

For 10 pin data output type (E2)

ECN-1689

Remote Switch Assembly (for Hold/Reset)

Handswitch

EAS-2867

Footswitch

EAS-2868

Splashcover for Maxµm III

ECV-1307-W1

Battery for Maxµm III

2239138

Overlay Kit for Maxµm III

2239040

Access Key (6 pin)

2240545



Access Key (10 pin)


2240547

# Millimess. Dial Comparators

## Overview

### Models

Metric	1000 A	1000 B	1002	1003	1003 XL	1004*
						
Measuring range	± 100 µm	± 50 µm	± 25 µm	± 50 µm	± 130 µm	± 0.13 mm
Readings	1 µm	1 µm	0.5 µm	1 µm	2 µm	5 µm
Dial style	100-0-100	50-0-50	25-0-25	50-0-50	130-0-130	130-0-130
Accuracy*	Factory standard	Factory standard	DIN 879-1	DIN 879-1	DIN 879-1	Factory standard
G <sub>ges</sub>	2 µm	2 µm	0.6 µm	1.2 µm	2.4 µm	4 µm
G <sub>e</sub>	1.5 µm	1.5 µm	0.5 µm	1 µm	2 µm	3.5 µm
f <sub>u</sub>	1 µm	1 µm	0.3 µm	0.5 µm	1 µm	1 µm
G <sub>t</sub>	0.7 µm	0.7 µm	0.4 µm	0.7 µm	1.4 µm	3 µm
r	0.5 µm	0.5 µm	0.3 µm	0.5 µm	1 µm	1 µm
Order no. Standard	4338000	4339000	4335000	4334000	4334001	4333000
Order no. Waterproof						
			4335005	4334005	4334006	4333005

Inch	1000 Z	1002 Z	1003 Z		1004 Z
Measuring range	± .0020"	± .0010"	± .0020"		± .0050"
Readings	.00005"	.00002"	.00005"		.0001"
Dial style		.001-0-.001	.002-0-.002		.005-0-.005
Accuracy	Factory standard	Factory standard	Factory standard		Factory standard
G <sub>ges</sub>	.0001"	.000025"	.00006"		.00012"
G <sub>e</sub>	.000075"	.00002"	.00005"		.0001"
f <sub>u</sub>	.00005"	.00001"	.000025"		.00003"
G <sub>t</sub>		.000014"	.000035"		.00005"
r		.00001"	.000025"		.00003"
Order no. Standard	4339900	4335900	4334900		4333900
Order no. Waterproof					
		4335905	4334905		4333905

\* Accuracy of 1004, 1010, 1010 Z, 1050 exceeds DIN 879-1


\*\* Accuracy of 1104 N, 1110 N and 1150 N exceeds DIN 879-3



1010*	1050*	1103 N	1104 N**	1110 N**	1150 N**
± 0.25 mm	± 1.5 mm	± 50 µm	± 0.13 mm	± 0.25 mm	± 1.5 mm
0.01 mm	0.05 mm	1 µm	5 µm	0.01 mm	0.05 mm
25-0-25	15-0-15				
Factory standard	Factory standard	DIN 879-3	Factory standard	Factory standard	Factory standard
8 µm	40 µm	1.8 µm	6 µm	12 µm	60 µm
7 µm	35 µm	1 µm	5 µm	6.5 µm	35 µm
2 µm	10 µm	1 µm	1.5 µm	3.5 µm	17 µm
4 µm	24 µm	1 µm	3.5 µm	5 µm	25 µm
2 µm	10 µm	1 µm	1.5 µm	0.5 µm	17 µm
<b>4332000</b>	<b>4330000</b>	<b>4345100</b>	<b>4344100</b>	<b>4343100</b>	<b>4342100</b>
<b>4332005</b>	<b>4330005</b>	<b>4345105</b>	<b>4344105</b>	<b>4343105</b>	<b>4342105</b>

1010 Z	
± .0100"	
.0005"	
.01-0-.01	
Factory standard	
.0004"	
.00035"	
.0001"	
.00025"	
.0001"	
<b>4332900</b>	
<b>4332905</b>	


## Metrological characteristics

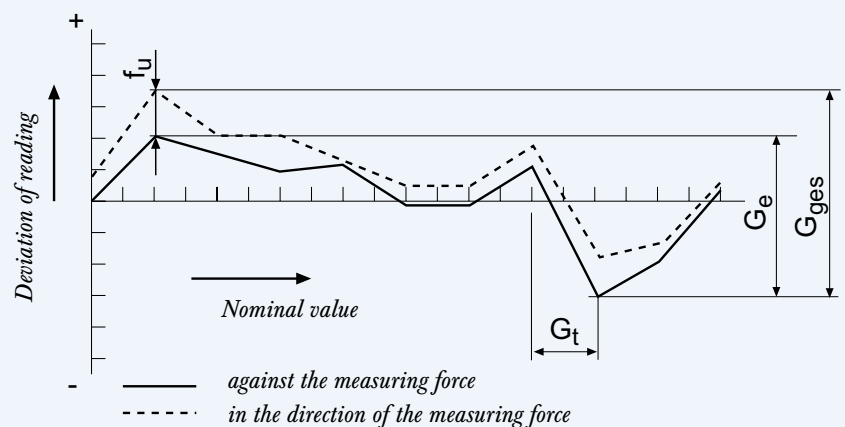


# Millimess. Dial Comparators

## Overview



### Design Features

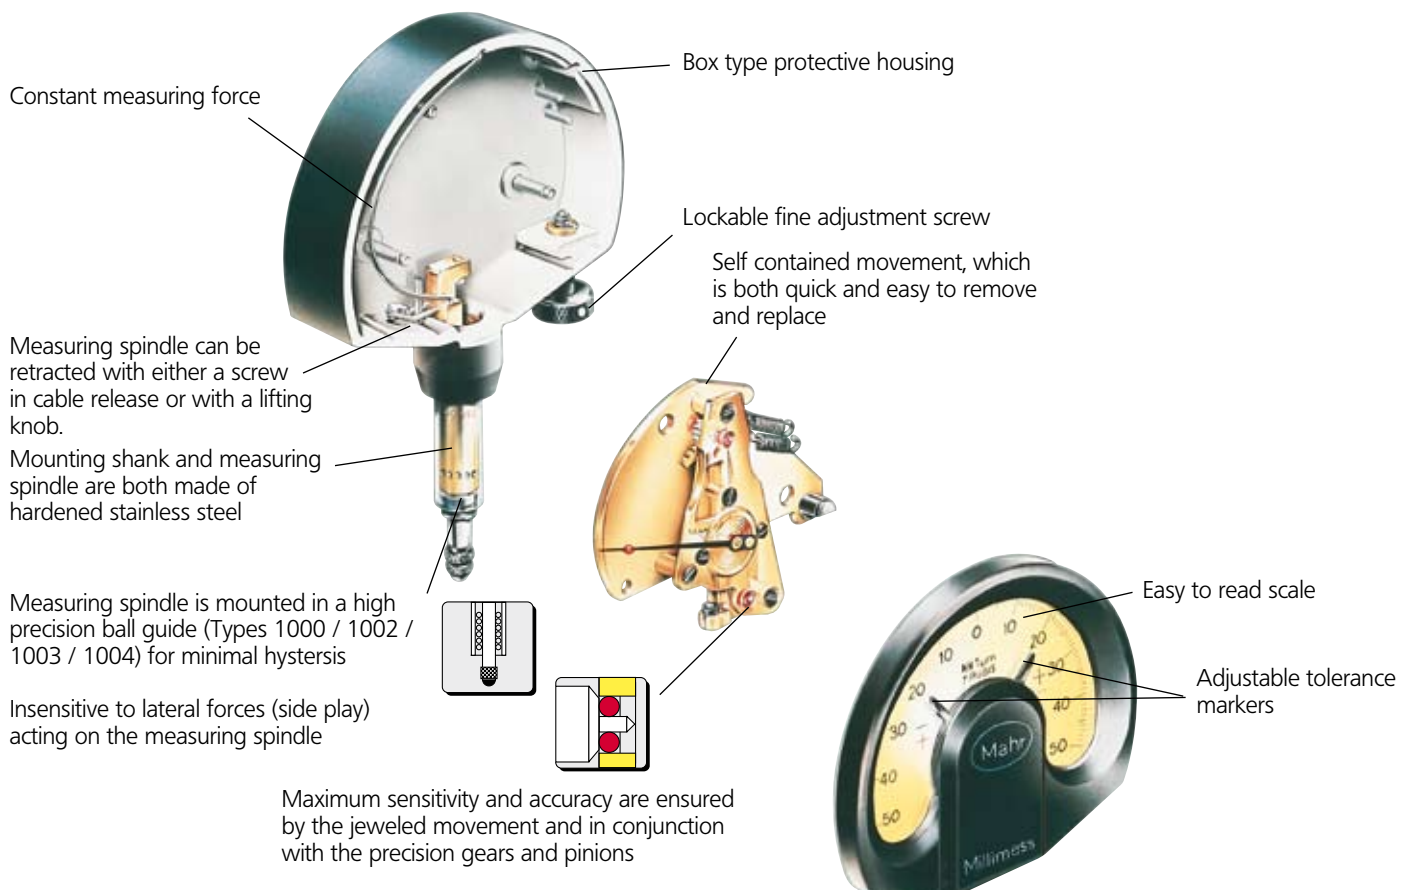


### Shockproof Mechanism

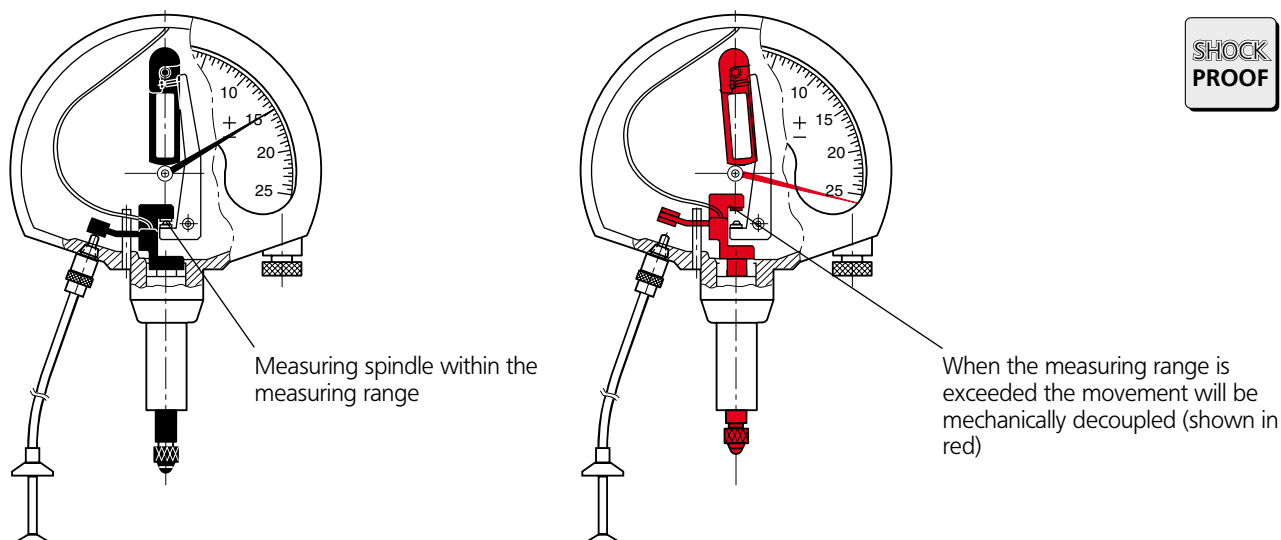


## Mechanical Dial Comparator Large Type Millimess



1000 A

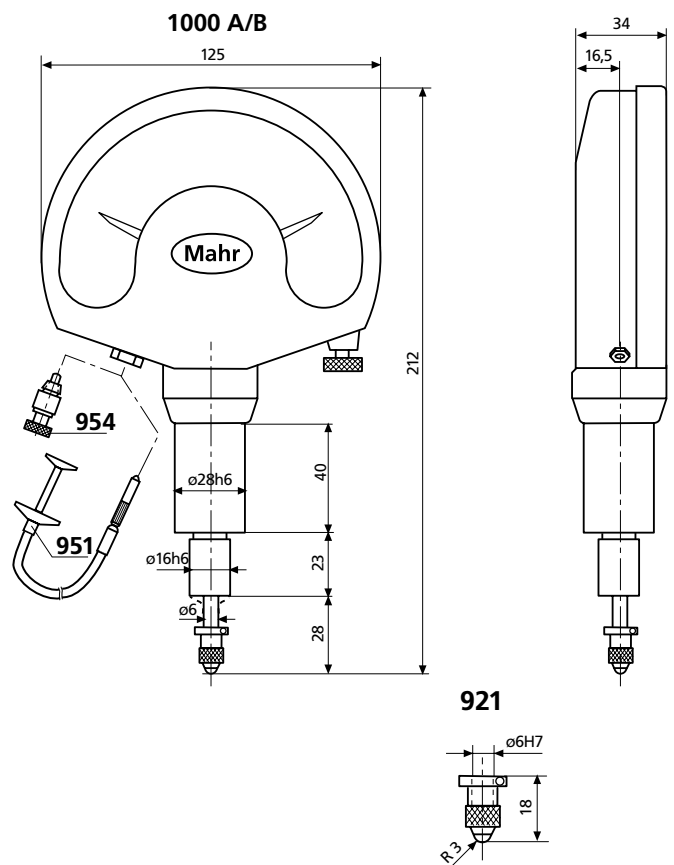

921



### Features

- Large design
- Easy to read dial
- Shockproof movement
- Jeweled movement bearings
- Measuring spindle is mounted in a high-precision ball guide which precludes play
- Supplied with: Cable Release 951, case

### Accessories

	Order no.	
<b>Contact Points</b>		
with Steel ball	921	4362001
with Ruby ball	921 R	4362002
<b>Cable Release</b> to raise the measuring spindle	951	4372000
<b>Lifting Knob</b> for lifting the measuring spindle	954	4372030
<b>Rubber Bellows</b> to seal the open end of the measuring spindle		4338008
<b>Additional Accessories</b>	Page	
<b>Precision Stand</b>	824 GT	8-13

### Technical Data

Metric	Measuring range	Reading	Scale division	Over-travel	Measuring force	Order no.
1000 A	$\pm 100 \mu\text{m}$	$1 \mu\text{m}$	1 mm	4 mm	3.5 N	4338000
1000 B	$\pm 50 \mu\text{m}$	$1 \mu\text{m}$	2 mm	4 mm	3.5 N	4339000
<b>Inch</b>						
1000 Z	$\pm .0020''$	$.00005''$	$.08''$	$.2''$	3.5 N	4339900

## Mechanical Dial Comparators



1002

DIN  
879-1



1003

DIN  
879-1



1004



1003XL

DIN  
879-1



1003T\*\*

DIN  
879-1




### Technical Data

	Measuring range	Readings	Over-travel	Measuring force	Order no. Standard*	Order no. Water-proof**
<b>Metric</b>						
1002 Supramess	± 25 µm	0.5 µm	2.8 mm	1 N	4335000	4335005
1003 Millimess	± 50 µm	1 µm	2.8 mm	1 N	4334000	4334005
1003 Millimess XL	± 130 µm	2 µm	2.5 mm	1 N	4334001	4334006
1004 Compramess	± 0.13 mm	5 µm	2.5 mm	1 N	4333000	4333005
1010 Zentimess	± 0.25 mm	0.01 mm	2.5 mm	1 N	4332000	4332005
1050 Dezimess	± 1.5 mm	0.05 mm	0.3 mm	1 N	4330000	4330005
<b>Inch</b>						
1002 Z Supramess	± .0010"	.00002"	.11"	1 N	4335900	4335905
1003 Z Millimess	± .0020"	.00005"	.11"	1 N	4334900	4334905
1004 Z Compramess	± .0050"	.0001"	.10"	1 N	4333900	4333905
1010 Z Zentimess	± .0100"	.0005"	.10"	1 N	4332900	4332905

\* Incl. Plastic Case; Adapter 940 (for inch instruments only)

\*\* IP54, Incl. Plastic Case, Splash Guard Cover 957, Rubber Bellows (only for 1002/1003/1004); Adapter 940 (for inch instruments only)

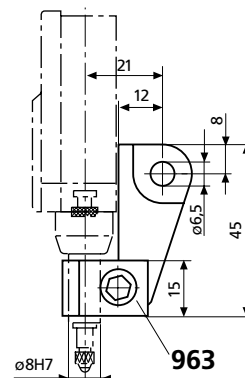

## Mechanical Dial Comparators and Electrical Comparator with limit contacts



1103 N



DIN  
879-3

1103 NT\*\*



DIN  
879-3



1104 N



1110 N



1150 N



1100



### Features

- Can be applied for example as tolerance control or as a precision contactor in automatic control systems
- Design features are identical with Mechanical Dial Comparators, but with the addition of adjustable limit contacts; made from high-grade precious metal
- Limit contacts are particularly well protected against vibration and mechanical overload

### Technical Data

Metric		Measuring range	Readings	Over-travel	Measuring force	Order no. Standard*	Order no. Waterproof**
1103 N	Elmillimess	± 50 µm	1 µm	2.8 mm	2 N	4345100	4345105
1104 N	Elcompramess	± 0.13 mm	5 µm	2.5 mm	2 N	4344100	4344105
1110 N	Elzentimess	± 0.25 mm	0.01 mm	2.3 mm	2 N	4343100	4343105
1150 N	Eldezimess	± 1.5 mm	0.05 mm	0.3 mm	1.5 N	4342100	4342105
<b>Inch</b>							
1103 NZ	Elmillimess	± .0020"	.00005"	.11"	2 N	4345910	4345915
1104 NZ	Elcompramess	± .0050"	.0001"	.10"	2 N	4344910	4344915
1110 NZ	Elzentimess	± .0100"	.0005"	.10"	2 N	4343910	4343915
		Measuring range		Overtravel	Measuring force	Order no.	
1100	Elmess	± 0.4 mm		2 mm	1.5 N	4340000	

\* Incl. Plastic Case, Setting Knob 953, Cable (1.2m); Adapter 940 (for inch instruments only)


\*\* IP54, Incl. Plastic Case, Splash Guard Cover 957, Rubber Bellows (only for 1103/1110); Adapter 940 (for inch instruments only)



## Mechanical Dial Comparators and Electrical Comparator with limit contacts

### Electrical Specifications

	Contact uncertainty with non-inductive load of 10 mA/24V	max. contact rating	max. contact voltage	max. contact current
<b>1103 N</b>	+/- 0.3 $\mu\text{m}$	240 mW	24 V	100 mA
<b>1104 N</b>	+/- 0.75 $\mu\text{m}$			
<b>1110 N</b>	+/- 1.5 $\mu\text{m}$			
<b>1150 N</b>	+/- 7 $\mu\text{m}$			
<b>1100</b>	+/- 0.3 $\mu\text{m}$			

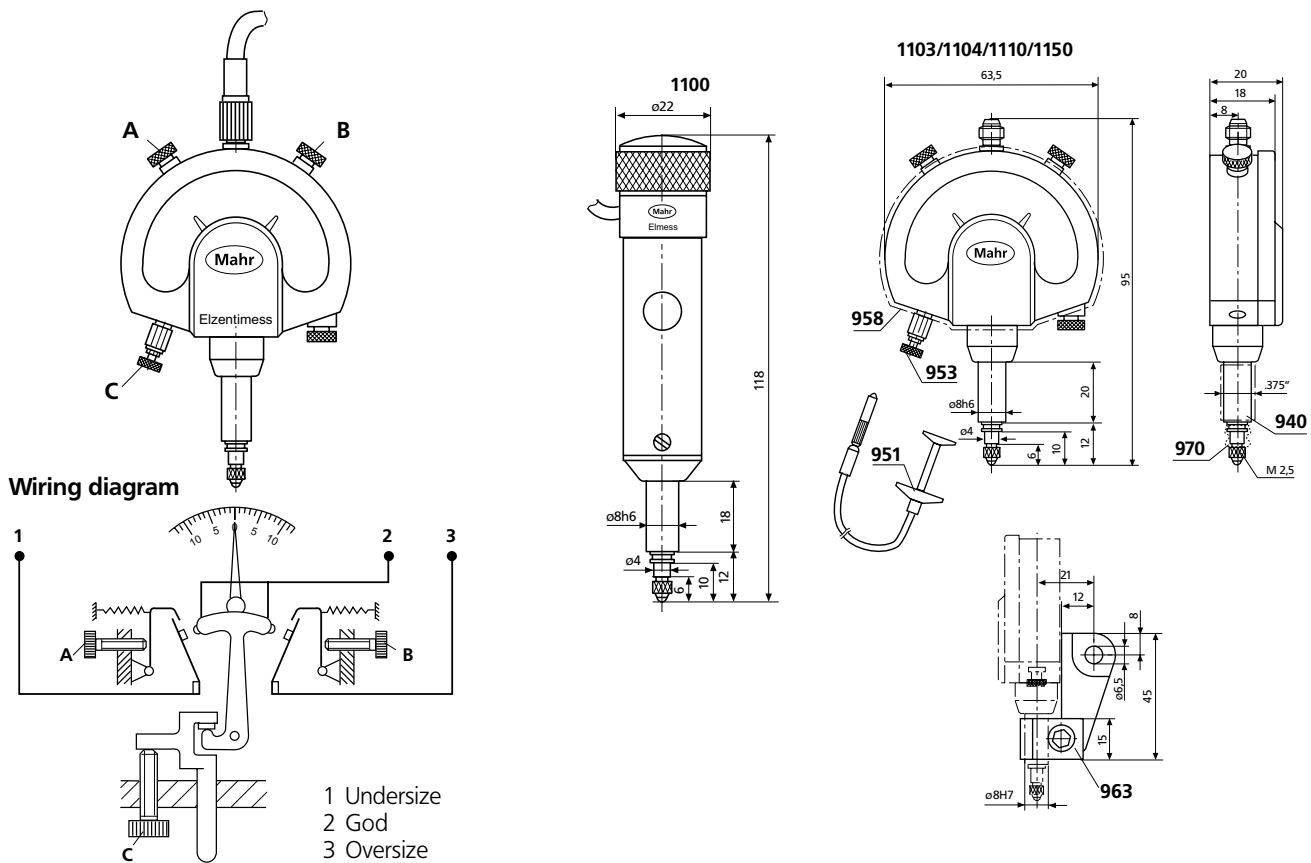

### Accessories

Order no.		Order no.	
<b>Connection Cable</b> (1.2 m), axial	<b>4345695</b>	<b>Splash Guard Cover</b>	<b>958 4373031</b>
<b>Connection Cable</b> (5 m), axial	<b>4345694</b>	<b>Rubber Bellows</b> to seal the open end of the measuring spindle	<b>970 4334786</b>
<b>Adapter Bush</b> for adapting mounting shank 8h6 mm to inch bore .375"	<b>940 4310103</b>	<b>Mounting Lug</b> to mount on mounting shank 8h6 mm	<b>963 4375002</b>
<b>Cable Release</b> to raise the measuring spindle	<b>951 4372000</b>	<b>Additional Accessories</b>	
<b>Setting Knob</b> for setting the limit contacts without an additional setting standard	<b>953 4372020</b>	<b>Contact Points</b>	<b>901-913 5-52</b>
<b>Lifting Knob</b> for lifting the measuring spindle	<b>954 4372030</b>	<b>Special Holder</b>	<b>941 5-53</b>
		<b>Sensor Lever</b>	<b>943 5-53</b>

# COMPLEX MEASURING TASKS BROUGHT STRAIGHT TO THE POINT.

## MILLIMAR



The latest information on MILLIMAR products can be found on our website:

[www.mahr.com](http://www.mahr.com), WebCode 153



► | The requirements for electrical length measuring instruments are almost as broad as their scope of application. Reliability, precision as well as simple operation are the major demands, Millimar compact and column measuring instruments fulfill all these demands and requirements.

Millimar probes are the most influential components of a measurement chain. Their characteristics determine the quality of the entire measurement; depending upon the type of application we have the corresponding probe for your requirements. For example; a Millimar Inductive Probe: robust, versatile and has an attractive price, or a Millimar Incremental Probe which is ideal over a large measuring range and has a small linearity error over the entire measuring range.

## ► | Millimar. Electrical Length Measuring Instruments and Air Gaging

<b>Overview</b>	
<b>Electrical Length Measuring Instruments</b>	<b>7- 2</b>
<b>Overview</b>	
<b>Inductive Probes Program</b>	<b>7- 4</b>
<b>Millimar P1300</b>	<b>7- 6</b>
Half-Bridge Probes, Mahr compatibility, plug connector on the probe	
<b>Millimar P2001 / P2004 / P2010 / P2104</b>	<b>7-10</b>
High Linearity Probes: Mahr, Tesa, Marposs, Federal compatibility	
<b>Millimar 1300 / 1310</b>	<b>7-14</b>
Half-Bridge Probes, Mahr compatibility	
<b>Millimar 1301 / 1303 / 1304 K / 1318</b>	<b>7-16</b>
Mahr compatibility	
<b>Millimar Lever Type Gage Heads EHE</b>	<b>7-18</b>
Lever Probes, Federal compatibility	
<b>Millimar 1340</b>	<b>7-22</b>
High Precision Probe	
<b>Millimar P1514 / P1526</b>	<b>7-23</b>
Incremental Probe	
<b>Overview</b>	
<b>Evaluation Instruments</b>	<b>7-24</b>
<b>Millimar 1200 IC / 830 / 832 / C 1208 / C1216 / C 1245 / 1240</b>	<b>7-26</b>
Compact Amplifiers	
<b>Millimar S 1840</b>	<b>7-34</b>
Column Amplifier	
<b>Overview</b>	
<b>Air Gaging Instruments</b>	<b>7-35</b>
<b>Dimensionair® Air Gages</b>	<b>7-36</b>
<b>µDimensionair®</b>	<b>7-38</b>
<b>Millimar S 1840 PE</b>	<b>7-39</b>
<b>832 Dimensionair®</b>	<b>7-40</b>
<b>Millimar C 1208 PE / C 1245 PE</b>	<b>7-41</b>
<b>Air Plugs / Through Hole Plugs / Blind Hole / Counterbore Plugs</b>	<b>7-42</b>
<b>Air Gaging Instruments</b>	<b>7-45</b>
<b>Dimensionair® Air Rings</b>	<b>7-47</b>

# Millimar. Electrical Length Measuring Instruments

## Overview

### Evaluation Instruments



C 1216



C 1245

- Compact, handy and simple to operate
- Extremely precise and easy to read due to the clearly defined analog of digital display
- Single, sum and differential measurement; plus limit switches and extreme value memories

- Highly accurate, long term stability and insensitive to environmental influences
- Good zero stability even when changing the measuring range
- Short response time ideal for assessment of fast processes
- Analog or digital display

- Digital output for the connection to a controller or a computer
- Analog output (optional)



S 1840

### Inductive Probes

- Large linearity range, strong output signal and insensitive to interference
- Precise measuring spindle and lever, frictionless ball or spring bearing for the highest resolution with the lowest hysteresis
- Robust construction for use on the shop floor, further models for all applications



P1300M

### Incremental Probes

- Highly accurate due to the precision glass scale
- Large measuring range with high resolution for absolute measurement
- Pneumatically cushioned measuring spindle lifter



P1526

# Millimar. Electrical Length Measuring Instruments


## Applications with Inductive Probes

### Single measurement with one probe


Indicating instrument instantly displays the measured value.

- Used for all kinds of direct measurements on cylindrical and flat work pieces
- Applied in the same way as with digital / dial indicators, digital / dial comparators or test indicators


#### Thickness measurement



#### Radial run-out




#### Axial run-out



### Sum measurement with 2 probes

Indicates the sum of deviation (total composite error) acquired from 2 probes irrespective of the form, support and concentricity deviation.


#### Thickness measurement

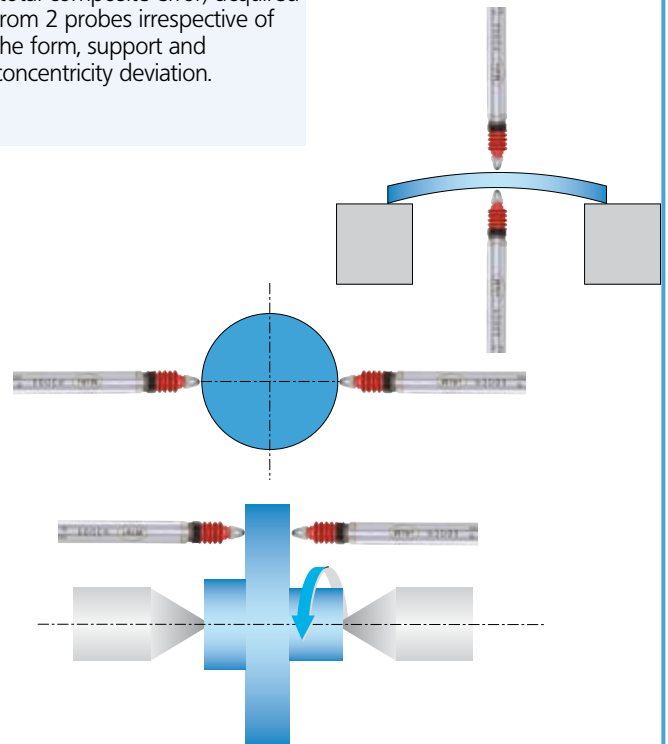


### Difference measurement with 2 probes

Shows the difference between the measured values acquired by 2 probes irrespective of the absolute dimension of the test piece. This is particularly suitable for dimensional comparison of two test points.


#### Form measurement of wedges, cones




#### Height difference between 2 steps

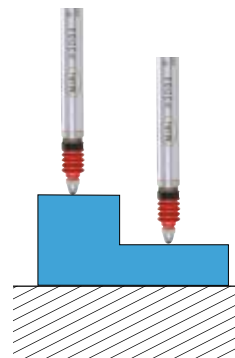

#### Perpendicularity measurement



#### Concentricity measurement on 2 shaft diameters

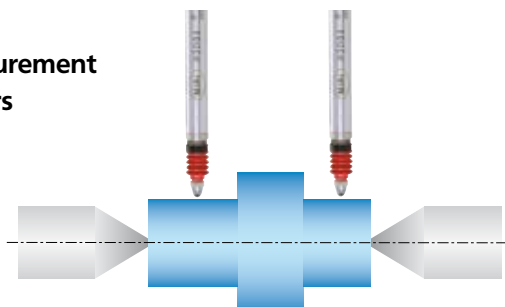



# Millimar. Electrical Length Measuring Instruments

## Inductive Probe Program

### P2000-Series



P2001

P2004


P2010 A

P2104 A

- Available in all prominent compatibilities (Mahr, Mahr-Federal, Tesa, Marposs)
- Wide product spectrum; measuring ranges from 1 to 10 mm plus models with a compressed air (pneumatic) lifter or with vacuum retraction
- With rotary stroke bearings (except P2001)
- High linearity over the total measuring range
- Excellent electromagnetic shielding (EMC)
- All probes (except P2001) can be easily converted from axial to radial by mounting a slip on cap, included in the scope of supply

Page 7-10

### P1300-Series / 1300 / 1310 Series (Mahr-Half Bridge)

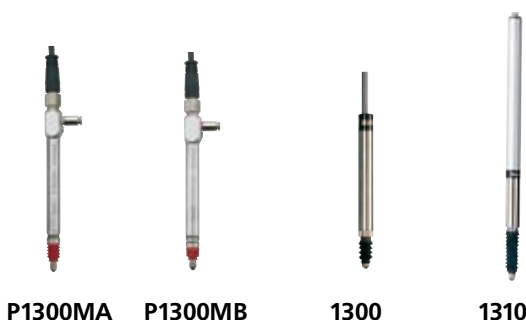

P1300MA

P1300MB

1300

1310

- Well-proven and established Mahr-Half Bridge technology
- Easy to service. cable and Probe can be separated via the plug-in connector (P1300)
- Simple to change to pneumatic lifting (P1300)
- Measuring spindle runs in rotary stroke bearings
- Compact design (1300)

Page 7-6, 7-14

### 1301 / 1303 / 1304 K / 1318 (Mahr-LVDT) / EHE-Series (Federal-LVDT)



1301

1303

1304 K

1318

EHE-2056

- Extremely robust in all operating conditions; measuring system is offset to guide and mounting shank
- Excellent clamping characteristics
- Measuring spindle runs in rotary stroke bearings (except 1318)
- Measuring spindle can be lifted with a cable release (1301/1303)
- Gaging pressure is less than 4g / .14 oz in either direction, with a change of less than 0.1 g per 25  $\mu\text{m}$  / .0001" of contact travel and linearity of 0.1% over the full range  $\pm 0.250 \text{ mm} \pm .010''$ , also clutch-mounted contact swivels through 280° arc for easy positioning (EHE-Series)

Page 7-16

### 1340 Mahr High Precision Probe



1340

- To obtain the best results use in conjunction with Millitron 1240
- Unprecedented measuring accuracy and minimum linearity error < 0.01 %, i.e. 0.4  $\mu\text{m}$  over the total measuring range


Page 7-22



## General Technical Data of Inductive Probes

The measuring principle of inductive probes is based on the change of position of a magnets conductive core moving within a coil system, generally this is distinguished between a half bridge and LVDT's.


The Mahr P2000 series of probes applies a high linear, patented VLDT transducer which is similar to an LVDT transducer. This also operates according to a differential transformer principle.

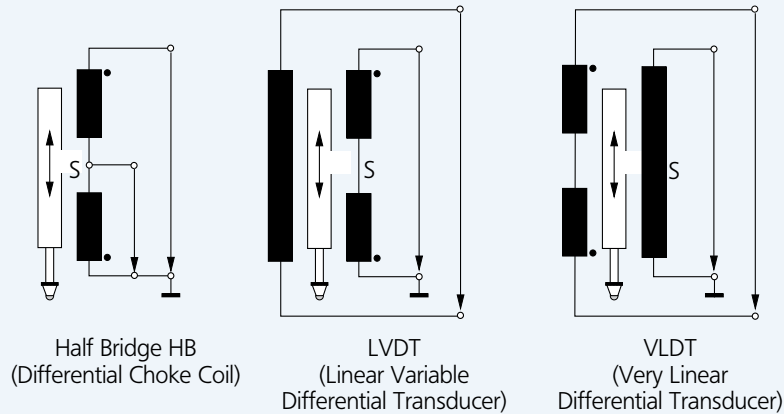

## Electrical specification of various compatibilities

		Type	Mahr	Tesa	Marposs	Mahr-Federal
Carrier frequency	KHz		19.4	13	7.5	5
Sensitivity	mV/V/mm	P2001 P2004 P2104	192	73.75	115	78.74
		P1300 1300 1301 1303 1304 K 1318	192	—	—	—
		P2010	19.2	29.5	11.5	7.874
		1310	19.2	—	—	—
Amplitude	Veff		5	3	3.5	2

## Schematic drawings of Mahr input amplifiers according to the various compatibilities

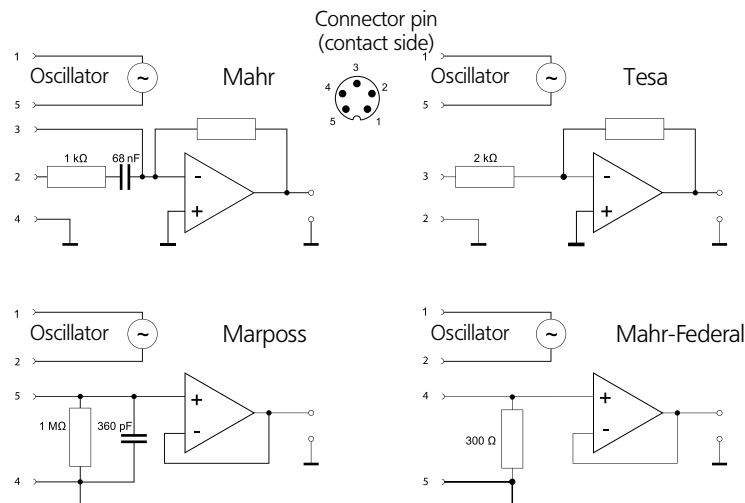

# Millimar P1300 M

► | The new Inductive Probe **Millimar P1300 M**.

The Plug and Play Probe: Cable and Probe can be separated with the plug-in connector. High linearity due to sensitivity compensation in the probe. | ◀

**High linearity** due to the probe being able to compensate sensitivity.

**Pneumatic Lifter** can be fitted to any standard probe (standard accessories).  
Simply fasten and unfasten an air hose.



**Rotary stroke bearings**  
Insensitive to lateral forces acting upon the spindle

Especially suited for use in critical manufacturing environments. Probe and cable connector are water proof **IP64** according to IEC 60529



Sealing bellow is made from Viton which has a **excellent chemical resistance**.



Code Initial	IP	International Protection
First Numeral	<b>6</b>	Dust tight
Second Numeral	<b>4</b>	Protected against splash water from all directions





### Extremely easy to service

Cable and Probe can be separated via the plug-in connector.



## Advantages of a probe with a plug-in connector:

Service incident	P1300	Standard Probe
<b>Cable break</b> 	<p>Only the cable has to be replaced.</p> <p><b>Advantage:</b></p> <ul style="list-style-type: none"> <li>a) Shorter downtime of manufacturing equipment as the probe does not need to be newly installed and adjusted.</li> <li>b) Inexpensive, as only the cable has to be replaced and not the complete probe.</li> </ul>	<p>The complete probe must be removed from the fixture and replaced.</p> <p><b>Disadvantage:</b></p> <ul style="list-style-type: none"> <li>a) Longer downtime as the probe must be newly installed, set-up and adjusted.</li> <li>b) Expensive as the complete probe must be replaced.</li> </ul>
<b>Defective probe</b> e.g. collision with workpiece 	<p>Only the probe has to be replaced.</p> <p><b>Advantage:</b></p> <p>The cable does not need to be removed from the cable guide or the cable harness.</p>	<p>The complete probe including the cable must be replaced.</p> <p><b>Disadvantage:</b></p> <p>The cable must be dismounted from the cable guide or the cable harness.</p>

## Inductive Probe Millimar P1300 M Half Bridge

### Features


- Supplied with:  
Inductive Probe P1300  
Connection cable 2.5 m  
Screwed sealing plug  
Hose connector for  
compressed air  
Open-ended spanner  
Operating instructions



P1300 MA



P1300 MB



*Cable and probe can be separated with the plug-in connector.*

### Technical Data


Probe type	P1300 MA	P1300 MB
Measuring range	± 2.0 mm / ± <b>0.079"</b>	
Distance of lower stop <sup>1)</sup>	-- 2.2 ... 0 mm / <b>-0.09 ... 0"</b>	
Distance of upper stop <sup>1)</sup>	2.2 ... 4.4 mm / <b>0.09 ... 0.173"</b>	
Lifter/Retraction	Vacuum Lifter (Standard option)	Compressed Air Retraction (max. 1 bar)
Measuring force at electrical zero point	0.75 N / ± 0.15 N <sup>2)</sup>	depending upon air pressure
Increase in measuring force	0.3 N / mm	–
Sensitivity deviation	0.3 %	
Repeatability fw	0.1 µm / <b>4 µin</b>	
Hysteresis fu	0.5 µm/ <b>20 µin</b>	
<b>Linearity deviation with revised sensitivity</b>		
within range ± 0.5 mm	0.4 µm/ <b>16 µin</b>	
within range ± 1.0 mm	1.5 µm/ <b>60 µin</b>	
within range ± 2.0 mm	3.0 µm/ <b>120 µin</b>	
Protection class according to IEC 60529	IP64	
Length of cable	2.5 m / 8 ft (detachable)	
Compatibility - Mahr	Half Bridge	
Order no.	4400180	4400181

<sup>1)</sup> Relative to the electrical zero point. Adjustable; lower and upper stops are simultaneously adjusted

<sup>2)</sup> Measuring force springs are interchangeable, following measuring force springs are available (0.25; 0.5; 1; 1.25; 1.5 N)

## Inductive Probe Millimar P1300 M Half Bridge

- 1 Connection jack for an evaluation instrument
- 2 Connecting plug for the probe
- 3 Socket
- 4 Screw sealing plug SW 4.6
- 5 Hose connector for compressed air (external diameter 3 mm)
- 6 Mounting shank
- 7 Locking nut
- 8 Sealing bellows
- 9 Contact point 901 H
- 10 Preferred clamping area

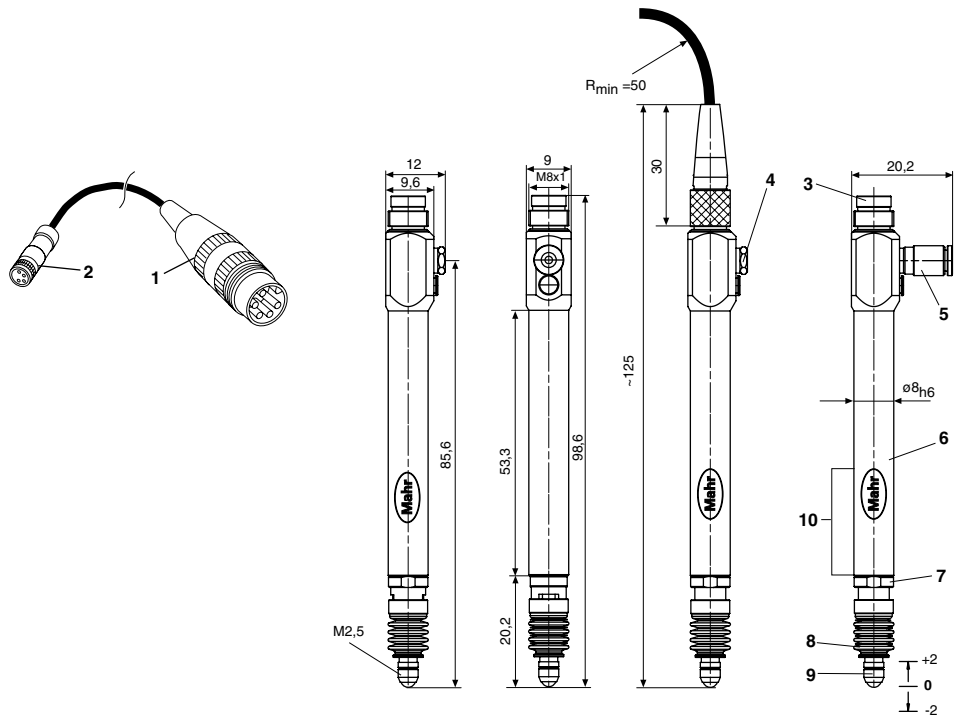

All dimensions and values are metric

## Individual Components and Accessories P1300M



P1300 MA



Connector for the air hose (90°)



Connection cable 2.5 m / 8 ft



P1300 MB

Order no.

P1300 MA without cable	4400182
P1300 MB without cable	4400183
Hose connector for compressed air 90°	4400238
Cable for P1300 M 2.5 m / 8 ft	4885220
Cable for P1300 M 5 m / 16 ft	4885259
Cable for P1300 M 10 m / 20 ft	4885260

Sealing bellows for

P1300 MA	7021546
P1300 MB	7028220


Order no.

Measuring force springs<sup>1)</sup> for P1300 MA

0.25 N	7026827
0.50 N	7026827
0.75 N	7026828
1.00 N	7026849
1.25 N	7025579
1.50 N	7025505

<sup>1)</sup> All measuring forces (except 0.25 N) including the sealing bellows have a measuring spring force of approx 0.25 N at zero point.

## Inductive Probe Millimar P2000-Series



### Technical Data

Probe type	P2001	P2004	P2004 A	P2004 B
Measuring range	$\pm 0.5 \text{ mm} / \pm 0.020''$		$\pm 2.0 \text{ mm} / \pm 0.079''$	
Distance of lower stop <sup>1)</sup>	–		$-2.2 \dots 0 \text{ mm} / -0.09 \dots 0''$	
Distance of upper stop <sup>1)</sup>	–		$2.2 \dots 4.4 \text{ mm} / 0.09 \dots 0.173''$	
Lifter/Retraction	–	–	Vacuum lifter	Compressed air (max. 1 bar)
Measuring force at the electrical zero point	$0.75 \text{ N} \pm 0.15 \text{ N}$	$0.75 \text{ N}^{2)} \pm 0.15 \text{ N}$	$0.75 \text{ N}^{2)} \pm 0.15 \text{ N}$	depending on air pressure
Increase in measuring force	$0.1 \text{ N} / \text{mm}$	$0.2 \text{ N} / \text{mm}$	$0.2 \text{ N} / \text{mm}$	–
Sensitivity deviation	0.3 %		0.3 %	
Repeatability $f_w$	$0.15 \text{ }\mu\text{m} / 6 \text{ }\mu\text{in}$		$0.1 \text{ }\mu\text{m} / 4 \text{ }\mu\text{in}$	
Hysteresis $f_u$	$0.2 \text{ }\mu\text{m} / 8 \text{ }\mu\text{in}$		$0.5 \text{ }\mu\text{m} / 20 \text{ }\mu\text{in}$	

#### Linearity deviation with corrected sensitivity

within range $\pm 0.1 \text{ mm}$	$0.6 \text{ }\mu\text{m}$	–
within range $\pm 0.5 \text{ mm}$	$1.5 \text{ }\mu\text{m} / 60 \text{ }\mu\text{in}$	$0.4 \text{ }\mu\text{m} / 16 \text{ }\mu\text{in}$
within range $\pm 1.0 \text{ mm}$	–	$1.5 \text{ }\mu\text{m} / 60 \text{ }\mu\text{in}$
within range $\pm 2.0 \text{ mm}$	–	$3.0 \text{ }\mu\text{m} / 120 \text{ }\mu\text{in}$
Protection class according to DIN VDE 0470 Part 1 / EN 60529	IP40	IP64
Cable length	$2.5 \text{ m} / 8 \text{ ft}^{3)}$	$2.5 \text{ m} / 8 \text{ ft}^{3)}$

Order no.	P2001	P2004	P2004 A	P2004 B
Compatibility - Mahr	<b>5323040</b>	<b>5323010</b>	<b>5323020</b>	<b>5323030</b>
Compatibility - Tesa	<b>5323041</b>	<b>5323011</b>	<b>5323021</b>	<b>5323031</b>
Compatibility - Marposs	<b>5323043</b>	<b>5323013</b>	<b>5323023</b>	<b>5323033</b>
Compatibility - Federal	<b>5323044</b>	<b>5323014</b>	<b>5323024</b>	<b>5323034</b>


<sup>1)</sup> Relative to the electrical zero point. Adjustable; lower and upper stops are simultaneously adjusted

<sup>2)</sup> Measuring force springs are interchangeable, additional measuring force springs are available (0.25; 0.5; 1; 1.25; 1.5 N)

<sup>3)</sup> Extension cables are available, see accessories



## Inductive Probe Millimar P2000-Series



### Technical Data

Probe type	P2010 A	P2010 B	P2104 A	P2104 B
Measuring range	$\pm 5.0 \text{ mm} / \pm 0.197''$		$\pm 2.0 \text{ mm} / \pm 0.079''$	
Distance of lower stop	- 5.3 mm / - .20"	- 5.3 mm / - .20"	- 2.2 ... 0 mm / -0.09 ... 0" <sup>1)</sup>	
Distance of upper stop	+ 5.3 / + .20"	+ 5.3 / + .20"	8.4 ... 10.4 mm / -0.33 ... 0.41" <sup>1)</sup>	
Lifter/Retraction	Vacuum lifter	Compressed air (max. 1 bar)	Vacuum lifter	Compressed air (max. 1 bar)
Measuring force at the electrical zero point	0.75 N $\pm 0.15 \text{ N}$ <sup>2)</sup>	depending on air pressure	0.75 N $\pm 0.15 \text{ N}$ <sup>2)</sup>	depending on air pressure
Increase in measuring force	0.1 N / mm	—	0.1 N / mm	—
Sensitivity deviation	0.3 %		0.3 %	
Repeatability $f_w$	0.2 $\mu\text{m}$ / 8 $\mu\text{in}$		0.2 $\mu\text{m}$ / 8 $\mu\text{in}$	
Hysteresis $f_u$	1 $\mu\text{m}$ / 40 $\mu\text{in}$		0.5 $\mu\text{m}$ / 20 $\mu\text{in}$	

#### Linearity deviation with corrected sensitivity

within range $\pm 0.5 \text{ mm}$	—	0.5 $\mu\text{m}$ / 20 $\mu\text{in}$
within range $\pm 1.0 \text{ mm}$	—	2.0 $\mu\text{m}$ / 80 $\mu\text{in}$
within range $\pm 2.0 \text{ mm}$	4.0 $\mu\text{m}$ / 160 $\mu\text{in}$	4.0 $\mu\text{m}$ / 160 $\mu\text{in}$
within range $\pm 5.0 \text{ mm}$	20.0 $\mu\text{m}$ / 800 $\mu\text{in}$	—
Protection class according to DIN VDE 0470 Part 1 / IEC 60529	IP64	
Cable length	2.5 m / 8 ft <sup>3)</sup>	2.5 m / 8 ft <sup>3)</sup>

Order no.	P2010 A	P2010 B	P2104 A	P2104 B
Compatibility - Mahr	5324020	5324030	5324070	5324080
Compatibility - Tesa	5324021	5324031	5324071	5324081
Compatibility - Marposs	5324023	5324033	5324073	5324083
Compatibility - Federal	5324024	5324034	5324074	5324084


<sup>1)</sup> Relative to the electrical zero point. Adjustable; lower and upper stops are simultaneously adjusted

<sup>2)</sup> Measuring force springs are interchangeable, additional measuring force springs are available (0.25; 0.5; 1; 1.25; 1.5 N)


<sup>3)</sup> Extension cables are available, see accessories

## Inductive Probe Millimar P2000-Series

### P2001





### P2004

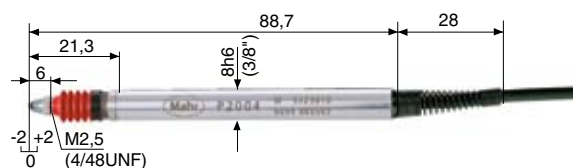



With the supplied slip-on cap, the cable can be flexed to 90° (vertical to horizontal)

### P2004 A / P2004 B

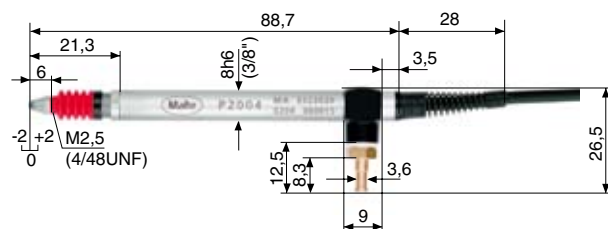


With the supplied slip-on cap, the cable can be flexed to 90° (vertical to horizontal)

### P2010 A / P2010 B

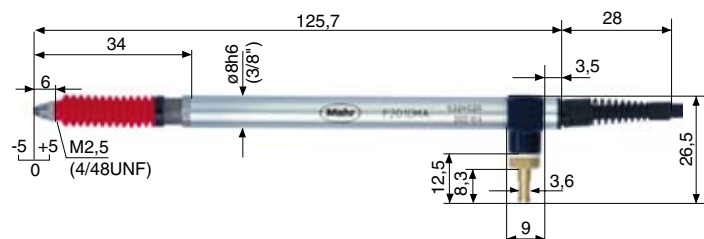

With the supplied slip-on cap, the cable can be flexed to 90° (vertical to horizontal)

### P2104 A / P2104 B

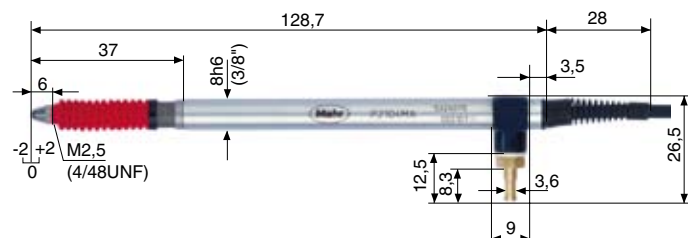

With the supplied slip-on cap, the cable can be flexed to 90° (vertical to horizontal)

Values shown in brackets apply to Federal-compatibility  
All dimensions and values are metric



## Accessories

Extension cables		Mahr M	Tesa T	Marposs U	Mahr Federal F
Length	Description	Order no.	Order no.	Order no.	Order no.
2.5 m	C 2025	5323130	5323131	5323133	5323134
5 m	C 2050	5323140	5323141	5323143	5323144
7.5 m	C 2075	5323150	5323151	5323153	5323154
10 m	C 2100	5323160	5323161	5323163	5323164
		Order no.	Order no.		
Measuring force springs <sup>1)</sup> for P2004 and 2004 A			Measuring force springs <sup>1)</sup> for P2010 A		
0.25 N		7026827	0.25 N		7028212
0.50 N		7026827	0.50 N		7028212
0.75 N		7026828	0.75 N		7027764
1.00 N		7026849	1.00 N		7028213
1.25 N		7025579	1.25 N		7028214
1.50 N		7025505	1.50 N		7028215
1) All measuring forces (except 0.25 N) include the sealing bellows have a measuring spring force of approx. 0.25 N in zero position.			1) All measuring forces (except 0.25 N) include the sealing bellows have a measuring spring force of approx. 0.25 N in zero position.		
		Order no.	Order no.		
Measuring force springs <sup>1)</sup> for P2104 A			Sealing bellows for		
0.25 N		7028212	2004, 2004 A		7021546
0.50 N		7027764	2004 B		7028220
0.75 N		7028213	2010 A, 2104 A		7027758
1.00 N		7028214	2010 B, 2104 B		7028221
1.25 N		7028215			
1) All measuring forces include the sealing bellows					
Pneumatic Lifter 1340/1		for connection with 1 Probe			5313420
Pneumatic Foot Switch 1340/1F		for connecting max. 4 Probes, types 1340, P2004xA, P2010xA, P2104xA, 1300 A, 1310 A			5313419

## Temperature specifications

Temperature coefficient ftT	0.15 µm / °C
Working temperature range	+ 10 ... + 55 °C
Operating temperature range	- 10 ... + 80 °C
Information regarding chemical resistance	Resistant against oil, gasoline (petrol), water, alipate. Moderate against acids, alkaline solutions, solvents, ozone

## Inductive Probe Millimar 1300 / 1310 Half Bridge



### Technical Data

Probe type	1300	1300 A	1310	1310 A	1310 B
Measuring range	$\pm 2.0 \text{ mm} / \pm 0.079''$		$\pm 5.0 \text{ mm} / \pm 0.197''$		
Distance of lower stop	$-2.2 \dots 0 \text{ mm} / -0.09 \dots 0''^{1)}$		$-5.2 \text{ mm} / -0.204''$		
Distance of upper stop	$-2.2 \dots 4.4 \text{ mm} / -0.09 \dots 0.173''^{1)}$		$5.8 \text{ mm} / -0.228''$		
Lifter/Retraction	–	Vacuum lifter	–	Vacuum lifter	Compressed air (max. 1 bar)
Measuring force at the electrical zero point	$0.75 \text{ N}^{2)}$ $\pm 0.15 \text{ N}$	$0.75 \text{ N}^{2)}$ $\pm 0.15 \text{ N}$		$0.75 \text{ N}^{2)}$ $\pm 0.15 \text{ N}$	depending on air pressure
Increase in measuring force	$0.3 \text{ N} / \text{mm}$		$0.08 \text{ N} / \text{mm} \dots 0.15 \text{ N} / \text{mm}$		–
Sensitivity deviation	$0.5 \%$		$0.5 \%$		
Repeatability $f_w$	$0.1 \mu\text{m} / 4 \mu\text{in}$		$0.5 \mu\text{m} / 20 \mu\text{in}$		
Hysteresis $f_u$	$0.5 \mu\text{m} / 20 \mu\text{in}$		$2 \mu\text{m} / 80 \mu\text{in}$		

#### Linearity deviation with corrected sensitivity

within range ± 0.5 mm	0.4 µm/ <b>16 µin</b>		–		
within range ± 1.0 mm	1.5 µm / <b>60 µin</b>		–		
within range ± 2.0 mm	3.0 µm/ <b>120 µin</b>		10 µm / <b>400 µin</b>		
within range ± 5.0 mm	–		30 µm / <b>1200 µin</b>		
Protection class acc. to IEC 60529	IP64		IP52		
Cable length	1.5 m / 5 ft <sup>3)</sup>				
Compatibility - Mahr	Half Bridge				
Order no.	5313000	5313001	5313100	5313101	5313102


<sup>1)</sup> Relative to the electrical zero point. Adjustable; lower and upper stops are simultaneously adjusted

<sup>2)</sup> Measuring force springs are interchangeable. additional measuring force springs are available, see accessories


<sup>3)</sup> Extension cables are available, see accessories

## Inductive Probe Millimar 1300 / 1310 Half Bridge


**1300**

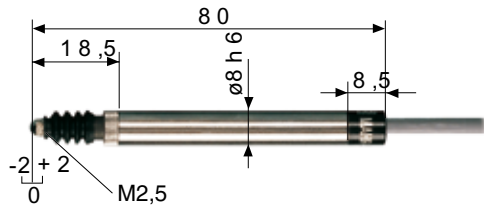


**1310**

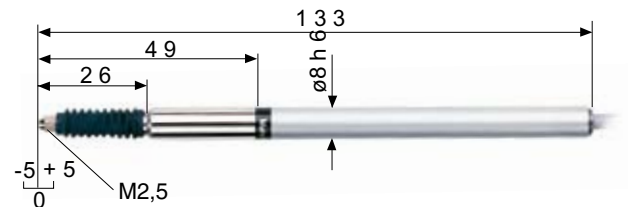


**1300 A**

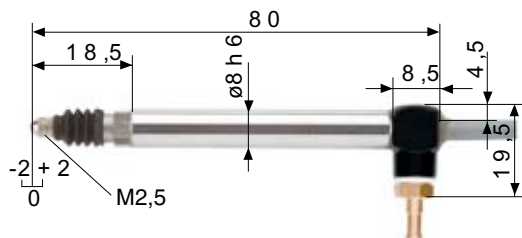

**1310 A**

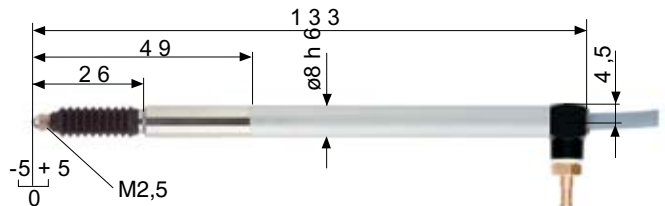

**1310 B**

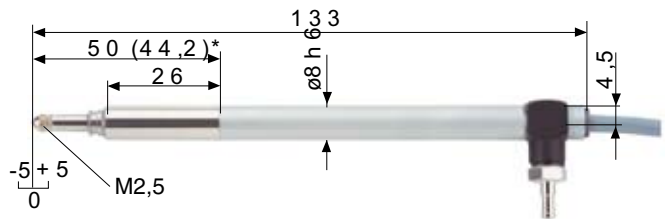

All dimensions and values are metric

\* in initial position

## Accessories

	Order no.		Order no.
<b>Extension cable</b> for 1300 / 1310		<b>Measuring force springs</b> for 1300	
1 m	9024001	0.25 N	7005555
2 m	9024002	0.50 N	7005556
3 m	9024003	0.75 N	7005557
5 m	7021787	1.00 N	7005558
7 m	9024007	1.50 N	7005559
10 m	7021788	2.00 N	7005560
15 m	9024015		
18 m	7021789	<b>Measuring force springs</b> for 1310	
20 m	9024020	0.5 N	7003549
25 m	9024025	0.75 N	7003550
28 m	9024028	1.00 N	7003551
		2.00 N	7003553
<b>Pneumatic lifter 1340/1</b>		<b>Sealing bellows</b> for	
<b>Pneumatic lifter 1340/1F</b>		1300	3001869
for 1300 A / 1310 A		1310	4321787

## Inductive Probe Millimar 1301 / 1303 / 1304 K / 1318



### Technical Data

Probe type	1301	1303	1304 K	1318
Measuring range	$\pm 1.0 \text{ mm} / \pm 0.039''$		$\pm 1.0 \text{ mm} / \pm 0.039''$	$-0.3..+1.0 \text{ mm} / -0.12..+0.039''$
Distance of lower stop <sup>1)</sup>	$-1.1 \dots 0 \text{ mm} / -0.043 \dots 0''$		$1.1 \text{ mm} / -0.043''$	$-0.37 \text{ mm} / -0.0146''$
Distance of upper stop <sup>1)</sup>	$+2.7 \text{ mm} / +0.106''$		$+1.1 \text{ mm} / +0.043''$	$+1.6 \text{ mm} / +0.063''$
Lifter/Retraction	Cable release		—	—
Measuring force at the electrical zero point	0.75 N $\pm 0.15 \text{ N}$		0.75 N $\pm 0.15 \text{ N}$	0.25 N $\pm 0.05 \text{ N}$
Increase in measuring force	0.4 N / mm		0.15 N / mm	0.04 N / mm
Sensitivity deviation	0.5 %		1.0 %	0.5 %
Repeatability $f_w$	0.1 $\mu\text{m}$ / <b>4 <math>\mu\text{in}</math></b>		0.15 $\mu\text{m}$ / <b>6 <math>\mu\text{in}</math></b>	0.03 $\mu\text{m}$ / <b>1.2 <math>\mu\text{in}</math></b>
Hysteresis $f_w$	0.2 $\mu\text{m}$ / <b>8 <math>\mu\text{in}</math></b>		0.2 $\mu\text{m}$ / <b>8 <math>\mu\text{in}</math></b>	0.5 $\mu\text{m}$ / <b>20 <math>\mu\text{in}</math></b>

#### Linearity deviation with corrected sensitivity





within range $\pm 0.3 \text{ mm}$	—	—	0.9 $\mu\text{m}$ / <b>36 <math>\mu\text{in}</math></b>
within range $\pm 0.5 \text{ mm}$	0.5 $\mu\text{m}$ / <b>20 <math>\mu\text{in}</math></b>		—
within range $\pm 1.0 \text{ mm}$	2.0 $\mu\text{m}$ / <b>80 <math>\mu\text{in}</math></b>		—
Protect. class acc. to IEC 60529	IP64		IP50
Cable length	1.5 m / 5 ft <sup>2)</sup>		
Compatibility - Mahr	LVDT		
Order no.	5313010	5313030	5313049
			5313180

<sup>1)</sup> Relative to the electrical zero point

<sup>2)</sup> Extension cables are available, see accessories



## Inductive Probe Millimar 1301 / 1303 / 1304 K / 1318

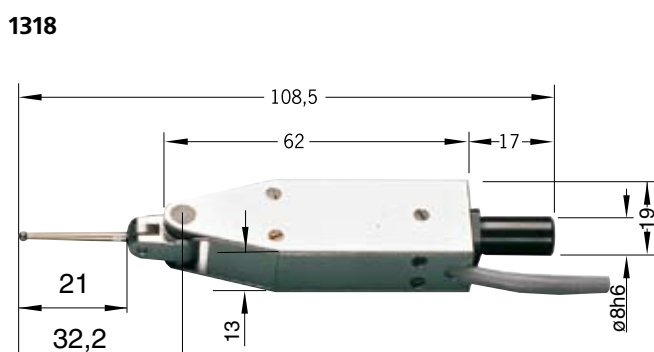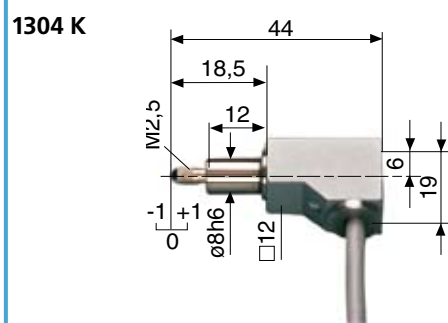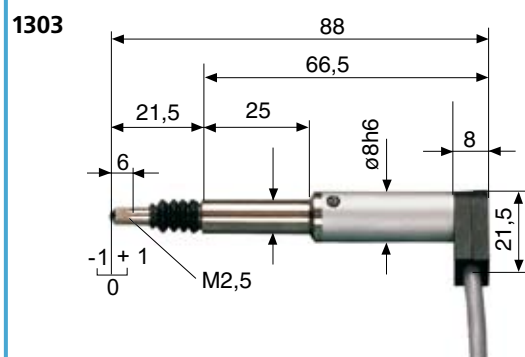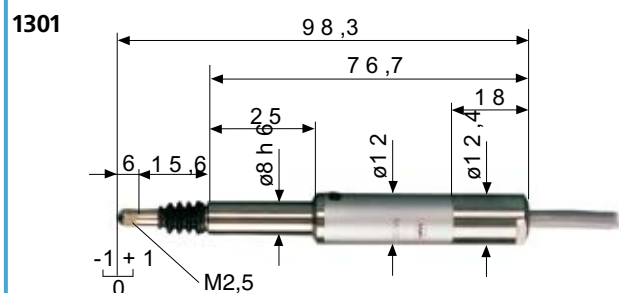

All dimensions and values are metric

## Accessories

	Description	Order no.
<b>Extension Cables</b> for 1301 / 1303 / 1304 K / 1318	<b>1288/1</b> 1 m / 3 ft	<b>5312881</b>
	<b>1288/2,5</b> 2.5 m / 8 ft	<b>5312882</b>
	<b>1288/5</b> 5 m / 16 ft	<b>5312885</b>
	<b>1288/7,5</b> 7.5 m / 24 ft	<b>5312887</b>
	<b>1288/10</b> 10 m / 30 ft	<b>5312889</b>
<b>Cable Release</b> for 1301 / 1303	<b>1399</b>	<b>5313990</b>
<b>Styluses</b> for 1318 with carbide ball	d = 2 mm; L = 21 mm (Standard)	<b>3005223</b>
	d = 1 mm; L = 21 mm	<b>7003902</b>
	d = 3 mm; L = 21 mm	<b>7003903</b>
<b>Styluses</b> for 1318 with ruby ball	d = 2 mm; L = 21 mm	<b>8004231</b>

## Lever Type Gage Heads

F



EHE-2056


### Features

- Clutch-mounted contact swivels through 280° arc for easy positioning
- Linearity – 0.1% over full range of  $\pm 0.250$  mm /  $\pm 0.010$ "
- Gaging pressure less than 4 g / .14 oz. in either direction, with a change of less than 0.1 gram per 25  $\mu$ m / .001" of contact travel. Special gaging pressures available. Contact Mahr Federal Technical Assistance
- Repeatability better than 0.1  $\mu$ m / 4  $\mu$ in
- Cable length – 1.2 m / 4 ft
- Miniature models include the same powerful features as standard sized Lever Type Gage Heads


For use on test stands, surface plate work, or where light pressure is needed.

## Automatic Cosine Error Compensation

Angle "A"	Correction Factor
10	.985
20	.940
30	.866
40	.766
50	.643
60	.500



Involute tip (normally furnished) automatically corrects for cosine error when finger is at an angle up to 20°. Simplifies "reach over" jobs.



When exceeding 20°, use ball tip contact and table above. With multiplier function, 832F & 1840F Amplifiers can correct for cosine error.

## Accessories

**Adaptor** to mount EHE-2048 on Model 2400 Stand

**Clamp** for mounting EHE-2048 on model 2300 Stand

**Accessories kit** for EHE-2048. Includes EAM-1071, CP-116, EPT-1013, two rectangular holding bars and a holding rod

**Replacement tip**, 1.6 mm/ .062" dia. steel ball

**Replacement tip**, 0.787 mm/ .031" dia. tungsten carbide ball

**Replacement tip**, steel "volute (normally furnished)

**Replacement tip**, 0.787 mm/ .031" steel ball

**Replacement tip**, 1.6 mm/ .062" dia., sapphire ball, 1:1 ratio

**Replacement tip**, 1.6 mm/ .062" dia., sapphire ball, 2:1 ratio

**Replacement tip**, 1.6 mm/ .062" dia., sapphire ball, 3:1 ratio

**Replacement tip**, 1.6 mm/ .062" dia., sapphire ball, 4:1 ratio

**Replacement tip**, 1.6 mm/ .062" dia., sapphire ball, 5:1 ratio

**Replacement adjustable nose mounting bracket**

**Replacement fixed back plate mounting bracket**

### Order no.

**EAM-1071**

**CP-116**

**EAS-1333**

**EPT-1004**

**EPT-1007**

**EPT-1008**

**EPT-1013**

**EPT-1059-W1**

**EPT-1059-W2**

**EPT-1059-W3**

**EPT-1059-W4**

**EPT-1059-W5**


**EAT-1010**

**EPL-1140**


## Lever Type Gage Heads

F


### Models and Accessories




**Model EHE-2048** – Post Bracket Back, (BK-108) tamper-proof mounted. Option: Conversion Bracket, EAM-1071, attaches quickly and securely in any rotational direction to suit a wide variety of mounting needs.




**Model EHE-2056** – Adjustable Nose Mount (EAT-1010), tamper-proof mounted. Permits wide choice of positions and approximately 3.8mm/.150in fine adjustment for quick setup with support close to gaging contact.

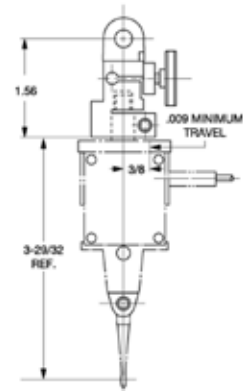


**Model EAT-1026** – Fine Adjust Attachment for Lever Type Gage Heads with post mounting option, permits mounting on a wide variety of fixtures.



**Model EHE-2050** – Fixed Nose Mount (EAM-1045), tamper-proof mounted. Provides support close to gaging contact for the most critical applications.

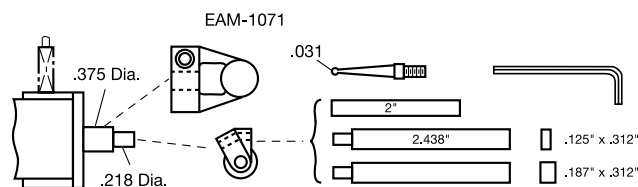

**Model EAS-1333** – Mounting Kit for use with EHE-2048. Permits Gage Head to be mounted on a wide variety of stands and holding fixtures. Includes Conversion Bracket, EAM-1071 and 0.787mm/.031in diameter ball tip contact.



**Model EHE-2052** – Fixed Back Plate, (EPL-1140) tamper-proof mounted. For mounting on adjustable plates or slides in fixtures for continuous duty application.

## Spring (Pantograph) Type Gage Heads

F



### Features


- Friction-free, straight line motion.
- Repeatability better than  $0.01 \mu\text{m}$  /  $.5 \mu\text{in}$
- Linearity – 0.05% over full range of  $\pm 0.250 \text{ mm}$  /  $\pm .010''$ , with repeat accuracy within  $0.01 \mu\text{m}$  /  $.5 \mu\text{in}$ .
- Adjustable pretravel.
- Gaging pressure provided by external spring, from 85 g / 3oz. to 400 g / 14 oz.
- Uses regular 4-48 threaded Contact Points (PT-223 normally furnished).
- Cable length – 2.4 m / 8 ft.

**Rugged and reliable, ideal for fixtures or automatic gages**

### Technical Data


#### Model EHE-2053

Fixed Back Plate EPL-1140 (15.8 mm / 0.625" wide), tamper-proof mounted. Provides means of attachment for mounting on adjustable plates or slides in fixtures for continuous duty application.




#### Model EHE-2049

Pressure Spring mount, tamper-proof mounted. Permits setting pre-travel and provides ample gaging pressure regardless of Gage Head position.




#### Model EGH-2011

Protective Housing encloses head in tamper-proof mounting. Permits adjustment of both gaging pressure (from 3 to 14 oz.) and pre-travel.



#### Model EGH-2006

Housing is extended and equipped with heavy duty back plate forming suitable support for use with Model 700 Comparator Stand.



### Gage Head Adapter Cables


#### Order no.

**Gage Head Adapter Cables** connects Mahr Federal EHE-2XXX and P2XXXF gage heads to Mahr Federal series 432 and 230 amplifiers; 152 mm / 6" long


**ECB-1852**

**Gage Head Adapter Cables** connects Mahr Federal EHE 1XXX gage heads to Mahr Federal series 832 and 830 amplifiers; 152 mm / 6"

**ECB-1853**




## Adapters for Cartridge Type Gage Heads

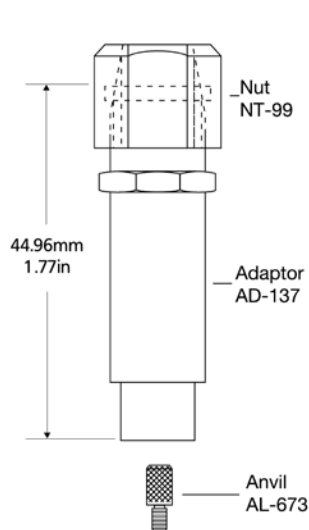

### AD-138


Electronic probe adapter permits using cartridge type gage heads with any regular Mahr Federal indicator.

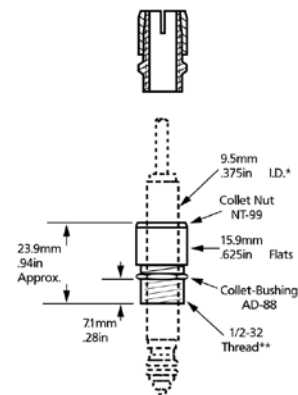

\* For .315"/8mm dia. gage heads, bushing EBU-197 (not shown) is required.

### AD-87

Split collar adapter for mounting .375" dia. gage heads. For 1/2-32 taps use **V-892**

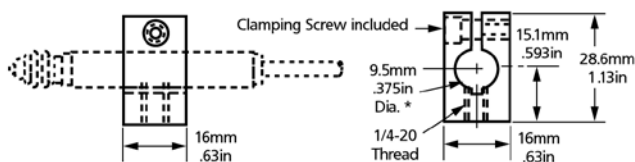


\* For .315"/8mm dia. gage heads, bushing EBU-197 (not shown) is required.

### AAD-67


For .375" diameter stem, square bracket. 1/4-20 mounting thread.

### AT-29

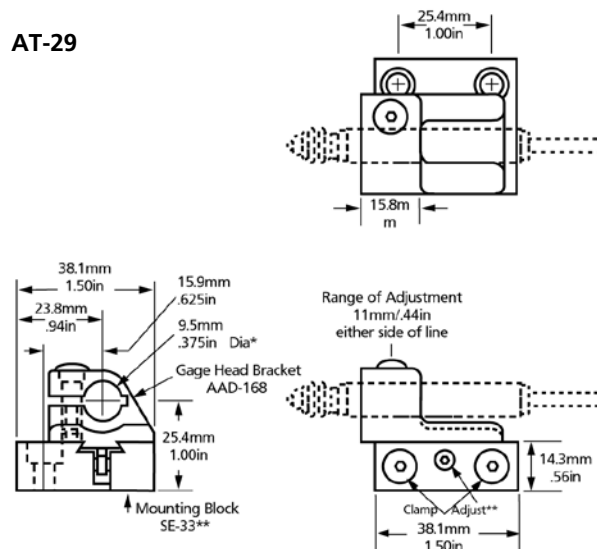

\* For .315"/8mm dia. gage heads, bushing EBU-197 (not shown) is required.


\*\* Gage Head Bracket AAD-168 also fits SE-73 Mounting Block (with adjustment knob in place of socket head adjustment screw)

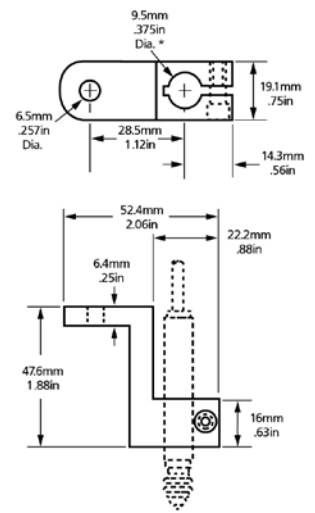

\* For .315"/8mm dia. gage heads, bushing EBU-197 (not shown) is required.


### AAD-66

"L" bracket used for mounting .375" diameter gage heads on comparator stands.

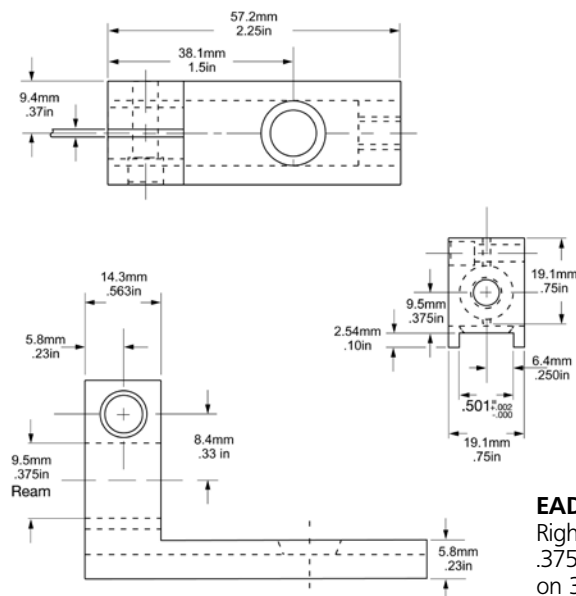

### EAD-1029

Right angle adapter for mounting .375" diameter cartridge gage heads on 36B series comparators.

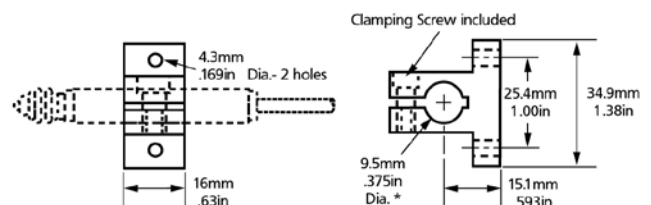


\* For .315"/8mm dia. gage heads, bushing EBU-197 (not shown) is required.

### AAD-91


"T" bracket flange mounted, two 4.3 mm / .169" through holes. For .375" dia. gage heads.

## Inductive Probe Millimar 1340

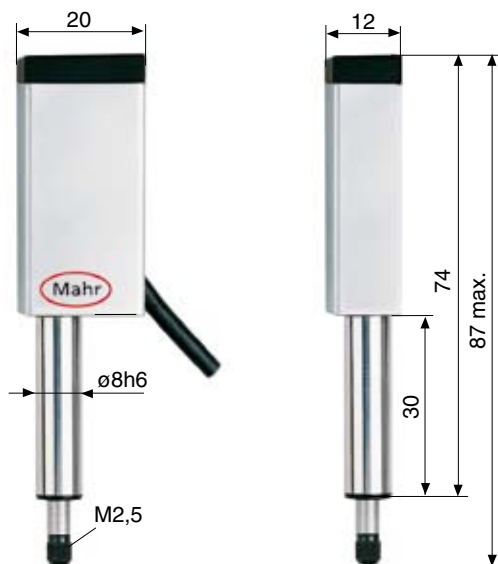

All dimensions and values are metric

Commercial deviation diagram

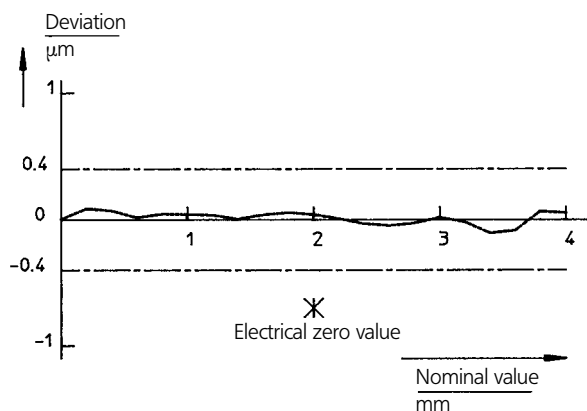

### Features

- To obtain the best results use in conjunction with the Millitron 1240
- Unprecedented measuring accuracy and minimum linearity error < 0.01 %, i.e. 0.4 μm over the total measuring range
- Probe is protected against dirt and moisture, thus ideally suited for production related application
- Cable length 1.5 m / 5 ft

### Technical Data

#### 1340

Measuring range	$\pm 2 \text{ mm} / \pm 0.079''$
Distance of lower stop <sup>1)</sup>	- 2.2 mm / - 0.09'' (adjustable)
Distance of upper stop <sup>1)</sup>	+ 3.0 mm / + 0.118''
Spindle lift	pneumatic
Measuring force	0.75 N
Sensitivity deviation	0.3 %
Repeatability fw	$\leq 0.08 \text{ } \mu\text{m}$
Hysteresis fu	0.08 μm
Linearity deviation	
within range $\pm 1 \text{ mm}$	0.15 μm
$\pm 2 \text{ mm}$	0.4 μm
Contact points	carbide ball
Protection class acc. to IEC 60529	IP64
Cable output	lateral
Temperature coefficient	0.6 μm/K
Working temperature range	+ 10 ... + 40° C / + 50 ... + 104°F
Operating temperature range	- 10 ... + 80° C / - 14 ... + 176°F
Hysteresis of measuring value	- 10 ... + 80° C / - 14 ... + 176°F

Order no.

5313400


<sup>1)</sup> Relative to the electrical zero point

### Accessories

	Order no.		Order no.
Extension Cable 5 m / 16 ft	5313425	Pneumatic Lifter 1340/1	
Extension Cable 10 m / 32 ft	5313421	Pneumatic hand pump with an plug-in hose approx. 1 m / 3 ft	5313420
Extension Cable 20 m / 64 ft	5313422	Pneumatic Foot Switch 1340/1F	
Extension Cable 30 m / 98 ft	5313423	for connecting max. 4 Probes 1340	5313419



## Incremental Probe Millimar P1514 / P1526

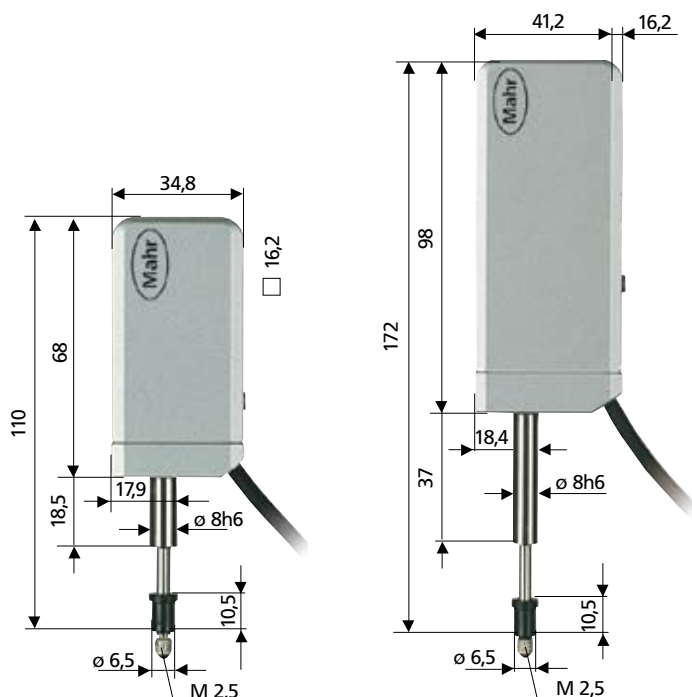

### Features

- To obtain the best results use in conjunction with C 1245 I
- Excellent accuracy over a large measuring range
- Supplied with: Finger lifter

### Technical Data

Probe type	P1514	P1526
Output signal	1 Vss	
Measuring system	DIADUR-glass scale with incremental graduation	
Scale graduation	4 μm	
Signal period	2 μm	
Measuring range	12 mm / <b>0.47"</b>	25 mm / <b>0.98"</b>
System accuracy	± 0.2 μm	
Operating position	no limitation	
<b>Measuring force</b>		
Vertical. downwards	0.6 ... 0.85 N	
Vertical. upwards	0.35 ... 0.6 N	
Horizontal	0.48 ... 0.73 N	
Admissible measuring speed	0.5 m/s	
Admissible lateral force	0.8 N	
<b>Max. Acceleration<sup>1)</sup></b>		
Shock in m/s²	1000	
Vibration in m/s²	100	
Protection class acc. to DIN	IP50	
Reference temperature	20°C / 68°F	
Working temperature	+ 10 ... + 40° C / + 50 ... + 104°F	
Storage temperature	-20 ... 70°C / - 4 ... + 158°F	
Weight excluding cable	100 g	180 g
Connection cable	1.5 m / 5 ft	
<b>Order no.</b>	<b>5315140</b>	<b>5315260</b>

### Accessories

#### Order-no.

**Cable lifter**  
with integral  
pneumatic damping **3014019**







#### Extension cables






3 m / 10 ft	<b>4407663</b>
5 m / 16 ft	<b>4407662</b>
7 m / 23 ft	<b>4407661</b>
10 m / 32 ft	<b>4407660</b>

1) The accuracy of this data is not guaranteed

# Millimar. Evaluation Instruments

## Overview

	C 1200 IC	830	832
			
Catalog page	7 - 26	7 - 27	7 - 28
Display	Needle analog scale with 2 tolerance markers	Needle analog scale	Analog display with 1 digital line display
Measuring channels	1 Inductive Probe (A)	According to type, up to: 2 Inductive Probes (A, B)	2 Inductive Probes (A, B) 1 Pneumatic Measuring Instrument (A, B)
Compatible Inductive Probe (carrier frequency)	Mahr	Mahr Federal	Mahr / TESA / Mahr Federal / Marposs
Max. Resolution	0.1 $\mu\text{m}$ / .000002"	0.1 $\mu\text{m}$ / .000005"	0.01 $\mu\text{m}$ / .000001"
Input Combinations	+A, - A	+A, - A, +B, -B, A + B, A - B, B - A, -A - B	+A, - A, +B, -B, A + B, A - B, B - A, -A - B
Features / Programs	1	2 / 2	2 / 2
Test steps	1	1	1
Dynamic measurements 	–	–	MAX, MIN, MAX-MIN, (MAX+MIN)/2
Statistics functions	–	–	–
Classification	–	–	–
Control inputs and outputs/ SPC connection 	–	–	3 inputs, 5 TTL Opto-coupler outputs
Analog output	–	1	1
Data interface / ports 	–	–	RS232, 9 pin, plug
Configuration	Turn switch	Turn switch	Keypad
Battery operated	yes	yes	yes
Dimensions in mm (H x W x D)	137 x 157 x 80	165 x 190 x 148	254 x 168 x 143

C 1208	C 1216	C 1245	1240	S 1840
				
7 - 30	7 - 31	7 - 32	7 - 33	7 - 34
Background lit LCD with 1 analog display and a 2 digital line digital display	Background lit LCD with 1 analog display and a 2 digital line digital display	Needle analog scale and 2 line display	Needle analog scale and 1 line display	1 illuminated bar graph and 2 line digital display
According to type, up to: 2 Inductive Probes (A, B) 1 Pneumatic Meas. Inst.	2 Inductive Probes (A, B)	According to type, up to: • 8 Inductive Probes • 4 Incremental Probes • 2 Pneumatic Meas. Inst. • 8 Analog Signals • or a combination of these inputs	2 Inductive Probes (A, B) 2 Incremental Probes (A, B) 1 Pneumatic Meas. Inst.	According to type, up to: 2 Inductive Probes (A, B) 1 Pneumatic Meas. Inst.
Mahr / TESA / Mahr Federal	Mahr / TESA / Mahr Federal	Mahr / TESA Mahr Federal	Mahr	Mahr / TESA Mahr Federal
0.1 μm / .000005"	0.01 μm / .000001"	0.1 μm / .000005"	0.01 μm / .000001"	0.1 μm / .000005"
+A, -A, +B, -B, A + B, A - B, B - A, -A - B	+A, -A, +B, -B, A + B, A - B, B - A, -A - B	Formula editor for 80 characters Functions: + / - / * / +/ ( ) / factor	+A, -A, +B, -B A+B, +A-B, -A+B, -A-B	A, -A, B, -B, A+B, A-B, -A+B, -A-B
2 / 2	2 / 2	16 / 6	2 / 2	2 / 2
1	1	6	1	1
MAX, MIN, MAX-MIN, (MAX+MIN)/2	MAX, MIN, MAX-MIN, (MAX+MIN)/2	MAX, MIN, MAX-MIN, (MAX+MIN)/2, mean	MAX, MIN, MAX-MIN, (MAX+MIN)/2, mean	MAX, MIN, MAX-MIN, (MAX+MIN)/2
—	—	N, x-quer, S, Xmax, Xmin, Range	n, xn, x, s, R	—
—	—	max. 998, max. 79 auf I/O	max. 30	—
3 Opto-coupler inputs, 3 Opto-coupler outputs	3 Opto-coupler inputs, 3 Opto-coupler outputs	3 Opto-coupler inputs, 6 Opto-coupler outputs	3 Opto-coupler inputs, 3 TTL outputs	3 Opto-coupler inputs, 3 Opto-coupler outputs
—	1	1	1	1
RS232, 9 pin, plug	RS232, 9 pin, plug	RS232, 9 pin, plug	RS232, 9 pin, plug	RS232, 9 pin, plug
PC, Keypad	PC, Keypad	PC, Keypad	Keypad	PC, Keypad
—	—	—	—	—
205 x 160 x 165	205 x 160 x 165	210 x 160 x 155	195 x 156 x 120	487 x 47 x 144

## Millimar 1200 IC compact amplifier

M



1200 IC/MZ

### Features

- Compact housing
- Battery powered for portable usage in the workshop
- Large analog display with 2 tolerance markers
- Quick and reliable display of the measured value
- Switchable measuring direction
- One inductive probe can be connected
- Fine adjustment due to the large range zero setter
- Battery operation with the commercially available round R14 batteries
- Testing button for batteries
- Supplied with: Mains adapter

### Technical Data

	1200 IC	1200 IC/MZ
Measuring range	$\pm 3 \mu\text{m} / 0.1 \mu\text{m}$	$\pm .0001'' / .000002''$
Resolution	$\pm 10 \mu\text{m} / 0.2 \mu\text{m}$ $\pm 30 \mu\text{m} / 1 \mu\text{m}$ $\pm 100 \mu\text{m} / 2 \mu\text{m}$ $\pm 300 \mu\text{m} / 10 \mu\text{m}$	$\pm .0003'' / .00001''$ $\pm .001'' / .00002''$ $\pm .003'' / .0001''$ $\pm .01'' / .0002''$
Scale length		120 mm / <b>4.724"</b>
Response time		350 ms
Probe input		1
Single meas. combinations		+A, -A
Range of zero adjustment: 5 and 100 $\mu\text{m}$		1 Large range setter
Deviation spread referring to measuring range		$\leq 2.5\%$
Protection class acc. to DIN		IP40
Working temperature range		+ 10... + 40° C / + 50... + 104° F
Power supply		mains adapter, 9V = ~5 VA
Power consumption		approx. 0.1 W
Dimensions		137 x 157 x 80 mm / <b>5.394" x 6.181" x 3.149"</b>
Weight		1 kg / 2.205 lbs
Order no.	<b>5312000*</b>	<b>5312009*</b>

\* When placing an order please specify which type of mains adapter is required

### Accessories

	Order-no.
<b>Battery</b> , R 14 battery 1.5 V, (6 are required)	<b>3004424</b>
<b>Mains Adapter</b> 100-240V~, 50-60Hz	<b>3017926*</b>

For appropriate Inductive probes please refer to pages 7-6 to 7-17

\* Included in scope of supply

## Millitron 830 Gaging Amplifier

F



### Features

- Battery operates more than 8 hours under full load.
- Choice of Power Modules for 120 or 240 VAC operation.
- $\pm 2$  volt analog output.
- Conforms to CE Standards.
- The essential performer for today's slim budgets.
- Dual input - for single or differential modes.
- Normal/Reverse transducer setting.
- Selectable ranges in either Inch or Metric units.
- Calibration adjustments for each input.
- Convenient, front-mounted controls.
- Tilt base provides stable support and easy adjustment for best viewing angle.
- Used with "Federal" — F type Inductive Probes.

### Technical Data

Repeatability	to within 0.00005 mm / <b>.000002"</b> or 1/10 of a graduation, whichever is greater
Linearity	less than 4/5 of a scale division
Calibration	less than 4/5 of a scale division
Response Speed-Display	less than .5 seconds for 10% to 90% step follow
Response Time - Output	< 15 ms
Dimensions	approx. 165 mm / 6.5" h x 190 mm / 7.5" w x 148 mm / 5.8" d
Temperature at specified accuracy	20°C / 68°F $\pm 2^\circ\text{C}$
Operating temperature	5° to 45°C / 40° to 110°F, with a temperature coefficient of .02% change/°C x full scale range
Storage temperature	0° to 60°C / 0° to 140°F

Order no.	830 F	120V	220V EU	240V UK	Ranges	Resolution
(Standard Unit)	EAS-3031-	W11	W12	W13	$\pm 100 \mu\text{m}$ / <b><math>\pm 004''</math></b> $\pm 20 \mu\text{m}$ / <b><math>\pm 001''</math></b> $\pm 10 \mu\text{m}$ / <b><math>\pm 0002''</math></b>	5 $\mu\text{m}$ / <b>200 <math>\mu''</math></b> 1 $\mu\text{m}$ / <b>50 <math>\mu''</math></b> 0.5 $\mu\text{m}$ / <b>10 <math>\mu''</math></b>
(High Resolution — Inch)	EAS-3031-	W41	W42	W43	$\pm 200 \mu\text{m}$ / <b><math>\pm 004''</math></b> $\pm 50 \mu\text{m}$ / <b><math>\pm 001''</math></b> $\pm 10 \mu\text{m}$ / <b><math>\pm 0001''</math></b>	5 $\mu\text{m}$ / <b>200 <math>\mu''</math></b> 1 $\mu\text{m}$ / <b>50 <math>\mu''</math></b> 0.5 $\mu\text{m}$ / <b>10 <math>\mu''</math></b>
(High Resolution — Metric)	EAS-3031-	W41 V6117	W42 V6207	W43 V6245	$\pm 200 \mu\text{m}$ / <b><math>\pm 004''</math></b> $\pm 50 \mu\text{m}$ / <b><math>\pm 001''</math></b> $\pm 2 \mu\text{m}$ / <b><math>\pm 0001''</math></b>	10 $\mu\text{m}$ / <b>200 <math>\mu''</math></b> 2.5 $\mu\text{m}$ / <b>50 <math>\mu''</math></b> 0.1 $\mu\text{m}$ / <b>5 <math>\mu''</math></b>

### Accessories

	Order-no.
Analog Output Connector	PRT-2380
120V Battery Charger	EBY-1016
220V Battery Charger (EU)	EBY-1019
240V Battery Charger (UK)	EBY-1020
Battery	EBY-1021
Battery Eliminator Kit for 110V Models	EKT-1237-W1
Battery Eliminator Kit for 220 Models	EKT-1237-W2

## Millitron 832 Digital Electronic Amplifier



### Features

- Dynamics – simultaneously computes the minimum, maximum, T.I.R., nominal and actual gage head signal for dynamic measurement capability.
- Multi-Range – three selectable ranges in inch or metric units.
- Message Center – display provides a simple “menu-driven” setup procedure in English, French or Spanish.
- RS-232 Output – for communicating with Data Collection Devices.
- Two Gage Head Input – Independent reading or for providing the capability of “summing” for diameter reading, matching clearances, runout and parallelism.
- Angular units – selectable arc seconds or millirads for angular measurement applications (see Electronic Levels).
- User selectable password for full lockout capability or individual key lockout in both setup and gaging modes.
- Specific models available for use with Mahr, Mahr Federal, Tesa or Marposh inductive probes.

### Technical Data

	Measuring Range	Digital Resolution	Analog Minimum Grad.
<b>Linear</b>	±2 mm / <b>±0.100"</b> ±.200 mm / <b>±.010"</b> ±.020 mm / <b>±.001"</b>	.001 mm / <b>.0001"</b> .0001 mm / <b>.00001"</b> .00002 mm / <b>.000001"</b>	0.1 mm / <b>.005"</b> 0.1 mm / <b>.0005"</b> .001 mm / <b>.00005"</b>
<b>Angular</b>	5 mrad / ±1000 arc sec. 1 mrad / ±200 arc sec.	.005 mrad / 1 arc sec. .0005 mrad / 0.1 arc sec.	.25 mrad / 50 arc sec. .05 mrad / 10 arc sec.
<b>Auto Range</b>	automatically selects the smallest range for the best resolution, in both linear and angular units		
<b>Repeatability</b>	±1 digit		
<b>Calibration Accuracy</b>	±1 digit		
<b>Linear Error</b>	less than .025% of full scale		
<b>Response Time</b>	42 msec.		
<b>Thermal Stability</b>	.01% /C x full scale		
<b>Temperature Range:</b>	20°C / 68°F ±2°C		
<b>At Specified Accuracy</b>	5° to 45°C / 40° to 110°F, with a temperature coefficient of .02% change/°C x full scale range.		
<b>Operating Storage</b>	0° to 60°C / 0° to 140°F		
<b>Digital I/O</b>	five TTL opto-isolated outputs		
<b>Data Output</b>	RS-232, transmits Channels A, B, or both, units, and tolerances		
<b>Analog Output</b>	±5 VDC full scale for displayed value signal		
<b>Measuring Modes</b>	Actual, Minimum, Maximum, T.I.R., Nominal		
<b>Tolerance Indicators</b>	five LEDs		
<b>Weight</b>	3.5 lbs. / 1.58 kg		
<b>Dimensions</b>	168 mm w x 254 mm d x 143 mm h / <b>6.63"</b> w x <b>10"</b> d x <b>5.63"</b> h		
<b>Gage Head Display</b>	A, B or both at any time		
<b>Auto Power Off</b>	User selectable, up to 99 minutes of non-use		
<b>Power Requirements</b>	rechargeable battery, 10 hour operation under full load: or 120 VAC/240 VAC 50-60Hz with power module (furnished with Amplifier)		
<b>Replacement Battery</b>	<b>EBY-1015</b> Ni-Cad rechargeable, 4.8v, 2.5 amp hours		



## Millitron 832 Digital Electronic Amplifier

### Technical Data

Power	832 F Mahr Federal probe type Order no.	832 M Mahr probe type Order no.	832 T Tesa probe type Order no.	832 U Marposs probe type Order no.
120VAC adapter	2004005	2004000	2004015	2004020
US battery/120VAC charger	2004007	2004002	2004017	2004022
EU/UK 220/240VAC adapter	2004006	2004001	2004016	2004021
EU battery/220VAC charger	2004008	2004003	2004018	2004023
UK battery/240VAC charger	2004009	2004004	2004019	2004024

### Accessories

	Order no.
<b>RS-232 cable</b> , amplifier to MSP2 printer or computer, 2 m / 6 ft	<b>7024634</b>
<b>Storage Cover</b> (opaque)– protection for the 832 Amplifier when used in harsh environments	<b>ECV-1276</b>
<b>Oil/Splash Cover</b> (clear)–protection for the 832 Amplifier when used in harsh environments	<b>ECV-1285</b>
<b>Footswitch for HOLD/RESUME</b> , 3 m / 10 ft cable (15 pin)	<b>ECB-1857</b>
<b>Footswitch for DYNAMIC RESET</b> , or remote zeroing 3 m / 10 ft cable (15 pin)	<b>ECB-1858</b>
<b>Footswitch for SEND DATA</b> , 3 m / 10 ft cable (15 pin)	<b>ECB-1859</b>
<b>Footswitch for DYNAMIC RESET</b> , or Remote Zeroing, 1.5m/5 ft cable (Phone Plug)	<b>300-50</b>
<b>Remote pushbutton for DYNAMIC RESET</b> , or remote zeroing 1.5 m / 5 ft cable (Phone Plug)	<b>ECB-1855</b>
<b>Remote pushbutton for SEND DATA</b> , 1.5 m / 5 ft cable (15 pin)	<b>ECB-1860</b>
<b>Remote pushbutton for HOLD/RESUME</b> , 1.5 m / 5 ft cable (15 pin)	<b>ECB-1861</b>
<b>Remote pushbutton for HOLD/RESUME and SEND DATA</b> , 3 m / 10 ft cable (15 pin)	<b>ECB-1868</b>
<b>Relay Box</b> – five relays each with Normally Open/Normally Closed contacts; Contact Rating – 30 Vdc/120 Vac, 3 amps Power Supply – 120 Vac Dimensions – 39 mm x 129 mm x 134.6 mm d/1.53" x 5.082 x 5.3" with ECB-1886W-2, 6.1 mm/24" interconnect cable for amplifier to relay box	<b>EKT-1236-W3</b>
<b>Mating connector</b> , Digital I/O connector (15 pin MALE)	<b>ECN-1695-W2</b>
<b>Mating connector</b> , Reset Data connector (3/32 microphone plug)	<b>ECN-1693</b>
<b>Mating connector</b> , RS-232 Digital Output connector (9 pin FEMALE)	<b>ECN-1695-W1</b>
<b>Mating connector</b> , Gage Head to amplifier connector (5 pin MALE)	<b>ECN-1690</b>
<b>Battery Charger Modules</b> (For 832 Units using 3 pin connector)	
<b>Plug-in</b> 120 VAC, 50-60Hz charger for use with 120 Vac battery operated units	<b>EBY-1028</b>
220 VAC, 50-60Hz charger for use with 220 Vac battery operated units	<b>EBY-1029</b>
240 VAC, 50-60Hz (UK) charger for use with 240 Vac battery operated units	<b>EBY-1030</b>
<b>Power Supply Module</b> (Bypass battery operated units to direct AC source operation)	
For 120 Vac models (For 832 Units using 3 pin connector)	<b>2010000</b>
For 220/240 Vac models (For 832 Units using 3 pin connector)	<b>2010001</b>
<b>Printers</b>	
<b>MSP-2 line printer</b> : includes power module for 120 V US	<b>4102045</b>
<b>MSP-2 line printer</b> : includes power module for 230 V Euro	<b>4102040</b>
<b>RS-232 Cable</b> : Amplifier to Printer, 2.0 m / 6 ft	<b>7024634</b>
<b>Paper rolls</b> for MSP-2 Line Printer	<b>4102041</b>

## Millimar C 1208 Compact amplifier with background lit display



### Features

#### Functions

- Favorites, frequently required functions can be assigned to the SELECT key
- Static measurements  $\pm A$ ,  $\pm B$  and all combinations
- Dynamic measurements: Max, Min, Max-Min, Max+Min, mean
- Auto-Detect-Mode, two measuring instruments can be connected (Probe, Plug Gage ...)
- Programmable via the integrated key pad or by RS232 interface in conjunction with the MS-Windows configuration Software

#### Display

- Background lit LCD-Display with an analog and a two line digital display
- 5 three color status lamps for warning and tolerances limits
- Up to 2 features can be simultaneously displayed

#### Connections

- 2 inputs for inductive probes (also compatible with probes from Mahr, Tesa, Mahr-Federal)
- RS232 interface
- 3 digital inputs for measurement start, master measurement, send measured values, ...
- 3 digital outputs for GO, NO GO, rework, measuring time, ...

### Technical Data

Display	Background LCD, 115 mm x 70 mm
Analog scale	Pointer, 61 graduations
Range and text display	7 digit LCD, 5 x 7 dot matrix, alpha-numeric
Measured value display	7 digit LCD, 7 segments
Tolerance display	5 LEDs, 3 colors
Displayed ranges	$\pm 3, 10, 30, 100, 300, 1000, 3000, 10000 \mu\text{m}$ <b><math>\pm 0.0001; 0.0003; 0.001; 0.003; 0.01; 0.03; 0.1; 0.3 \text{ inch}</math></b> or tolerance related
Resolution	$0.1 \mu\text{m} / .000005''$

#### Response time

- Meas. value memory	0.010s
- Digital display	0.100s
- Analog display	0.100s
- Outputs	0.020s

#### Error limits

- 10 x analog display	2.5%
- Digital display	0.3% (min. $0.2 \mu\text{m}$ )
Temperature coefficient	0.005%/°C
Operating temperature	0°C to 45°C / 32°F to 113°F

#### Interfaces

Computer, printer	RS232, 9 pin. male (PC-compatible assignment)
- Control outputs	3 Opto-coupler-outputs, 2 24V, 100mA
- Control inputs	3 Opto-coupler-inputs, 24V, 10mA
Power supply via Mains power pack	100V to 240V, 47Hz to 63Hz
Power consumption	10 VA
Protection class	IP54, with conductive dust IP43
Housing dimensions (H x W x D)	ca. 205 mm x 160 mm x 165 mm <b>ca. 8.07" x 6.29" x 6.49"</b>
Weight	ca. 2.1 kg / 4.6 lbs

### Order no.


		Order no.
<b>C 1208 M</b>	Mahr compatible	<b>5312080</b>
<b>C 1208 T</b>	Tesa compatible	<b>5312081</b>
<b>C 1208 F</b>	Mahr-Federal compatible	<b>5312082</b>

For appropriate Inductive probes please refer to pages 7-6 to 7-17

### Accessories

	Order no.
<b>Extension cable</b> (9 pin D-Sub-jack to a D-Sub-socket), length 3 m / 10 ft	<b>7024634</b>
<b>Control Unit</b> with 3 push buttons	<b>5330950</b>
<b>Foot switch</b> for	
for Input 1	<b>5330955</b>
for Input 2	<b>5330956</b>
for Input 3	<b>5330957</b>

## Millimar C 1216 Compact amplifier with background lit display



### Features

#### Functions

- Favorites, frequently required functions can be assigned to the SELECT key
- Static measurements  $\pm A$ ,  $\pm B$  and all combinations
- Dynamic measurements: Max, Min, Max-Min, Max+Min, mean
- Auto-Detect-Mode, two measuring instruments can be connected (Probe, Plug Gage ...)
- Programmable via the integrated key pad or by RS232 interface in conjunction with the MS-Windows configuration Software

#### Display

- Background lit LCD-Display with an analog and a two line digital display

- 5 three color status lamps for warning and tolerances limits
- Up to 2 features can be simultaneously displayed
- **Additional resolution, 0.01  $\mu\text{m}$  / 1  $\mu\text{in}$**

#### Connections

- 2 inputs for inductive probes (also compatible with probes from Mahr, Tesa, Mahr-Federal)
- RS232 interface
- 3 digital inputs for measurement start, master measurement, send measured values, ...
- 3 digital outputs for GO, NO GO, rework, measuring time, ...
- **Analog output**
- **Programmable analog output voltage (max.  $\pm 5\text{V}$ )**

### Technical Data

Display	Background LCD, 115 mm x 70 mm
Analog scale	Pointer, 61 graduations
Range and text display	7 digit LCD, 5 x 7 dot matrix, alpha-numeric
Measured value display	7 digit LCD, 7 segments
Tolerance display	5 LEDs, 3 colors
Displayed ranges	$\pm 3, 10, 30, 100, 300, 1000, 3000, 10000 \mu\text{m}$ <b><math>\pm 0.0001; 0.0003; 0.001; 0.003; 0.01; 0.03; 0.1; 0.3 \text{ inch}</math></b> or tolerance related
Resolution	0.01 $\mu\text{m}$ / <b>.000001"</b>
<b>Response time</b>	
- Meas. value memory	0.010s
- Digital display	0.100s
- Analog display	0.100s
- Outputs	0.020s

#### Error limits

- 10 x analog display	2.5%
- Digital display	0.3% (min. 0.2 $\mu\text{m}$ )
Temperature coefficient	0.005%/°C
Operating temperature	0°C to 45°C / 32°F to 113°F

#### Interfaces

Computer, printer	RS232, 9 pin. male (PC-compatible assignment)
- Control outputs	3 Opto-coupler-outputs, 2 24V, 100mA
- Control inputs	3 Opto-coupler-inputs, 24V, 10mA
Power supply via Mains power pack	100V to 240V, 47Hz to 63Hz
Power consumption	10 VA
Protection class	IP54, with conductive dust IP43
Housing dimensions (H x W x D)	ca. 205 mm x 160 mm x 165 mm <b>ca. 8.07" x 6.29" x 6.49"</b>
Weight	ca. 2.1 kg / 4.6 lbs

### Order no.

	Order no.
<b>C 1216 M</b> Mahr compatible	<b>5312160</b>
<b>C 1216 T</b> Tesa compatible	<b>5312161</b>
<b>C 1216 F</b> Mahr-Federal compatible	<b>5312162</b>

For appropriate Inductive probes please refer to pages 7-6 to 7-17

### Accessories

	Order no.
<b>Extension cable</b> (9 pin D-Sub-jack to a D-Sub-socket), length 3 m / 10 ft	<b>7024634</b>
<b>Control Unit</b> with 3 push buttons	<b>5330950</b>
<b>Foot switch</b> for	
for Input 1	<b>5330955</b>
for Input 2	<b>5330956</b>
for Input 3	<b>5330957</b>

## Millimar C 1245 compact amplifier



### Features

#### Display

- Analog indicator instrument for display of measurement values
- Two-line LCD for measuring values and help texts
- 5 three color status lamps for warning and tolerance limits
- Up to 3 features can be simultaneously displayed

#### Functions

- 16 characteristics can be defined
- With the formula editor (80 characters) the input channels C1 to C8 are mathematically linked with 4 basic arithmetical functions with factors and brackets
- Static measurements: current value, square root, arc tangent
- Dynamic measurements: Max, Min, Max-Min, Max+Min, mean,
- Statistical functions: n, x-bar, S, Xmax, Xmin, R

- Programmable via the integrated keypad or with MS-Windows configuration software via the RS232 interface
- Memory can store up to 500 measurements
- Measurement Start / Stop

#### Connections

- 2 input modules can be inserted into base unit
- Following modules are available:
  - 4 inputs for Inductive Probes (compatible with Mahr, Mahr-Federal, Tesa)
  - 2 inputs for Incremental Probes
- RS232 interface
- 1 Analog output
- 3 digital inputs for measurement start, master measurement / zeroize, send data
- 6 digital outputs for GO, NO GO, rework, ALL GO, measuring time, 4 classes

### Technical Data

Display	analog indicator instrument. LCD 53 mm x 40 mm <b>(2.087" x 1.585")</b>
Analog scale	145 mm x 80 mm <b>(5.709" x 3.149")</b>
Range and Text display	7-point LCD, 5 x 7 dot matrix. alphanumeric
Measured value display	7-point LCD. 7 Segment
Tolerance display	5 LEDs, 3-colors
Display ranges	$\pm 10; 30; 100; 300; 1000; 3000;$ $10000 \mu\text{m}$ <b><math>\pm 0.0003; 0.001; 0.003; 0.01; 0.03;</math></b> <b><math>0.1; 0.3 \text{ inch}</math></b>
Measuring range of inductive probe	4000 (+/-2000) $\mu\text{m}$ , resolution 0.1 $\mu\text{m}$ (measured value display)
Resolution	0.1 $\mu\text{m}$ / <b>.000005"</b>

#### Response time

- Meas. value memory	0.005s
- Digital display	0.300s
- Analog display	0.050s - 0.300s
- Outputs	0.020s

#### Error limits

- 10 x Analog display	2 %
- Digital display	0.3 % (min. 0.2 $\mu\text{m}$ )
Temperature coefficient	$\pm 0.005\%/^{\circ}\text{C}$
Oper. temperature range	0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$

#### Interfaces

Computer, printer	RS232, 9 pin. male (PC-compatible layout)
- Control outputs	6 Optocoupler-outputs, 24V, 10mA
- Control inputs	3 Optocoupler-inputs, 24V, 100mA
Analog output, voltage	programmable
Power supply	90 V ... 264 V, 47Hz ... 63Hz
Power consumption	11 VA
Protection class	IP53 with conductive dust IP43
Housing dimensions (H x B x T)	ca. 210 mm x 160 mm x 155 mm <b>ca. (8.268" x 6.299" x 6.1032")</b>
Weight	ca. 2 kg / 4.40 lbs


### Order no.

	Order no.
<b>C 1245 M</b> Mahr compatible	<b>5331250</b>
<b>C 1245 T</b> Tesa compatible	<b>5331251</b>
<b>C 1245 F</b> Mahr-Federal compatible	<b>5331253</b>
For appropriate Inductive probes please refer to pages 7-6 to 7-17	
<b>C 1245 I</b> for probes P1514, P1526	<b>5331254</b>

### Accessories

	Order no.
<b>Extension cable</b> (9 pin D-Sub-jack to a D-Sub-socket), length 3 m / 10 ft	<b>7024634</b>
<b>Control Unit</b> with 3 push buttons	<b>5330950</b>
<b>Foot switch</b> for	
for Input 1	<b>5330955</b>
for Input 2	<b>5330956</b>
for Input 3	<b>5330957</b>

## Millimar 1240 compact amplifier

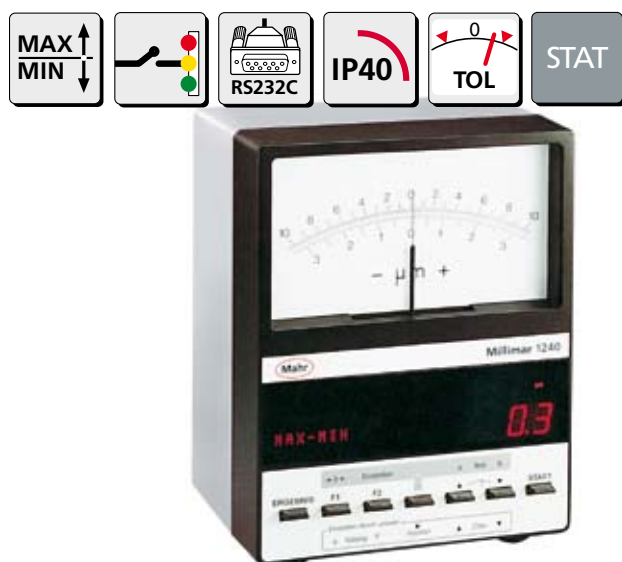

### Features

- Highly accurate processing of measured values
- Zero setting is possible at any point within the measuring range
- Actual value of a standard can be acquired at the touch of a button
- Statistical functions  $\bar{x}$ ,  $s$ ,  $r$  and  $n$  for 1 parameter
- 2 inputs for Inductive Probes for single, sum or difference measurements
- Tolerance monitoring (with adjustable hysteresis)
- Tolerance field can be set along the total width
- Universal classification possibilities
- Extreme value memories of long stability
- RS232C interface for connection to a printer / computer / data logger
- Analog output for connecting a recorder
- All functions can be remote controlled using the RS232C interface

### Technical Data

Display analog/digital

#### Analog display: Measuring range/resolution

- $\pm 1 \mu\text{m}/0.02 \mu\text{m}$  ( $\pm .003 \mu\text{in}/.0001 \mu\text{in}$ )
- $\pm 3 \mu\text{m}/0.1 \mu\text{m}$  ( $\pm .01 \mu\text{in}/.0002 \mu\text{in}$ )
- $\pm 10 \mu\text{m}/0.2 \mu\text{m}$  ( $\pm .03 \mu\text{in}/.01 \mu\text{in}$ )
- $\pm 30 \mu\text{m}/1 \mu\text{m}$  ( $\pm .1 \mu\text{in}/.002 \mu\text{in}$ )
- $\pm 100 \mu\text{m}/2 \mu\text{m}$  ( $\pm .3 \mu\text{in}/.01 \mu\text{in}$ )
- $\pm 300 \mu\text{m}/10 \mu\text{m}$  ( $\pm .0003 \mu\text{in}/.000001 \mu\text{in}$ )
- $\pm 1000 \mu\text{m}/20 \mu\text{m}$  ( $\pm .0001 \mu\text{in}/.000002 \mu\text{in}$ )
- $\pm 3000 \mu\text{m}/100 \mu\text{m}$  ( $\pm .0003 \mu\text{in}/.00001 \mu\text{in}$ )
- $\pm 10000 \mu\text{m}/200 \mu\text{m}$  ( $\pm .001 \mu\text{in}/.00002 \mu\text{in}$ )

#### Digital display: Measuring range/resolution

- $\pm 200 \mu\text{m}/0.01 \mu\text{m}$  ( $\pm .08 \mu\text{in}/.00001 \mu\text{in}$ )
- $\pm 2000 \mu\text{m}/0.1 \mu\text{m}$  ( $\pm .008 \mu\text{in}/.000001 \mu\text{in}$ )

Probe inputs 2

Suitable probes P2000-Series, 1300, 1301, 1303, 1304 K, 1310<sup>1)</sup>, 1318, 1340,

Single measurement/ combinations +A, -A, +B, -B, A+B, +A-B, -A+B, -A-B

Dynamic Functions Max, Min, Max-Min, (Max+Min)/2, mean

Static Functions  $n$ ,  $\bar{x}$ ,  $s$ ,  $R$

Zero adjuster Zero setting at any point

#### Deviation spread referring to measuring range

- Analog display  $\leq 1.5 \%$
- Digital display  $\leq 0.01\%$
- Analog output  $\leq 1 \%$
- Output voltage  $\pm 5 \text{ V}$
- Data output RS 232 C
- Limit switches 2
- Signal lamps 3
- Response time 15 ms
- Control outputs 3
- Type of output TTL
- Control inputs 3
- Protection class acc. to DIN IP40
- Working temperature range  $+10 \dots +40^\circ\text{C} / +50 \dots +104^\circ\text{F}$
- Power supply  $230 \text{ V} \sim / 115 \text{ V} \sim \pm 10\%$ , 50–60 Hz (switchable)

Power consumption ca. 30 VA  
Dimensions (W x H x D) **(6.142" x 7.677" x 4.7242)**

Weight 2.3 kg / 5.07 lbs

1) the probe signal has to be multiplied by factor 10

### Order no.

Version		Order no.
1240	Front Panel German	5312400
1240	Front Panel English	5312401
1240	Front Panel French	5312402

### Accessories

	Order no.
Push buttons 1240/3D for activating 3 different functions e.g., Start, zero setting etc., connection cable 1.5 m/ 5ft	5312430
Foot Switch 1240/1F, connection cable length 2 m/ 5ft	5312431
Data Cable to any. PC (9 pin D-jack)/MSP2	7024634
Statistics Printer MSP2, 230V / 110V	4102040

For appropriate inductive probes please refer to pages 7-6 to 7-17  
Recommended **Probe 1340** see page 7-22



## Millimar S 1840 compact column amplifier



### Features

- Easy to read 3 color analog display
- Measurement in conjunction with inductive probes (e. g. Mahr P2004) or electronic plug gages etc
- Two inputs for inductive probes (compatible with probes from Mahr, Mahr-Federal, Tesa)
- Extensive calculation of input signals:  $\pm A$ ,  $\pm B$  and all combinations
- Dynamic measurements: Max, Min, Max-Min, Max+Min, Mean
- Programmable either via the integrated keypad or the RS232 interface by means of MS-Windows configuration software
- Programmable warning and tolerance limits, exceeding the limit causes the color to change from green to yellow to red
- Background lit 2 lined LCD to display measured values, help text and measuring units
- Analog output: 3 digital inputs (e.g. start of measurement, master measurement)
- 3 digital outputs for GO – NO GO – rework, measuring time

### Technical Data

Analog display	101 LED elements, 3 colors
Range and Text display	7 point LCD, 14 Segment, alphanumeric
Measured value display	7 point LCD, 7 Segments
Tolerance display	via color changes in the analog display
Display ranges	$\pm 10; 30; 100; 300; 1000; 3000;$ $10000 \mu\text{m}$ $\pm .0003; .001; .003; .01; .03;$ $.1; .3 \text{ inch}$ or tolerance related
Measuring range of inductive probe	4000 (+/- 2000) $\mu\text{m}$ , resolution 0.1 $\mu\text{m}$ (Digital display)
Resolution	0.1 $\mu\text{m}$ / <b>.000005"</b>
<b>Response time</b>	
- Meas. value memory	0.008 s
- Analog display	0.020 s
- Outputs	0.020 s
<b>Error limits</b>	
- 10 x Analog display	1% (101 LEDs)
- Digital display	0.3% (min. 0.2 $\mu\text{m}$ )

Temperature coefficient	$\pm 0.005\% / ^\circ\text{C}$
Operating temp. range	0 ... 45 $^\circ\text{C}$ / 32 $^\circ\text{F}$ ... 113 $^\circ\text{F}$

### Interfaces

Computer, printer	RS232, 9 pin. male (PC-compatible layout)
- Control outputs	3 Optocoupler Outputs, 24 V, 10 mA
- Control inputs	3 Optocoupler Inputs, 24 V, 100 mA
Analog output	Voltage 1V/mm
Power supply	90 ... 264 V, 47 ... 63 Hz
Power consumption	20 VA
Protection class	IP53
	IP43 with conductive dust
Dimensions (H x W x D)	approx. 487 x 47 x 144 mm <b>(19.173" x 1.850" x 5.669")</b>
Weight	ca. 1.6 kg / 3.53 lbs

### Order no.

	Order no.
<b>S 1840 M</b> Mahr compatible	<b>5330001</b>
<b>S 1840 T</b> Tesa compatible	<b>5330002</b>
<b>S 1840 F</b> Mahr-Federal compatible	<b>5330107</b>

For appropriate Inductive probes please refer to pages 7-6 to 7-17

### Accessories

	Order no.
<b>Base Plate</b> , for up to 3 columns	<b>5330901</b>
<b>Connection Cable</b> (9 pin D-Sub-jack to D-Sub-jack), length 3 m / 10 ft	<b>7024634</b>
<b>Control Unit</b> with 3 push buttons	<b>5330950</b>
<b>Foot Switch</b> for Millimar	
Input 1	<b>5330955</b>
Input 2	<b>5330956</b>
Input 3	<b>5330957</b>




## Air Gages



### General Technical Data of Air Gages

Air gaging is a measuring system that uses airflow and / or air pressure to determine the size of measured part. The relationship between air pressure and distance of a restriction (workpiece) to the air escape (jets) can be plotted on a graph (line a).

As the distance between jets and work surface increases, the pressure decreases and the ratio becomes linear as represented by the straight section "B". This straight portion of the curve can be accurately calibrated, and represents the scale of the Dimensionair. Compare its length with "C" on the other curve, which is the usable portion of other air gage scales. This longer linear scale gives the Dimensionair its longer usable measuring range.

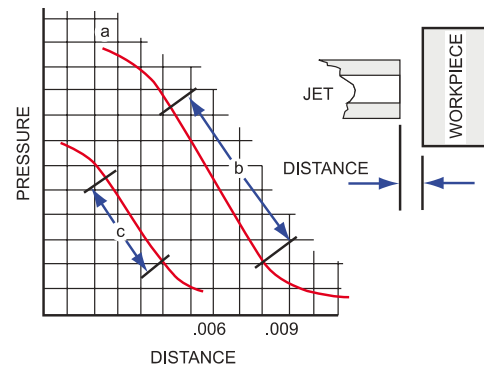

### Description

- Air plug gages are used for testing cylindrical through bores or blind bores. The plug gage bodies are equipped with two opposing measuring jets which record the measured value without contact. This arrangement allows the diameter, the diametric roundness and the cylindricity of bores to be calculated using a single jet air plug gage.
- The diameter is measured immediately after the air plug gage is introduced, while the diametric roundness deviation can be tested by rotation around 180° and the cylindricity by movement in a longitudinal direction.
- The maximum measuring range of the air plug gages is 76  $\mu\text{m}$  / .003".
- Air plug gages are furnished in high chrome stainless steel or chrome plated versions and, if required, with a shut-off valve to conserve air consumption.
- The air tooling long service life is due in part to hardened measuring jets which are recessed relative to the generated surface of the measuring body and are, therefore, protected against damage.
- The standard Mahr Federal air tooling is compatible with the complete line of evaluation units. These include Dimensionair,  $\mu$ Dimensionair, 830 PE, 1840 PE, and 1841 PE signal sharing column. Air/Electric convertors for interfacing to gaging computer systems are also available.
- Special air gage designs for measuring taper, straightness and other applications are available. Contact Mahr Federal.

## Dimensionair® Air Gages (single master system)



### Features

- Uses regular shop air (40 - 150 psig).
- Internal pressure regulator keeps measuring pressures within calibrated range.
- Adjust meter to zero using a single setting master and the zero setting screw.
- High visibility meter has fine line graduations and a needle-thin hand for clear, precise readings. An air filter is included to remove dust and dirt contaminants from air line.
- Tooling mounts to the front of the unit. Connections are tight with finger pressure.
- No recalibration necessary when changing tooling. Just set zero and measure!
- Models available in 5 magnifications, 2 dial styles, and either Metric or Inch.

### Technical Data

Magnification	Tooling ID no.	Range	Minimum Graduation	Dial Style	Surface Finish (recommended) uin / um Ra	Part Tolerance (recommended)	Order no.
1250:1	100	.006"	.0001"	Regular 82.6 mm / 3.25" diameter	100 / 2.54	± .002"	2095183
2500:1	50	.003"	.00005"		50 / 1.27	± .001"	2095184*
5000:1	20	.0015"	.00002"		20 / 0.50	± .0005"	2095185*
10000:1	10	.0006"	.00001"		10 / 0.25	± .0002"	2095186
20000:1	5	.0003"	.000005"		5 / 0.12	± .0001"	2095189
1250:1M	100	152 µm	2 µm		100 / 2.54	± 50 µm	2095190
2500:1M	50	76 µm	1 µm		50 / 1.27	± 25 µm	2095191*
5000:1M	20	38 µm	0.5 µm		20 / 0.50	± 13.5 µm	2095192*
10000:1M	10	15.2 µm	0.2 µm		10 / 0.25	± 5 µm	2095193
20000:1M	5	7.6 µm	0.1 µm		5 / 0.12	± 2.5 µm	2095194
4000:1	50	.003"	.000025"	Large 152.4 mm / 6" diameter	50 / 1.27	± .001"	2095195*
8000:1	20	.0015"	.000010"		20 / 0.50	± .0005"	2095196*
16000:1	10	.0006"	.000010"		10 / 0.25	± .0002"	2095197
32000:1	5	.0003"	.000005"		5 / 0.12	± .0001"	2095198
4000:1M	50	76 µm	0.5 µm		50 / 1.27	± 25 µm	2095199*
8000:1M	20	38 µm	0.2 µm		20 / 0.50	± 13.5 µm	2095200*
16000:1M	10	15.2 µm	0.2 µm		10 / 0.25	± 5 µm	2095201
32000:1M	5	7.6 µm	0.1 µm		5 / 0.12	± 2.5 µm	2095202

\* Contingent upon Plug having equivalent range, see chart on pages 7-43 & 7-44.

## Dimensionair® Air Gages (single or dual master system)



Each Universal Dimensionair is furnished with an adaptor (for connecting standard Mahr Federal air tooling) Optional adaptors are available for virtually any air tooling application.

### Features

- Uses regular shop air (40 -150 psig).
- Internal pressure regulators and differential meter assure ultimate stability over full operating range.
- Adjust span and zero setting to tune the gaging range to the interchangeable dial ranges.
- Interchangeable dials provide an easy, inexpensive means to accommodate various ranges
- High visibility meter has fine line graduations and a needle thin hand for clear, precise readings.
- An air filter is included to remove dust and dirt contaminants from airline.
- Tooling mounts to the front of the unit. Adaptors are available for virtually any tooling configuration.

### Technical Data

Dial Size diameter mm / <i>inch</i>	82.6 / <b>3.25"</b>
Housing Dimensions	mm 127 x 187 x 197 (high) <b>inch 5" x 7.125" x 7.75"</b>
Weight (including filter) approx.	6.7 kg / 14.25 lbs.
Operating Pressure	414-1034 kPa / 60-150 psig
A plastic protective cover for Universal Dimensionair is available	
<b>Order No. ACV-1</b>	

### Ordering Information

Universal Dimensionair, complete with air filter and tooling adaptor for standard Mahr Federal single master air tooling. Supplied with one **2242662** Dial. **Order No.2098125**

#### Optional Dials

	Total Range	Range	Dial Graduations	Magnification	Order No.
(inch)	.006"	± .003"	.0001"	1260:1	<b>2242760</b>
	.004"	± .002"	.0001"	1875:1	<b>2242761</b>
	.003"	± .0015"	.00005"	2500:1	<b>2242762</b>
	.002"	± .001"	.00005"	3750:1	<b>2242763</b>
	.0015"	± .00076"	.00002"	5000:1	<b>2242764</b>
	.001"	± .0005"	.00002"	7500:1	<b>2242765</b>
	.0006"	± .0003	.00001"	10000:1	<b>2242766</b>
(metric)	152 µm	± 76 µm	2 µm	1260:1	<b>2242770</b>
	100 µm	± 50 µm	2 µm	1875:1	<b>2242771</b>
	76 µm	± 38 µm	1 µm	2500:1	<b>2242772</b>
	50 µm	± 25 µm	1 µm	3750:1	<b>2242773</b>
	38 µm	± 19 µm	0.5 µm	5000:1	<b>2242774</b>
	15.2 µm	± 7.6 µm	0.2 µm	10000:1	<b>2242776</b>

#### Tooling Adaptors

Adaptors are available for many standard-tooling configurations:

Thread/Adaptor style	Plug Type / Measured size	Order No.
1/4-28	2.7686 mm / <b>.109"</b> to 12.547 mm / <b>.494"</b>	<b>AAD-193* AAD-312</b>
10-32	12.547 mm / <b>.494"</b> to 23.876 mm / <b>.940"</b>	<b>AAD-194* AAD-313</b>
1/2-20	23.876 mm / <b>.940"</b> to 139.7 mm / <b>5.500"</b>	<b>AAD-195* AAD-314</b>
1/8 Barb	3/8-32 Female	<b>2242767</b>
Setlock	Moore	<b>2242777</b>
8mm	Mahr Row	<b>2240621</b>
12mm	Mahr Row	<b>2240623</b>
9/32-40	Mahr Federal High Mag	

\* Includes bleed to simulate MFI jetting.



## μDimensionair® (single master system)



*The μDimensionair is the ultimate of portability and versatility — in your hand or at the workbench or machine tool.*

### Features

- **Affordable**
  - **Versatile**
  - **Innovative**
  - **Rugged**
- All other features of the μMaxum Digital Indicator:
- Inch/metric units
  - Digital and analog display
  - Bi- and uni-lateral tolerances with presets
  - Absolute transducer for eliminating travel errors
  - Calibratable — battery retains settings
  - Multiple data output formats
  - Auto-zeroing
  - Normal-reverse settings for ID/OD measurements
- No other air gaging system offers so much — in the palm of your hand — mounted to the workbench or even right to the machine tool. μDimensionair is rated IP54, so, it can be used on the shop floor — and, the air tooling cleans dirt from the part for high performance measurements — fast and easy!
  - Air gage readout is right in front of you — simple and clear.
  - Fixed resolution and balanced air system makes the gage stable and reliable for your manufacturing environment.
  - Single mastering for fast setup.

### Technical Data

Measuring Range mm/inch	Digital Resolution mm/inch	Tooling I.D. Number
± 0.080/ ± <b>0.003"</b>	0.001/ <b>0.00005"</b>	60
± 0.040/ ± <b>0.0016"</b>	0.0005/ <b>0.00002"</b>	50
± 0.020/ ± <b>0.00076"</b>	0.0005/ <b>0.00002"</b>	20
Operating Temperature	5 - 35° C / 41 - 95° F	
Storage Temperature	0 - 60° C / 32 - 140° F	
Repeatability	± 1 digit	
Calibration Accuracy	± 1 digit	
Linear Error	± 1 digit	
Response Time	Approximately 1 second	
Thermal Stability	0.1% of full scale/F	
Data Output	ASCII/Digimatic	
Tolerance Indicators	Two — over/under	
Weight	25 kg / 5lbs.	
Dimensions - Main body	approx. 100 x 60 x 70 mm <b>approx. (4" x 2.5" x 3")</b>	
Auto Power Off	15 minutes of non-use	
Power Requirements	3 volt lithium battery coin cell, 2 per unit — CR-2450	
Battery Life	9 months normal usage — 3000 hours	
Air Supply	2.10 ± .01 bar / 30.4 ± .15 psi	
Display	Rotates through 270 degrees	


### Order no.

	Order no.
μDimensionair, complete with handle, adaptor and hose	<b>2095389</b>


### Accessories

	Order no.
<b>Pressure Regulator</b> with filter	<b>2238020</b>
<b>Pressure Meter</b>	<b>2095924</b>
<b>Bench Kit</b> with adaptor	<b>2239307</b>
<b>Output cable</b> — Digimatic	<b>2001025</b>
<b>Serial output cable</b> to DB-9 pin	<b>SCB-4</b>
<b>Battery</b> 3V type CR-2450	<b>EBY-1018</b>
<b>Insulated Handle</b>	<b>2237666</b>
<b>Shut off valve</b>	<b>2240993</b>
<b>Rest Stand</b>	<b>2241109</b>
<b>Swivel Adaptor</b>	<b>2240594</b>
<b>Supply Hose</b> to Regulator/Filter	<b>AHO-2</b>
<b>Oil and water Trap</b>	<b>AFL-24</b>

## Millimar S 1840 PE (single or dual master system)

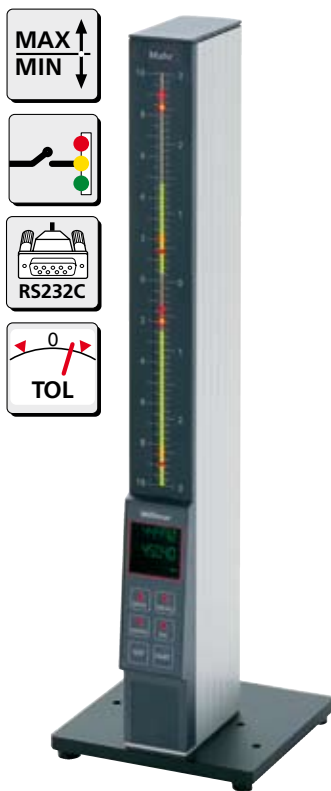

The Millimar S 1840 column amplifier can be programmed either menu-guided via the integrated membrane keypad or with the provided MS Windows® configuration software.

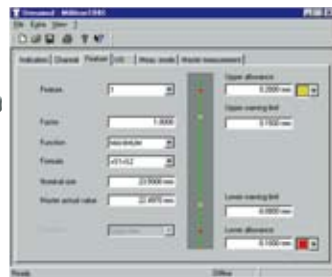

### Features

Assess and judge measuring results at a glance – nothing is easier than that with the Millimar S 1840 column amplifier.

The Millimar S 1840 column amplifier offers a broad range of functions for combining the signals from both static and dynamic measurements.

Measuring results are indicated by way of 101 three-color LEDs. When the programmable warning and tolerance limits are exceeded, the LEDs change their color from green to yellow or red, accordingly – high visibility from any distance.

### Display

- Three-color illuminated bar graph with analog warning and tolerance limit display
- Two-line backlit LCD for indicating measured values, help texts, and measuring units
- Up to two characteristics can be displayed simultaneously.

### Connections

- Single input.
- RS 232 interface.
- Analog output.
- Three digital inputs for measuring start, master measurement, etc.
- Three digital outputs for Accept – Reject – Rework classification, measuring time, etc.

### Functions

- Static measurements:  $\pm A$ ,  $\pm B$ , and all combinations.
- Dynamic measurements: Max, Min, Max-Min, Max+Min, mean.
- Windows® software for configuring the LED display. The Millimar S 1840 column amplifier can be programmed either menu-guided via the integrated membrane keypad or with the provided MS Windows® configuration software.
- Single Master or Dual Master setup.
- Password lockout in Setup Mode.

### Technical Data

#### Air/electronic converter for Millimar S 1840 PE

Measuring principle	differential pressure		
Measuring value acquisition	piezo		
Magnification	2500:1	5000:1	10000:1
Pneumatic measuring range in $\mu\text{m}$ (inch)	$\pm 50$ ( $\pm 00196''$ )	$\pm 25$ ( $\pm 00098''$ )	$\pm 12.5$ ( $\pm 00049''$ )
Resolution	0.1 $\mu\text{m}$ / .000005"		
Measuring error in $\mu\text{m}$ (inch)	< 1 % of measuring range, better 0.5 %		
Signal noise in $\mu\text{m}$ (inch)	$\leq 0.4$ (15.748)	$\leq 0.2$ (7.874)	$\leq 0.1$ (3.937)
Setting time in sec. (1 m / 3.3 ft hose)	$\leq 0.3$	$\leq 0.3$	$\leq 0.5$
Setting time in sec. (2 m / 6.6 ft hose)	$\leq 0.5$	$\leq 0.5$	$\leq 0.7$
Operating temperature	0 ... 40 °C (32 ... 104 °F)		
Supply pressure (> 4 bar before pressure reducer)	2 bar $\pm$ 5 %		
Air supply connection	PU hose, dia 8 x 1 (.315 x .0394")		
Measuring air connection	PU hose, dia. 6 x 1 (.236 x .0394")		
Zero setter (OFFSET)	electrical		
Amplification (GAIN)	electrical		
Air consumption	approx. 1-2 m <sup>3</sup> approx. (1.308-2.616 cu.yd.)		

### Order no.

#### Order no.

#### Millimar S 1840 PE/F

for 1 Air Gage 2500:1 / 5000:1 without Regulator  
for 1 Air Gage 10000:1 without Regulator

**5330104\***  
**5330106\***

\* Base with Regulator required and sold separately.  
Air Supply Kit recommended.

### Accessories

#### Order no.

#### Basefoot

With 1 Regulator for 1 1840 PE Column Unit  
With 2 Regulators for 2 1840 PE Column Units  
With 3 Regulators for 3 1840 PE Column Units

**5330910**  
**5330911**  
**5330912**

#### Air Supply Adaptor Kit

Includes AFL-24 Filter and AHO-2 Hose

**2121236**



## 832 Dimensionair® Air Gaging System (single master system)



### Features

- Digital and analog displays in a single unit. Large, high contrast digital readout shows exact deviation from zero; analog display shows measurement conditions at a glance.
- Fixed resolution and balanced air system makes the Digital Dimensionair a stable and reliable system for manufacturing environments.
- Only a single master required to set zero; system is precalibrated for correct magnification.
- Ranges and resolutions for virtually any air gage application, including 2-, 3-, 4- and 6-jet tooling plus AirProbes and JetProbes.
- Dynamics measurement capability.
- RS-232 Output – for communicating with a data collector, computer or printer, permitting statistical process control.
- Master Deviation – enhances measurement by making Auto Zero even more accurate.

### Technical Data

Model	Measuring Range	Digital Resolution	Analog Resolution	Tooling I.D. Number
<b>Low Magnification</b>	$\pm 0.080 \text{ mm} / \pm 003''$		$0.004 \text{ mm} / 150\mu''$	60
<b>Single or Dual Input</b>	$\pm 0.040 \text{ mm} / \pm 0015''$	$0.0002 \text{ mm} / 10\mu''$	$0.002 \text{ mm} / 75\mu''$	50
	$\pm 0.020 \text{ mm} / \pm 00075''$		$0.001 \text{ mm} / 38\mu''$	20
<b>High Magnification</b>	$\pm 0.008 \text{ mm} / \pm 0003''$		$0.0004 \text{ mm} / 15\mu''$	10
<b>Single or Dual Input</b>	$\pm 0.004 \text{ mm} / \pm 00015''$	$0.0001 \text{ mm} / 5\mu''$	$0.0002 \text{ mm} / 8\mu''$	5

Number of Jets	Voltage/Adaptor	Low Magnification Single Input Order no.	High Magnification Single Input Order no.	Low Magnification Dual Input Order no.	High Magnification Dual Input Order no.
1, 2, 3	110 / U.S.	2004100	2004103	2004106	2004109
4	110 / U.S.	2004101	2004104	2004107	2004110
6	110 / U.S.	2004102	2004105	2004108	2004111
1, 2, 3	240 / International	2004112	2004115	2004118	2004121
4	240 / International	2004113	2004116	2004119	2004122
6	240 / International	2004114	2004117	2004120	2004123



## Millimar C 1208 PE / C 1245 PE (single or dual master system)



1208 PE



C 1245 PE

### Features

#### C1208 PE Display

- Background lit LCD-Display with an analog and a two line digital display
- 5 three-color status lamps for warning and tolerance limits
- Up to 2 characteristics can be displayed at the same time.

#### C1208 PE Functions

- Favorites, frequently required functions can be assigned to the SELECT key
- Static measurements  $\pm A$ ,  $\pm B$  and all combinations
- Dynamic measurements: Max, Min, Max-Min, Max+Min, mean

#### C1245 PE Display

- Analog indicator instrument for display of measurement value.
- Two-line LCD display for values and menu text
- 5 three-color status lamps for warning and tolerance limits.
- Up to 3 characteristics can be displayed at the same time.

#### C1245 PE Functions

- 16 characteristics can be defined using an equation editor (80 characters), input channels C1 to C8 are mathematically linked with factors and brackets using the 4 basic mathematical functions.
- Static measurements: Current value, square root, arc tangent.
- Dynamic measurements: Max, Min, Max-Min, Max+Min, Mean value.
- Statistical functions: n, x-bar, S, Xmax, Xmin, R.
- Measured value memory for 5000 measured values.
- Measurement start / stop via keyboard, digital input, RS232.

### Technical Data

		Order no.
Millimar C 1208 PE/F	For 1 Air Gage 2,500:1 / 5000:1 with Regulator	5312095
Millimar C 1208 PE/F	For 1 Air Gage 10,000:1 with Regulator	5312093
Millimar C 1245 PE/F	For 1 air gage 2,500:1 / 5000:1 with Regulator	5331271
Millimar C 1245 PE/F	For 1 air gage 10,000:1 with Regulator	5331273
Millimar C 1245 PE/F2	For 2 air gages 2,500:1 / 5000:1 without Regulator	5331275*
Millimar C 1245 PE/F2	For 2 air gages 10,000:1 without Regulator	5331277*
Air Supply Adaptor Kit	includes AFL-24 Filter and AHO-2 Hose	2121236
* Baseplate with 2 Regulators	(required for 2 Air Gage Units)	5330909

## Air Plugs

### Features

- **Calibrated I.D. tooling for the Dimensionair® Air Gaging Systems**
- Tooling is interchangeable without adjusting system magnification.
- Federal Air Plugs have large clearance (see table below), allowing easy entrance into the hole being measured and greater measuring range.
- Long life - wide clearance and high chrome stainless steel body extends useful life of the Air Plug. Chromed steel or other materials for extreme use are available.
- Deep, recessed jets - Air jets are recessed into the plug body which protects them from damage.
- Large jet size eliminates clogging from dirt and oils.

### Plug identification



Air Plugs are marked with an identification number which identifies its size, number of jets, plug style, and the Dimensionair® Model the plug should be used with.

For example: **DP50-T2-1.000** is the identification number of an Air Plug for a **2095184** or a standard magnification 832 Dimensionair (DP50), through-hole style with two jets (-T2), and 25 mm/1.000" nominal size (-1.000).

The number (50) which identifies the Dimensionair intended is marked on the plug and also appears on the dial of the Dimensionair Model.

#### Total Clearance from Nominal Size

Plug Identification	Nominal Size mm/ <i>inch</i>	To & include above mm/ <i>inch</i>	Clearance from Nominal Size mm/ <i>inch</i>
<b>DP100, DP60</b>	6.3/ <b>.248"</b>	76.4/ <b>3.004"</b>	0.081/ <b>.0032"</b>
<b>DP50</b>	3/ <b>.123"</b> 3.5/ <b>.140"</b> 4.7/ <b>.185"</b> 6.3/ <b>.248"</b> 76.5/ <b>3.004"</b> Above 127/ <b>5"</b>	3.5/ <b>.140"</b> 4.7/ <b>.185"</b> 6.3/ <b>.248"</b> 76.5/ <b>3.004"</b> 127/ <b>5"</b>	0.015/ <b>.0006"</b> 0.027/ <b>.0011"</b> 0.030/ <b>.0012"</b> 0.045/ <b>.0018"</b> 0.071/ <b>.0028"</b> 0.081/ <b>.0032"</b>
<b>DP20</b>	3/ <b>.123"</b> 3.5/ <b>.140"</b> 4.7/ <b>.185"</b> 6.3/ <b>.248"</b> 76.5/ <b>3.004"</b> Above 127/ <b>5"</b>	3.5/ <b>.140"</b> 4.7/ <b>.185"</b> 6.3/ <b>.248"</b> 76.5/ <b>3.004"</b> 127/ <b>5"</b>	0.009/ <b>.00035"</b> 0.013/ <b>.0005"</b> 0.015/ <b>.0006"</b> 0.023/ <b>.0009"</b> 0.071/ <b>.0028"</b> 0.081/ <b>.0032"</b>
<b>DP10</b>	All sizes to 1.75	44.45/ <b>1.750"</b> up	0.009/ <b>.00035"</b> 0.014/ <b>.00055"</b>
<b>DP5</b>	All sizes to 1.0 1.75	25.4/ <b>1.0"</b> 1.75 up	0.004/ <b>.000175"</b> 0.005/ <b>.0002"</b> 0.0076/ <b>.0003"</b>

### Ordering Information

When ordering Air Plugs please specify:

1. Nominal I.D. Size and Tolerance.
2. Dimensionair Model to be used.
3. Air Plug style (Through Hole, Blind Hole, or Counterbore).
4. Air Plug finish (Normally furnished High Chrome stainless steel, or specify chromed steel).
5. Order Master Setting Ring at same time.


Unless otherwise specified, Mahr Federal will furnish a 2-jet, Through Hole, High Chrome Air Plug for a 2500:1 Dimensionair.



Through Hole and Blind Hole Air Plugs


## Through Hole Plugs (DP50 - DP20 & 60)

### 3-3.5 mm / .123-.140"




Minimum recommended hole length: .187"

### 9.5-14.93 mm / .3735-.588"




Minimum recommended hole length: .250". With guide sleeve or stop collar: .070". May be used with AEX-1 or -2 Extensions for deep holes.

### 3.5-4.7 mm / .140-.185"

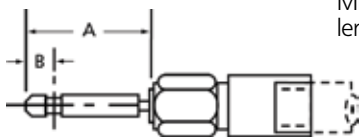


Minimum recommended hole length: .187"

### 14.93-37.7 mm / .588-1.484"




Minimum gageable hole length: .250". With guide sleeve or stop collar: .070". May be used with AHA-4 or -5 Extensions for deep holes.

### 4.7-6.3 mm / .185-.248"

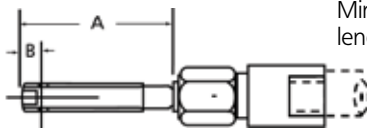


Minimum recommended hole length: .187"

### 37.7-76.3 mm / 1.484-3.004"




Minimum recommended hole length: .250". With guide sleeve or stop collar: .070". May be used with AHA-4 or -5 Extensions for deep holes.

### 6.3-9.5 mm / .248-.3735"



Minimum recommended hole length: .250"  
With guide sleeve or stop collar: .070"

### 76.3-114.3 mm / 3.004-4.50"



Minimum recommended hole length: .250".  
With guide sleeve or stop collar: .070".

## Technical Data

### Through Hole Plugs


Above	To & include	"A"	"B"	Minimum Hole Length*	Measuring Range DP50	Measuring Range DP20
mm/ <i>inch</i>	mm/ <i>inch</i>	mm/ <i>inch</i>	mm/ <i>inch</i>	mm/ <i>inch</i>	mm/ <i>inch</i>	mm/ <i>inch</i>
3 / .123"	3.5 / .140"	23.8 / .9375"	4.8/ .1875"	4.7/ .187"	0.025/ .001"	0.013/ .0005"
3.5 / .140"	4.7 / .185"	23.8 / .9375"	4.8/ .1875"	4.7/ .187"	0.038/ .0015"	0.020/ .00075"
4.7 / .185"	6.3 / .248"	38 / 1.5"	12.7/ .500"	4.7/ .187"	0.051/ .002"	0.025/ .001"
6.3 / .248"	9.5 / .3735"	38 / 1.5"	12.7/ .500"	6.4/ .250"	0.076/ .003"	0.038/ .0015"
9.5 / .3735"	14.93 / .588"	38 / 1.5"	12.7/ .500"	6.4/ .250"	0.076/ .003"	0.038/ .0015"
14.93 / .588"	37.7 / 1.484"	41.3 / 1.625"	15.9/ .625"	6.4/ .250"	0.076/ .003"	0.038/ .0015"
37.7 / 1.484"	76.3 / 3.004"	50 / 2"	19/ .750"	6.4/ .250"	0.076/ .003"	0.038/ .0015"
76.3 / 3.004"	114.3 / 4.5"	50 / 2"	19/ .750"	6.4/ .250"	0.076/ .003"	0.038/ .0015"

\* If a guide sleeve or stop collar is used, minimum hole length can be as small as 1.8 mm/.070" for holes larger than 6.3 mm/.248".

\*\* A handle 152 mm/6" long and 33.3 mm/1.31" diameter is supplied with plugs over 76.3 mm/3.004".


## Blind Hole/Counterbore Plugs (DP50 - DP20 & 60)

### 3.9-4.7 mm / .155-.185"




Minimum recommended hole length: .250".  
Note: Masters must simulate workpiece for holes of this size.

### 4.7-6.3 mm / .185-.248"

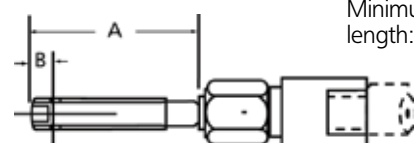


Minimum recommended hole length: .250".

### 6.3-9.48 mm / .248-.3735"




Minimum recommended hole length: .250".  
Shorter bores can be checked. Consult Mahr Federal Customer Resource Center.

### 9.48-11.8 mm / .3735-.467"




Minimum recommended hole length: .250".  
Shorter bores can be checked. Consult Mahr Federal Customer Resource Center. May be used with Extension AHA-28 for deep holes.

### 11.8-14.93 mm / .467-.588"




Minimum recommended hole length: .250".  
Shorter bores can be checked. Consult Mahr Federal Customer Resource Center. May be used with Extensions AEX-1 or -2 for deep holes.

### 14.93-37.7 mm / .588-1.484"




Minimum recommended hole length: .250".  
Shorter bores can be checked. Consult Mahr Federal Customer Resource Center. May be used with AHA-4 or -5 Extensions for deep holes.

### 37.7-76.30 mm / 1.484-3.004"



Minimum recommended hole length: .250".  
Shorter bores can be checked. Consult Mahr Federal Customer Resource Center. May be used with AHA-4 or -5 Extensions for deep holes.

### 76.3-108.114.3 mm/3.004-4.50"



Minimum gageable hole length: .250".

## Technical Data

### Blind Hole/Counterbore Plugs

Above	To & include	"A"	"B"	Minimum Hole Length*	Measuring Range DP50	Measuring Range DP20
mm/inch	mm/inch	mm/inch	mm/inch	mm/inch	mm/inch	mm/inch
3.9/ .155"	4.7/ .185"	19/ .750"	4/ .156"	6.4/ .250"	0.038/ .0015"	0.01905/ .00075"
4.7/ .185"	6.3/ .248"	29.4/ 1.156"	4/ .156"	6.4/ .250"	0.051/ .002"	0.025/ .001"
6.3/ .248"	11.8/ .467"	29.4/ 1.156"	4/ .156"	6.4/ .250"	0.076/ .003"	0.038/ .0015"
11.8/ .467"	14.93/ .588"	29.4/ 1.156"	4/ .156"	6.4/ .250"	0.076/ .003"	0.038/ .0015"
14.93/ .588"	37.7/ 1.484"	29.4/ 1.156"	4/ .156"	6.4/ .250"	0.076/ .003"	0.038/ .0015"
37.7/ 1.484"	76.3/ 3.004"	35.7/ 1.406"	4/ .156"	6.4/ .250"	0.076/ .003"	0.038/ .0015"
76.3/ 3.004"	114.3/ 4.5"	38/ 1.5"	4/ .156"	6.4/ .250"	0.076/ .003"	0.038/ .0015"

\* A handle 152 mm/ 6" long and 33.3 mm / 1.31" diameter is supplied with plugs over 76.3 mm / 3.004"

### Super Blind Plugs

Blind Hole Air Plugs can be furnished to check shorter holes than listed, and can be furnished to check closer to the bottom of a hole. Holes must be at least 2.8 mm/ .110" long, and the distance from the end of the plug to the center-line of the jets can be as short as 2.2 mm/ .085" for plugs below 6.3 mm/ .248" or 1.9 mm/ .075" for plugs above 6.3 mm/ .248".

Contact Mahr Federal Customer Resource Center with your requirements

## Air Gaging Instruments

### Accessories

#### Handles and Extensions

When an Air Plug is used with a hose, it should be equipped with a Handle to avoid excessive strain on the air connection and corrosion on the polished plug body. Handles may be combined for gaging deep holes.

Selection of a handle or extension is determined by the bore itself and whether or not it is preceded by a larger C-bored diameter. Corresponding thread sizes of the handle or extension must also be considered.

If no portion of the handle or extension enters the part, only thread sizes must be considered. If the plug does enter the part, then both O.D. and thread size must be considered.

**AHA-4 and AHA-5 Extensions** — accept AHO-1 Hose on one end and the following plug sizes on the opposite end: all 1250:1 thru 8000:1 plugs up to 76.3 mm / 3.004".

**AHA-6 Handle** — accepts AHO-1 Hose on one end and the following plug sizes on the opposite end: all 1250:1 thru 8000:1 plugs up to 76.3 mm / 3.004". Has Bakelite insulating cover. Recommended for 37.7 mm / 1.484" up to 76.3 mm / 3.004" diameters.

**2237666** — High impact and coolant resistant, light weight composite handle — normally furnished with uDimensionair and air snaps.

**AHA-66 and 2236070** — light weight aluminum handles without or with air shutoff valve.

**AHA-15 Handle** — Used and furnished with 1250:1 thru 8000:1 through or blind hole plugs over 76.3 mm / 3.004".


**AHA-23 and AHA-24 Handles** — Used with 10000:1 thru 32000:1 plugs.

**AHA-28 Handle** — Used with 2500:1 thru 8000:1 blind hole plugs in the 9.48 mm / .3735" to 11.8 mm / .467" range, using an AAD-315 Adaptor.


**AEX-1 and AEX-2 Extensions** — Used with 2500:1 thru 8000:1 through hole air plugs in the 9.5 mm / .3735" to 14.93 mm / .588" range and with 11.8 mm / .467" to 14.93 mm / .588" range blind hole plugs, using an AAD-55 Adaptor.

**2201975** — extension used with BA-100 adjustable base. Provides easily configured base for bench-mounted air tooling fixturing. See Dimetron Plugs (Chapter 9. MaraMeter).

#### Accessory Configuration for DP60/DP50/DP20 Systems — Low Magnification

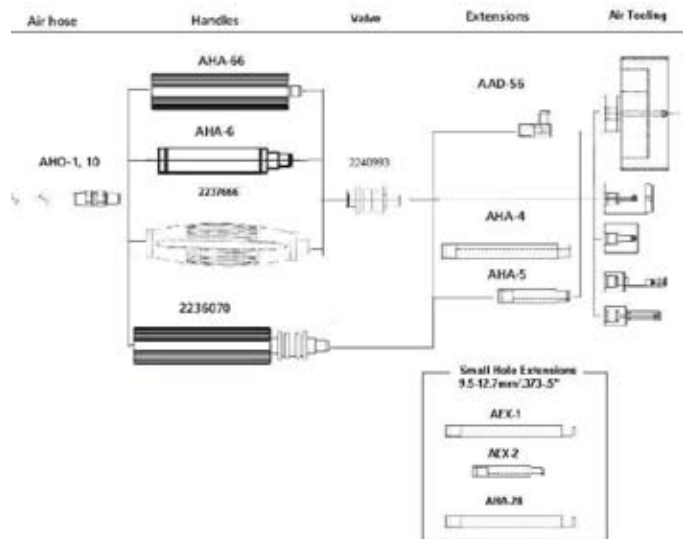

#### Accessories for High Magnification Systems — DP10/DP5

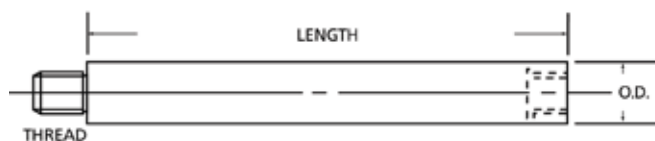


Order no.	Thread	O.D. mm/ <i>inch</i>	Length mm/ <i>inch</i>
<b>AHA-4</b>	3/8-32	12.07/ <b>.475"</b>	102/ <b>4"</b>
<b>AHA-5</b>	3/8-32	12.07/ <b>.475"</b>	51/ <b>2"</b>
<b>AHA-6</b>	3/8-32	19/ <b>.750"</b>	102/ <b>4"</b>
<b>AHA-15</b>	1-1/8-18	33.4/ <b>1.315"</b>	152/ <b>6"</b>
<b>AHA-20</b>	3/8-32	12.7/ <b>.500"</b>	144.8/ <b>5.7"</b>
<b>AHA-23</b>	9/32-40	9.14/ <b>.360"</b>	51/ <b>2"</b>
<b>AHA-24</b>	9/32-40	9.14/ <b>.360"</b>	102/ <b>4"</b>
<b>AHA-28</b>	10-32	9.14/ <b>.360"</b>	102/ <b>4"</b>
<b>AEX-1</b>	5/16-32	9.02/ <b>.355"</b>	51/ <b>2"</b>
<b>AEX-2</b>	5/16-32	9.02/ <b>.355"</b>	102/ <b>4"</b>
<b>2201975*</b>	3/8-32	9.5/ <b>.374"</b>	61.7/ <b>2.43"</b>


\* Use on BA-100

## Dimensionair® Air Rings

Air rings are supplied in several styles for external measuring. Two and three jet rings are most common, used for checking outside diameters for sizes out of round conditions from 6.3 mm / .248" to 63.5 mm / 2.500". Four and six jet rings are also available for special applications. All Air Rings have chrome-plated wear surfaces unless otherwise specified.

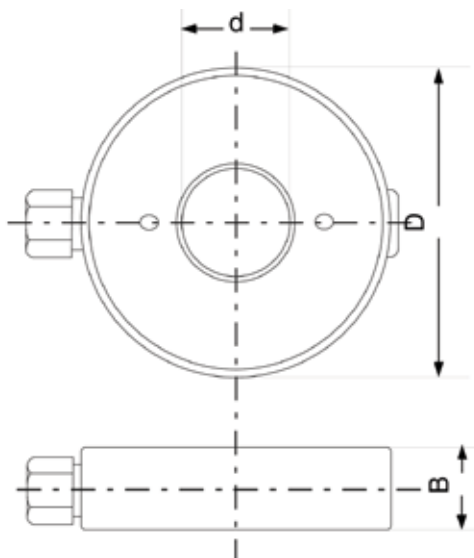


Jet air ring gage with 2 measuring jets

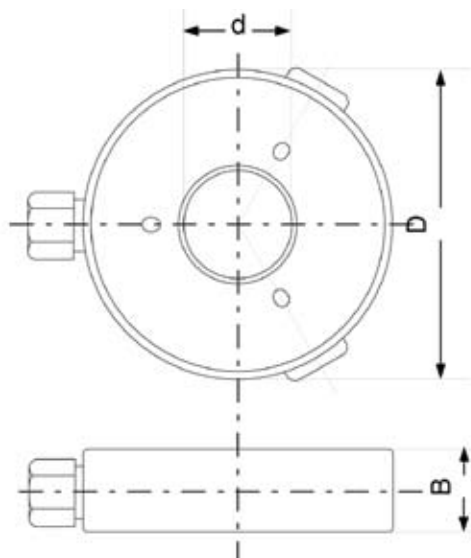


Jet air ring gage with 3 measuring jets


For applications where O.D.'s need to be checked near a shoulder, or where part length is restricted, contact Mahr Federal for technical assistance about shoulder and SnoutType Air Rings.

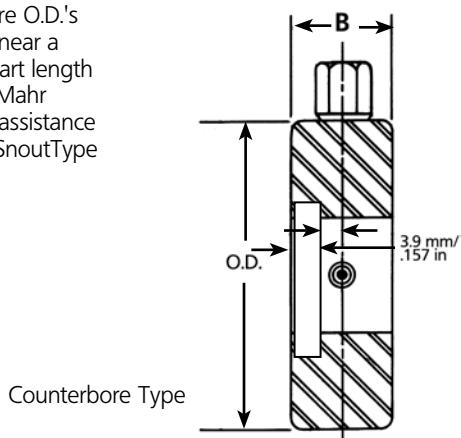

Counterbore Type



Shoulder Type  
(for 2500:1 & 4000:1  
5000:1 & 8000:1 only)

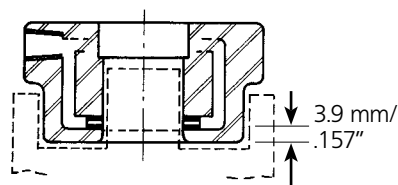

Snout Types

## Technical Data

Diameter d mm/ <i>inch</i>	Diameter D mm/ <i>inch</i>	Width B mm/ <i>inch</i>
6.3-7.6/ <b>.248-.299"</b>	76.2/ <b>3.00"</b>	25.4/ <b>1.00"</b>
7.6-9.3/ <b>.299-.366"</b>	76.2/ <b>3.00"</b>	25.4/ <b>1.00"</b>
9.3-13.0/ <b>.366-.512"</b>	76.2/ <b>3.00"</b>	25.4/ <b>1.00"</b>
13.0-21.0/ <b>.512-.827"</b>	76.2/ <b>3.00"</b>	25.4/ <b>1.00"</b>
21.0-25.4/ <b>.827-1.00"</b>	76.2/ <b>3.00"</b>	25.4/ <b>1.00"</b>
25.4-38.4/ <b>1.00-1.51"</b>	101.6/ <b>4.00"</b>	25.4/ <b>1.00"</b>
38.4-44.5/ <b>1.41-1.75"</b>	101.6/ <b>4.00"</b>	25.4/ <b>1.00"</b>
44.5-50.8/ <b>1.75-2.00"</b>	127.0/ <b>5.00"</b>	25.4/ <b>1.00"</b>
50.8-63.5/ <b>2.00-2.50"</b>	127.0/ <b>5.00"</b>	25.4/ <b>1.00"</b>
63.5-76.2/ <b>2.50-3.00"</b>	139.7/ <b>5.00"</b>	25.4/ <b>1.00"</b>

When ordering ring gages, please specify the following:

- Nominal workpiece dimensions
- Tolerance
- Desired magnification
- Instrument used
- Setting plug to be supplied?

*Air Rings may be attached directly to a Dimensionair or used on a base and connected to the gage with a plastic hose. Vee type Guide Chutes can be furnished on one or both sides if Air Rings from 6.3 mm / .248" through 44.5 mm / 1.750". Tube type guide can be furnished on sizes from 6.3 mm / .248" through 63.5 mm / 2.500".*



## Air Gaging Accessories

### Magnification Kits

Magnification Kits provide a means for checking Amplifier accuracy, traceable to the National Institute of Standards and Technology (NIST). Each Kit contains restrictors that provide pressure characteristics at zero and at both ends of the scale, a calibrated dial diagram and a Certification of Calibration.

Order No.	For use with:	Tooling
<b>AMR-SPEC-136</b>	1250:1	DP/DR100
<b>2094182</b>	1260:1	DP/DR60
<b>AMR-12</b>	2500:1/4000:1	DP/DR50
<b>AMR-13</b>	5000:1/8000:1	DP/DR20
<b>AMR-14</b>	10000:1/16000:1	DP/DR10
<b>AMR-15</b>	20000:1/32000:1	DP/DR5




AMR-12

### Manifolds

Manifolds allow connecting multiple pieces of air tooling to one Dimensionair. Toggle valves allow activation of the selected tool. Manifolds are compatible with Dimensionairs 1250:1 through 8000:1M Manifolds for use with other Dimensionairs, contact Mahr Federal Customer Resource Center — **1-800-333-4243**.

Order No.	Description
<b>AAD-82</b>	2-way Manifold
<b>AAD-83</b>	3-way Manifold
<b>AAD-84</b>	4-way Manifold
<b>AAD-85</b>	5-way Manifold

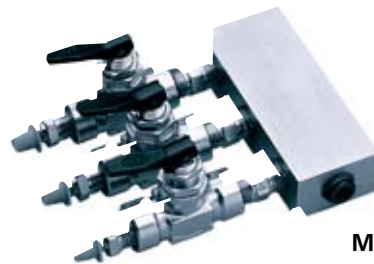

Manifold AAD-83

### Hoses

Supply hoses and hoses between Dimensionair and air tooling.

Order No.	Description	Thread
<b>AHO-2</b>	1.5 m / 5 ft Air Supply Hose. Fits all Dimensionair models. (rubber)	7/16-20
<b>AHO-1</b>	0.9 m / 3 ft Air hose for tooling for Models 1250:1 – 8000:1. (Tygon)	3/8-32
<b>AHO-8</b>	1.5 m / 5 ft Air hose for tooling on Models 1250:1 – 8000:1. (Tygon)	3/8-32
<b>AHO-10</b>	1.8 m / 6 ft Air hose for Models 1250:1 – 8000:1. (Tygon)	3/8-32
<b>AHO-20</b>	0.9 m / 3 ft Air hose for tooling on Models 10000:1 – 32000:1. (Tygon)	9/32-40
<b>ARG-1</b>	Replacement O-ring for AHO-1, -8, -10 Hoses and AHA-4, -5, -6, -20 Handles.	
<b>ARG-6</b>	Replacement O-ring for AHO-20 Hose, AHA-23 and -24 Handles.	
<b>ARG-10</b>	For AEX-1, AEX-2 and AHA-28	

### Traps and Filters

Good gaging practice requires clean, dry air for gage performance. Dimensionair Models are furnished with a particle filter. Shop air contains water and oil, which should be removed, using Model **AFL-24** Oil and Water Separator Trap.

Order No.	Description
<b>AFL-10</b>	Particle Filter (normally furnished on all Dimensionair Models). Filter size: 5 microns; Maximum pressure: 250 p.s.i.; maximum working temperature: 175°F.
<b>AFL-24</b>	Oil and Water Separator Trap, includes mounting hardware. Filtering capacity: 99.7% removal of oil and water; filter size: 3-6 microns; maximum pressure: 150 p.s.i.; flow rate: 20 cubic feet of air/minute @ 80 p.s.i.
<b>AFL-23</b>	Replacement cartridge for AFL-24.
<b>AFL-21</b>	Replacement cartridge for AFL-10.
<b>AAD-263</b>	Retrofit Kit for AFL-9



AFL-24 Trap

## YOUR STABLE PARTNER FOR MANUFACTURING. **MARSTAND.**



The latest information on MARSTAND products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 210**

► | MarStand Indicator Stands, Comparator Stands and Run out Testing Instruments offer high stability which ensures precise measurements. Whether you are using a dial indicator, a dial comparator, a test indicator or a measuring probe you will always have the best possible support. ◀

## ► | MarStand. Indicator Stands, Comparator Stands, Run out Testing Instruments

### Indicator Stands

#### MarStand 815 GN

8- 2

With Cast Iron Base

#### MarStand 2400

8- 2

For Electronic Measurements

#### MarStand 815 MA / 815 MB / 815MG / 815 P

8- 3

With Magnetic Base

### Post & Support Arm Assemblies

#### MarStand 815 XN / 815 XMA / 815 XMB / 815 XMS / 815 XMG / 815 XP

8- 5

With Mounting Thread and / or T-slot

### Magnetic Bases

#### MarStand 815 Y / 815 YP

8- 5

### Center Bench

#### MarStand 818

8- 6

With moveable Tail Stocks and Support Arms

### Comparator Stands

#### MarStand 820 N / 820 NC / 820 FC / 820 NG / 820 FG 35 B / NB-60

8- 8

Small Version

#### MarStand 821 NG / 821 FG

8-12

Large Version

#### MarStand 824 NT / 824 FT / 824 GT

8-13


Hexysion

### Modular Units

#### MarStand 827 b

8-14

## Indicator Stand 815 GN

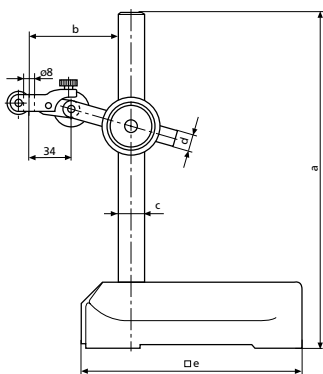

### Features

- Rugged base ensures both maximum stability and sturdiness
- The upper side of the base has a convenient hand grip
- Moves easily over surfaces without vibration
- Front of the base is ground to allow movement of the stand along edges and rules
- Stable due to the three point support
- Support arm can be fine adjusted
- Post and support arm are made from stainless steel
- Indicator can be rotated through  $\pm 90^\circ$

### Technical Data

Total height with base a mm / inch	Max. projection of support arm b mm	Post dia. c mm      d mm		Base surface e mm	Fine adjustment range mm	Weight kg	Order no.* Mount dia. 8H7	Order no.* Mount dia. 3/8 inch
300 / <b>12"</b>	185	18	14	150 x 150	2	4.2	<b>4413000</b>	<b>4413050</b>
500 / <b>20"</b>	200	25	18	190 x 180	2	9	<b>4413001</b>	<b>4413051</b>
750 / <b>30"</b>	230	35	25	190 x 180	2	10	<b>4413005</b>	<b>4413052</b>

\* excludes indicating instrument

## Indicator Stand 2400




### Features

- A stable Height Stand for electronic measurement,
- Fine adjustment in the base allows easy operator set-up, even at high magnification. Up to 3.8 mm / .150" adjustment when arms fully extended.
- Collar has Teflon bearings and metal-to-metal clamping.
- Post is thermally isolated from heat transfer from the base.
- Arm lock is independent of the pivot lock.
- Uses vertical lug mounting
- EHE-2056 Lever gage head mounts directly to arm (as shown) EHE-2048 Lever gage head requires an EAM-1071 adaptor
- CP-83 Extra arm and swivel clamp assembly (allows mounting two lever gage heads on one stand)

### Technical Data

Total height with base mm / inch	Arm reach mm / inch	Post dia. force mm / inch	Base surface mm / inch	Fine adjustment range mm / inch	Order no.*
530 / <b>20.8"</b>	254 / <b>10"</b>	38.1 / <b>1.25"</b>	161.7 x 94 / <b>6.2 x 3.7"</b>	3.8 / <b>1.5"</b>	<b>2400</b>

\* excludes indicating instrument

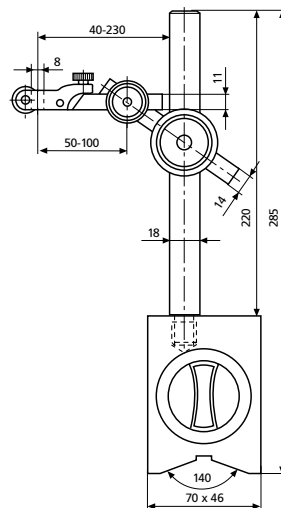
**Indicator Stand 815 MA** with magnetic base**Features**

- Support arm with two joints
- Base has a powerful ON/OFF permanent magnet
- Magnetic force is active across the surfaces and the V-shaped bottom plus the front of the base
- Post and support arm are made from stainless steel
- Support arm can be fine adjusted

**Technical Data**

Total height with base mm / inch	V-way for shaft dia. mm	Magnetic force N	Fine adjustment range mm	Weight kg	Order no.* Mount dia. 8H7	Order no.* Mount dia. 3/8 inch	Order no. wooden case
285 / 11.2"	20 - 100	450	2	2.5	4416000	4416050	4416001

\* excludes indicating instrument

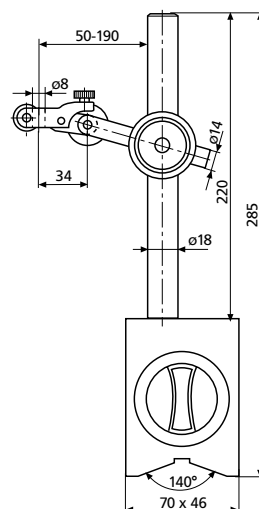**Indicator Stand 815 MB** with magnetic base**Features**


- Support arm with one joint
- Base has a powerful ON/OFF permanent magnet
- Magnetic force is active across the surfaces and the V-shaped bottom plus the front of the base
- Post and support arm are made from stainless steel
- Support arm can be fine adjusted
- Indicating instrument can be rotated through  $\pm 90^\circ$

**Technical Data**

Total height with base mm / inch	V-way for shaft dia. mm	Magnetic force N	Fine adjustment range mm	Weight kg	Order no.* Mount dia. 8H7	Order no.* Mount dia. 3/8 inch	Order no. wooden case
285 / 11.2"	20 - 100	450	2	2.2	4417000	4417050	4416001

\* excludes indicating instrument

## Indicator Stand 815 MG with flexible stem

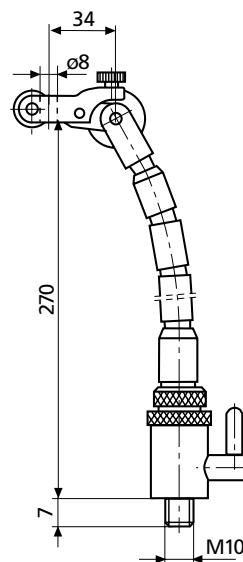

### Features


- Flexible in any direction, arm can be locked in position
- The sleeves and grounded steel balls of the stem are compressed with a strong steel cable
- Clamping force is adjustable
- Base has a powerful ON/OFF permanent magnet
- Magnetic force is active across the surfaces and the V-shaped bottom plus the front of the base
- Support arm can be fine adjusted
- Indicating instrument can be rotated through  $\pm 90^\circ$

### Technical Data

Total height with base mm / inch	V-way for shaft dia. mm	Magnetic force N	Fine adjustment range mm	Weight kg	Order no.* Mount dia. 8H7	Order no.* Mount dia. 3/8 inch	Order no. wooden case
350 / 14"	20 - 100	450	1.5	1.9	4420000	4420001	4416001

\* excludes indicating instrument

## Indicator Stand 815 P with magnetic base

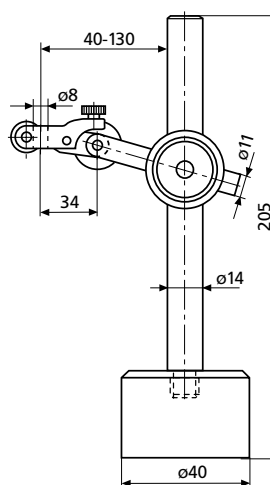

### Features

- Support arm has one joint
- Sturdy circular base with permanent magnet
- Post and support arm are made from stainless steel
- Support arm can be fine adjusted
- Indicating instrument can be rotated through  $\pm 90^\circ$

### Technical Data

Total height with base mm / inch	Magnetic force N	Fine adjustment range mm	Weight kg	Order no.* Mount dia. 8H7	Order no.* Mount dia. 3/8 inch
205 / 8"	250	1.5	0.7	4422000	4422050

\* excludes indicating instrument



## Post and Support Arm Assemblies 815 X


For application in inspection equipment for conducting length and concentricity (run-out) tests

### 815 XN

for mounting in a T-slot

- Two joints
- Knurled nut for clamping to the post
- Post and support arm are made from stainless steel
- With fine adjustment

**Order no. 4424000**

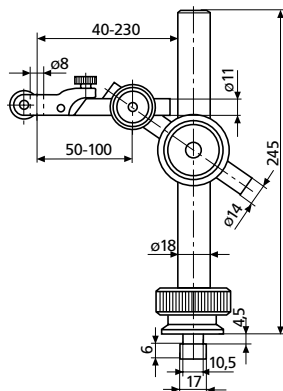


### 815 XMA

with mounting thread

- Two joints
- Post and support arm are made from stainless steel
- With fine adjustment

**Order no. 4424005**




### 815 XMB

with mounting thread

- One joint
- Post and support arm are made from stainless steel
- With fine adjustment

**Order no. 4424006**

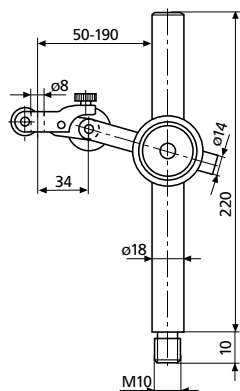

### 815 XMS

especially stable version with mounting thread

- One joint
- Post and support arm are made from stainless steel
- With fine adjustment

**Post height Order no.**

285 mm  
485 mm


**4435011  
4435015**

### 815 XMG

with mounting thread

- Flexible in any direction, arm can be locked in position
- With fine adjustment

**Order no. 4424010**

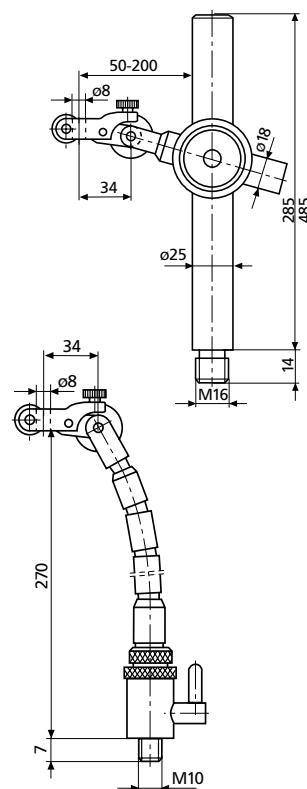


### 815 XP

with mounting thread

- One joint
- Post and support arm are made from stainless steel
- With fine adjustment

**Order no. 4424015**

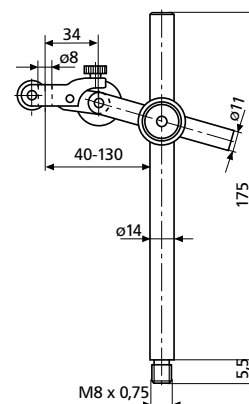


## Magnetic Bases 815 Y

For the setting up of inspection equipment or as a base for adjusting devices on machine tools.

### 815 YM Standard Version

- Base has a powerful ON/OFF permanent magnet
- With threaded mounting hole
- V-groove in base
- Front is flat
- Magnetic force 450 N


**Order no. 4425000**



### 815 YP Round Version

- Permanent magnet plus threaded mounting hole
- Underside of the base is flat
- Magnetic force 250 N

**Order no. 4425002**



## Center Bench 818



### Features

- Ideal for quick and accurate concentricity / run-out checks

#### Bench:

- Flatness of the surface is in accordance to DIN 876/1
- Two T-slots for Tailstock and / or Support Arm

#### Tailstock:

- Both Tailstocks can be relocated (slide into position)
- The Tailstock on the right side has a retractable (spring actuated) precision aligned center
- The Tailstocks have a peak height of 75 mm with a 90° prism for workpieces without a center, to a diameter of 20 mm (0.79")

#### Support Arm 815 XNB:

- Support arm with one joint
- with fine adjustment

### Technical Data

Height of centers mm (inch)	Distance between centers mm (inch)	Base size (L x W) mm	Lateral and/or height difference of Tailstocks mm	T-slot width mm	Weight kg	Order no.*
50 (2")	0 - 200 (0-8")	350 x 110	0.01	10H7	8	4622200
75 (3")	0 - 350 (0-14")	500 x 110	0.01	10H7	12	4622201
100 (4")	0 - 450 (0-18")	700 x 180	0.01	12H7	35	4622202
150 (6")	0 - 450 (0-18")	700 x 180	0.01	12H7	38	4622203

\* excludes indicating instrument

### Center Bench 818 with V-support

V-support height mm	Base size (L x W) mm	T-slot width mm	Weight kg	Order no.
70	350 x 110	10H7	6.5	4622260
70	500 x 110	10H7	9.5	4622261
120	700 x 180	12H7	30	4622262

### Center Bench 818 with Roller support


Roller support height mm	Base size (L x W) mm	T-slot width mm	Weight kg	Order no.
70	350 x 110	10H7	6.5	4622250
70	500 x 110	10H7	9.5	4622251
120	700 x 180	12H7	30	4622252

**Modular Units 818** for individual center benches**Accessories****818 pe V-support anvils** in pairs

Center height mm	Dia. range mm	Order no.
50 / 75	3 - 15	<b>4622210</b>
100	8 - 45	<b>4622211</b>

**818 pe****818 ab****818 pb V-support** in pairs

Height mm	Dia. range mm	T-slot width mm	Order no.
70	5 - 20	10	<b>4622215</b>
120	5 - 45	12	<b>4622216</b>

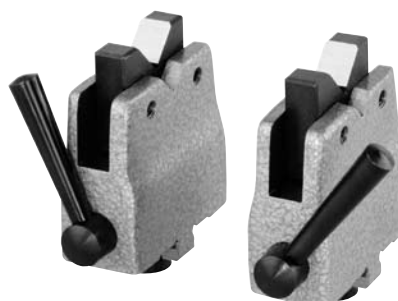**818 pb****818 ab Roller support** in pairs

Height mm	Dia. range mm	T-slot width mm	Order no.
70	3 - 20	10	<b>4622220</b>
120	3 - 45	12	<b>4622221</b>

**Supporting table**

Center height mm	Base size (L x W) mm	Order no.
50	350 x 110	<b>4622265</b>
75	500 x 110	<b>4622266</b>
100 / 150	700 x 180	<b>4622267</b>

**Pointed support** in pairs

Center height mm	Order no.
50	<b>4622270</b>
75	<b>4622271</b>
100	<b>4622272</b>
150	<b>4622273</b>

**Support arm 818 XNB**

Center height mm	Support Arm Dia. mm	Length mm	Order no.
50 / 75	18	210	<b>4622275</b>
100	18	260	<b>4622276</b>
150	18	360	<b>4622277</b>



## Small Comparator Stands 820

### 820 N



### Features

- Sturdy design
- Plate is made from either hardened steel or black granite or ceramic
- Rugged ground post made of stainless steel
- Fine adjustment, consisting of a strong, rigid parallel spring assembly (Small Comparator Stands 820 FG and 820 FC)
- Adjustable support arm of a indicating instrument

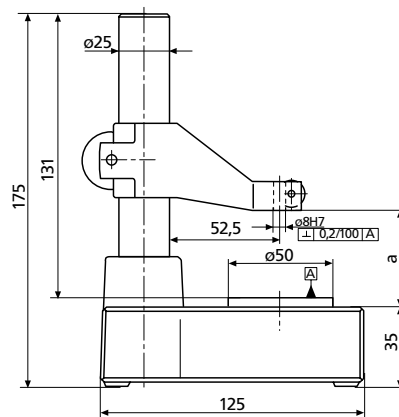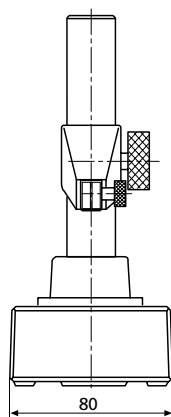

820 N

### Technical Data

	Working range a		Flatness tolerance (DIN 876)	Fine adjustment range	Weight	Order no.* Mount dia. 8H7	Order no.* Mount dia. 3/8 inch	Remarks
	mm	(inch)	mm		kg			
820 N	0 - 110	(0 - 4.3")	steel	00	2.6	4430000	4430018	
820 NG	0 - 130	(0 - 5.1")	granite	0	3.2	4430100	4430110	
820 FG	0 - 130	(0 - 5.1")	granite	± 0.2	3.2	4431100	4431110	fine adjustment
820 NC	0 - 110	(0 - 4.3")	ceramic	00	4.0	4432100	4432120	
820 FC	0 - 110	(0 - 4.3")	ceramic	± 0.2	4.0	4433100	4433110	fine adjustment

\* excludes indicating instrument

## Small Comparator Stands 820


820 FC




820 FG



820 FC

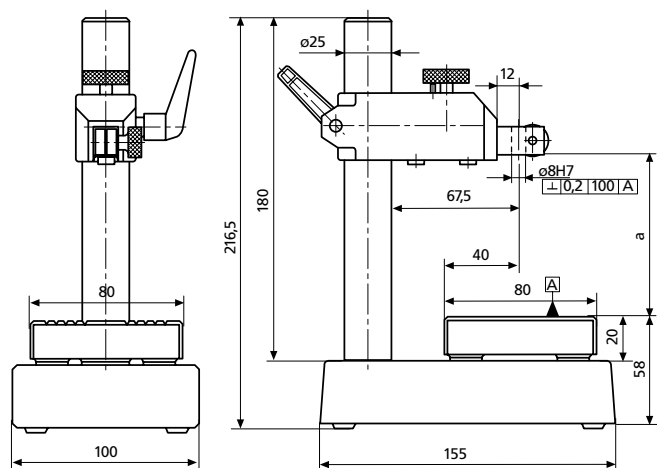

820 FG

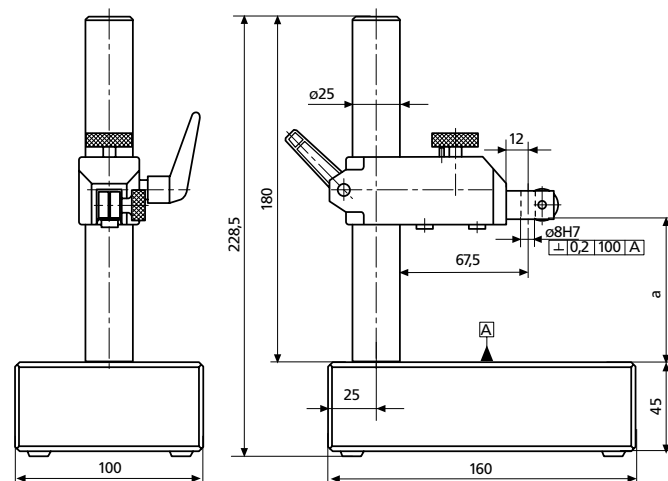

### Accessories

V-Block 108° for checking small, cylindrical work pieces for out of roundness and polygon errors (for further details please refer to Page 12-8)

107 V

(Single)  
(Pair)

Order no.

4229000  
4229001

## Comparator Stands 35 B



### Features

- Model 35B has a precision ground base. Indicator arms with and without fine adjustment are available. Models are also available with lapped anvils for the highest precision work.
- Alternate post lengths, Indicators, Anvils and special fixturing available upon request. Contact Mahr Federal Technical Assistance

*Excludes indicating instrument. Only indicating instruments that have a horizontal lug back can be used.*

### Technical Data

Capacity	Post Diameter	Throat Depth	Reference Surface	Gaging Arm	Anvil	Order no. (w/o indicator)
<b>0 - 8.75"</b> 0 - 222 mm	<b>1.25"</b> 31.75 mm	<b>2.5"</b> 62.5 mm	<b>1 x 3"</b> 25 x 75 mm	adjustable AM-146 plain AM-3 adjustable AM-146 adjustable AM-146	plain none none serrated	<b>OMI-35B-21</b> <b>OMI-35B-30</b> <b>OMI-35B-32</b> <b>OMI-35B-41</b>

### Accessories

#### Replacement Anvils

- Anvils for Comparator Stands 35B-21 and 35B-41 are available: Surface is lapped flat to within .00001"

Type	Dimensions	Order no.
plain surface	25 x 25 x 75 mm <b>(1 x 1 x 3")</b>	<b>AL-96</b>
serrated surface	25 x 25 x 75 mm <b>(1 x 1 x 3")</b>	<b>AL-97</b>

#### Fine Adjustment Arm

- The Fine Adjust Arm is available separately to convert 35B Comparator Stands with plain arms

Range	Order no.
1.5 mm / <b>0.060"</b>	<b>AM-146</b>

**Readout Specification:** Because of the versatility of the Series 35B and NB-60 Stands, almost any type of readout can be used.

- With Dial or Digital Indicators having a horizontal lug back



## Comparator Stand NB-60



### Features

- Model NB-60 and NB-61 have the largest base and greatest throat depth. Indicator arms with and without fine adjust are available. Base has a pattern of 1/4-20 tapped holes for mounting platens or special tooling

*Excludes indicating instrument. Only indicating instruments that have a horizontal lug back can be used.*

### Technical Data

Capacity	Post Diameter	Throat Depth	Reference Surface	Gaging Arm	Anvil	Order no. (w/o indicator)
0 - 8"	1.25"	4.88"	9.38 x 6.5"	plain AM-10011	none	<b>OMI-NB-60</b>
0 - 203 mm	31.75 mm	124 mm	238 x 165 mm	adjustable AM-147	none	<b>OMI-NB-61</b>

### Accessories

#### Platens

Type	Dimensions	Order no.
serrated	114 x 152 mm (4.5 x 6")	<b>PL-99</b>
serrated	152 x 203 mm (6 x 8")	<b>PL-147</b>

*Note: (4) screws SW-1338 are required*

#### Fine Adjustment Arm

- The Fine Adjust Arm is available separately to convert NB-60 Comparator Stands with plain arms

Range	Order no.
1.5 mm / 0.060"	<b>AM-147</b>


**Readout Specification:** Because of the versatility of the Series 35B and NB-60 Stands, almost any type of readout can be used.

- With Air Probes or Electronic Probes having a 3/8 in dia., order Mounting Adapter **AAD-66**

## Large Comparator Stands 821

### Features

- Extremely sturdy design
- Plate is made from lapped black granite
- Heavy duty post and adjustable support arm for maximum stability
- Post made from stainless steel and precision ground
- Support arm has a fall brake
- Fine adjustment, consisting of a strong, rigid parallel spring assembly (Large Comparator Stand 821FG)

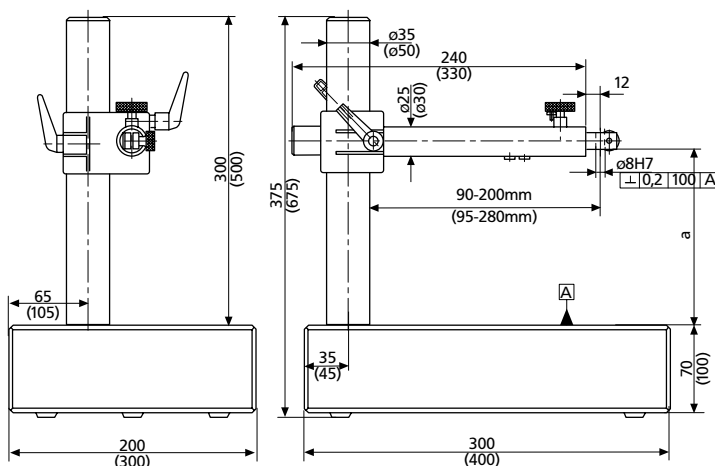

821 FG

### Technical Data

	Working range a		Flatness tolerance (DIN 876) Grade	Fine adjustment range	Weight	Order no.* Mount dia. 8H7	Order no.* Mount dia. 3/8 inch	Remarks
	mm	(inch)		mm	kg			
<b>821 NG</b>	0 - 250	(0 - 10")	0	-	15.8	<b>4435100</b>	<b>4435150</b>	
	0 - 430	(0 - 17")	0	-	48	<b>4435110</b>	<b>4435160</b>	
<b>821 FG</b>	0 - 250	(0 - 10")	0	± 0.2	15.8	<b>4435101</b>	<b>4435151</b>	Fine adjustment
	0 - 430	(0 - 17")	0	± 0.2	48	<b>4435111</b>	<b>4435161</b>	Fine adjustment

\* excludes indicating instrument

### Accessories

V-Block 108° for checking small, cylindrical work pieces for out of roundness and polygon errors (for further details please refer to Page 12-8)

#### Order no.

<b>107 V</b>	(Single) (Pair)	<b>4229000</b> <b>4229001</b>
--------------	--------------------	----------------------------------

## Heavy Comparator Stands 824



**Precision Stand 824 NT**

Without fine adjustment



**Precision Stand 824 FT**

With fine adjustment, consisting of a strong, rigid parallel spring assembly



**Precision Stand 824 GT**

For Large Type Millimess. With fine adjustment by way of vertical movement of the mounting socket

### Features

#### Basic Units

- Sturdy, T-shaped base which is made from a special cast iron
- Extremely stable
- Fine adjustment, consisting of a strong, rigid parallel spring assembly
- Support arm has a rotation lock, height of the arm via the toothed rack is adjustable

#### Plates

- Measuring faces are hardened and lapped
- Longitudinal grooves
- Plates for sum measurements have a 8H7 mm mounting hole for Inductive Probes

## Technical Data

### Basic Unit

	Working range mm (inch)	Fine adjustment range mm	Weight kg	Order no.* Mount dia. 8H7	Order no.* Mount dia. 28H7	Order no.* Mount dia. 3/8 inch
<b>824 NT</b>	0 - 210 (0 - 8.2")	-	17	<b>4442100</b>		<b>4442105</b>
<b>824 FT</b>	0 - 210 (0 - 8.2")	± 0.2	19	<b>4443100</b>		<b>4443105</b>
<b>824 GT</b>	0 - 200 (0 - 8.0")	± 1.5	18		<b>4444200</b>	

\* excludes indicating instrument,  
excludes plate

### Plates

	Plate size mm	Flatness tolerance μm	Mounting hole mm	Weight kg	Order no.	Remarks
<b>827 b 31</b>	100 x 40	1		1.2	<b>4082731</b>	for single measurement
<b>827 b 32</b>	100 x 40	1	8H7	1.0	<b>4082732</b>	for sum measurement
<b>827 b 33</b>	130 x 130	1		2.5	<b>4082733</b>	for single measurement
<b>827 b 34</b>	130 x 130	1	8H7	2.5	<b>4082734</b>	for sum measurement

## Accessories

V-Block 108° for checking small, cylindrical work pieces for out of roundness and polygon errors (for further details please refer to Page 12-8)

### Order no.


<b>107 V</b>	(Single) (Pair)	<b>4229000</b> <b>4229001</b>
--------------	--------------------	----------------------------------

## Modular Units 827 for individual comparator stands

For the combination of comparator stands for special tasks, to adapt existing stands as well as the incorporation into inspection equipment for all types of length measurements.

### Base with Post

#### 827 b 5




- T-shaped base which is made from a special cast iron
- Post has a chrome finish

Order no. 4082705

### Support Arms


#### 827 b 16

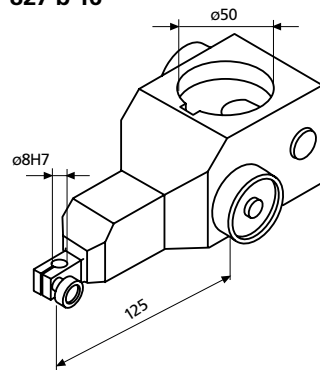

- Mounting hole 8 mm
- Without fine adjustment

Order no. 4082716


#### 827 b 17

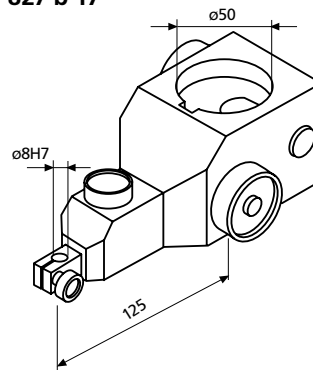

- Mounting hole 8 mm
- Fine adjustment, consisting of a strong, rigid parallel spring assembly

Order no. 4082717


#### 827 b 18



- Mounting hole 28 mm
- With fine adjustment

Order no. 4082718

#### 827 b 19

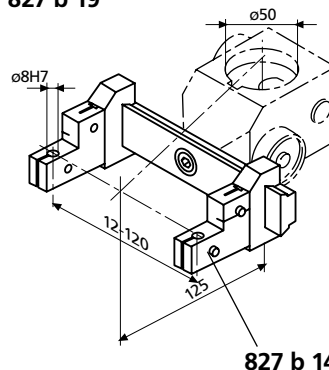

- Support arm with dovetail guide

Order no. 4082719


- With probe holder, mounting hole 8 mm

Order no. 4082714

## Modular Units 827 for individual comparator stands

### Plates


#### 827 b 31



- For single measurement
- Hardened and lapped
- Reversible
- Measuring surface has longitudinal grooves
- Flatness deviation 1  $\mu\text{m}$

Order no. 4082731


#### 827 b 32



- For sum measurement
- Measuring surface has longitudinal grooves, hardened and lapped
- With mounting hole 8H7 mm/.375" and a clamp for inductive probes
- Flatness deviation 1  $\mu\text{m}$

Order no. 8 mm 4082732  
Order no. .375" 9100238


#### 827 b 33



- For single measurement
- Large measuring surfaces which have longitudinal grooves, hardened and lapped
- Flatness deviation 1  $\mu\text{m}$

Order no. 4082733

#### 827 b 34




- For sum measurement
- Large measuring surfaces which have longitudinal grooves, hardened and lapped
- With mounting hole 8H7 mm/.375" and a clamp for inductive probes
- Flatness deviation 1  $\mu\text{m}$

Order no. 8 mm 4082734  
Order no. .375" 9100239

### Adjustable Stop

#### 827 b 35




- Ensures that a work piece is correctly positioned
- To be attached to plates 827 b 31 and 827 b 32

Order no. 4082735

### Attachment Stand

#### 827 b 36



- With adjustment screws for parallel alignment of 2 plan surfaces
- Particularly suitable for mounting Pin Gages 426 M
- To be attached to plates 827 b 31 and 827 b 32

Order no. 4082736

# THE BENCHMARK OF INDICATING MEASURING INSTRUMENTS. **MARAMETER.**



The latest information on MARAMETER products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 211**

► | Marameter is the ideal measuring instrument for highly precise measurements of internal and external diameters on either an individual part or on serial components. Our indicating measuring instruments obtain the best results due to their constant measuring force, their exact transmission lever system as well as their high parallelism on the measuring faces. For special measuring tasks such as threads, teeth, grooves or precision mechanical parts Marameter offers the right solution. I ◀



## ► | MaraMeter. Indicating Measuring Instruments

### Indicating Measuring Instruments for Outside Dimensions, Indicating Snap Gages

**MaraMeter 1000 P / 300 P / 840 F / 840 FC / 840 FH /  
840 FG / 840 FM / 840 FS**

**9- 2**

With fixed or interchangeable measuring faces

**MaraMeter 840 E**

**9-17**

For extremely high precision

**MaraMeter 852 / 852 TS / 853**

**9-18**

For threads, pitches, roots, serrations

### Portable Thickness Gages

**MaraMeter 22 P / 26 P / 838 A / 838 B / 838 AB / 57 B**

**9-24**

With digital and/or analog display

### Caliper Gages

**MaraMeter 49 P / 838 TA / 838 EA / 838 TI / 838 EI**

**9-31**

With digital and/or analog display

### Depth Gages

**MaraMeter 65 P-40 / 75 P-30 / 837 / 75 P-30 / 75 B-1**

**9-37**

### Indicating Measuring Instruments for Inside Dimensions,

**Dimentron® Plug Inside Diameter Gages**

**9-41**

Designed for high production I.D. gaging

**MaraMeter 844 D**

**9-45**

Indicating Plug Gage for rapid testing of serial components

**MaraMeter 844 K**

**9-52**

Self-centering Dial Bore Gage

**Marameter 1280 P Adjustable Bore Gages**

**9-57**

Superior accuracy for production and inspection

**MaraMeter 844 N**

**9-60**

Self-centering Dial Bore Gage

**MaraMeter 844 Z**

**9-64**


Dial Bore Gage for internal serrations

## MaraMeter. Indicating Snap Gages


### Overview

► | **MaraMeter.** The Indicating Snap Gage is ideal for highly accurate and reliable results on cylindrical work pieces with a narrow tolerance. | ◀

#### MaraMeter 840 F

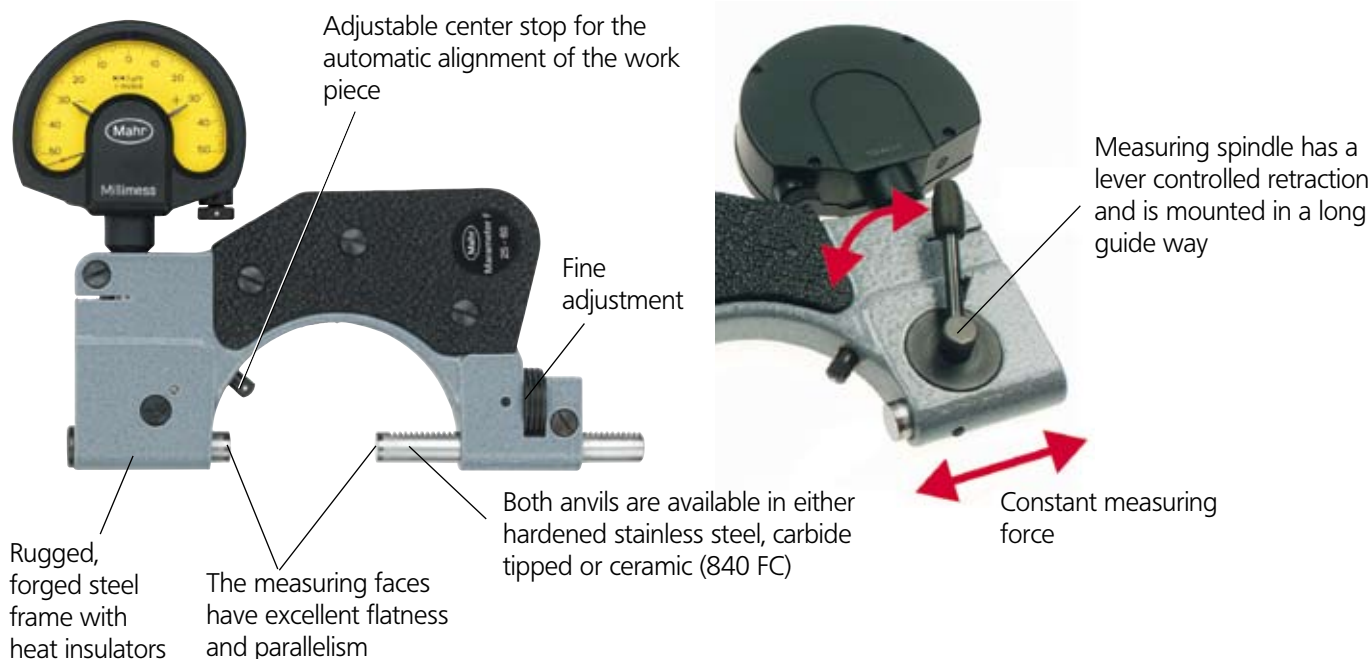


#### MaraMeter 300 P-1

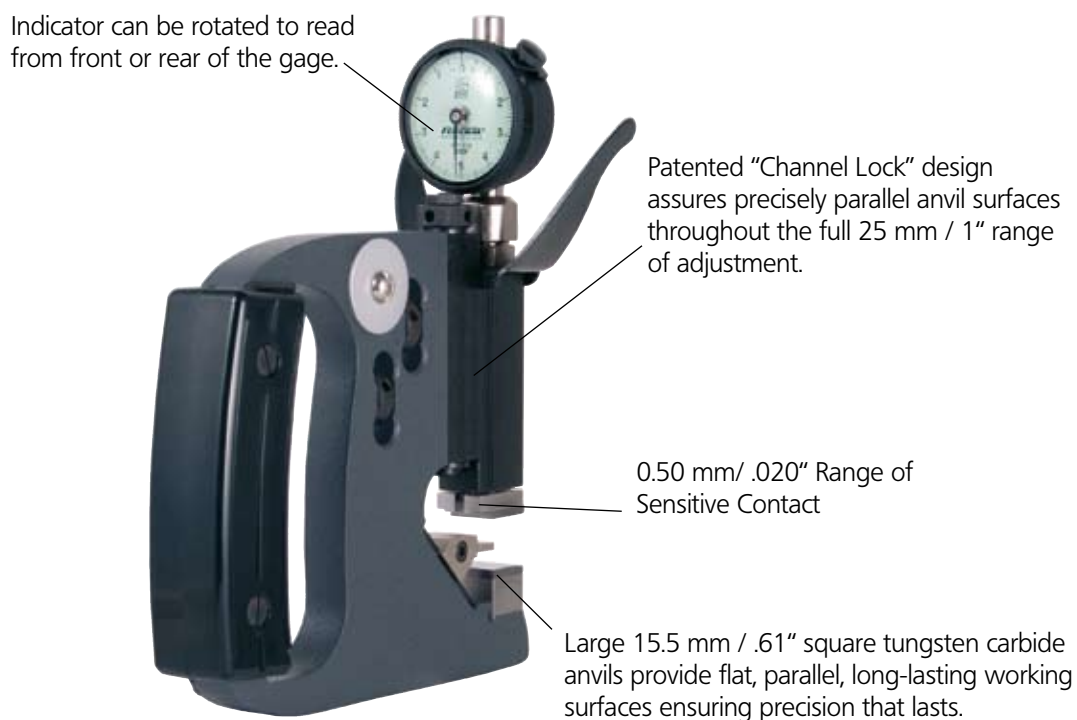

## Advantages of the Snap Gage compared to a Micrometer

### • Reduced Measuring Uncertainty

The MaraMeter Indicating Snap Gages have a notably reduced measuring uncertainty in comparison to a Micrometer.

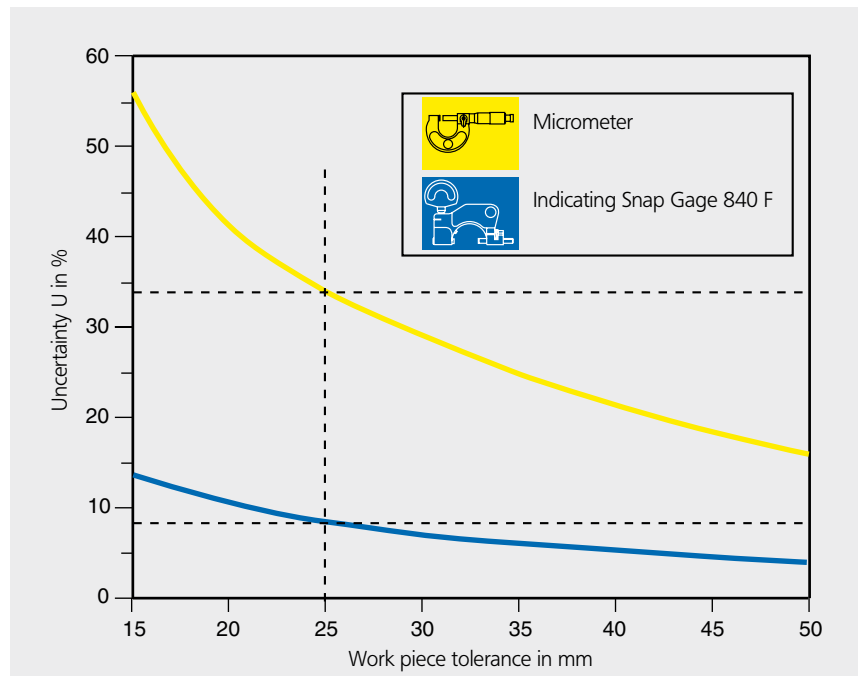


Measuring Uncertainty U is dependent upon the tolerance of the work piece

### • Better utilization of the tolerance zone

Example:  
Work piece tolerance  $25 \mu\text{m}$

The measured value in the uncertainty range can lie outside of the tolerance range, therefore the utilized tolerance of the micrometer is reduced to only 32% ( $8 \mu\text{m}$ ).

With a MaraMeter Indicating Snap Gage 83% ( $20.8 \mu\text{m}$ ) of the work piece tolerance can be utilized.

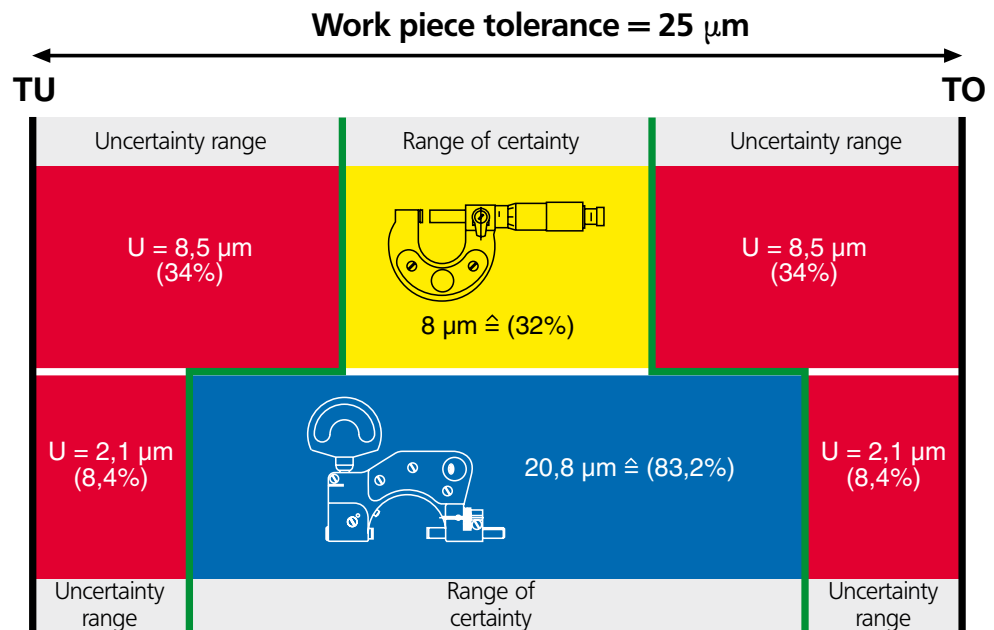

### Advantage:

With the Indicating Snap Gage the tolerance zone can be used to far greater extent, thus reducing the production costs.

## Snap Gages for Outside Diameters 1000P



The economical way to check outside diameters on the shop floor.

### Features

- Flat lower anvil (reference) adjustable over a broad range.
- Radiused upper anvil (sensitive) spring-loaded to counter balance the weight of the gage.
- 0.01 mm grads. on Metric Models. .0005" grads. on Inch Models.
- 0.50 mm / .020" Range of Sensitive Contact.
- Indicator can be rotated to read from front or rear of the gage.
- Anvils are tungsten carbide for long life.

### 1000P-3

0.01 mm or .0005" Dial Indicator normally furnished

### Technical Data

Capacity		Reference Anvil Diameter mm / <i>inch</i>	Order no. Metric	Order no. Inch
mm	( <i>inch</i> )			
0 - 25	(0 - 1")	13 / .50"	1000P-1M*	1000P-1*
19 - 50	(.75 - 2")	13 / .50"	1000P-2M*	1000P-2*
44 - 82	(1.75 - 3.25")	13 / .50"	1000P-3M	1000P-3
76 - 114	(3 - 4.5")	16 / .625"	1000P-4M	1000P-4
102 - 152	(4 - 6")	16 / .625"	1000P-5M	1000P-5
152 - 203	(6 - 8")	19 / .75"	1000P-6M	1000P-6
203 - 254	(8 - 10")	19 / .75"	1000P-7M	1000P-7

Series 1000P gages with greater capacity, alternate Indicators, alternate contact configurations, or other modification to suit specific applications are available – contact Mahr Federal.

\* Insulated grip not available.

## Snap Gages for Outside Diameters 300P

Superior precision for  
O.D. checks



**EDI-301P-1**  
BA-26 Bench Stand (not included)

### Features

- Patented "Channel Lock" design assures precisely parallel anvil surfaces throughout the full 25 mm / 1" range of adjustment.
- All Series 300P Snap Gages are fully adjustable with positive position locking at any point within the range.
- 0.50 mm / .020" Range of Sensitive Contact.
- Snap Gages available over a wide range of sizes, styles, and readout configurations.
- Large 15.5 mm / .61" square tungsten carbide anvils provide flat, parallel, long lasting working surfaces ensuring precision that lasts.
- Indicator can be rotated to read from front or rear of the gage.
- Optional lift-lever model (301P) available for retracting the upper anvil.
- All adjustments accomplished using a single hex wrench (furnished).

### Technical Data

Style	Normally Furnished Indicating Instruments Readings	Snap Style	Separately, Order no.
12I/22I	.0001"	Flat Anvil	<b>IDT-102/IDT-106</b>
O1I/P1I	0.002 mm	Flat Anvil	<b>IDS-206/IDS-208</b>
Maxum® III (1)	selectable (3)	Flat Anvil	<b>2033109</b>
Maxum® III (2)	selectable (3)	Flat Anvil	<b>2033119</b>
EDI-10102	0.001 mm / .00005"	Flat Anvil	<b>EDI-10102</b>
B5M/C5M	.0005"	Groove Anvil	<b>IDS-101/IDS-105</b>
O6I/P6I	0.010 mm	Groove Anvil	<b>IDS-207/IDS-209</b>
Maxum® III (1)	selectable (3)	Groove Anvil	<b>2033109</b>
Maxum® III (2)	selectable (3)	Groove Anvil	<b>2033119</b>
with Air Probe for 2500:1		All	*
with Electronic Gage Heads		All	*



**A300P-2**

\* Call Mahr Federal.

(1) With no Data Output


(2) With Data Output (6 pin)

(3) Selectable Readings — 0.001 mm / 0.005 mm / 0.0005 mm / .0001" / .0005" / .00002"



## Snap Gages for Outside Diameters 300P

### Technical Data

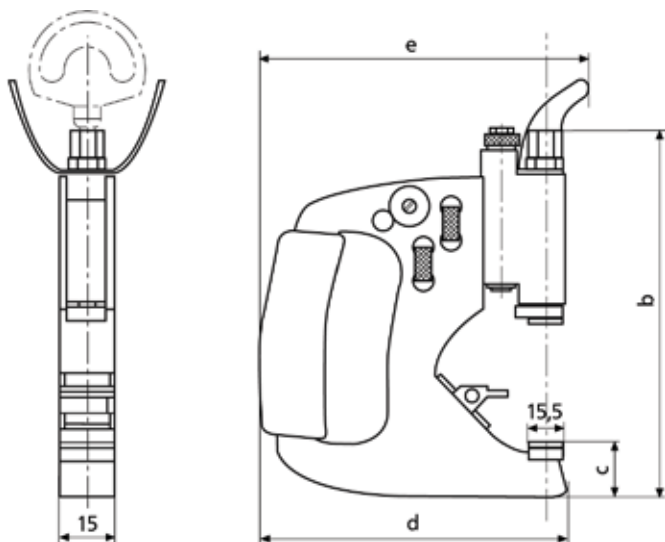

### Dimensions

Meas. range mm / <i>inch</i>	b	c	d	e
0-25 / <b>0-1"</b>	150/ <b>6"</b>	29/ <b>1.16"</b>	145/ <b>5.8"</b>	158/ <b>6.3"</b>
25-50 / <b>1-2"</b>	175/ <b>7"</b>	29/ <b>1.16"</b>	141/ <b>5.6"</b>	154/ <b>6.16"</b>
50-76 / <b>2-3"</b>	200/ <b>8"</b>	29/ <b>1.16"</b>	155/ <b>6.2"</b>	167/ <b>6.7"</b>
76-100 / <b>3-4"</b>	226/ <b>9"</b>	29/ <b>1.16"</b>	167/ <b>6.7"</b>	180/ <b>7.2"</b>
100-127 / <b>4-5"</b>	251/ <b>10"</b>	29/ <b>1.16"</b>	180/ <b>7.2"</b>	193/ <b>7.7"</b>
127-152 / <b>5-6"</b>	278/ <b>11"</b>	30/ <b>1.2"</b>	203/ <b>8"</b>	215/ <b>8.6"</b>
152-178 / <b>6-7"</b>	303/ <b>12"</b>	30/ <b>1.2"</b>	213/ <b>8.5"</b>	226/ <b>9"</b>
178-203 / <b>7-8"</b>	329/ <b>13"</b>	30/ <b>1.2"</b>	231/ <b>9.2"</b>	244/ <b>9.7"</b>
203-229 / <b>8-9"</b>	335/ <b>13.5"</b>	30/ <b>1.2"</b>	248/ <b>9.9"</b>	261/ <b>10.4"</b>

### Ordering Information

**Plain Anvils** (Anvils included in price – choose from list below)

Capacity mm/ <i>inch</i>	No Indicator	No Indicator with 8 mm adaptor	With Maxµm <sup>®</sup> /// indicator	With Maxµm indicator	With AirProbe <sup>®</sup>	No Indicator with 8 mm adaptor & lift lever	With Dial Indicator No lift lever	With lift lever
0 - 25/ <b>0-1"</b>	OMI-300P-1	2003100	EMD-300P-1	EDI-300P-1	A300P-1	2003110	300P-1	301P-1
25 - 50/ <b>1-2"</b>	OMI-300P-2	2003101	EMD-300P-2	EDI-300P-2	A300P-2	2003111	300P-2	301P-2
50 - 76/ <b>2-3"</b>	OMI-300P-3	2003102	EMD-300P-3	EDI-300P-3	A300P-3	2003112	300P-3	301P-3
76 - 100/ <b>3-4"</b>	OMI-300P-4	2003103	EMD-300P-4	EDI-300P-4	A300P-4	2003113	300P-4	301P-4
100 - 127/ <b>4-5"</b>	OMI-300P-5	2003104	EMD-300P-5	EDI-300P-5	A300P-5	2003114	300P-5	301P-5
127 - 152/ <b>5-6"</b>	OMI-300P-6	2003105	EMD-300P-6	EDI-300P-6	A300P-6	2003115	300P-6	301P-6
152 - 178/ <b>6-7"</b>	OMI-300P-7	2003106	EMD-300P-7	EDI-300P-7	A300P-7	2003116	300P-7	301P-7
178 - 203/ <b>7-8"</b>	OMI-300P-8	2003107	EMD-300P-8	EDI-300P-8	A300P-8	2003117	300P-8	301P-8
203 - 229/ <b>8-9"</b>	OMI-300P-9	2003108	EMD-300P-9	EDI-300P-9	A300P-9	2003118	300P-9	301P-9

**Blade Anvils** (Anvils included in price – choose from list below)

0 - 25/ <b>0-1"</b>	OMI-300P-31		EMD-300P-31	EDI-300P-31	A300P-31		300P-31	301P-31
25 - 50/ <b>1-2"</b>	OMI-300P-32		EMD-300P-32	EDI-300P-32	A300P-32		300P-32	301P-32
50 - 76/ <b>2-3"</b>	OMI-300P-33		EMD-300P-33	EDI-300P-33	A300P-33		300P-33	301P-33
76 - 100/ <b>3-4"</b>	OMI-300P-34		EMD-300P-34	EDI-300P-34	A300P-34		300P-34	301P-34
100 - 127/ <b>4-5"</b>	OMI-300P-35		EMD-300P-35	EDI-300P-35	A300P-35		300P-35	301P-35

Larger capacities available on request.

To specify Metric models, add suffix "M" to the Model number. To specify Digital Output, add suffix "D" to Model numbers of EMD-300P and EMD-301P Series Gages. To specify both, add suffix "MD" to Model numbers of EMD-300P and EMD-301P Series Gages.

**Examples:** 300P-2 specifies a Snap Gage with a 121 (.0001" grad.) Dial Indicator, 25-50 mm / 1-2" capacity.

EMD-301P-33D specifies a Groove Diameter Snap Gage with lift lever, 50-76 mm / 2-3" capacity, AL-110 Blade Anvils, 2033119 (selectable units and resolution) Maxµm/// Indicator with Digital Output



## Snap Gages for Outside Diameters 300P

### Accessories



**BA-71**  
Bench Stand for Disc Masters



**Groove Diameter Snap Gages** – One pair of anvil inserts must be specified with each gage. Stocked anvils (shown below) are hardened steel. If no other anvils are specified, AL-110 will be provided.

**Anvil Inserts** – For all Series 300P-30 and 301P-30 groove gages (2 required per gage).

#### Order no.

#### Bench Stand for Gages

Clamps 300P and 1000P Series Gages firmly. A 6.4 mm / 0.25" mounting hole allows permanent fastening to bench surface.

**BA-26**

#### Bench Stand for Disc Masters

Holds any AGD type Disc up to 127 mm / 5" diameter and 27 mm / 1.12" wide. Two 6.4 mm / 0.25" mounting holes allow permanent fastening to bench surface

**BA-71**

#### Gaging pressure options

For EMD, OMI and Dial Indicator models


Lighter  
Heavier

**SP-192**  
**SP-118**

For EDI models only


Lighter  
Heavier

**2243295**  
**2243297**

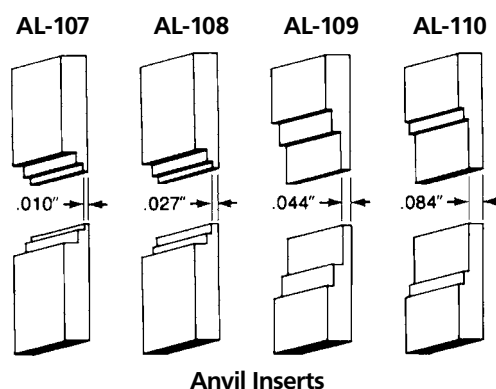

**Anvil Inserts**

#### Plain Anvil Options Front View

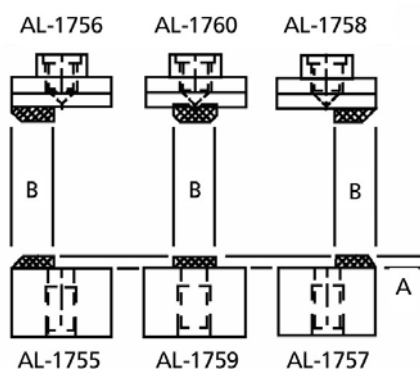

A = 2mm/.080in  
B = 5.08mm/.250in

#### Blade Anvils

Width mm / inch	Depth mm / inch	Order no. Steel	T.C.
0.25 / .010"	0.76 / .030"	AL-107	AL-1741
0.69 / .027"	1.02 / .040"	AL-108	AL-1742
1.12 / .044"	4.83 / .19"	AL-109	AL-1743
2.13 / .084"	6.35 / .25"	AL-110*	AL-1744

\* normally provided

## Indicating Snap Gages 840 F / 840 FC MaraMeter F



### Features

- For cylindrical parts such as shafts, bolts and spindles, for thickness and length measurements
- Rugged, forged steel frame with heat insulators
- Measuring spindle is mounted in long guide way with lever-controlled retraction
- Anvil spindle can easily be fine adjusted
- Measuring spindle and anvil spindle are both made of hardened stainless steel, carbide-tipped or ceramic (840 FC) measuring faces
- Adjustable center stop for automatic alignment
- Maximum wear resistance due to non-contact positioning in conjunction with carbide-tipped measuring faces
- Constant measuring force as a result of built-in spring, thus eliminating user influence
- Universally applicable and extremely versatile. Each instrument spans a broad measuring range, within this range any dimension and fit can be very quickly and easily adjusted

### Technical Data

Catalog no.	Measuring range		Measuring** force N	Distance of moveable anvil mm	Measuring face		Order no.*	Order no. Wooden case
	mm	(inch)			Flatness µm	Parallelism µm		
840 F	0 - 25	(0 - 1")	7.5	2	≤ 0.2	≤ 1	4450000	4450010
	25 - 60	(1 - 2.36")	7.5	2	≤ 0.2	≤ 2	4450001	4450011
	50 - 100	(2 - 4")	7.5	2.5	≤ 0.2	≤ 2	4450002	4450012
	100 - 150	(4 - 6")	7.5	2.5	≤ 0.2	≤ 2	4450003	4450013
	150 - 200	(6 - 8")	7.5	2.5	≤ 0.2	≤ 2	4450004	4450014
840 FC	0 - 25	(0 - 1")	7.5	2	≤ 0.2	≤ 1	4450100	4450010
	25 - 60	(1 - 2.36")	7.5	2	≤ 0.2	≤ 2	4450101	4450011

\* Excludes indicating instrument \*\* Further measuring forces are available on request

## Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:


Dial Comparator		Readings		Order no.	
		mm	/ inch	mm	/ inch
Compramess	1004 / 1004 Z	5 $\mu\text{m}$	/ .0001"	4333000 / 4333900	
Millimess	1003 / 1003 Z	1 $\mu\text{m}$	/ .00005"	4334000 / 4334900	
Millimess	1003 XL	2 $\mu\text{m}$		4334001	
Supramess	1002 / 1002 Z	0.5 $\mu\text{m}$	/ .00002"	4335000 / 4335900	
Extramess	2000	0.2 $\mu\text{m}$	/ .00001"	4346000*	
		0.5 $\mu\text{m}$	/ .00002"		
		1 $\mu\text{m}$	/ .00005"		
Extramess	2001	0.2 $\mu\text{m}$	/ .00001"	4346100*	
		0.5 $\mu\text{m}$	/ .00002"		
		1 $\mu\text{m}$	/ .00005"		
$\mu\text{Max}\mu\text{m}$		.001 mm	/ .00005"	EDI-10302**	

Digital Indicators see Chapter 5

Electrical Indicating Instruments see Chapter 7

\* 230 V, for 115 V please refer to page 6-5

\*\* requires contact 4360107

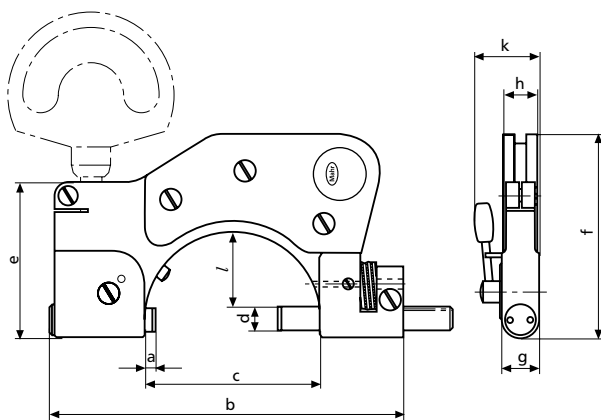

Meas. range mm	0 - 25	25 - 60	50 - 100	100 - 150	150 - 200
a*	5	5	6.5	6.5	6.5
b	97	140	193	258	316
c	34	68	110	162	212
d	8	9	10	12	12
e	54	60	60	70	75
f	65	77	103	141	171
g	12	13	14	16	16
h	13	13	13	12	12
k	23	25	28	31	31
l	14	30	54	81	106

\* In initial position


## Accessories

Reference Discs 390 see Chapter 13

Gage Blocks see Chapter 13

Holder 840 Fk and Stand 840 Ff see Page 9-15

## Indicating Snap Gage 840 FH with interchangeable anvils

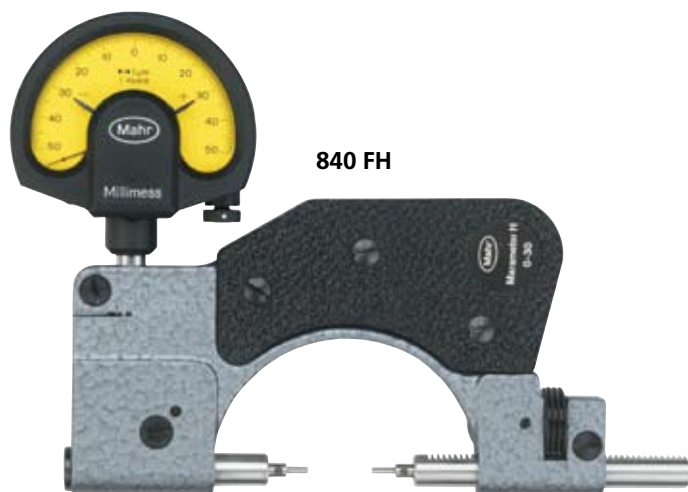

### Features


- Measuring spindle and anvil spindle have precision tapered bores for mounting interchangeable anvils 40 He
- For cylindrical parts such as shafts, bolts and spindles
- Rugged, forged steel frame with heat insulators
- Measuring spindle is mounted in long guide way with lever-controlled retraction
- Anvil spindle can easily be fine adjusted
- Measuring spindle and anvil spindle and both made from hardened stainless steel
- Maximum wear resistance due to non-contact positioning
- Constant measuring force as a result of built-in spring, thus eliminating user influence
- Universally applicable
- All kinds of measurement problems can be solved with the broad range of interchangeable anvils

### Technical Data

Catalog no.	Measuring range*		Distance of moveable anvil	Meas. force	Order no.**	Order no. Wooden case
	mm	(inch)	mm	N		
840 FH	0 - 30	(0 - 1.18")	2	7.5	4451000	4510010
	30 - 80	(1.18 - 3")	2.5	7.5	4451005	4510011

\* Measuring is dependent upon the length of the anvils being used

\*\* Excludes indicating instrument

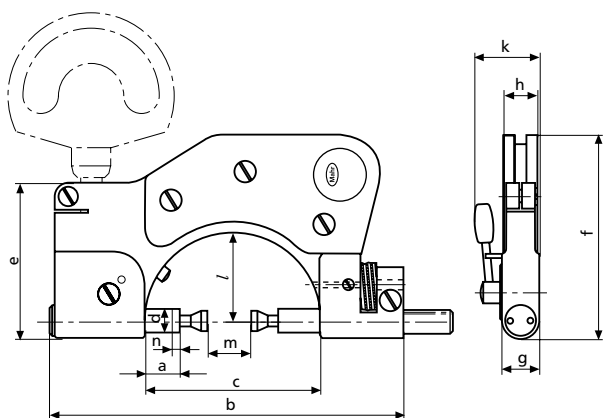

Meas. range 840 FH  
m (mm) 0 - 30 30 - 80

a*	12.5	7.5
b	140	193
c	68	110
d	9	10
e	60	60
f	77	103
g	13	13
h	13	13
k	25	28
l	34	59
n**	2	2.5

\* In initial position

\*\* Distance of moveable anvil

## Interchangeable Anvils 40 He for Indicating Snap Gage 840 FH

with tapered shank

Catalog no.	Features	Order no.
40 He 0H*	Flat faces	4152036
40 He 1	Stepped flat faces	4152011
40 He 1H*	Stepped flat faces	4152033
40 He 2	Stepped flat faces	4152012
40 He 2H*	Stepped flat faces	4152032
40 He 3	Discs	4152013
40 He 4	Discs with V-groove	4152014
40 He 5	Blades	4152015
40 He 6	Offset blades	4152016
40 He 7	Recessed blades	4152017
40 He 8	Recessed flat faces with V-grooves on sleeve	4152018
40 He 9	Recessed flat faces with slip on support	4152019
40 He 10	With clearance bores	4152020
40 He 11	Point	4152021

\* Carbide version

## Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

Dial Comparator	Readings mm / inch	Order no. mm / inch
Compramess 1004 / 1004 Z	5 µm/ .0001"	4333000/4333900
Millimess 1003 / 1003 Z	1 µm/ .00005"	4334000/4334900
Millimess 1003 XL	2 µm	4334001
Supramess 1002 / 1002 Z	0.5 µm/ .00002"	4335000/4335900
Extramess 2000	0.2 µm/ .00001"	
	0.5 µm/ .00002"	4346000*
	1 µm/ .00005"	
Extramess 2001	0.2 µm/ .00001"	
	0.5 µm/ .00002"	4346100*
	1 µm/ .00005"	
µMaxµm	.001mm/.00005"	EDI-10302**

Digital Indicators see Chapter 5

Electrical Indicating Instruments see Chapter 7

\* 230 V, for 115 V please refer to page 6-5 \*\* requires contact 4360107

## Accessories


**Spanner** (Included in scope of supply)  
for 840 FH, to loosen anvils

Order no. 4880210


**Reference Discs 390** see Chapter 13

**Gage Blocks** see Chapter 13


**Holder 840 Fk** and **Stand 840 Ff** see Page 9-15




40 He 0H




40 He 1




40 He 2




40 He 3




40 He 4




40 He 5




40 He 6




40 He 7




40 He 8



40 He 9



40 He 10



40 He 11

## Indicating Snap Gages 840 FG with interchangeable anvils



### Features


- Measuring spindle and anvil spindle have a M 2.5 connection thread, thus enabling the use of interchangeable anvils that are also used in dial indicators and dial comparators
- For cylindrical parts such as shafts, bolts and spindles
- Rugged, forged steel frame with heat insulators
- Measuring spindle is mounted in long guide way with lever-controlled retraction
- Anvil spindle can easily be fine adjusted
- Measuring spindle and anvil spindle and both made from hardened stainless steel
- Maximum wear resistance due to non-contact positioning
- Constant measuring force as a result of built-in spring, thus eliminating user influence
- Universally applicable
- All kinds of measurement problems can be solved with the broad range of interchangeable anvils

### Technical Data

Catalog no.	Measuring range*		Distance of moveable anvil mm	Meas. force N	Order no.**	Order no. Wooden case
	mm	(inch)				
840 FG	0 - 50	(0 - 2")	2	7.5	4454000	4450011
	30 - 90	(1.57 - 3.57")	2.5	7.5	4454001	4450012

\* Measuring is dependent upon the length of the anvils being used

\*\* Excludes indicating instrument

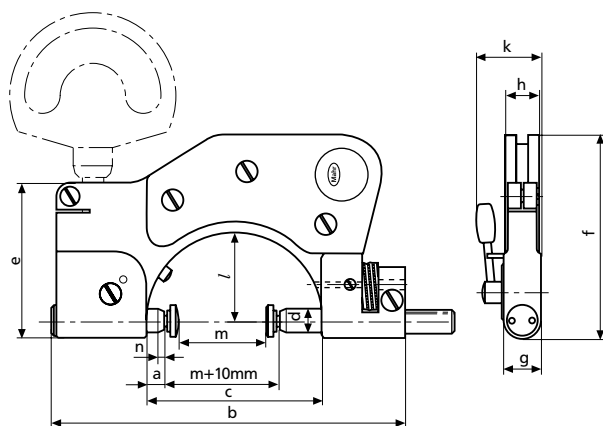

Meas. range 840 FG  
m (mm) 0 - 50 40 - 90

	0 - 50	40 - 90
a*	5	6.5
b	140	193
c	68	110
d	9	10
e	60	60
f	77	103
g	13	14
h	13	13
k	25	28
l	34	59
n**	2	2.5


\* In initial position

\*\* Distance of moveable anvil



## Interchangeable Anvils for Indicating Snap Gage 840 FG

Catalog no.	Features	Order no.			
901 H	Standard contact point with carbide ball, ball dia. 3 mm	4360002			
902 H	Spherical contact point, with carbide face, R = 6 mm				
	Length <i>l</i> in mm				
	10				
	15	4360041			
	20	4360043			
		4360044			
903 H*	Flat contact point, carbide tipped				
	Length <i>l</i> in mm				
	6	4360101			
	10	4360103			
	15	4360105			
	20	4360106			
904 H	Conical contact point, carbide tipped	4360131			
906 H	Ball Contact Points				
	with carbide ball, manufacturing tolerance ball dia. 0/-6 µm				
Ball dia. d mm	<i>l</i> mm	Order no.	Ball dia. d mm	<i>l</i> mm	Order no.
1	8.5	4360150	5.5	9	4360161
1.25	8.5	4360151	6	9	4360162
1.5	8.5	4360152	6.35 (1/4")	9	4360163
1.75	8.5	4360153	6.5	10	4360164
2	8.5	4360154	7	10	4360165
2.5	8.5	4360155	7.5	11	4360166
3	8.5	4360156	8	11	4360167
3.5	8.5	4360157	8.5	12	4360168
4	8.5	4360158	9	12	4360169
4.5	8.5	4360159	10	13	4360170
5	9	4360160			

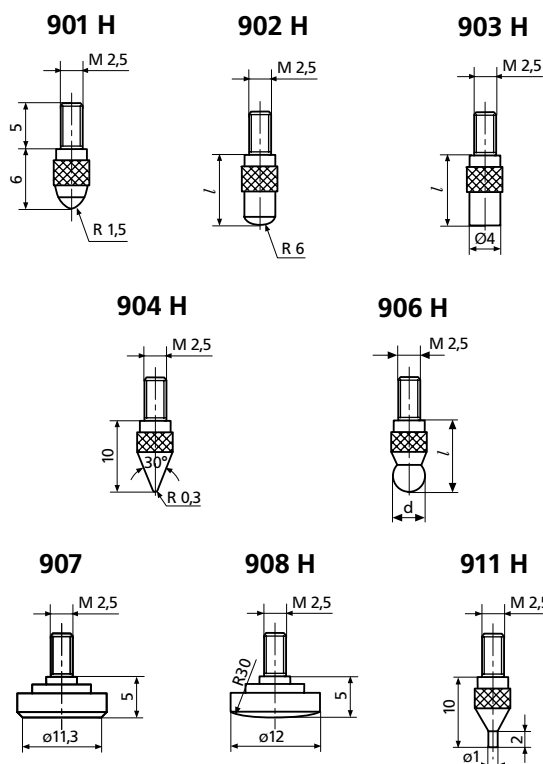

Catalog no.	Features	Order no.
<b>907</b>	Flat contact plates* steel, dia. 11.3 mm, A = 1 cm²	<b>4360200</b>
<b>907 H</b>	Flat contact plates*, carbide tipped, dia. 7 mm	<b>4360201</b>
<b>908</b>	Spherical contact plates, steel	<b>4360210</b>
<b>908 H</b>	Spherical contact plates, carbide tipped	<b>4360211</b>
<b>911 H</b>	Pin contact point, carbide tipped, dia. 1 mm, plan	<b>4360240</b>

\* When using a flat contact plate the opposite facing anvil must be a spherical contact plate.

## Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

Dial Comparator	Readings mm / inch	Order no. mm / inch
<b>Compramess 1004 / 1004 Z</b>	5 µm/ .0001"	<b>4333000/4333900</b>
<b>Millimess 1003 / 1003 Z</b>	1 µm/ .00005"	<b>4334000/4334900</b>
<b>Millimess 1003 XL</b>	2 µm	<b>4334001</b>
<b>Supramess 1002 / 1002 Z</b>	0.5 µm/ .00002"	<b>4335000/4335900</b>
<b>Extramess 2000</b>	0.2 µm/ .00001"	
	0.5 µm/ .00002"	<b>4346000*</b>
	1 µm/ .00005"	
<b>Extramess 2001</b>	0.2 µm/ .00001"	
	0.5 µm/ .00002"	<b>4346100*</b>
	1 µm/ .00005"	
<b>µMaxµm</b>	.001mm/.00005"	<b>EDI-10302**</b>

Digital Indicators see Chapter 5

Electrical Indicating Instruments see Chapter 7

\* 230 V, for 115 V please refer to page 6-5 \*\* requires contact 4360107


## Accessories

**Reference Discs 390** see Chapter 13

**Gage Blocks** see Chapter 13

**Holder 840 Fk and Stand 840 Ff** see Page 9-15

## Indicating Snap Gages 840 FM MaraMeter M with measuring jaws

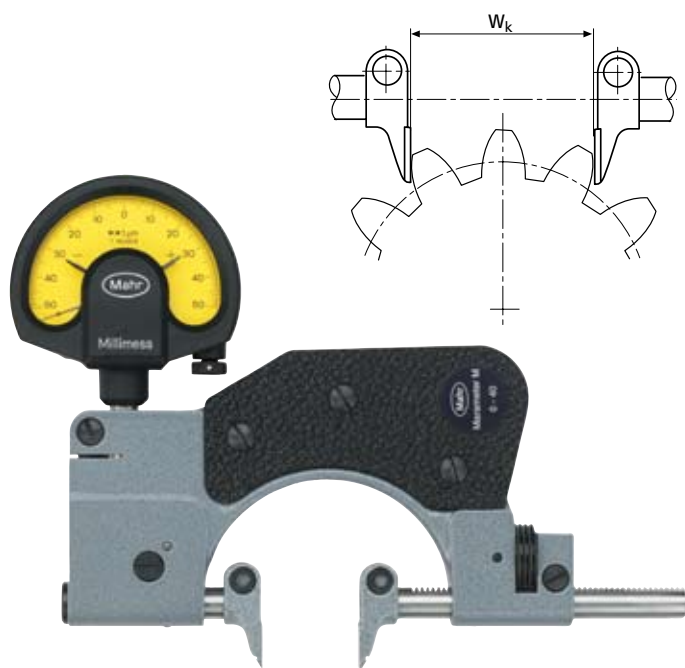

### Features

- For diameters of small hubs, registers, shoulders on shafts and groove widths as well as for tooth span  $W_k$  as indirect, reference-free determination of tooth thickness on spur gears with straight and helical teeth
- Rugged, forged steel frame with heat insulators
- Measuring spindle is mounted in long guide way with lever-controlled retraction
- Anvil spindle can easily be fine adjusted
- Maximum wear resistance due to non-contact positioning in conjunction with carbide-tipped measuring faces
- Measuring spindle and anvil spindle made of hardened stainless steel; with extending carbide-tipped measuring jaws
- Constant measuring force as a result of built-in spring, thus eliminating user influence
- Universally applicable and extremely versatile, each instrument spans a broad measuring range, within this range any dimension and fit can be very quickly and easily adjusted

### Technical Data


Measuring range mm (inch)	Measuring force N	area mm	Measuring face flatness $\mu\text{m}$	parallelism $\mu\text{m}$	Tooth span measurements as per module m	Order no.*	Order no. Wooden case
0 - 40 (0 - 1.57")	7.5	12 x 12	$\leq 0.5$	$\leq 2$	0.5	<b>4452000</b>	<b>4450011</b>
40 - 80 (1.57 - 3")	7.5	12 x 12	$\leq 0.5$	$\leq 3$	0.5	<b>4452001</b>	<b>4450012</b>
80 - 130 (3 - 5")	9	15 x 17	$\leq 0.5$	$\leq 3$	1.0	<b>4452002</b>	<b>4450013</b>
130 - 180 (5 - 7")	9	15 x 17	$\leq 0.5$	$\leq 3$	1.0	<b>4452003</b>	<b>4450014</b>

\* Excludes indicating instrument

### Dimensions

Meas. range (mm)	0 - 40	40 - 80	80 - 130	130 - 180
Dist mov. anvil (mm)	2	2.5	2.5	2.5
<b>a*</b>	14	14	19	15
<b>b</b>	140	193	258	316
<b>c</b>	68	110	162	212
<b>e</b>	60	60	70	75
<b>f</b>	77	103	141	171
<b>g</b>	13	14	16	16
<b>h</b>	13	13	12	12
<b>k</b>	25	28	31	31
<b>l</b>	34	59	87	112
<b>m</b>	12	12	17	17
<b>p</b>	12	12	15	15
<b>t</b>	11	11	17	17

\* In initial position

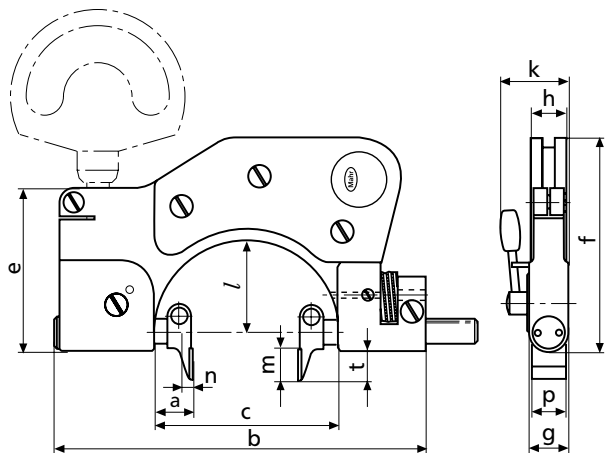

### Accessories

Indicating instruments, see Page 9-9  
 Reference Discs 390 see Chapter 13  
 Gage Blocks see Chapter 13  
 Holder 840 Fk and Stand 840 Ff see Page 9-15

## Accessories for Dial Indicators and Dial Comparators



840 Fk

### Holder 840 Fk for Dial Indicators and Dial Comparators

- For attaching to the following measuring instruments  
**840 F/FC, 840 FH, 840 FG, 840 FM and 852**
- Straight transfer of the spindle movement to the indicator
- Following the Abbe principle allows an even higher degree of accuracy than the already excellent level obtained with the standard set-up employing 90° transmission
- When the indicating instrument is in the shown position it is often easier to read
- For stationary application when in conjunction with the **Stand 840 Ff**

Catalog no.	Suitable for instruments with measuring ranges (mm)					Order no.
	840 F/FC	840 FH	840 FG	840 FM	852	
<b>840 Fk/1</b>	0 - 25					<b>4450050</b>
<b>840 Fk/2</b>	25 - 60	0 - 30	0 - 50	0 - 40	0 - 45	<b>4450051</b>
<b>840 Fk/3</b>	50 - 100	30 - 80	40 - 90	40 - 80	45 - 85	<b>4450052</b>
<b>840 Fk/4</b>	100 - 150			80 - 130	85 - 140	<b>4450053</b>
	150 - 200			130 - 180	140 - 190	



840 Ff

### Stand 840 Ff

- For stationary application in conjunction with the following measuring instruments  
**840 F/FC, 840 FH, 840 FG, 840 FM, 840 E and 852**
- User has both hands free for insertion of work piece and retraction of moving spindle
- Indicating instrument is always in operator's field of vision
- Rugged, rigid cast-iron stand with clamp for locking the indicating snap gage
- Indicating snap gage is locked in mounting hole for dial comparator
- Only in conjunction with **Holder 840 Fk**


Catalog no.	Suitable for instruments with measuring ranges (mm)						Order no.
	840 F/FC	840 FH	840 FG	840 FM	840 E	852	
840 Ff	<div><div></div><div>0 - 25</div><div>25 - 60</div></div>	0 - 30	0 - 50	0 - 40	0 - 25	0 - 45	4450020

## Indicating Snap Gages 840 FS MaraMeter S

### Features

- For all kinds of cylindrical work pieces, whether directly on a machine tool or in the production control
- Rigid frame; convenient handle with heat insulators open on one end to eliminate heat transfer from operators hand
- Both spindles are made of hardened stainless steel and mounted in long guide ways

- Carbide-tipped measuring faces slightly chamfered at the front to facilitate positioning
- Projects over width of frame for measurement of narrow registers or when measuring directly at shoulders
- Maximum accuracy. Straight transfer of spindle movement to indicator. During the measurement, the weight of the gage rests on the anvil spindle
- Adjustable center stop for automatic alignment
- Indicating instrument is protected against possible impact during handling by a laterally projecting guard
- Direct indication and evaluation of measurement results
- Universally applicable and extremely versatile, each instrument spans a broad measuring range, within this range any dimension and fit can be very quickly and easily adjusted
- Constant measuring force as a result of built-in spring, thus eliminating operator influence

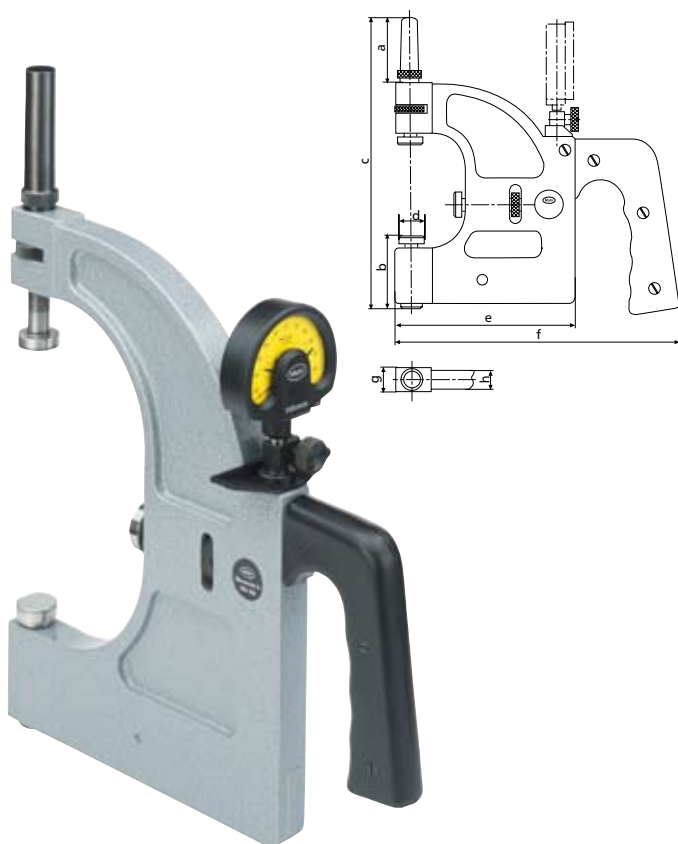

### Dimensions

Meas. range mm	dia. d	a	b	c	e	f	g	h
10 - 30	18	37	46	154	87	161	17	15
30 - 60	18	45	51	199	122	196	17	15
60 - 100	22	56	62	260	154	228	20	18
100 - 150	22	71	62	335	189	263	20	18
150 - 200	22	71	62	385	214	288	20	18
200 - 250	22	71	62	436	248	322	20	18
250 - 300	22	71	62	487	280	354	20	18
300 - 350	22	71	62	537	310	384	20	18
350 - 400	22	71	62	587	350	424	20	18
400 - 450	22	71	62	637	380	454	20	18
450 - 500	22	71	62	687	410	484	20	18

### Technical Data

Measuring range		Measuring force N	Distance of moveable anvil mm	Meas. faces		Weight kg	Order no.*	Order no. Wooden case
mm	(inch)			flat-ness μm	Parallelism μm			
10 - 30	(.39 - 1.18")	13.5	0.7	≤ 0.5	≤ 3	0.6	4455000	4455020
30 - 60	(1.18 - 2.36")	13.5	0.7	≤ 0.5	≤ 3	0.9	4455001	4455021
60 - 100	(2.36 - 4")	13.5	0.7	≤ 0.5	≤ 3	1.3	4455002	4455022
100 - 150	(4 - 6")	15	0.7	≤ 0.5	≤ 3	1.7	4455003	4455023
150 - 200	(6 - 8")	15	0.7	≤ 0.5	≤ 3	2.0	4455004	4455024
200 - 250	(8 - 10")	15	0.7	≤ 0.5	≤ 3	2.2	4455005	4455025
250 - 300	(10 - 12")	15	0.7	≤ 0.5	≤ 3	2.5	4455006	4455026
300 - 350	(12 - 14")	15	0.7	≤ 0.5	≤ 4	3.3	4455007	4455027
350 - 400	(14 - 16")	15	0.7	≤ 0.5	≤ 4	3.3	4455008	4455028
400 - 450	(16 - 18")	15	0.7	≤ 0.5	≤ 4	4.3	4455009	4455029
450 - 500	(18 - 20")	15	0.7	≤ 0.5	≤ 4	4.7	4455010	4455030

\* Excludes indicating instrument

## Accessories for Indicating Snap Gages 840 FS MaraMeter S

### Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

Dial Comparator	Readings mm / inch	Order no. mm / inch
Compramess 1004 / 1004 Z	5 $\mu\text{m}$ / .0001"	4333000/4333900
Millimess 1003 / 1003 Z	1 $\mu\text{m}$ / .00005"	4334000/4334900
Millimess 1003 XL	2 $\mu\text{m}$	4334001
Supramess 1002 / 1002 Z	0.5 $\mu\text{m}$ / .00002"	4335000/4335900
Extramess 2000	0.2 $\mu\text{m}$ / .00001"	4346000*
	0.5 $\mu\text{m}$ / .00002"	4346000*
	1 $\mu\text{m}$ / .00005"	4346100*
Extramess 2001	0.2 $\mu\text{m}$ / .00001"	4346100*
	0.5 $\mu\text{m}$ / .00002"	4346100*
	1 $\mu\text{m}$ / .00005"	4346100*
$\mu\text{Max}\mu\text{m}$	.001mm/.00005"	EDI-10302**

Digital Indicators see Chapter 5

Electrical Indicating Instruments see Chapter 7

\* 230 V, for 115 V please refer to page 6-5 \*\* requires contact 4360045



2000



1003

## Electronic Snap Gage 840 E MaraMeter E for extremely high accuracy

### Features

- Inductive measuring system incorporated directly into frame
- Readings selectable down to 0.01  $\mu\text{m}$
- Rugged, forged steel frame with heat insulators
- Measuring spindle mounted in extra long guideway with lever-controlled retraction
- Anvil spindle can easily be fine adjusted
- Measuring spindle and anvil spindle made of hardened stainless steel; measuring faces carbide-tipped
- Adjustable center stop for automatic alignment
- Extremely accurate due to the straight transfer of spindle movement to the inductive measuring system according to the Abbe principle
- Universally applicable and extremely versatile, each instrument spans a broad measuring range, within this range any dimension and fit can be very quickly and easily adjusted
- Maximum wear resistance due to non-contact positioning in conjunction with carbide-tipped measuring faces
- Constant measuring force as a result of built-in spring, thus eliminating user influence

### Accessories

**Reference Discs 390** see Chapter 13

**Gage Blocks** see Chapter 13

**Stand 840 Ff** see Page 9-15

#### Recommended indicating instruments:

Electrical indicating instruments; recommended are C 1208 M and 1240, please refer to Chapter 7



### Technical Data

Measuring range	0-25 mm
Readings / Resolution adjustable to*	0.01 $\mu\text{m}$
Measuring force	4.5 N
Measuring face dia.	7.5 mm
Repeatability	$\leq 0.1 \mu\text{m}$
Parallelism of measuring surfaces	$\leq 0.3 \mu\text{m}$

**Order no.** (without indicating instrument)

**4453000**

**Order no. Wooden case**

**4453010**

\* Depending upon which indicating instrument is being used

## Indicating Thread Snap Gage 852



### Features

- For measuring pitch, root and outside diameters of all kinds of external threads as well as serrations
- Rugged, forged steel frame with heat insulators
- Measuring spindle is mounted in long guide way with lever-controlled retraction
- Anvil spindle can easily be fine adjusted
- Measuring spindle and anvil spindle are both made of hardened stainless steel, with mounting bore for insertion of interchangeable anvils
- Adjustable center stop for automatic alignment
- Maximum wear resistance due to non-contact positioning
- Constant measuring force as a result of built-in spring, thus eliminating user influence
- Universally applicable and extremely versatile, each instrument spans a broad measuring range

### Technical Data

Measuring range*	Meas. force	Order no.**	Order no.
mm (inch)	N		wooden case
0 - 45 (0 - 1.77")	7.5	4510000	4510010
45 - 85 (1.77 - 3.34")	7.5	4510001	4510011
85 - 140 (3.34 - 5.51")	9	4510002	4510012
140 - 190 (5.51 - 7.48")	9	4510003	4510013

\* Depending upon which anvils are being used, purchase separately

\*\* Excludes indicating instrument and anvils

### Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

Dial Comparator	Readings	Order no.
mm / inch	mm / inch	mm / inch
Compramess 1004 / 1004 Z	5 µm/ .0001"	4333000/4333900
Millimess 1003 / 1003 Z	1 µm/ .00005"	4334000/4334900
Millimess 1003 XL	2 µm/ .00001"	4334001
Supramess 1002 / 1002 Z	0.5 µm/ .00002"	4335000/4335900
Extramess 2000	0.2 µm/ .00001"	4346000*
	0.5 µm/ .00002"	4346100*
	1 µm/ .00005"	
Extramess 2001	0.2 µm/ .00001"	
	0.5 µm/ .00002"	
	1 µm/ .00005"	
µMaxµm	.001mm/.00005"	EDI-10302**

Digital Indicators see Chapter 5

Electrical Indicating Instruments see Chapter 7


\* 230 V, for 115 V please refer to page 6-5 \*\* requires contact 4360107

### Accessories

**Interchangeable Anvils** please refer to Pages 9-21 to 9-23

**Thread Setting Plug Gages** see Page 13-14

**Holder 840 Fk and Stand 840 Ff** (for 0-45 mm) see Page 9-15

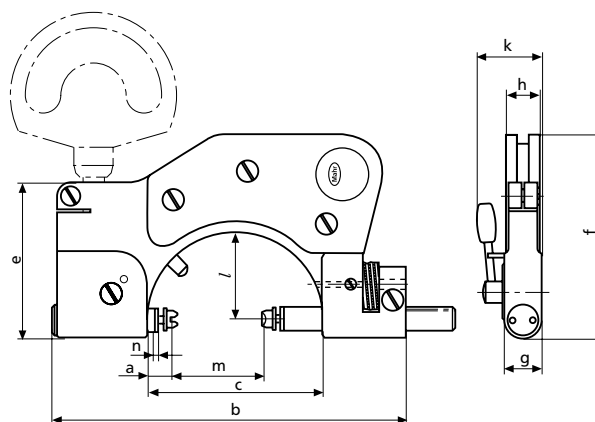

Meas. range m (mm)	0-45	45-85	85-140	140-190
Dist mov. anvil n (mm)	2	2.5	2.5	2.5
a*	13	8	10	6
b	140	193	258	316
c	68	110	162	212
e	60	60	70	75
f	77	103	141	171
g	13	14	16	16
h	13	13	12	12
k	25	28	31	31
l	34	59	87	112

a\* = in initial position



## Indicating Bench Snap Gage 852 TS



### Applications

- For rapid measurements of diameters of cylindrical parts (shafts, bolts and shanks)
- For measuring pitch, root and outside diameters of all kinds of external threads as well as serrations
- For thickness and length measurement
- Particularly suited for batch produced parts

### Features


- Rugged steel frame, can be inclined up to 45° from the sturdy base
- Measuring spindle and anvil spindle are both made of hardened stainless steel, with mounting bore for insertion of interchangeable anvils
- Anvil spindle can easily be fine adjusted
- Height adjustable stop
- Constant measuring force as a result of built-in spring, thus eliminating user influence
- Universally applicable and extremely versatile, each instrument spans a broad measuring range
- Scope of supply: TC tipped-anvils, dia. D= 3.5 mm, Dial Comparator 1003

### Technical Data

Measuring range <sup>1</sup>		Retraction	Measuring force	Measuring face Parallelism	Mounting dia.	Order no.
mm	(inch)	mm	N	µm		
0 - 80	(0 - 4")	1.2	6.5	≤ 2	8 mm 8 mm .375"	4510030 4510031 <sup>2</sup> 4510035 <sup>2</sup>

<sup>1</sup> Depending upon which anvils are being used

<sup>2</sup> Excludes indicating instrument, order indicating instrument separately. Delivery with a different indicating instrument order separately

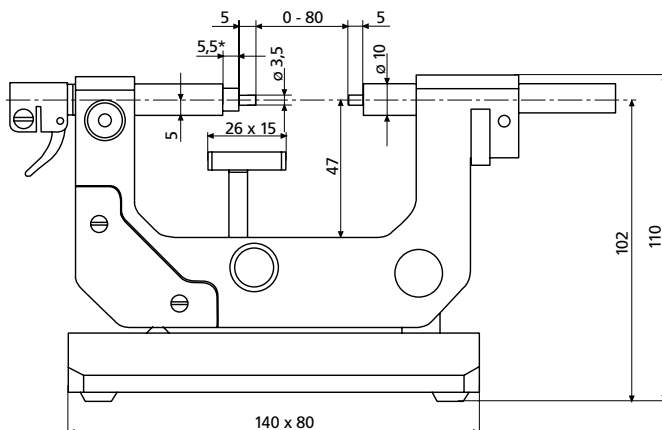

\* In initial position

### Accessories

	Order no.
Standard TC tipped-anvils, pair dia. D= 3,5 mm	4510840
Interchangeable Anvils please refer to Pages 9-21 to 9-23	
Thread Setting Plug Gages see Page 13-14	

## Indicating Thread Snap Gage 853 for taps



### Features

- For pitch, root and outside diameters on taps in conjunction with inter-changeable anvils
- Measuring spindle mounted in long guideway, lever-controlled retraction with mounting bore for inter-changeable anvils
- Anvil spindle adjustable with thumbscrew via worm and rack, for mounting inter-changeable support yokes
- Measuring spindle and anvil spindle are made of hardened stainless steel
- Further features are similar to the model 852; for details please refer to Page 9-18

### Technical Data

Meas. range mm (inch)	Meas. force N	Order no.*	Order no. Wooden case
1.2 - 35 (.04 - 1.37")	7.5	4511000	4511020
35 - 75 (1.37 - 3")	7.5	4511001	4511021

\* Excludes indicating instrument, yoke and anvils

### Interchangeable Support Yokes 853 q

Depending upon the number of flutes, allowance has to be made for a compensation factor when reading the result. See the following table:


Cat. no.	No. of flutes of taps	For meas. range mm	Compens. factor**	Order no.
853 qk 3	3	1.2 - 35	x 1	4511024
853 qk 5	5	1.2 - 35	x 1.34	4511026
853 qk 7	7	1.2 - 35	x 1.42	4511028
853 qg 3	3	35 - 75	x 1	4511025
853 qg 5	5	35 - 75	x 1.34	4511027
853 qg 7	7	35 - 75	x 1.42	4511029

\*\* Allowance is to be made for other compensation methods when using the Holder 840 Fk

### Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

	Readings	Order no.
MarCator 810S	0.001 mm	4311000
Compramess 1004/1004 Z	5 µm / .0001"	4333000/4333900
Zentimess 1010/1010 Z	0.01 mm / .0005"	4332000/4332900
MarCator 1087/1087 Z	1 µm / .00005"	4337060/4337070

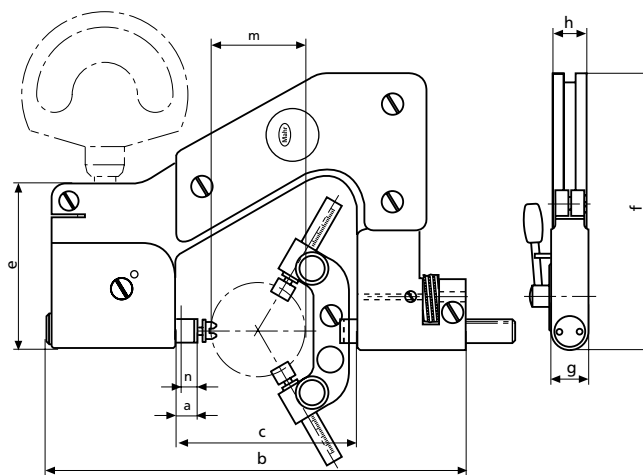

Meas. range m (mm)	1.2-35	35-75
Dist mov. anvil n (mm)	8	8
a*	12	11.5
b	152	192
c	66	110
e	60	65
f	98	125
g	14	14
h	11.5	14


a\* = in initial position

### Accessories

**Dial Comparators** see Page 9-18  
Recommendations: 810 S (see Page 5-32), 1010, 1004  
**Interchangeable Anvils** see from Pages 9-21 to 9-23  
**Thread Setting Plug Gages** see Page 13-20

## Interchangeable Anvils for 852, 852 TS and 853

For pitch, root and outside diameters. Special wear-resistant hardened steel. With cylindrical mounting shank and retainer ring which ensures locking while permitting rotation in bore of indicating snap gages.

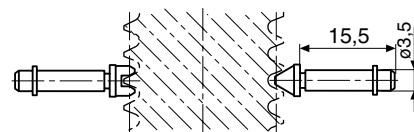

### Sets consist of:

#### For pitch diameters

852 - 1 V-anvil and 1 blade  
853 - 1 V-anvil and 2 radiused blades

#### For root diameters

852 - 1 V-anvil and 1 blade  
853 - 1 V-anvil and 2 blades

#### For outside diameters

852 - 2 flat-face anvils  
853 - 3 flat-face anvils

## Anvils for pitch diameters for 852 and 852 TS

Metric thread (60°)			Whitworth thread (55°)			American UST thread (60°)		
Pitch	V-anvil	Blade	Pitch range	V-anvil	Blade	Pitch range	V-anvil	Blade
mm	Order no.	Order no.	tpi	Order no.	Order no.	tpi	Order no.	Order no.
0.2*	4173007	4173707	40 - 32	4173043	4173743	60 - 48	4173113	4173813
0.25*	4173008	4173708	32 - 24	4173044	4173744	48 - 40	4173114	4173814
0.3*	4173009	4173709	24 - 18	4173045	4173745	40 - 32	4173115	4173815
0.35*	4173010	4173710	18 - 14	4173046	4173746	32 - 24	4173116	4173816
0.4*	4173011	4173711	14 - 10	4173047	4173747	24 - 18	4173117	4173817
0.45*	4173012	4173712	10 - 7	4173048	4173748	18 - 14	4173118	4173818
0.5 - 0.7	4173000	4173700	7 - 4.5	4173049	4173749	14 - 10	4173119	4173819
0.7 - 1	4173001	4173701	4.5 - 3	4173050	4173750	10 - 7	4173120	4173820
1.25 - 2	4173002	4173702	3 - 2.5	4179408	4179410	7 - 4.5	4173121	4173821
2 - 3.5	4173003	4173703				4.5 - 3	4173122	4173822
3.5 - 5	4173004	4173704						
5 - 7	4173005	4173705						
7 - 9	4173006	4173706						

## Anvils for pitch diameters for Indicating Thread Snap Gage 853

Metric thread (60°)			Whitworth thread (55°)			American UST thread (60°)		
Pitch	V-anvil	Blade	Pitch range	V-anvil	Blade	Pitch range	V-anvil	Blade
mm	Order no.	Order no.	tpi	Order no.	Order no.	tpi	Order no.	Order no.
0.2	4173051	4174007	40 - 32	4173043	4176043	60 - 48	4173124	4176113
0.25	4173052	4174008	32 - 24	4173044	4176044	48 - 40	4173125	4176114
0.3	4173053	4174009	24 - 18	4173045	4176045	40 - 32	4173115	4176115
0.35	4173054	4174010	18 - 14	4173046	4176046	32 - 24	4173116	4176116
0.4	4173055	4174011	14 - 10	4173047	4176047	24 - 18	4173117	4176117
0.45	4173056	4174012	10 - 7	4173048	4176048	18 - 14	4173118	4176118
0.5 - 0.7	4173000	4174000	7 - 4.5	4173049	4176049	14 - 10	4173119	4176119
0.7 - 1	4173001	4174001	4.5 - 3	4173050	4176050	10 - 7	4173120	4176120
1.25 - 2	4173002	4174002	3 - 2.5	4179408	4179411	7 - 4.5	4173121	4176121
2 - 3.5	4173003	4174003				4.5 - 3	4173122	4176122
3.5 - 5	4173004	4174004						
5 - 7	4173005	4174005						
7 - 9	4173006	4174006						

## Carbide anvils for 852, 852TS and 853


1.25 - 2	4511105	4511104
2 - 3.5	4511108	4511107
3.5 - 5	4511140	4511139
5 - 7	4511142	4511141

\* V-anvil covers 3 pitches

## Interchangeable Anvils for 852, 852 TS and 853

### For root diameters

Each pitch requires a separate V-anvil.  
Blade can be used for several pitches.

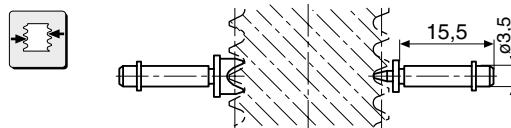

### Anvils for root diameters


Metric thread (60°)			Whitworth thread (55°)			American UST-thread (60°)
Pitch	V-anvil	Blade	Pitch	V-anvil	Blade	The same anvils are to be used as with the Whitworth-thread (55°).
mm	Order no.	Order no.	range tpi	Order no.	Order no.	
0.5	4173213	4173719	40	4173331	4173833	
0.6	4173214		36	4173321		
0.7	4173215		32	4173332		
0.75	4173216		28	4173333		
0.8	4173217		26	4173335		
0.9	4173218	4173723	24	4173336	4173840	
1	4173219		22	4173337		
1.25	4173221		20	4173338		
1.5	4173222		19	4173339		
1.75	4173223		18	4173340		
2	4173225	4173727	16	4173342	4173843	
2.5	4173226		14	4173343		
3	4173227		12	4173345		
3.5	4173229		11	4173346		
4	4173230		10	4173347		
4.5	4173231	4173731	9	4173349	4173851	
5	4173233		8	4173350		
5.5	4173234		7	4173451		
6	4173235		6	4173453		
7	4173237		5	4173454		
8	4173238	4173739	4.5	4173455	4173855	
9	4173239		4	4173457		
			3.5	4173458		
			3.25	4173459		
			3	4173460		

### For outside diameters

#### Anvil 40 Za, flat

Measuring face dia. 7.5 mm  
with 853 smallest  
measurable O.D. dia. 5 mm


Hardened steel **Order no. 4173210**  
Carbide tipped **Order no. 4511190**

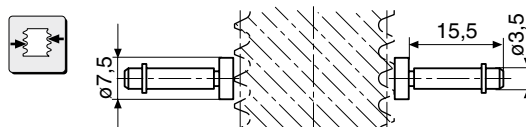

## Interchangeable Anvils for 852 and 852 TS

### Ball Anvils

For measuring gears and for special applications. Carbide ball. With cylindrical mounting shank and retainer ring.  
For mounting into mounting bores of thread micrometers 40 Z and 852.

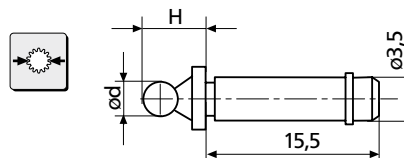

Shank dia. 3.5 mm  
Shank length 15.5 mm  
Manufacturing tolerance  
Ball dia.  $\pm 2 \mu\text{m}$


dia. d mm	H mm	Order no.	dia. d mm	H mm	Order no.	dia. d mm	H mm	Order no.
0.5	5.0	<b>4179150</b>	1.65	6.2	<b>4179168</b>	3.048	7.5	<b>4179182</b>
0.551	5.1	<b>4179151</b>	1.7	6.2	<b>4179169</b>	3.2	7.7	<b>4170570</b>
0.62	5.1	<b>4179152</b>	1.75	6.3	<b>4170553</b>	3.25	7.8	<b>4170566</b>
0.623	5.1	<b>4179153</b>	1.782	6.3	<b>4179170</b>	3.4	7.9	<b>4179183</b>
0.63	5.1	<b>4179154</b>	1.8	6.3	<b>4179171</b>	3.5	8.0	<b>4170558</b>
0.722	5.2	<b>4179155</b>	1.829	6.3	<b>4179172</b>	3.658	8.2	<b>4179184</b>
0.862	5.4	<b>4179156</b>	1.9	6.4	<b>4179173</b>	3.7	8.2	<b>4170571</b>
0.895	5.4	<b>4179157</b>	2	6.5	<b>4170554</b>	4	8.5	<b>4170559</b>
0.965	5.5	<b>4179158</b>	2.032	6.5	<b>4170568</b>	4.5	9.0	<b>4170560</b>
1	5.5	<b>4170550</b>	2.2	6.7	<b>4170569</b>	4.835	9.3	<b>4179185</b>
1.1	5.6	<b>4179159</b>	2.25	6.8	<b>4170564</b>	5	9.5	<b>4170561</b>
1.118	5.6	<b>4179160</b>	2.284	6.8	<b>4179174</b>	5.25	9.8	<b>4179186</b>
1.125	5.6	<b>4179161</b>	2.386	6.9	<b>4179175</b>	5.486	10.0	<b>4179187</b>
1.25	5.8	<b>4170551</b>	2.438	6.9	<b>4179176</b>	5.5	10.0	<b>4170562</b>
1.35	5.9	<b>4179162</b>	2.5	7.0	<b>4170556</b>	6	10.5	<b>4170563</b>
1.372	5.9	<b>4179163</b>	2.667	7.2	<b>4179177</b>	6.096	10.6	<b>4179188</b>
1.385	5.9	<b>4179164</b>	2.704	7.2	<b>4179178</b>	6.35	10.9	<b>4179189</b>
1.5	6.0	<b>4170552</b>	2.713	7.2	<b>4179179</b>	6.5	11.0	<b>4170567</b>
1.524	6.0	<b>4179165</b>	2.721	7.2	<b>4179180</b>	7	11.5	<b>4170572</b>
1.54	6.0	<b>4179166</b>	2.743	7.2	<b>4179181</b>	8	12.5	<b>4170573</b>
1.6	6.1	<b>4179167</b>	2.75	7.3	<b>4170565</b>	9	13.5	<b>4170574</b>
			3	7.5	<b>4170557</b>	10	14.5	<b>4170575</b>

*Further sizes are available upon request (material: steel)*

### Roller Blades

For measuring gears and for special applications. The measuring roller is made of carbide.  
To be mounted in the mounting bores of the 40 Z and 852.

Shank dia. 3.5 mm  
Shank length 15.5 mm  
Manufacturing tolerance  
Ball dia.  $\pm 2 \mu\text{m}$

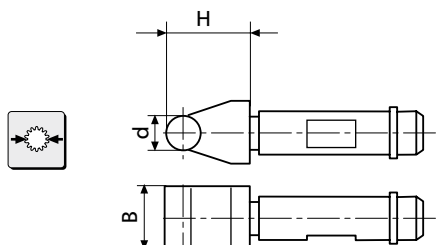

dia. d mm	Dimension H mm	Dimension B ø mm	Order no.
1	5.5	5	<b>4510200</b>
1.25	5.8	5	<b>4510201</b>
1.5	6.0	5	<b>4510202</b>
1.75	6.3	5	<b>4510203</b>
2	6.5	5.5	<b>4510204</b>
2.5	7.0	5.5	<b>4510206</b>
3	7.5	5.5	<b>4510207</b>
3.5	8.0	5.5	<b>4510208</b>
4	8.5	5.5	<b>4510209</b>
4.5	9.0	5.5	<b>4510210</b>
5	9.5	6	<b>4510211</b>
5.5	10.0	6	<b>4510212</b>
6	10.5	6	<b>4510213</b>

*Further sizes are available upon request (material: steel)*

## Portable Thickness Gages 22 P

Portable measurement of sheet materials and small parts

### Features

- Indicator built into gage frame for maximum ruggedness.
- Lift-lever for one-hand operation.
- Continuous reading dials with revolution counter for absolute measurement of thin materials, plastic films, a small parts.
- 6.3 mm / .25" diameter, flat steel contacts.
- XLI Models (with  $\mu$ Max $\mu$ m<sup>®</sup> XL Digital Indicator) can be Left/Right hand operated or front mounted and used with BA-26 Stand for bench applications.



22P-15



**XLI-22P-20** with **XLI-20000**  $\mu$ Max $\mu$ m XL Digital Indicator (front mounted) and BA-26 Stand (Stand not included)



**XLI-22P-20** with **XLI-20000**  $\mu$ Max $\mu$ m XL Digital Indicator

### Technical Data

Metric	Inch	Capacity mm / <i>inch</i>	Throat Depth mm / <i>inch</i>	Graduation
<b>22P-10M</b>	<b>22P-11</b>	0 - 2.54 / <b>0-.10"</b>	28.6 / <b>1.13"</b>	.002 / <b>.0001"</b>
<b>22P-15M</b>	<b>22P-15</b>	0 - 12.70 / <b>0-.50"</b>	50 / <b>2"</b>	.01 / <b>.001"</b>
<b>22P-20M</b>	<b>22P-20</b>	0 - 25 / <b>0-1"</b>	50 / <b>2"</b>	.01 / <b>.001"</b>
<b>XLI-22P-20</b>		25 / <b>0-1"</b>	50 / <b>2"</b>	.001 / <b>.00005"</b> (Resolution)



## Portable Thickness Gages 26 P



26P-7

### Features

- Push-down movement.
- Molded body fits shape of hand; built-in indicator.
- Gage is normally open for easy part entry. Push-down button to close the contacts.
- Rugged and compact for roving inspection.
- 6.3 mm / .25" diameter, flat steel contacts.

### Technical Data

Metric	Inch	Capacity mm / <i>inch</i>	Throat Depth mm / <i>inch</i>	Graduation mm / <i>inch</i>
26P-7M	26P-7	0-7.6 / <i>0-.30"</i>	16 / <i>.63"</i>	.01 / <i>.001"</i>

## Portable Thickness Gages 838

838 A



838 B



### Features

- Rugged sturdy frame made from hard aluminum
- Built-in Digital or Dial Indicator
- With a lifting lever for the moveable upper measuring spindle
- Convenient heat insulated handle, open at one end
- Versions with a throat depth of 200 mm have a removable stand

### Thickness Gage 838 A

- With flat measuring faces
- For measuring soft materials for example; foil, felt, rubber, paper and cardboard

### Thickness Gage 838 B

- With flat measuring faces
- For measuring soft materials for example; foil, felt, rubber, paper and cardboard

### Technical Data

Catalog-no.	Throat depth	Measuring range	Measuring face dia.	Measuring face radius	Order no. with Indicator 810	Order no. with Indicator 1080	Order no. Wooden case
	mm (inch)	mm (inch)	mm	mm	0.01 mm Res	0.005/ .0001" Res	
838 A	50 (2")	0 - 20 (0 - .750")	11.3 = 1 cm <sup>2</sup>	-	4495000	4495120	4495050
	100 (4")	0 - 20 (0 - .750")	11.3 = 1 cm <sup>2</sup>	-	4495001	4495121	4495051
	200 (8")	0 - 20 (0 - .750")	11.3 = 1 cm <sup>2</sup>	-	4495002	4495122	4495052
	50 (2")	0 - 20 (0 - .750")	20 = 3.14 cm <sup>2</sup>	-	4495103	4495125	4495050
	100 (4")	0 - 20 (0 - .750")	20 = 3.14 cm <sup>2</sup>	-	4495104	4495126	4495051
	200 (8")	0 - 20 (0 - .750")	20 = 3.14 cm <sup>2</sup>	-	4495105	4495127	4495052
	50 (2")	0 - 20 (0 - .750")	30 = 7.06 cm <sup>2</sup>	-	4495109	4495130	4495050
	100 (4")	0 - 20 (0 - .750")	30 = 7.06 cm <sup>2</sup>	-	4495110	4495131	4495051
	200 (8")	0 - 20 (0 - .750")	30 = 7.06 cm <sup>2</sup>	-	4495111	4495132	4495052
838 B	50 (2")	0 - 20 (0 - .750")	12	30	4495010	4495135	4495050
	100 (4")	0 - 20 (0 - .750")	12	30	4495011	4495136	4495051
	200 (8")	0 - 20 (0 - .750")	12	30	4495012	4495137	4495052

## 838 AB



### Features

- Rugged sturdy frame made from hard aluminum
- Built-in Digital or Dial Indicator or Dial Comparator
- With a lifting lever for the moveable upper measuring spindle
- Convenient heat insulated handle, open at one end

### Thickness Gage 838 AB

- Lower measuring face is flat
- Upper measuring face is spherical
- For measuring hard materials for example; sheet metal, hardboard

### Technical Data

Catalog no.	Throat depth mm (inch)	Measuring range mm (inch)	Measuring face dia. mm lower	Measuring face radius mm upper	Order no. with Indicator <b>810</b> 0.01 mm Res	Order no. with Indicator <b>1080</b> 0.005/ .0001" Res	Order no. Wooden case
<b>838 AB</b> flat/ spherical	50 (2") 100 (4")	0 -20 (0 - .750") 0 -20 (0 - .750")	11.3 = 1 cm <sup>2</sup> 11.3 = 1 cm <sup>2</sup>	30 30	<b>4495504</b>	<b>4495140</b> <b>4495141</b>	<b>4495050</b> <b>4495051</b>

Catalog no.	Throat depth mm (inch)	Measuring range mm (inch)	Measuring faces dia. mm lower	Measuring faces radius mm upper	Order no. with Indicator <b>1082</b> 0.001 mm/ .0005" Res	Order no. with Comparator <b>1003</b> 1 µm Res	Order no. Wooden case
<b>838 AB</b> flat/ spherical	50 (2") 100 (4")	0 -20 (0 - .750") 0 -20 (0 - .750")	11.3 = 1 cm <sup>2</sup> 11.3 = 1 cm <sup>2</sup>	30 30	<b>4495145</b> <b>4495146</b>	<b>4495519</b> <b>4495517</b>	<b>4495050</b> <b>4495051</b>

## Dead Load Thickness Gages 57B



**XLI-57B-15**

### Features

- Solid casting with ribbed frame provides strength and rigidity for accurate measurements.
- 0.003 mm / .0001" parallelism with tables up to 19 mm / .75" diameter.
- 283 g / 10 oz. dead load weight for constant gaging pressure.
- 10 mm / .407" diameter flat upper 54.0 mm/ 2.125" lower contacts.
- Indicator mounts with adjustable back for quick positioning for each gaging requirement.
- Available with Dial Indicator or Digital Electronic Indicator.
- Gage is supplied with a lift lever so work can be easily placed between the table and contact.
- Four-inch throat depth for part clearance.

### Technical Data

Metric	Order no.	Inch	Capacity mm / <i>inch</i>	Description
<b>57B-14M</b>	<b>57B-14</b>		0-2.5 / <b>0-.10"</b>	Dial Indicator readout with 2.5mm / .10" sensitive range and .002 mm / .0001" grads.
<b>57B-15M</b>	<b>57B-15</b>		0-25 / <b>0-1"</b>	Dial Indicator readout with 25mm / 1" sensitive range and .01 mm / .001" grads.
	<b>XLI-57B-15</b>			μMaxum® XL Digital Indicator with 25mm / 1" range and .001 mm / .00005" resolution (Model XLI-50002).

*Alternate Indicators and contact points available upon request.  
Contact Mahr Federal.*

## Wire Insulation Thickness Gages 57B

For checking wall thickness of wire insulation and other small-diameter tubular parts



57B-13

### Features

- Using the basic design of the Model 57B-13 (Model 57B-13M — Metric) Gage, the lower contact is PT-103, 1.10 mm / .043" diameter rod, mounted horizontally. The upper radiused contact is a chisel contact, in line with the rod. By slipping tubular parts onto the lower contact, the gage can measure the thickness of the wall of the tube. A 10 gram auxiliary weight (WT-3) on the Indicator provides a total dead-load weight of 25 grams. (Replacement lower rod: PS-43)


### Technical Data

Metric	Order no.	Inch	Capacity mm / <i>inch</i>	Description
57B-13M	57B-13		0-2.5 / <b>0-.10"</b>	Dial Indicator readout with 7.6 mm / .30" sensitive range and 0.01 mm / .0005" grads.
	XLI-57B-13			μMaxum® XL Digital Indicator with 25 mm / 1" range and 0.001 mm / .00005" resolution (Model XLI-50002).
<b>Options</b>				
	PT-2245			0.050 mm / .02" diameter Pin, Lower Contact Assembly

### Measuring Compressible Materials

Compressible materials such as paper, plastics, rubber or fabrics must be measured under controlled conditions. Many materials have measurement standards specified by A.S.T.M., U.L., or other industry standards organizations. Measurement standards specify dead load weight, upper and lower contact configurations, and Indicator resolution.

Series 57B Gages are easily modified to meet most of these industry standards. Mahr Federal has on file designs for the measurement of paper, latex foam rubber, sponge rubber, vulcanized rubber, asbestos tape and cloth, sheet and roll felt, and many other materials. When inquiring, specify A.S.T.M. Specification Number, if possible.



## Thickness Gages 57B Bench Style



57B-12

### Features

- Solid casting with ribbed frame provides strength and rigidity for accurate measurements.
- Gage is furnished with a lift lever so work can be easily placed between the contacts.
- Large 54 mm/ 2.125" diameter lower anvil provides convenient stage for small parts or flat materials.
- 4.75 mm/ .187" diameter radiused upper contact normally provided.
- 102 mm/ 4" throat depth for part clearance.
- Indicator mounts with adjustable back for quick positioning for each gaging requirement.
- Available with Dial Indicator or Digital Electronic Indicator.

### Technical Data

Metric	Order no.	Inch	Capacity mm / <i>inch</i>	Description
57B-11M	57B-11		0-25 / <b>0-1"</b>	Dial Indicator readout with 25 mm / 1" sensitive range and .01 mm / .001" grads.
	XLI-57B-11			μMaxμm® XL Digital Indicator with 25 mm/ 1" range and .001 mm / .00005" resolution (Model XLI-50002).
	EMD-57B-11		0-21.5 / <b>0-.85"</b>	Maxμm/// Digital Indicator with selectable range and resolution, 2033101.
	EDI-57B-11			μMaxμm Digital Indicator with 2 mm / .08" sensitive range, .001 mm / .00005" resolution (Model EDI-10101).
57B-12M	57B-12		0-12.5 / <b>0-.5"</b>	Dial Indicator readout with 12.5 mm/ .50" sensitive range and .01 mm / .0005" grads.
	XLI-57B-12			μMaxμm® XL Digital Indicator with 12.5 mm / .50" range and .001 mm / .00005" resolution (Model XLI-10002).

*Alternate Indicators and contact points available upon request.  
Contact Mahr Federal.*



## Caliper Gages 49P

The most widely used gages for checking medium tolerance dimensions on patterns, castings, forgings, dies, sheet metal.



49P

### Features

- The most widely used gages for checking medium tolerance dimensions on patterns, castings, forgings, dies, sheet metal.
- Generous clearance on jaws reaches over non-measured part protrusions for easy access to areas where thickness must meet critical dimensional specs.
- Retraction lever is conveniently located for one-hand operation.
- .02 mm or .1 mm / .01", .001", or 1/64" grads. available.
- Continuous reading dials with revolution counters normally provided.
- Cylindrical radius steel contact tips normally furnished.

### Technical Data

Metric	Order no.		Capacity* mm / <i>inch</i>	Gaging Depth mm / <i>inch</i>	Minimum Graduation mm / <i>inch</i>	A B	
	Inch						
49P-17M	49P-17		0 - 50 / <b>0 - 2"</b>	100 / <b>4"</b>	0.02 / <b>.001"</b> grads.	1-1/4	1-1/4
49P-19M	49P-19		0 - 50 / <b>0 - 2"</b>	200 / <b>8"</b>	0.02 / <b>.001"</b> grads.	2-9/16	2
49P-1M	49P-1		0 - 75 / <b>0 - 3"</b>	100 / <b>4"</b>	0.1 / <b>.01"</b> grads.	1-1/4	1-1/4
49P-2M	49P-2		0 - 75 / <b>0 - 3"</b>	200 / <b>8"</b>	0.1 / <b>.01"</b> grads.	2-9/16	2


\* Ordinarily this gage is used as a comparator. The actual measuring range of the instrument is 38 mm / 1.50".

If the gage is used for direct linear measurement, chordal errors may need to be corrected.

Contact Mahr Federal Technical Assistance for details.

### Special Applications

**Series 49P and 149P Caliper Gages** have many design possibilities. Specially shaped arms of various lengths can be designed to reach inaccessible spots or get around obstructions to make measurements possible which might otherwise go unchecked. For alternate contact shapes or materials, alternate capacities and gaging depths, and special designs to meet your application contact Mahr Federal Technical Assistance.

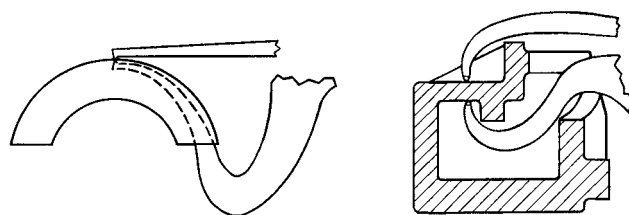


## Gages for External Measurement 838 TA

### Features

- For measuring thicknesses and wall thicknesses
- Precision rack and pinion mechanism ensures reliable reproducibility
- Easy to operate, very habile and portable
- Resolution from 0.005 mm
- Tolerance markers are easy to read
- Dust and splash waterproof
- Contact points are made from carbide
- Absolute measuring instrument



### Applications

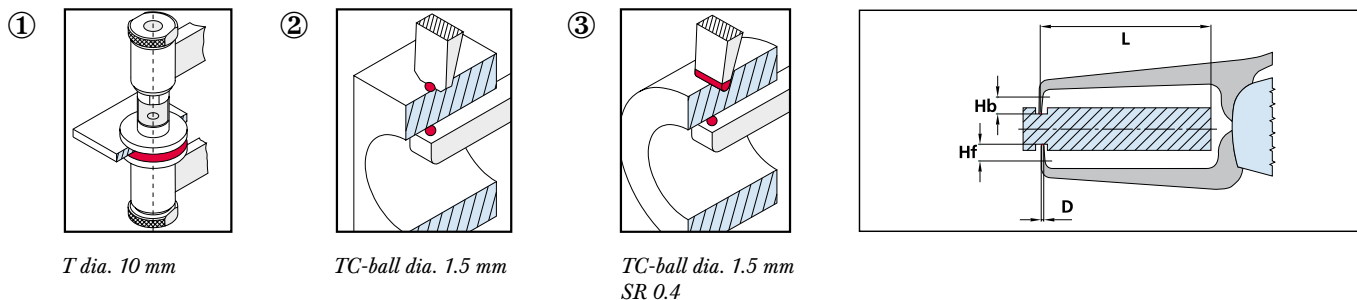

### Technical Data and Dimensions

Application range	Awb	mm / <i>inch</i>	0 - 5 / <b>0 - .2"</b>	0 - 10 / <b>0 - .4"</b>	0 - 10 / <b>0 - .4"</b>
Measuring range	Meb	mm / <i>inch</i>	5 / <b>.2"</b>	10 / <b>.4"</b>	10 / <b>.4"</b>
Readings	Skvw	mm / <i>inch</i>	0.005 / <b>.0002"</b>	0.01 / <b>.0005"</b>	0.01 / <b>.0005"</b>
Deviation within the meas. range	$f_M$	mm / <i>inch</i>	$\pm 0.02$ / <b><math>\pm .001"</math></b>	$\pm 0.02$ / <b><math>\pm .001"</math></b>	$\pm 0.02$ / <b><math>\pm .001"</math></b>
Repeatability	$f_w$	mm / <i>inch</i>	0.005 / <b>.0002"</b>	0.005 / <b>.0002"</b>	0.005 / <b>.0002"</b>
Measuring depth	L	mm / <i>inch</i>	28 / <b>1.1"</b>	59 / <b>2.3"</b>	59 / <b>2.3"</b>
Contact point - type	D	mm	T dia. 10 ①	K dia. 1.5 ②	K dia. 1.5/SR 0.4 ③
Contact point - length (moveable)	Hb	mm / <i>inch</i>	16.5 / <b>.65"</b>	8 / <b>.314"</b>	8 / <b>.314"</b>
Contact point - length (fixed)	Hf	mm / <i>inch</i>	8.5 / <b>.332"</b>	0.9 / <b>.035"</b>	0.9 / <b>.035"</b>
Minimum meas. force	Fmin.	N	1.20	0.80	0.80
Maximum meas. force	Fmax.	N	1.70	1.30	1.30
Order no. Metric graduation			<b>4495070</b>	<b>4495071</b>	<b>4495072</b>
Order no. Inch graduation			<b>4495970</b>	<b>4495971</b>	<b>4495972</b>

## Electronic Gage for External Measurement 838 EA for measuring thicknesses and wall thickness


### Features

- High contrast analog and digital LCD
- Specified measuring programs according to applications /measuring tasks
- Absolute/Relative measuring program
- Tolerance is displayed with 2 LEDs
- mm/inch switchable
- Protection class IP63 according to EN 60529
- Supplied with:  
Test certificate,  
Battery




### Applications

①




Ball dia. 1.5 mm

②



Ball dia. 1.5 mm  
Ball dia. 3 mm



### Technical Data and Dimensions

Measuring range	mm / <i>inch</i>	0 - 20 / <b>0 - 8"</b>	0 - 20 / <b>0 - 8"</b>	0 - 40 / <b>0 - 16"</b>
Resolution	mm / <i>inch</i>	0.01 / <b>.0005"</b>	0.01 / <b>.0005"</b>	0.01 / <b>.0005"</b>
Measuring depth "L"	mm / <i>inch</i>	50 / <b>1.97"</b>	50 / <b>1.97"</b>	115 / <b>4.53"</b>
Contact point-length "Hb"	mm / <i>inch</i>	15 / <b>.59"</b>	15 / <b>.59"</b>	22 / <b>.87"</b>
Contact point-length "Hf"	mm / <i>inch</i>	15 / <b>.59"</b>	0,9	22
Contact point-type	mm / <i>inch</i>	K dia. 1.5 / <b>.059"</b> ②	K dia. 1.5 / <b>.059"</b> ①	K dia. 3 / <b>.118"</b> ②
Measuring force	N	0.7 - 1.3	0.7 - 1.3	1.0 - 1.5
Error limit "G"	mm / <i>inch</i>	0.02 / <b>.001"</b>	0.02 / <b>.001"</b>	0.04 / <b>.0015"</b>
Repeatability "r"	mm / <i>inch</i>	0.01 / <b>.0005"</b>	0.01 / <b>.0005"</b>	0.02 / <b>.001"</b>
Order no.		<b>4495057</b>	<b>4495058</b>	<b>4495059</b>

### Accessories

	Order no.
<b>838 di</b> Digimatic Interface incl. Data Connection Cable	<b>4495084</b>
Battery Alkaline AA 1.5 V	<b>4243072</b>


## Gages for Internal Measurement 838 TI

### Features


- For measuring bores and internal grooves
- Precision rack and pinion mechanism ensures reliable reproducibility
- Easy to operate, very habile and portable
- Resolution from 0.005 mm
- Tolerance markers are easy to read
- Dust and splash waterproof
- Contact points are made from carbide
- Absolute measuring instrument




### Applications




Blade R 0.1 mm



TC-ball dia. 1 mm  
TC-ball dia. 0.6 mm



TC-ball dia. 1 mm

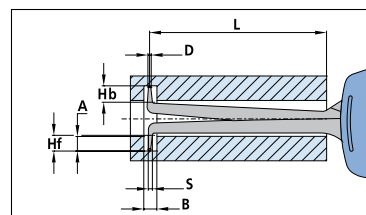

### Technical Data and Dimensions

Application range	Awb	mm	2.5 - 7.5	5 - 10	5 - 15	10 - 20	20 - 30	30 - 40	40 - 50
		inch	.1 - .3"	.2 - .4"	.2 - .6"	.4 - .8"	.8 - 1.2"	1.2 - 1.6"	1.6 - 2.0"
Measuring range	Meb	mm/inch	5 / .2"	5 / .2"	10 / .4"	10 / .4"	10 / .4"	10 / .4"	10 / .4"
Readings	Skw	mm	0.005	0.005	0.01	0.01	0.01	0.01	0.01
		inch	.0002"	.0002"	.0005"	.0005"	.0005"	.0005"	.0005"
Deviation within the meas. range	f <sub>M</sub>	mm	±0.01	±0.01	±0.02	±0.02	±0.02	±0.02	±0.02
		inch	±.0005"	±.0005"	±.001"	±.001"	±.001"	±.001"	±.001"
Repeatability	f <sub>w</sub>	mm	0.0025	0.0025	0.005	0.005	0.005	0.005	0.005
		inch	.0001"	.0001"	.0002"	.0002"	.0002"	.0002"	.0002"
Measuring depth	L	mm/inch	10/.4"	22/.86"	30/1.2"	50/2.0"	52/2.05"	57/2.25"	57/2.25"
Groove depth	A	mm/inch	0.7/.03"	2.2/.08"	1.7/.06"	4/.16"	4/.16"	4.5/.17"	4.5/.17"
Groove width	B	mm/inch	0.6/.024"	1.4/.05"	1.1/.04"	2/.08"	2/.08"	2/.08"	2/.08"
Contact point - type	D	mm	SR 0.1 ①	K dia. 0.6 ②	K dia. 0.6 ②	K dia. 1 ③	K dia. 1 ③	K dia. 1 ②	K dia. 1 ②
		inch	.004"	.02"	.02"	.04"	.04"	.04"	.04"
Contact point - length (mov.)	Hb	mm/inch	0.7/.03"	2.3/.09"	2.3/.09"	5/.2"	5/.2"	5/.2"	5/.2"
Contact point - length (fixed)	Hf	mm/inch	0.7/.03"	2.3/.09"	2.3/.09"	5/.2"	5/.2"	5/.2"	5/.2"
Contact point - thickness	S	mm/inch	0.5/.02"	1.2/.05"	1.2/.05"	1.7/.06"	1.7/.06"	1.7/.06"	1.7/.06"
Minimum meas. force	Fmin.	N	1.20	1.20	0.80	0.80	0.80	0.80	0.80
Maximum meas. force	Fmax.	N	1.70	1.70	1.30	1.30	1.30	1.30	1.30
Order no.	Metric		4495060	4495061	4495062	4495063	4495064	4495065	4495066
Order no.	Inch		4495960	4495961	4495962	4495963	4495964	4495965	4495966

## Electronic Gage for Internal Measurement 838 EI for measuring bores and internal grooves


### Features

- High contrast analog and digital LCD
- Specified measuring programs according to applications / measuring tasks
- Absolute/Relative measuring program
- Tolerance is displayed with 2 LEDs
- mm/inch switchable
- Protection class IP63 according to EN 60529
- Supplied with:  
Test certificate,  
Battery




### Applications

①




Ball dia. 0.6 mm  
Ball dia. 1 mm

②



Ball dia. 1 mm



### Technical Data and Dimensions

Measuring range	mm / <i>inch</i>	5 - 25 / <b>.197 - .984"</b>	10 - 30 / <b>.394 - 1.18"</b>	20 - 40 / <b>.787 - 1.574"</b>
Resolution	mm / <i>inch</i>	0.01 / <b>.0005"</b>	0.01 / <b>.0005"</b>	0.01 / <b>.0005"</b>
Measuring depth "L"	mm / <i>inch</i>	29 / <b>1.14"</b>	49 / <b>1.93"</b>	53 / <b>2.09"</b>
Groove depth "A"	mm / <i>inch</i>	2.2 / <b>.087"</b>	4 / <b>.157"</b>	4 / <b>.157"</b>
Groove width "B"	mm / <i>inch</i>	1.8 / <b>.071"</b>	2 / <b>.079"</b>	2 / <b>.079"</b>
Contact point-type	mm / <i>inch</i>	K dia. 0.6 / <b>.024"</b> ①	K dia. 1 / <b>.039"</b> ②	K dia. 1 / <b>.039"</b> ①
Measuring force	N	0.9 - 1.4 / <b>.035" - .055"</b>	0.9 - 1.4 / <b>.035" - .055"</b>	1.1 - 1.4 / <b>.043" - .055"</b>
Error limit "G"	mm / <i>inch</i>	0.02 / <b>.001"</b>	0.02 / <b>.001"</b>	0.02 / <b>.001"</b>
Repeatability "r"	mm / <i>inch</i>	0.02 / <b>.001"</b>	0.01 / <b>.0005"</b>	0.01 / <b>.0005"</b>
Order no.		<b>4495053</b>	<b>4495054</b>	<b>4495055</b>

### Accessories

	Order no.
<b>838 di</b> Digimatic Interface incl. Data Connection Cable	<b>4495084</b>
Battery Alkaline AA 1,5 V	<b>4243072</b>

# Definition of Terms Specifications for inspection and test acceptance procedure of mechanical and electronic caliper gages

## 1. Basics

The inspection only follows approximately the testing methods and procedures of the German standard DIN 878 for dial gages and the testing statements for caliper gages according to VDI/VDE/DGQ 2618 page 13. The gages are referred to without special reference as gages for 'absolute' measurements and adjustable zero point.

## 2. Definitions

Definitions of length checking techniques see DIN 2257 part 1 and part 2 (see also Illustration).

### 2.1 Application range Awb

Application range Awb of a gage corresponds to the sum of adjusting and measuring range.

### 2.2 Measuring range Meb

The measuring range of an indicating gage represents the range of measuring values in which agreed error limits must not be exceeded.

### 2.3 Reading Zw

The reading Zw of a numerical interval of a numerical scale is the modification of the value of a measured variable that causes the modification of the indication by one interval. The numerical interval corresponds to the scale interval of a line scale and is indicated in the unity of the measured variable.

### 2.4 Scale interval Skw

The scale interval Skw is indicated on the scale, i.e. 0.01 mm. It corresponds to the measuring value between two scale graduation marks.


### 2.5 Deviation within the measuring range $f_M$

The deviation within the measuring range (range of deviation)  $f_M$  represents the distance of ordinates between the highest and the lowest position in the deviation diagram when the movable caliper arm closes. The error limits G for  $f_M$  is symmetrically positioned to the zero line and is indicated as  $\pm f_{Mzul}$ .

The deviation in the partial measuring range  $f_r$  can only be determined by using electronic testing methods during the preparation of certificates of quality.

### 2.6 Repeatability $f_w$

Repeatability  $f_w$  is a characteristic value for deviations of the measured variable within the measuring range in the same motion direction of the movable caliper arm (usually n is 5).

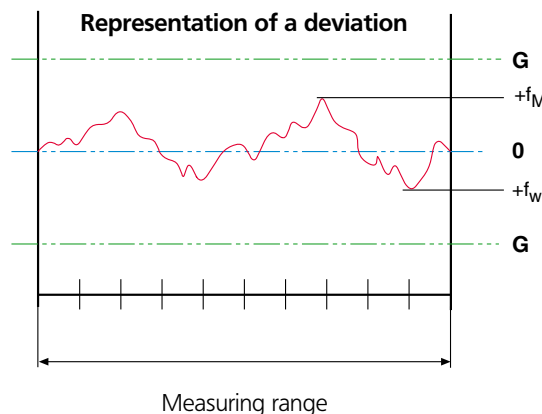


## Measuring Capacity of Inside Measuring Instruments

The data that is shown in the table refer to groove depth A, groove width B and measuring depth L, these are only meant to be rough guidelines.

For each type of instrument there is dependence of these three values from each other and on the application range Awb. This is shown in the adjacent table of examples. For each inside measuring instrument this table is available upon request in connection with a detailed data sheet.

Groove depth A (mm)	Application range Awb (mm)										
	10	11	12	13	14	15	16	17	18	19	20
0	0/55	0/55	0/56	0/56	0/57	0/57	0/57	0/57	0/57	0/57	0/58
0.5		1.4/55	1.4/56	1.4/56	1.4/56	1.4/56	1.4/56	1.4/56	1.4/57	1.4/57	1.4/57
1			1.4/56	1.4/56	1.4/56	1.4/56	1.4/56	1.4/56	1.4/56	1.4/56	1.4/57
1.5				1.4/55	1.4/55	1.4/55	1.4/55	1.4/56	1.4/56	1.4/56	1.4/56
2					1.4/55	1.4/55	1.4/55	1.5/55	1.5/55	1.5/56	1.5/56
2.5						1.4/55	1.5/55	1.5/55	1.6/55	1.6/55	1.6/55
3							1.5/54	1.6/54	1.6/55	1.6/55	1.6/55
3.5								1.6/54	1.6/54	1.6/54	1.6/55
4									1.7/54	1.7/54	1.7/54
4.5										1.7/53	1.8/54

Relationship B/L

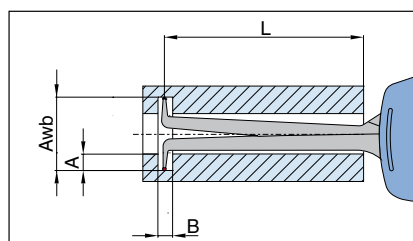


B = Min. groove depth (mm)  
L = Max. usable caliper arm length (mm)

Example: Awb = 12      B = 1.4  
              A = 0.5      L = 56



## Indicating Depth Gage 65P-40, 75P-30 and 837

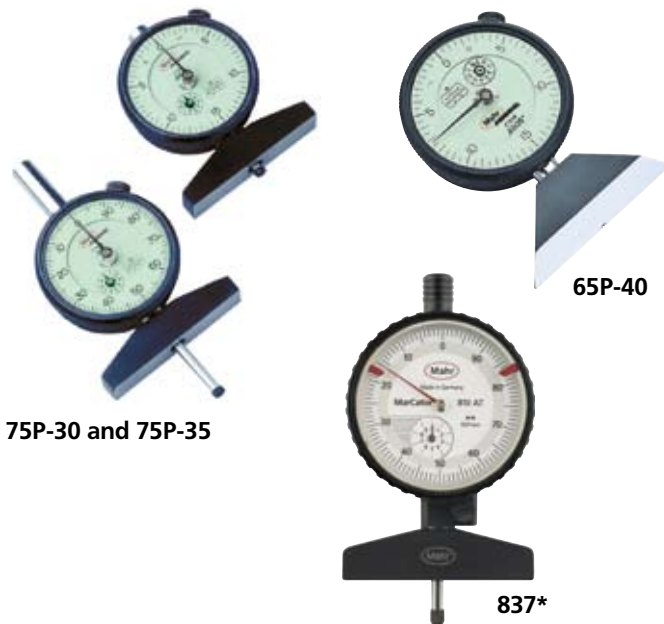

### Features

- **65P-40** has a "V" shaped base and a needle contact. Movement is "Push-Down" style. Ideal for measuring etch depth, pits, or small, shallow recesses.
- **75P-30** Depth Gages have rectangular, flat base and a radiused contact point. 75P-30 is supplied with contact point, for measuring depths from the base as a reference. Contact points for other depths are available upon request.
- **75P-35** Depth Gages have three interchangeable contact points, allowing inspection of depths to 76 mm / 3". Check depths against a setting master.
- **837** has a large cross beam with hardened and ground contact surface as well as mounting clamp for dial indicator.

### Technical Data

Order no. Metric	Order no. Inch	Capacity	Range of Sensitive	Graduation Contact	Base Dimensions	Contact Style/ Length
65P-40M	65P-40	0-2 mm / <b>0-.075"</b>	0-2 mm / <b>0-.075"</b>	0.01 mm / <b>.0005"</b>	64 mm / <b>2.50"</b>	Needle
75P-30M	75P-30	0-4 mm / <b>0-.15"</b>	0-4 mm / <b>0-.15"</b>	0.01 mm / <b>.0005"</b>	64x14 mm / <b>2.5x.56"</b>	radiused: 3 mm / <b>.13"</b>
75P-35M	75P-35	0-75 mm / <b>0-3"</b>	0-75 mm / <b>0-3"</b>	0.01 mm / <b>.001"</b>	64x14 mm / <b>2.5x.56"</b>	(3) radiused: 3 mm / <b>.13"</b> 28 mm / <b>1.13"</b> 54 mm / <b>2.13"</b>
Model	Range	Range with Anvils (837v)	Beam length	Beam width	Mounting hole dia.	Order no.
837	0-10 mm	0-100 mm	60 mm	12 mm	8 mm	4494000*

\* Indicator not included.

### Indicating Instruments


All indicating instruments that has a 8 mm mounting shank may be used. However the Dial Indicator 810 AT is recommended due to its large measuring range.

Readings 0.01 mm  
Measuring range 10 mm

Order no. 4311060

Other alternatives are Digital Indicators 1075 or 1086, please refer to Chapter 5 for more information.

### Accessories

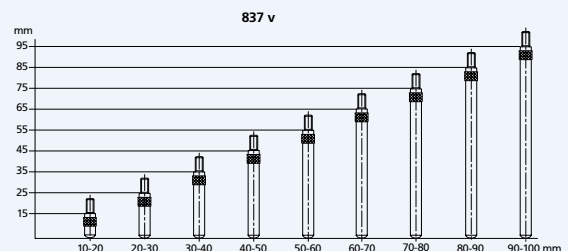

#### Anvil Set 837 v

Set of 9 anvils in increments of 10 mm. Spherical measuring faces, M 2.5 connection thread

Order no. 4494009

#### Wooden case

Accommodates the Depth Gage, a Dial Indicator and Anvils

Order no. 4494001

## Depth Gages 75P-50



75P-52 with  
Setting Master

### Features

- Modular depth gages for all applications.
- Single and multi-purpose bases with choice of Dial Indicator for comparative or direct measurement.
- Indicator collet mounting allows easy interchangeability of Indicators and bases — use one Indicator with several bases or change Indicators to meet range requirements.
- Family of contact points available to cover wide range of depth measurement applications.
- Setting masters available with anvil ground to specified depth ( $\pm 0.0025$  mm /  $\pm .0001$ " in accuracy).

### Technical Data

- **For Comparative Measurement:** Unless otherwise specified, a comparative measurement Indicator will be furnished. Correct contact point will be furnished for the gaging depth specified.

Metric: Furnished with .01 mm grads. / 2.50 mm range, balance dial.

Inch: Furnished with .0005" grads. / .075" range, balanced dial.

- **For Direct Measurement:** (Special Order) Contact point for 0-25 mm / 0-1" depth will be furnished unless otherwise specified.

Metric: Model SP6IS (0.01 mm grads. / 25 mm range, continuous dial with revolution counter).

Inch: Model 28ISN (.001" grads. / 1" range, continuous dial with revolution counter).

Digital: Model XLI-20000 (.001 mm/.00005" resolution, 25 mm / 1" range)

- For long range models contact Mahr Federal.

**Base Dimensions** (all bases are 15 mm / .59" high x 19 mm / .75" wide)

Order no. Metric	Inch	Length mm / inch	Width mm / inch	Diameter mm / inch	Measuring Positions	Base only Model*
75P-50M	75P-50	50 / 2"	19 / .75"	—	One	BA-42
75P-51M	75P-51	76 / 3"	19 / .75"	—	One	BA-43
75P-52M	75P-52	102 / 4"	19 / .75"	—	Two	BA-44
75P-53M	75P-53	152 / 6"	19 / .75"	—	Three	BA-45
75P-54M	75P-54	203 / 8"	19 / .75"	—	Three	BA-46
75P-55M	75P-55	—	—	19 / .75"	One	BA-47
75P-56 M	75P-56	—	—	32 / 1.25"	One	BA-76

### Ordering Information

#### When ordering please specify:

1. Model Number.
2. Comparative or Direct Measurement.
3. Depth to be gaged.
4. Master Setting Block, if required.
5. Any special or optional features such as special contact points, Indicator Housing, or alternate Indicators.

\* If base only is specified, it is supplied without the indicator holding collet, model AD-87.

Order collet separately if required.

## Contact Points

To increase the versatility of any **75P-50** Series Depth Gage, additional contacts may be used to extend the capacity of the gage. Specify additional contact points required from the table at right.

To order the entire set of points, order by Model **PT-750** Contact Point Set.

Gaging Depth mm / <i>inch</i>	Contact Point model*	Max $\mu$ m <i>III</i>
0.00 - 1.60 / <b>0</b> - <b>.063"</b>	PT-201	PT-564
1.60 - 4.80 / <b>.063</b> - <b>.188"</b>	PT-232	PT-31
4.80 - 8 / <b>.188</b> - <b>.313"</b>	PT-305	PT-201
8 - 11 / <b>.313</b> - <b>.438"</b>	PT-565	PT-232
11 - 14 / <b>.438</b> - <b>.563"</b>	PT-239	PT-305
14 - 17.50 / <b>.563</b> - <b>.688"</b>	PT-50	PT-565
17.50 - 21 / <b>.688</b> - <b>.813"</b>	PT-235	PT-239
21 - 24 / <b>.813</b> - <b>.938"</b>	PT-241	PT-50
24 - 27 / <b>.938</b> - <b>1.063"</b>	PT-100	PT-235
27 - 30 / <b>1.063</b> - <b>1.188"</b>	PT-51	PT-241
30 - 33.40 / <b>1.188</b> - <b>1.313"</b>	PT-243	PT-100
33.4 - 37 / <b>1.313</b> - <b>1.438"</b>	PT-696	PT-51
37 - 40 / <b>1.438</b> - <b>1.563"</b>	PT-101	PT-243
40 - 43 / <b>1.563</b> - <b>1.688"</b>	PT-245	PT-696
43 - 46 / <b>1.688</b> - <b>1.813"</b>	PT-102	PT-101
46 - 49 / <b>1.813</b> - <b>1.938"</b>	PT-566	PT-245
49 - 52.4 / <b>1.938</b> - <b>2.063"</b>	PT-247	PT-102

\* For "C" size dial indicators, "EDI-" and "XLI-"  $\mu$ Max $\mu$ m Digital Indicators.

## Semi-finished Model

0-25 mm/ <b>0-1"</b>	25-50 mm/ <b>1-2"</b>	Gaging Positions	Used with Model	"A"	"B"	"C"	"D"
<b>MR-501</b>	<b>MR-502</b>	One	75P-50, 75P-30/35	25 mm/ <b>1"</b>	25 mm/ <b>1"</b>	—	—
<b>MR-511</b>	<b>MR-512</b>	One	75P-51	38 mm/ <b>1.5"</b>	38 mm/ <b>1.5"</b>	—	—
<b>MR-521</b>	<b>MR-522</b>	Two	75P-52	50 mm/ <b>2"</b>	25 mm/ <b>1"</b>	25 mm/ <b>1"</b>	—
<b>MR-531</b>	<b>MR-532</b>	Three	75P-53	75 mm/ <b>3"</b>	25 mm/ <b>1"</b>	25 mm/ <b>1"</b>	25 mm/ <b>1"</b>
<b>MR-541</b>	<b>MR-542</b>	Three	75P-54	102 mm/ <b>4"</b>	25 mm/ <b>1"</b>	25 mm/ <b>1"</b>	25 mm/ <b>1"</b>
<b>MR-551</b>	<b>MR-552</b>	One	75P-55, 75P-56	17 mm/ <b>.68"</b>	17 mm/ <b>.68"</b>	—	—


Six different setting masters are available for Series 75P Models. Setting masters are available in two styles: Finished (ground to final size) and Semi-finished (assembled but not ground to final size). Finished depths available from 0 - 50 mm / 0 - 2". Unground Anvil can be purchased separately. Specify **Model AL-89**.

For multi-position masters, please specify the anvil location.

Protective Housings for the Dial Indicator are available, see page 5-23.

For Series 75P-50 style depth gages with alternate Indicators, greater gaging depth, alternate contact configurations or other modifications, contact Mahr Federal Technical Assistance.

For master finished to size, specify size and add suffix "F". Example: MR-502F, size 1.265" (Master for 75P-50 set to 1.265").

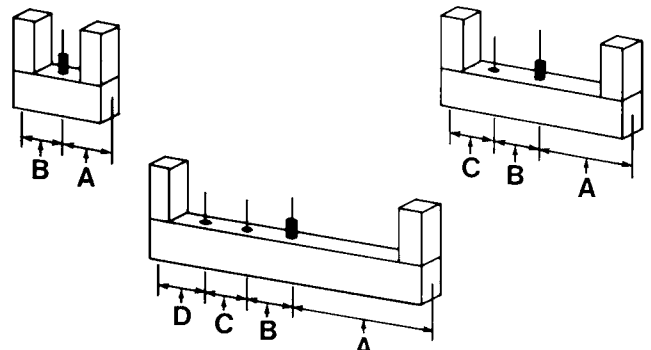

Bench Depth Gages 75B-1

For inspecting small parts



75B-1

Features

- Available with Dial Indicator (75B-1 Models) or Maxµm® III and µMaxµm Digital Electronic Indicators (EMD-75B and XLI-75B Models).
  - 89 x 102 mm / 3.50 x 4" hardened, ground work surface provides excellent reference surface.
  - Four #10-32 tapped holes provided for mounting part location fixturing.
  - Indicator adjustable vertically over 32 mm / 1.25".
- Two contact points provided, 6 mm / .25" and 32 mm / 1.25" to check features up to 50 mm / 2" deep.

Technical Data

Order no.		Indicator Range / Graduation or Resolution
Metric	Inch	
75B-1M	75B-1	25 mm / .01 mm ( <b>1" / .001"</b> ) graduation Dial Indicator.
EMD-75B-1		Maxµm/// Digital Indicator with selectable range and resolution, 2033201.
XLI-75B-1		µMaxµm XL Digital Indicator, 25 mm / <b>1"</b> range, .001 mm / <b>.00005"</b> resolution
XLI-75B-2		µMaxµm XL Digital Indicator, 12 mm / <b>.50"</b> range, .001 mm / <b>.00005"</b> resolution

To specify Digital Output on EMD-75B Models, add suffix "D". Example = EMD-75B-1D.  
Output is standard with XLI and EDI models.

## Dimentron® Plug Inside Diameter Gages



Thru-hole and Blind Hole  
Dimentron Plugs

### Features

- Designed for high production I.D. gaging.
- High chrome content; hardened stainless steel bodies ground precisely for specified size measurement.
- Plug tooling interchangeable for quick changeover.
- Measuring is easy — just insert plug into diameter and read. No rocking needed.
- Set to nominal dimension with a single master ring.
- Long life: Tungsten carbide contacts and vee rod ensure durable motion transfer.
- Three styles of plugs available — Thru-hole, Blind Hole and Super-blind.
- Open design rinses clean easily.
- Explore bores for taper, barrel shape, bell-mouth and 2-point out-of-round.
- Stop Collars available for all standard sizes.
- Captive vee rod design.

### Technical Data

#### Blind Hole Plugs\*\*\*

Use Dimension "A" below. Dimension "B" is 4 mm / .157".


#### Super-blind Plugs

Use Dimension "A" below. Dimension "B" is 2 mm / .08", for 5.5 mm / .217" & up .108" for 3.2 mm / .125" to 5.5 mm / .217"

#### Super-Super blind Plugs

Use Dimension "A" below. Dimension "B" is 0.79 mm / .031". (4.500" to 9.000" are not available with this model.)

### Dimentron Plug Dimensions



Blind Hole Plugs



### Thru-hole Plugs

Sizes above mm / inch	To and include mm / inch	A mm / inch	B mm / inch	Group*
3.2 / .125"	5.5 / .217"	30.4 / 1.2"	6.4 / .25"	no group**
5.5 / .217"	8.2 / .322"	34.8 / 1.37"	6.5 / .256"	5
8.2 / .322"	9.5 / .375"	34.8 / 1.37"	6.5 / .256"	6
9.5 / .375"	12.7 / .50"	35.4 / 1.39"	13 / .512"	8
12.7 / .50"	19.05 / .75"	35.4 / 1.39"	13 / .512"	8
19.05 / .75"	25 / 1"	48.3 / 1.90"	16 / .63"	12
25 / 1"	38 / 1.50"	48.3 / 1.90"	16 / .63"	12
38 / 1.50"	63 / 2.50"	46.7 / 1.84"	19 / .748"	12
63 / 2.50"	114.3 / 4.5"	46.7 / 1.84"	19 / .748"	12
114.3 / 4.50"	228.6 / 9.0"	46.7 / 1.84"	9.5 / .375"	12

\* Group Number specifies thread size on gaging plugs. Threaded bushings are provided with each plug to allow mounting to Maxim® Adaptor or Electronic Handle Assembly.

\*\* Only available as Thru- and Blind Hole Small Bore Probe. For larger or smaller plugs, alternate contact materials, extended gaging depths, more clearance, or other plug modifications - contact Mahr Federal Technical Assistance.

\*\*\* A blind-hole, Dimentron Plug Gage with Maxim® Digital Electronic Indicator makes a compact, lightweight portable hand tool.

## Dimetron® Plug Inside Diameter Gages



**Dimetron Plug Assembly**  
shown with Maxum® Indicator,  
Housing and Handle

### Ordering Information

When ordering specify:

1. Diameter
2. Tolerance
3. Gaging depth
4. Plug style
5. Contact type — polished chrome steel or tungsten carbide
6. Stop collar

#### Gaging Range:

Dimetron Plugs are ground to one of four measuring ranges, based on part tolerance.

### Technical Data

Sizes above mm / inch	To and include mm / inch	Metric M01 Inch 050 mm / inch	Maximum Part Tolerance		
			M02 100 mm / inch	M05 200 mm / inch	M08 400 mm / inch
3.18 / .1250"	3.62 / .1426"	±0.025 / ±.0010"	±0.038 / ±.0015"		
3.62 / .1426"	5.52 / .2171"	±0.025 / ±.0010"	±0.046 / ±.0018"	±0.076 / ±.0030"	
5.50 / .2171"	7.94 / .3125"	±0.025 / ±.0010"	±0.046 / ±.0018"	±0.069 / ±.0027"	±0.102 / ±.0040"
7.94 / .3125"	9.50 / .375"	±0.030 / ±.0012"	±0.051 / ±.0020"	±0.069 / ±.0027"	±0.127 / ±.0050"
9.50 / .3750"	12.7 / .500"	±0.038 / ±.0015"	±0.058 / ±.0023"	±0.086 / ±.0034"	±0.137 / ±.0054"
12.7 / .5000"	19.05 / .750"	±0.038 / ±.0015"	±0.069 / ±.0027"	±0.102 / ±.0040"	±0.165 / ±.0065"
19.05 / .750"	25.4 / 1.000"	±0.038 / ±.0015"	±0.076 / ±.0030"	±0.127 / ±.0050"	±0.180 / ±.0071"
25.4 / 1.000"	38 / 1.500"	±0.038 / ±.0015"	±0.076 / ±.0030"	±0.152 / ±.0060"	±0.221 / ±.0087"
38 / 1.500"	114.3 / 4.50"		±0.076 / ±.0030"	±0.152 / ±.0060"	±0.254 / ±.0100"
114.3 / 4.5"	229 / 9.00"			±0.152 / ±.0060"	±0.254 / ±.0100"

Order Maxum Indicator and Accessories separately.

#### Maxum Indicator

Inch: Specify **2033101** (**2033111** if Digital Output is required) for .00005" resolution, .0001" grad., and "0" on the Indicator in the 12 o'clock position.  
For "0" at 6 o'clock position, specify **2033201**.

Metric: Specify **2033101** (**2033111** if Digital Output is required) for 0.001 mm resolution, 0.001 mm grad., and "0" at 12 o'clock.  
Specify DEI-24121 for "0" at 6 o'clock.

**EKT-1120-W1** is required to mount the Maxum Indicator to Dimetron Plugs. (Specify **EKT-1120-W2** for Maxum Indicators with 8 mm stems). This adaptor kit includes mounting adaptor, hex wrench, and flat-end, carbide faced contact point for the Indicator.

Other models include:

**EKT-1120-W3** — EDI/Dial .375" stem — 4-48 thread

**EKT-1120-W4** — EDI/Dial 8 mm stem — 2.5 thread

**EKT-1120-W6** — 1002 - 1010 8 mm stem — 2.5 thread

#### Protective Housings for Plugs over 50 mm/ 2"

**EHG-1172** For Maxum Indicators without Output. Requires in-line or pistol style grip Handle (**HA-88** Handle and **AT-124** Adaptor).

**EHG-1198** For Maxum Indicators with Output. Requires pistol style grip Handle (**HA-88** and **AT-124** Adaptor).

**B-12668** For Maxum Indicators with Output. Complete with in-line style handle. **AT-125** Bench Stand Adaptor permits the Maxum Indicator in a Protective Housing to be clamped in **BA-26** Bench Stand. (See pages 9-5 and 9-7)



## Dimentron® Plug Inside Diameter Gages

### With Electronic Gage Heads

Gage heads are mounted to Dimentron Plugs using HA-88 and AD-140 Adaptor. Electronic Gage Heads can be ordered separately. The following Handle Assemblies include Adaptor, Wrenches and Gage Head:

### Handle Assemblies

Order no.	Description
<b>EHA-1146</b>	Flat Contact 3 m / 11 ft. coiled cable
<b>EHA-1145</b>	Flat Contact 3 m / 11 ft. straight cable

### Accessories

#### Base, BA-100

Heavy cast base has tooling plate allowing plug to be mounted vertically or horizontally. Can be used with Electronic Gage Heads or Maxµm Remote Transducers or Maxµm/// Digital Transducers.

#### Stop Collars

Stop collars are available for all Dimentron Plugs.



Right Angle Adaptor  
AT-155

### Extensions

Extensions for Dimentron Plugs are available for Plugs over 9.5 mm / .375". See table below:

Group 8 Plugs 9.3 mm/.366" O.D.	Group 12 Plugs 16 mm/.63" O.D.	Extension Length
<b>EX-204</b>	<b>EX-210</b>	50 mm/ <b>1.97"</b>
<b>EX-205</b>	<b>EX-211</b>	100 mm/ <b>3.94"</b>
<b>EX-206</b>	<b>EX-212</b>	200 mm/ <b>7.87"</b>

Consists of 1280P Indicator and Handle Assembly with stocked adaptor:

	Order no.		Minimum graduation
Inch	<b>550P-10</b>	Dial Indicator	<b>.0001"</b>
Metric	<b>550P-20</b>	Dial Indicator	.002 mm
	<b>EDI-550P-10</b>	(with EDI-10102)	<b>.00005"/.001 mm</b>
	<b>EDI-550P-20</b>	(with EDI-20102)	<b>.00002"/.0005 mm</b>



EDI-550P-10



Remote Maxµm Transducer or Maxµm///  
Digital Transducer Dimentron Plug  
Handle/ Adaptor: **HA-141**



**BA-100** (Dimentron Plug  
not included)

## Dimentron® Plug Inside Diameter Gages

This table depicts available readouts for Dimentron Plug Inside Diameter Gages. After making a Plug selection, follow the chart for all the components needed to make up a gaging system suited to your application.

Dimetron Plug Gage	Adaptors	Handles	Readout	Housing Housings	Handle
Dimetron Plug			2014802		
Stop Collar			EDI-10102		
Extension	EKT-1120-WX		2033111	B-12668	
				EHG-1198	
			2033101	EHG-1172	AT-124 HA-88
			2033001 - no Data Output 2033011 - with Data Output (6 pin)		
		HA-141	2033091 - canister style* 2033099 - pencil style* * ± 1 mm/ ±.040" Range Digital Transducer.		
			550P-10/20	Dial Indicator	
		EHA-1146 EHA-1145	832 AMP		
		BA-100			
		AAT-192 AAT-193 AAT-194	D-2500: 1 - 4000:1		
		EDI-550P-10 EDI-550P-20	µMaxµm		

Change-WX suffix as required:  
For adaptor selection see page 9-40

## Indicating Plug Gages 844 D



### Features

- For the rapid testing of diameter, roundness and conicity of bores
- Especially suitable for testing batches with tight tolerances
- No rocking in the bore is required to determine the reversal point
- Therefore ideal for use in conjunction with a digital indicating instrument and for subsequent processing of measured values
- Measuring head has a hardened, hard chromium plated guide cylinder and carbide-tipped anvils
- The carbide expanding pin transfers radial movement to indicating instrument
- Constant measuring force as a result of built-in spring, thus eliminating user influence
- Measuring head, holder, depth extension, right angle attachments and depth stops are part of an extensive modular system

### Technical Data of the Measuring Heads

Nominal diameter of the bore	Measuring range starting from the minimum bore dimension to be measured	
	844 Dk/844Dkr	844 Dks (from 4 mm)
2.98 - 8 mm	= -0.02 + 0.1 mm	= -0.02 + 0.1 mm
over 8 - 16 mm	= -0.02 + 0.15 mm	= -0.02 + 0.15 mm
over 16 - 32 mm	= -0.02 + 0.2 mm	= -0.02 + 0.15 mm
over 32 - 70 mm	= -0.03 + 0.2 mm	= -0.03 + 0.15 mm
over 70 - 200 mm	= -0.04 + 0.2 mm	= -0.04 + 0.15 mm

When placing an order please quote the nominal diameter and tolerances, for example:

Bore diameter	Tolerance	
35 D7	+ 80	+105 $\mu$ m
35 H7	+ 0	+25 $\mu$ m
35 R7	- 50	-25 $\mu$ m


The diameter of the guide cylinder is produced between 0.02 and 0.07 mm smaller than the minimum dimension of the bore to be checked.

Example:

Plug Gage 844 Dk for bore 35 D7  
 Nominal diameter: 35 mm  
 Minimum dimension: 35.080 mm  
 Maximum dimension: 35.105 mm  
 Meas. range: 35.050 - 35.280 mm

### Accuracy

Hysteresis	$\leq 0.4 \mu$ m
Repeatability	$\leq 1 \mu$ m
Linearity	$\leq 1 \%$
Linearity 844 Dks >16 mm	$\leq 2 \%$

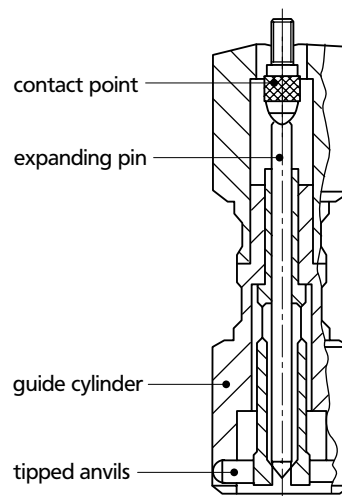

## Plug Gages

### Measuring Head 844 Dk, Standard version

	Nominal <sup>①</sup> diameter mm	Manufacturing <sup>②</sup> tolerance mm	Meas. range <sup>③</sup> dia. d mm	Order no.	
over	2.98 - 3.99 3.99 - 8	-0.02/-0.04 -0.02/-0.04	0.1 0.1	<b>4480184*</b> <b>4478200*</b>	
over	8 - 16	-0.02/-0.04	0.15	<b>4478201</b>	
over over over	16 - 25 25 - 32 32 - 44	-0.02/-0.05 -0.02/-0.05 -0.02/-0.06	0.2 0.2 0.2	<b>4478202</b> <b>4478204</b> <b>4478205</b>	
over over over	44 - 50 50 - 60 60 - 70	-0.03/-0.06 -0.03/-0.06 -0.03/-0.06	0.2 0.2 0.2	<b>4478206</b> <b>4478207</b> <b>4478208</b>	
over over over over over over over over over over over over over over over over	70 - 80 80 - 90 90 - 100 100 - 110 110 - 120 120 - 130 130 - 140 140 - 150 150 - 160 160 - 170 170 - 180 180 - 190 190 - 200	-0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07	0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2	<b>4478209</b> <b>4478210</b> <b>4478211</b> <b>4478212</b> <b>4478213</b> <b>4478214</b> <b>4478215</b> <b>4478216</b> <b>4478217</b> <b>4478218</b> <b>4478219</b> <b>4478220</b> <b>4478221</b>	

① Nominal diameter = smallest bore diameter

② dia. d in reference to the smallest bore diameter

③ Measuring range refers to the nominal diameter

\* With Adaptor for connection to the holder

## Plug Gages

**Measuring Head 844 Dks**, for blind holes, to measure to almost the base of the bore

	Nominal <sup>①</sup> diameter mm	Manufacturing <sup>②</sup> tolerance mm	Meas. range <sup>③</sup> dia. d mm	Order no.	
	4 - 8	-0.02/-0.04	0.10	<b>4478285*</b>	
over	8 - 16	-0.02/-0.04	0.15	<b>4478245</b>	
over over over	16 - 25 25 - 32 32 - 44	-0.02/-0.05 -0.02/-0.05 -0.02/-0.06	0.15 0.15 0.15	<b>4478230</b> <b>4478232</b> <b>4478233</b>	
over over over	44 - 50 50 - 60 60 - 70	-0.03/-0.06 -0.03/-0.06 -0.03/-0.06	0.15 0.15 0.15	<b>4478234</b> <b>4478235</b> <b>4478236</b>	
over over over over over over over over	70 - 80 80 - 90 90 - 100 100 - 110 110 - 120 120 - 130 130 - 140 140 - 150	-0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07 -0.04/-0.07	0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15	<b>4478237</b> <b>4478238</b> <b>4478239</b> <b>4478240</b> <b>4478241</b> <b>4478242</b> <b>4478243</b> <b>4478244</b>	

① Nominal diameter = smallest bore diameter






② dia. d in reference to the smallest bore diameter

③ Measuring range refers to the nominal diameter

\* With Adaptor for connection to the holder

## Plug Gages

**Measuring Head 844 Dkr**, with an extended guide cylinder to measure through holes for the edge of a bore, ideal for narrow parts

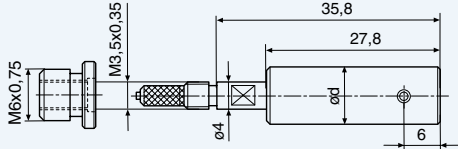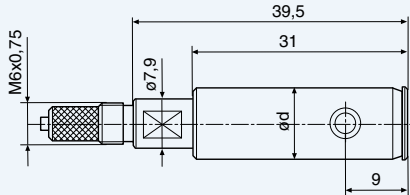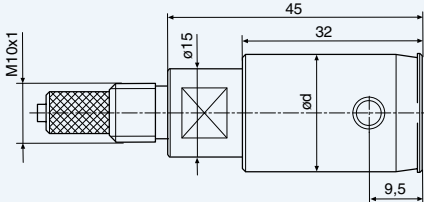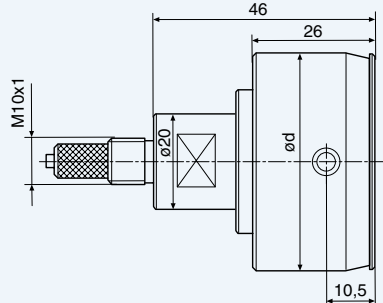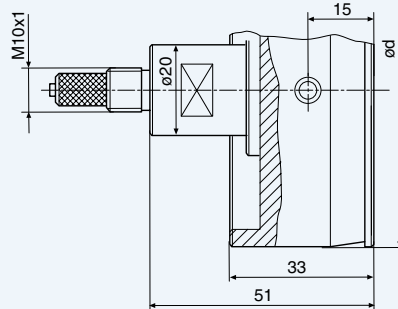	Nominal <sup>①</sup> diameter mm	Manufacturing <sup>②</sup> tolerance mm	Meas. range <sup>③</sup> dia. d mm	Order no.	
over	2.98 - 3.99	-0.02/-0.04	0.1	<b>4478272*</b>	
	3.99 - 8	-0.02/-0.04	0.1	<b>4478250*</b>	
over	8 - 16	-0.02/-0.04	0.15	<b>4478251</b>	
over	16 - 25	-0.02/-0.05	0.2	<b>4478252</b>	
over	25 - 32	-0.02/-0.05	0.2	<b>4478254</b>	
over	32 - 44	-0.02/-0.06	0.2	<b>4478255</b>	
over	44 - 50	-0.03/-0.06	0.2	<b>4478256</b>	
over	50 - 60	-0.03/-0.06	0.2	<b>4478257</b>	
over	60 - 70	-0.03/-0.06	0.2	<b>4478258</b>	
over	70 - 80	-0.04/-0.07	0.2	<b>4478259</b>	
over	80 - 90	-0.04/-0.07	0.2	<b>4478260</b>	
over	90 - 100	-0.04/-0.07	0.2	<b>4478261</b>	
over	100 - 110	-0.04/-0.07	0.2	<b>4478262</b>	
over	110 - 120	-0.04/-0.07	0.2	<b>4478263</b>	
over	120 - 130	-0.04/-0.07	0.2	<b>4478264</b>	
over	130 - 140	-0.04/-0.07	0.2	<b>4478265</b>	
over	140 - 150	-0.04/-0.07	0.2	<b>4478266</b>	
over	150 - 160	-0.04/-0.07	0.2	<b>4478267</b>	
over	160 - 170	-0.04/-0.07	0.2	<b>4478268</b>	
over	170 - 180	-0.04/-0.07	0.2	<b>4478269</b>	
over	180 - 190	-0.04/-0.07	0.2	<b>4478270</b>	
over	190 - 200	-0.04/-0.07	0.2	<b>4478271</b>	

① Nominal diameter = smallest bore diameter

② dia. d in reference to the smallest bore diameter

③ Measuring range refers to the nominal diameter

\* With Adaptor for connection to the holder



## Modular Unit System 844 D

### Standard Holder 844 Kg/844 Dg - Standard version

With locking clamp for an indicating instrument and a connecting thread for a measuring head. Heat insulated handle. The model 844 Dg is made from Invar steel.

Cat. no.	Connecting thread g	Length L mm/ <i>inch</i>	Handle dia. D mm/ <i>inch</i>	Order no.
844 Kg	M6 x 0.75	50/ <b>1.98"</b>	14/ <b>.55"</b>	4470851
844 Dg	M10 x 1	150/ <b>6"</b>	26/ <b>1"</b>	4478851

### Short Holder 844 Dgk - Short version

With locking clamp for an indicating instrument and a connecting thread for a measuring head. Heat insulated handle.

Cat. no.	Connecting thread g	Length L mm/ <i>inch</i>	Handle dia. D mm/ <i>inch</i>	Order no.
844 Dgk	M10 x 1	61/ <b>2.4"</b>	26/ <b>1"</b>	4478050

### Holder 844 Dge for Inductive Measuring Probes

With long sleeve for shock and waterproof mounting of inductive measuring probes. Strain relief clamp for probe cable. Threaded connection for measuring heads. Heat insulated handle.


Cat. no.	Connecting thread g	Length L mm/ <i>inch</i>	Handle dia. D mm/ <i>inch</i>	Order no.
844 Dge	M6 x 0.75	195/ <b>7.7"</b>	33/ <b>1.3"</b>	4478020
	M10 x 1	195/ <b>7.7"</b>	33/ <b>1.3"</b>	4478021

### Right Angle (Elbow) Attachment


For measuring difficult to reach bores, e.g. in tight spaces, on a machine tool or when the bores on a work piece are inconveniently located. For screwing in between holder and measuring head.

Cat. no.	Connecting thread g mm	Elbow		Order no.
		Length L mm/ <i>inch</i>	Height H mm/ <i>inch</i>	
<b>844 Kw</b>	M6 x 0.75	26.5/ <b>1.04"</b>	22.5/ <b>.89"</b>	<b>4470110</b>
<b>844 Dw</b>	M10 x 1	36.7/ <b>1.44"</b>	17/ <b>.67"</b>	<b>4478110</b>


844 Kg / 844 Dg

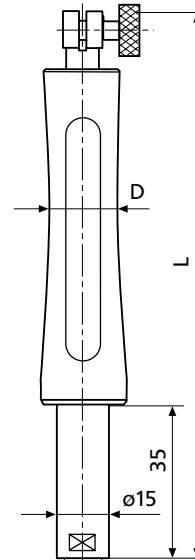


844 Dgk



844 Dge

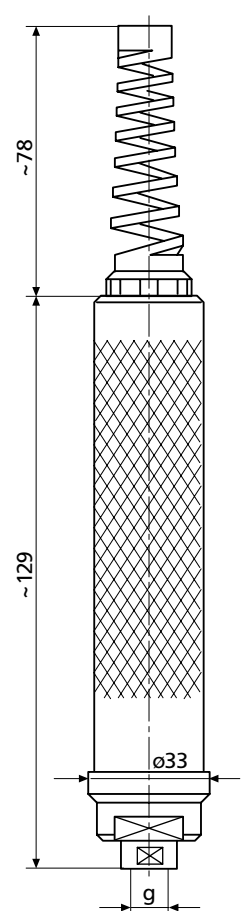

844 Kw / 844 Dw



## Modular Unit System 844 D

### Extensions

For extra-deep bores. Screws in between holder and measuring heads. Several extensions can be screwed together as of 8 mm. Models 844 Dv and 844 Dvk made of **Invar steel**.

Cat. no.	Connecting thread g	Length L mm/ <i>inch</i>	dia. D mm/ <i>inch</i>	Order no.
844 Dvk	M6x0.75/M3.5x0.35	64/ <b>2.5"</b>	3.8 / <b>.15"</b>	4478080
844 Kv	M6 x 0.75	64/ <b>2.5"</b>	8 / <b>.32"</b>	4470070
844 Dv	M10 x 1	64/ <b>2.5"</b>	15 / <b>.6"</b>	4478070
844 Dv	M10 x 1	80/ <b>3"</b>	15 / <b>.6"</b>	4478071
844 Dv	M10 x 1	100/ <b>4"</b>	15 / <b>.6"</b>	4478072
844 Dv	M10 x 1	125/ <b>5"</b>	15 / <b>.6"</b>	4478073
844 Dv	M10 x 1	250/ <b>10"</b>	15 / <b>.6"</b>	4478074
844 Dv	M10 x 1	500/ <b>20"</b>	15 / <b>.6"</b>	4478075
844 Dv	M10 x 1	750/ <b>30"</b>	15 / <b>.6"</b>	4478076

### Depth Stops


For limiting depth of insertion of measuring head in bore. Can be attached to Extensions 844 Kv or 844 Dv. With clamping screw.

Cat. no.	Mounting hole dia. d mm/ <i>inch</i>	Stop surface dia. A mm/ <i>inch</i>	Order no.
844 Kt	8 / <b>.32"</b>	25 / <b>1"</b>	4470115
844 Dt	15 / <b>.6"</b>	45 / <b>1.8"</b>	4478115
844 Dt	15 / <b>.6"</b>	75 / <b>3"</b>	4478116
844 Dt	15 / <b>.6"</b>	110 / <b>4.3"</b>	4478117
844 Dt	15 / <b>.6"</b>	160 / <b>6.3"</b>	4478118
844 Dt	15 / <b>.6"</b>	220 / <b>8.6"</b>	4478119


### Depth Stop Rings

For limiting depth of insertion of measuring head in bore. Clamped onto the measuring head.


Cat. no.	Mounting hole dia. d mm	Stop surface dia. A mm/ <i>inch</i>	Height h mm/ <i>inch</i>	Order no.
844 Dtr	3 - 5	27 / <b>1.1"</b>	10 / <b>.4"</b>	4478130
	5 - 8	30 / <b>1.2"</b>	10 / <b>.4"</b>	4478130
	8 - 11	33 / <b>1.3"</b>	10 / <b>.4"</b>	4478130
	11 - 15	37 / <b>1.5"</b>	10 / <b>.4"</b>	4478130
	15 - 20	42 / <b>1.7"</b>	10 / <b>.4"</b>	4478130
	20 - 25	51 / <b>2.0"</b>	12 / <b>.5"</b>	4478131
	25 - 30	56 / <b>2.2"</b>	12 / <b>.5"</b>	4478131
	30 - 35	61 / <b>2.4"</b>	12 / <b>.5"</b>	4478131
	35 - 40	66 / <b>2.6"</b>	12 / <b>.5"</b>	4478131
	40 - 44	71 / <b>2.8"</b>	12 / <b>.5"</b>	4478131
	44 - 50	76 / <b>2.9"</b>	12 / <b>.5"</b>	4478132
	50 - 60	86 / <b>3.4"</b>	12 / <b>.5"</b>	4478132
	60 - 70	96 / <b>3.8"</b>	12 / <b>.5"</b>	4478132
	70 - 80	106 / <b>4.1"</b>	12 / <b>.5"</b>	4478132
	80 - 90	116 / <b>4.6"</b>	12 / <b>.5"</b>	4478133
	90 - 100	126 / <b>4.9"</b>	12 / <b>.5"</b>	4478133

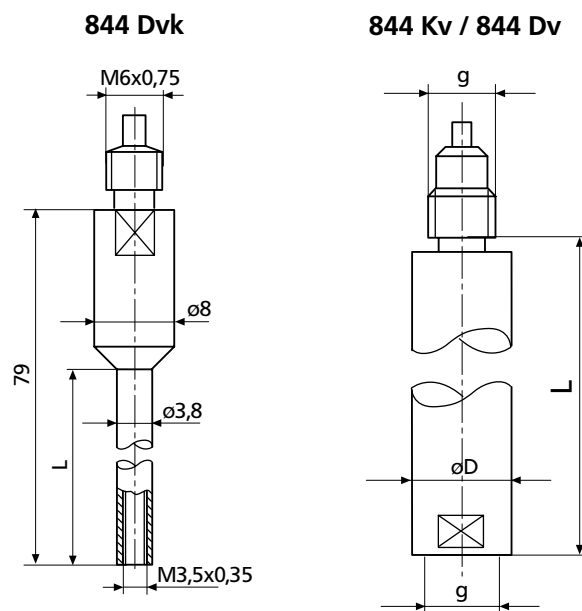

844 Kt / 844 Dt

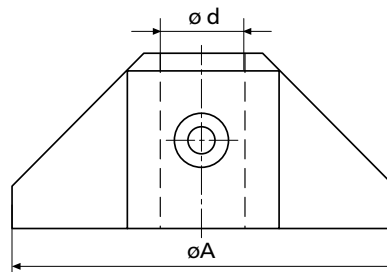


844 Dtr

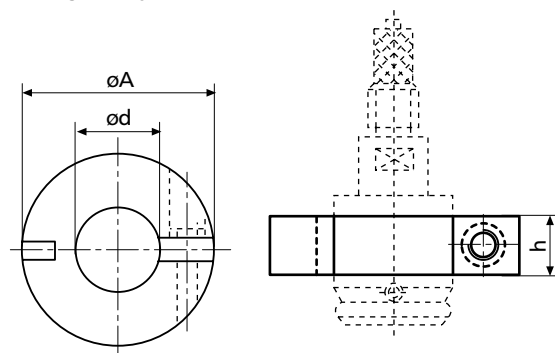

Modular Units	Diameter of Measuring Heads		
	2.98 - 8 mm (.16 - .3")	8 - 16 mm (.3" - .6")	over 16 mm (over .6")
844 Kg	4470851		4478851
844 Dg			
844 Dgk			
844 Dge	4478020		4478021
844 Dvk 844 Kv 844 Dv	4478080	4470070	4478070 to 4478076
844 Kt 844 Dt		4470115	4478115 to 4478119
844 Kw 844 Dw	4470110		4478110
844 Dk 844 Dks 844 Dkr			
355 E	see page 9-62		

Modular Unit	Diameter of Measuring Heads			
	2,98 - 20 (.16-.787")	20 - 44 (.787-1.72")	44 - 80 (1.72-3.15")	80 - 100 (3.15-3.94")
844 Dtr	4478130	4478131	4478132	4478133

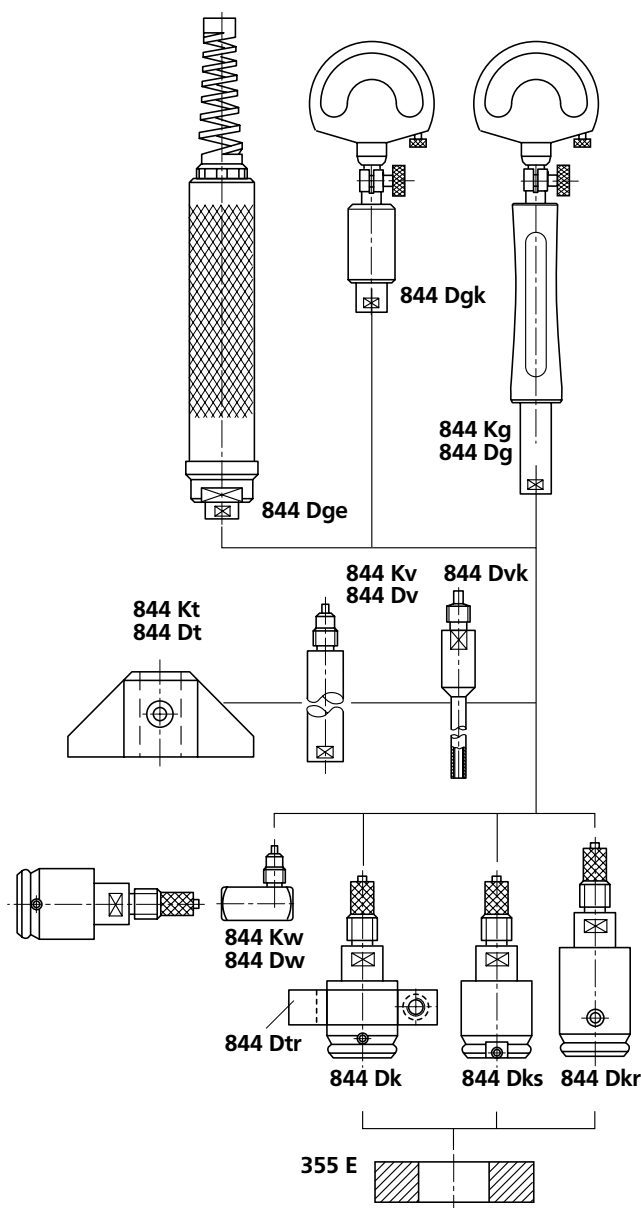

## Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

Indicator	Readings	Order no.
Compramess1004	5 $\mu\text{m}$	4333000
Millimess 1003	1 $\mu\text{m}$	4334000
Supramess 1002	0,5 $\mu\text{m}$	4335000
Extramess 2000	0,2 $\mu\text{m}$ , 0,5 $\mu\text{m}$ , 1 $\mu\text{m}$	4346000
Extramess 2001	0,2 $\mu\text{m}$ , 0,5 $\mu\text{m}$ , 1 $\mu\text{m}$	4346100
Millimar C 1208	$\pm 3$ , 10, 30, 100, 300, 1000 $\mu\text{m}$ 3000 $\mu\text{m}$ , 10000 $\mu\text{m}$	5312080
Millimar S 1840	$\pm 10$ , 30, 100, 300, 1000 $\mu\text{m}$ 3000 $\mu\text{m}$ , 10000 $\mu\text{m}$	5330001

Digital Indicators see Chapter 5

Electrical Indicating Instruments see Chapter 7

## Adjustment of Plug Gages 844 D

### Ring Gauge 355 E:

Special wear-resistant gage steel. Hardened and lapped. With actual deviation engraved.

Dimensions: DIN 2250, type C  
Manufacturing tolerance: DIN 2250  
Available diameters: 0.5-200 mm

## Self-Centering Dial Bore Gages 844 K Intramess



### Features

- Measuring the diameter, roundness and conicity of bores
- Spring-loaded halves of measuring probe are split via expanding pin with precision-lapped taper. This movement is transferred to indicating instrument
- Maximum wear-resistance due to hard chrome plating. From 4 mm alternatively with carbide tipped available on request
- Constant measuring force as a result of built-in spring thus eliminating user influence
- Highly versatile, each gage covers a large range. Within the respective limits, quickly and easily adjustable to any size and any type of measuring application
- Measuring probe, holder, depth extensions, right-angle attachments and depth stops are part of an extensive modular system

### Technical Data

#### Complete Instrument

- 844 K** Measuring heads hard chrome plated, expanding pin made of stainless steel
- 844 KH** Measuring heads carbide tipped on both sides, carbide expanding pin
- 844 KS** Blind hole measuring heads hard chrome plated, expanding pin made of stainless steel

Catalog no.	Measuring range mm	Number of meas. probes	Order no.*
<b>844 K</b>	0.47 - 0.97	6	<b>4470000</b>
	0.95 - 1.55	5	<b>4470001</b>
	1.5 - 4.2	10	<b>4470002</b>
	3.7 - 7.3	7	<b>4470003**</b>
	6.7 - 10.3	7	<b>4470004**</b>
<b>844 KH</b>	9.4 - 18.6	9	<b>4470005**</b>
	1.5 - 4.2	10	<b>4471002</b>
	3.7 - 7.3	7	<b>4471003**</b>
	6.7 - 10.3	7	<b>4471004**</b>
<b>844 KS</b>	9.4 - 18.6	9	<b>4471005**</b>
	1.5 - 4.2	10	<b>4482163</b>
	3.7 - 7.3	7	<b>4482164**</b>
	6.7 - 10.3	7	<b>4482165**</b>
	9.4 - 18.6	9	<b>4482166**</b>

\* Includes holder, measuring probe, expanding pin and wooden case, but not indicating instrument

\*\* Additionally includes measuring force spring 4470828 and disk 4470821

#### Accuracy

##### Deviation of linearity

- ≤ 2 % measuring ranges 0.47-1.55 mm
- ≤ 1 % measuring ranges 1.5-18.6 mm

##### Repeatability

- 1 µm manual measurement
- ≤ 0.5 µm measurement with Stand 844 Kst and Floating Holder 844 Ksts

#### Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

Dial Comparator	Readings mm / inch	Order no. mm / inch
<b>Compramess 1004 / 1004 Z</b>	5 µm/	<b>.0001" 4333000/4333900</b>
<b>Millimess 1003 / 1003 Z</b>	1 µm/	<b>.00005" 4334000/4334900</b>
<b>Millimess 1003 XL</b>	2 µm	<b>4334001</b>
<b>Supramess 1002 / 1002 Z</b>	0.5 µm/	<b>.00002" 4335000/4335900</b>
<b>Extramess 2000</b>	0.2 µm/	<b>.00001" 4346000*</b>
	0.5 µm/	<b>.00002" 4346100*</b>
<b>Extramess 2001</b>	1 µm/	<b>.00005" 4337062</b>
	0.2 µm/	<b>.00001" 4337062</b>
	0.5 µm/	<b>.00002" 4337062</b>
	1 µm/	<b>.00005" 4337062</b>
<b>µMaxµm Marcator 1087 B</b>	.001mm/	<b>.00005" EDI-10302**</b>
	0.1 µm/	<b>.001" 4337062</b>
	0.2 µm/	<b>.00001" 4337062</b>
	0.4 µm/	<b>.005" 4337062</b>
	1 µm/	<b>.00005" 4337062</b>

Digital Indicators see Chapter 5

Electrical Indicating Instruments see Chapter 7

\* 230 V, for 115 V please refer to page 6-5 \*\* requires contact 4360045

## Modular Unit System for 844 K Standard Measuring Probes


In addition complete Dial Bore Gages 844 K, modular units area available for assembly as required to suit an individual measuring task and or application.

### Measuring Probe 844 Kk, Expander Pin, individual Ring Gage for 844 Ke

Nominal dimension mm	Measuring range mm	Measuring depth mm	Measuring probe hard chrome plated	Expanding pin steel	Measuring probe carbide tipped	Expander pin carbide	Ring gage
0.50	0.47 - 0.53	1.25	4470586	4470801			4482300
0.55	0.52 - 0.58	1.5	4470587				4482301
0.60	0.57 - 0.67	1.7	4470588	4470802			4482302
0.70	0.65 - 0.77	2.2	4470589				4482303
0.80	0.75 - 0.87	2.55	4470590				4482304
0.90	0.85 - 0.97	2.65	4470591				4482305
1.00	0.95 - 1.15	10.5	4470592	4470803			4482306
1.10	1.07 - 1.25	10.5	4470593				4482307
1.20	1.17 - 1.35	10.5	4470594				4482308
1.30	1.27 - 1.45	10.5	4470595				4482309
1.40	1.37 - 1.55	10.5	4470596				4482310
1.75	1.50 - 1.90	16	4470597				4482311
2.00	1.80 - 2.20	16	4470598	4470804	4471234	4471207	4482312
2.25	2.05 - 2.45	16	4470599		4471206		4482313
2.50	2.30 - 2.70	21	4470600	4470805	4471812	4471819	4482314
2.75	2.55 - 2.95	21	4470601		4471813		4482315
3.00	2.80 - 3.20	21	4470602		4471814		4482316
3.25	3.05 - 3.45	21	4470603		4471208		4482317
3.50	3.30 - 3.70	21	4470604		4471815		4482318
3.75	3.55 - 3.95	21	4470605		4471816		4482319
4.00	3.80 - 4.20	21	4470606		4471817		4482320
4.00	3.70 - 4.30	38	4470607		4471204		4482320
4.50	4.20 - 4.80	38	4470608	4470808	4471607	4471202	4482320
5.00	4.70 - 5.30	38	4470609		4471608		4482321
5.50	5.20 - 5.80	38	4470610		4471609		4482322
6.00	5.70 - 6.30	38	4470611		4471610		4482323
6.50	6.20 - 6.80	38	4470612		4471611		4482324
7.50	7.20 - 7.80	38	4470615		4471612		4482325
8.00	7.70 - 8.30	38	4470616		4471615		4482327
8.50	8.20 - 8.80	45	4470617		4471616		4482328
9.00	8.70 - 9.30	45	4470618		4471617		4482329
9.50	9.20 - 9.80	45	4470619		4471618		4482330
10.00	9.70 - 10.30	45	4470620		4471619		4482331
10.00	9.40 - 10.60	45	4470621		4471620		4482332
11.00	10.40 - 11.60	45	4470622		4471621		4482332
12.00	11.40 - 12.60	45	4470623		4471622		4482333
13.00	12.40 - 13.60	45	4470624		4471623		4482334
14.00	13.40 - 14.60	45	4470625		4471624		4482335
15.00	14.40 - 15.60	45	4470626		4471625		4482336
16.00	15.40 - 16.60	80	4470627		4471626		4482337
17.00	16.40 - 17.60	80	4470628		4471627		4482338
18.00	17.40 - 18.60	80	4470629		4471628		4482339
					4471629		4482340

Nominal dimension mm	L mm	H 1 mm
0.50	19.50	0.25
0.55	19.50	0.27
0.60	19.50	0.29
0.70	19.50	0.31
0.80	19.50	0.33
0.90	19.50	0.35
1.00 - 1.40	19.50	0.60
1.75 - 2.25	25.30	0.90
2.50 - 4.00	30.60	1.20
4.00 - 10.00	47.30	2.00
10.00 - 18.00	48.50	3.30

Minimum measurement height




## Modular Unit System for 844 KS Blind Hole Measuring Probes


In addition to complete Dial Bore Gages 844 KS, modular units are available for assembly as required to suit a individual measuring task and or application.

### Blind Hole Measuring Probe 844 Kk, Blind Hole Expander Pin

Nominal dimension mm	Measuring range mm	Measuring depth mm	Blind hole measuring probe hard chrome plated	Blind hole expander pin steel
1.75	1.50 - 1.90	16	4482228	4482176
2.00	1.80 - 2.20	16	4482229	
2.25	2.05 - 2.45	16	4482230	
2.50	2.30 - 2.70	21	4470301	
2.75	2.55 - 2.95	21	4482227	
3.00	2.80 - 3.20	21	4482178	4482177
3.25	3.05 - 3.45	21	4482179	
3.50	3.30 - 3.70	21	4470300	
3.75	3.55 - 3.95	21	4482188	
4.00	3.80 - 4.20	21	4482180	
4.00	3.70 - 4.30	38	4482057	4482028
4.50	4.20 - 4.80	38	4482162	
5.00	4.70 - 5.30	38	4482056	
5.50	5.20 - 5.80	38	4470953	
6.00	5.70 - 6.30	38	4482140	
6.50	6.20 - 6.80	38	4482055	4482028
7.00	6.70 - 7.30	38	4482108	
7.50	7.20 - 7.80	38	4482204	
8.00	7.70 - 8.30	38	4482054	
8.50	8.20 - 8.80	45	4482206	
9.00	8.70 - 9.30	45	4482170	4482192
9.50	9.20 - 9.80	45	4482182	
10.00	9.70 - 10.30	45	4470375	
10.00	9.40 - 10.60	45	4482205	
11.00	10.40 - 11.60	45	4482042	
12.00	11.40 - 12.60	45	4482112	4482192
13.00	12.40 - 13.60	45	4482102	
14.00	13.40 - 14.60	45	4482181	
15.00	14.40 - 15.60	45	4482202	
16.00	15.40 - 16.60	80	4482021	
17.00	16.40 - 17.60	80	4482203	4482192
18.00	17.40 - 18.60	80	4482113	

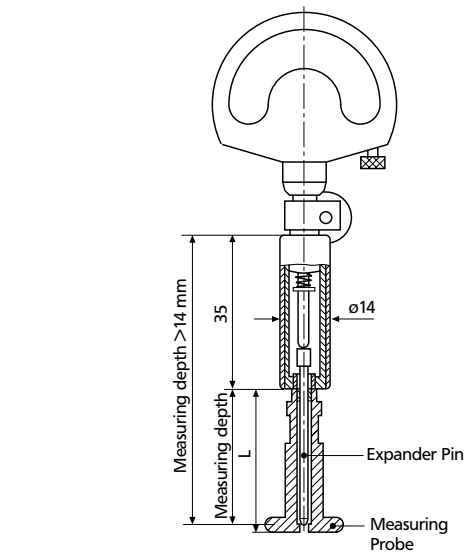

Minimum measurement height



Nominal dimension mm	L mm	H 2 mm
0.50	19.50	
0.55	19.50	
0.60	19.50	
0.70	19.50	
0.80	19.50	
0.90	19.50	
1.00 - 1.40	19.50	
1.75 - 2.25	25.30	0.30
2.50 - 4.00	30.60	0.30
4.00 - 10.00	47.30	0.50
10.00 - 18.00	48.50	1.00

## Ring Gage Sets 844 Ke

For setting Dial Bore Gages 844 K, 844 KH and 844 KS. Supplied in sets to match the measuring ranges of these instruments. Can be stored in the wooden case of the bore gages.

Diameter tolerance  $\pm 1 \mu\text{m}$

Ring Gages 844 Ke are only available with the diameters shown in the table.

For all other dimensions, Ring Gages 355 E with dimensions as per DIN 2250 and with actual deviation engraved are available.

For Meas. range mm	Diameter mm	Order no.
0.47 - 0.97	0.5/0.55/0.6/0.7/0.8/0.9	4470160
0.95 - 1.55	1/1.1/1.2/1.3/1.4	4470161
1.5 - 4.2	1.75/2/2.25/2.5/2.75/3/3.25/3.5/3.75/4	4470162
3.7 - 7.3	4/4.5/5/5.5/6/6.5/7	4470163
6.7 - 10.3	7/7.5/8/8.5/9/9.5/10	4470164
9.4 - 18.6	10/11/12/13/14/15/16/17/18	4470165



## Modular Unit System for 844 K

### Holder 844 Kg

With locking clamp for an indicating instrument and a connecting thread for a **Measuring Head 844 Kk**. Heat insulated handle.

Order no. 4470851

### Extensions 844 Kv

For extra-deep bores. Screws in between Holder 844 Kg and Measuring Head 844 Kk for measuring range 10-18 mm. Length 64 mm, dia. 8 mm.

Order no. 4470070

### Right Angle Attachment 844 Kw

For measuring bores which are difficult to reach, e.g. in tight spaces, on machine tools or when work piece bores are inconveniently located. For screwing in between Holder 844 Kg and Measuring Head 844 Kk.

Order no. 4470110

### Lifter 954


Facilitates insertion of measuring probe in bore by lifting measuring spindle of Dial Comparator.

Order no. 4372030

### Depth Stop 844 Kt

For checking diameter of bores at prescribed depth. Only to be used with Extension 844 Kv.


Order no. 4470115

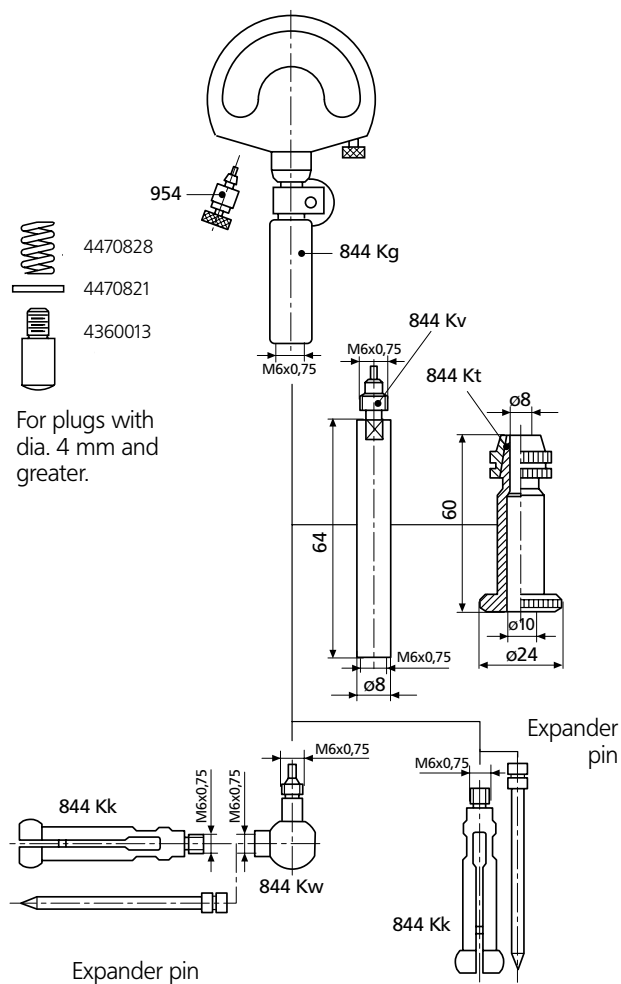

## Measuring Probes for Special Applications


For measurement of diameters of recesses, distances between plane-parallel surfaces, etc. special models of measuring probes are available on request.

1. Measurement of the diameter of recesses\*




\* Requires holder 4471196


2. Measurement of plane-parallel surfaces



3. Measurement of polygon bores



4. Measurement of inside serrations, see 844 Z Page 9-64



## Accessories

### Stand 844 Kst



### Floating Holder 844 Ksts



### Features

For quick checks of bores in small work pieces. Hardened table plate can be raised with lever, thus moving test piece into position. Plate can be clamped at any height for checking eccentricity. Particularly suited to use with digital indicators, where appropriate in conjunction with data printers or computer equipment, in cases where determination of reversal point is inappropriate.

Table dia. 58 mm / **2.28"**  
 Throat depth of arm 45 mm / **1.77"**  
 Table stroke 30 mm / **1.18"**  
 Max. work piece height ca. 100 mm / **4"**

**Order no. 4470100**

### Features


For use in conjunction with Stand 844 Kst. Enables measuring probe to find common axis of bore and measuring instrument quickly and easily on insertion into hole, thus providing optimum measuring speed and high accuracy. Particularly suitable for small diameters, as measuring confidence is considerably enhanced.

**Order no. 4470105**

### Angle Stop 844 Ka

Facilitates positioning of cylindrical work pieces under measuring instrument. For clamping to Stand 844 Kst.

**Order no. 4470120**

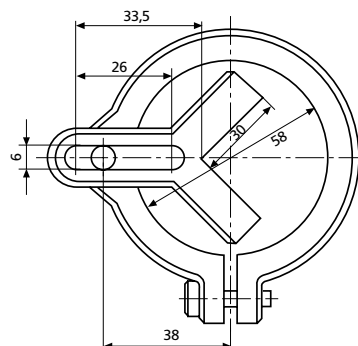

## Adjustable Bore Gages 1280 P

Superior Accuracy for Production and Inspection.



1282P-3W2 and 1280P-1W1

### Features

- Rugged construction for long life and low maintenance: Stainless steel gaging head, one piece centralizing yoke with replaceable tungsten carbide balls.
- Heavy duty housing protects Indicator.
- Flow-through design makes Series 1280P Bore Gages swish clean, no disassembly required.
- Outstanding stability: Holds mastered value.
- Furnished with either Dial Indicator or Maxum<sup>®</sup>/// Digital Electronic Indicator.
- Digital bore gages with output are provided with Maxum<sup>®</sup>/// Indicators. The Dynamic memory of the Maxum<sup>®</sup>/// greatly simplifies operation and assures repeatable readings with a single sweep of the diameter being measured.
- Output available for Statistical Quality Control requirements.

### Technical Data

#### With Dial Indicator

Range of Sensitive Contact: 0.63 mm / **.025"**,  
0.002 mm / **.0001"** grad.

#### With Maxum<sup>®</sup>/// Indicators

Range of Sensitive Contact: 0.39 mm / **.020"**  
Resolution: 0.001 mm / **.00005"** resolution,  
0.001 mm / **.001"** grad.

If gage capacity is 25 mm / 1" or greater, the Maxum<sup>®</sup>/// Indicator is covered with a cast aluminum protective housing.  
If under 25 mm / 1" capacity, the protective housing is not normally furnished.

With Dial Indicator	With Digital Output	Capacity mm/ <i>inch</i>	Gaging Depth mm/ <i>inch</i>	End of Head to Contact mm/ <i>inch</i>
1280P-1W1	1282P-1W1	12 - 25 / <b>.50 - 1"</b>	76 / <b>3"</b>	2.77 / <b>.11"</b>
1280P-2W2	1282P-2W2	25 - 50 / <b>1 - 2"</b>	152 / <b>6"</b>	4.37 / <b>.17"</b>
1280P-3W2	1282P-3W2	50 - 203 / <b>2 - 8"</b>	152 / <b>6"</b>	7.92 / <b>.31"</b>
1280P-1W2	1282P-1W2	12 - 25 / <b>.50 - 1"</b>	152 / <b>6"</b>	2.77 / <b>.11"</b>
1280P-2W3	1282P-2W3	25 - 50 / <b>1 - 2"</b>	305 / <b>12"</b>	4.37 / <b>.17"</b>
1280P-3W3	1282P-3W3	50 - 203 / <b>2 - 8"</b>	305 / <b>12"</b>	7.92 / <b>.31"</b>

See matrix on next page.

Note: Model numbers do not include extensions.

**Series 1280P** Adjustable Bore Gages are normally furnished with adjusting wrenches. Reference contacts for particular measurement sizes must be specified separately (see table on following page). If not specified, T.C. contacts will be furnished.  
For alternate gaging depths, contact materials, and other modifications are available.

Example: **1282P-3MW3** with **PT-156** and **EX-224** specifies an Adjustable Bore Gage with tungsten carbide reference contact and an extension to cover the range from 75 mm / 3" to 89 mm / 3.5".

The Gage is furnished with a Metric Maxum<sup>®</sup>/// Indicator, **2033119** (which has selectable resolution, units and includes Digital Output).

## Adjustable Bore Gages 1280 P

### Ordering Information

To order the correct bore gage to suit your measurement application, start with the base Model Number: **128XP-XXXX** and substitute the X with the appropriate number or letter from the boxes below:

**128 X P - X X X X**

#### Indicator

- 0** – Dial Indicator
- 2** – Maxµm®III with Output

#### Capacity

- 1** – 12.50 - 25 mm / **.50 - 1"** gaging depth to 305 mm / **12"**
- 2** – 25 - 50 mm / **1 - 2"** gaging depth to 610 mm / **24"**
- 3** – 50 - 200 mm / **2 - 8"** gaging depth to 1220 mm / **48"**

#### Units

- Omit for Inch
- M** – Metric

#### Configuration

- W** – Gage only
- S** – Complete kit with steel contacts\*
- T** – Complete kit with T.C. contacts\*

\* Each kit is complete with components needed for capacity ranging from 12.70 - 203 mm / .50 - 8". A fitted case is furnished for all models with a gaging depth 150 mm / 6" or under. It contains a Dial or MaxµmIII Indicator with each tube assembly and all contacts, extensions, extenders, locknuts and necessary wrenches.

#### Gaging Depth

- 1** – 76 mm / **3"**
- 2** – 150 mm / **6"**
- 3** – 300 mm / **12"**
- 4** – 450 mm / **18"**
- 5** – 600 mm / **24"**
- 6** – 760 mm / **30"**
- 7** – 910 mm / **36"**
- 8** – 1220 mm / **48"**

**Example:** If you chose **1282P-3S5** as your model number, you would have chosen an Inside Diameter gage with MaxµmIII Indicator, 50 - 200 mm / 2 - 8" capacity, inch units, having a complete kit with steel contacts and a gaging depth of 600 mm / 24". Metric equivalent Model would be: **1282P-3MS5**.

## Handles / Housing

All 1280P gages have a removable handle as a part of the Indicator Housing.

All 1282P gages can be equipped with a handle which projects at 90° to the gage housing.

1282P gages with capacity 12-25 mm / .50-1" are not normally furnished with a protective housing. Handles and Housings may be ordered separately.

For Handles order **HA-88** with **AT-124** Adaptor. For Housings order **EHG-1198**.

## Gaging Extensions

Specify the Reference Contact Gaging Extensions required from the table below. For all diameters below 50 mm / 2" the Reference Contact is integral with each Extension. For diameters over 50 mm / 2" the Reference Contact is separate and interchangeable among Extension Sets.



**1282P-1W1**  
(Output Cable not included)

## Technical Data

Diameter to be measured mm/ <i>inch</i>	Extension Required		Used on Gage Model Numbers
	Carbide	Steel	
12 - 16 / <b>.50 - .625"</b>	<b>PT-562</b>	<b>PT-558</b>	1280P-1xxx
16 - 19 / <b>.625 - .75"</b>	<b>PT-567</b>	<b>PT-559</b>	
19 - 22 / <b>.75 - .875"</b>	<b>PT-568</b>	<b>PT-560</b>	1282P-1xxx
22 - 25 / <b>.875 - 1"</b>	<b>PT-557</b>	<b>PT-561</b>	
25 - 32 / <b>1 - 1.25"</b>	<b>PT-554</b>	<b>PT-555</b>	1280P-2xxx
32 - 38 / <b>1.25 - 1.50"</b>	<b>PT-553</b>	<b>PT-556</b>	
38 - 45 / <b>1.50 - 1.75"</b>	<b>PT-552</b>	<b>PT-569</b>	1282P-2xxx
45 - 50 / <b>1.75 - 2"</b>	<b>PT-550</b>	<b>PT-551</b>	

For the gaging diameters listed below, select one Contact Point and at least one Extension Set.

Contact Point:		Extension Required	Used on Gage Models
	Carbide	PT-156	1280P-3XXX
	Steel	PT-2224	1282P-3XXX
Extension Sets:	Diameter to be Measured mm/ <i>inch</i>	Extension Sets	Used on Gage Models
	50 - 64 / <b>2 - 2.5"</b>	<b>EX-222</b>	
	64 - 76 / <b>2.5 - 3"</b>	<b>EX-223</b>	
	76 - 89 / <b>3 - 3.5"</b>	<b>EX-224</b>	1280P-3XXX
	89 - 100 / <b>3.5 - 4"</b>	<b>EX-225</b>	
	100 - 127 / <b>4 - 5"</b>	<b>EX-223 with EX-226</b>	1282P-3XXX
	127 - 152 / <b>5 - 6"</b>	<b>EX-225 with EX-226</b>	
	152 - 178 / <b>6 - 7"</b>	<b>EX-223 with EX-228</b>	
	178 - 200 / <b>7 - 8"</b>	<b>EX-225 with EX-228</b>	

## Self-Centering Dial Bore Gages 844 N Intramess




### Features

- Measuring the diameter, roundness and conical form of a bore as well as the distances of plane-parallel surfaces
- Measuring head consists of a carbide-tipped moving anvil and an interchangeable stationary anvil which has a hardened steel ball; alternatively a carbide ball is available
- Transmission lever system transfers movement of the movable anvil to indicating instrument
- The broad centering bridge ensures automatic centering in the bore
- Insensitive to temperature due to both the shank and transfer rod being made from heat resistant **Invar steel**
- Highly resistant to wear and tear due to the carbide-tipped moving anvil
- Constant measuring force due to built-in spring thus eliminating user influence
- Universally applicable and extremely versatile as every instrument spans a broad measuring range, within this range it is quick and easy to adjust to any size
- Measuring head, holder, extensions, right-angle attachments and depth stops are all part of this extensive modular system

**Invar steel** has a particularly low expansion coefficient and thus makes the instrument totally insensitive to any kind of heat. Body heat from the user, increases in ambient temperature have no influence on the measuring results.

The graph on the right compares the Invar steel version to a standard type. Both gages were hand-held and thus influenced by body heat. The deviation when using Invar steel is negligible.

Change in length due to heat

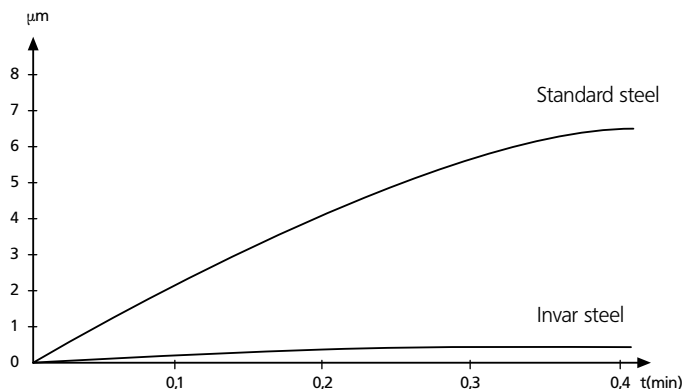



## Technical Data

### Complete Instrument

**844 N** Carbide-tipped moving anvil;  
stationary anvil with steel ball

**844 NH** Moving anvil **and** stationary anvil are carbide-tipped

### Accuracy

**Accuracy of transmission**  $\leq 2 \mu\text{m}$

**Repeatability**  $\leq 0.5 \mu\text{m}$

#### 844 N

Measuring range mm	for meas. depth** (inch) to mm/inch	Order no.*
18 - 50	(.7 - 2")	200/ 8"
35 - 100	(1.4 - 4")	250/ 10"
100 - 250	(4 - 10")	350/ 14"
250 - 400	(10 - 16")	500/ 20"
400 - 800	(16 - 32")	500/ 20"
250 - 800	(10 - 32")	500/ 20"

#### 844 NH

Measuring range mm	for meas. depth** (inch) to mm/inch	Order no.*
18 - 50	(.7 - 2")	200/ 8"
35 - 100	(1.4 - 4")	250/ 10"
100 - 250	(4 - 10")	350/ 14"
250 - 400	(10 - 16")	500/ 20"
400 - 800	(16 - 32")	500/ 20"
250 - 800	(10 - 32")	500/ 20"

\* Includes holder, measuring head, stationary anvil, wooden case (excludes indicating instrument)

\*\* Excludes extension

## Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

Dial Comparator	Readings mm / inch	Order no. mm / inch
Compramess 1004 / 1004 Z	5 $\mu\text{m}$ / .0001"	4333000/4333900
Millimess 1003 / 1003 Z	1 $\mu\text{m}$ / .00005"	4334000/4334900
Millimess 1003 XL	2 $\mu\text{m}$	4334001
Supramess 1002 / 1002 Z	0.5 $\mu\text{m}$ / .00002"	4335000/4335900
Extramess 2001	0.2 $\mu\text{m}$ / .00001"	
	0.5 $\mu\text{m}$ / .00002"	4346100*
	1 $\mu\text{m}$ / .00005"	
$\mu\text{Max}\mu\text{m}$	.001 mm / .00005"	EDI-10302**
	0,1 $\mu\text{m}$ / .001"	
Marcator 1087 B	0.2 $\mu\text{m}$ / .00001"	4337062
	0,4 $\mu\text{m}$ / .005"	
	1 $\mu\text{m}$ / .00005"	

Digital Indicators see Chapter 5

Electrical Indicating Instruments see Chapter 7

\* 230 V, for 115 V please refer to page 6-5 \*\* requires contact 4360045



## Accessories to set and adjust Dial Bore Gages

### 1. Ring Gage 355 E

Special wear-resistant gage steel. Hardened and lapped.  
With actual deviation engraved

Dimensions: DIN 2250, type C  
Manufacturing tolerance: DIN 2250  
Available diameters: 0.5 - 200 mm

355 E



### 2. Setting Device

Uses standard gage blocks for setting any bore diameter and any tolerance. Replaces ring gages and is universally applicable

#### Components

##### Measuring Jaw 844 em

Measuring range mm	Dimensions (inch)	Dimensions mm/inch	Order no.
18 - 800 (.7 - 32")	60 x 9.5 x 9	2.36 x .37 x .35"	4470095

##### Setting Bridge 844 Neb

Measuring range mm	Width (inch)	Width mm/inch	Height mm/inch	Order no.
18 - 250 (.7 - 10")	70	2.75"	12/.47"	4474080
18 - 400 (.7 - 16")	165	6.49"	17/.67"	4474081
18 - 800 (.7 - 32")	320	12.59"	20/.78"	4474082


##### Gage Block Holder 420 h

Clamping range mm	Clamping range (inch)	Order no.
0 - 70	(0 - 2.75")	4800120
0 - 120	(0 - 4.72")	4800121
100 - 220	(4 - 8.66")	4800122
100 - 420	(4 - 16.53")	4800123
400 - 820	(16 - 32.28")	4800124

##### Stand 844 ef

For mounting setting device up to 420 mm

Order no. 4470098

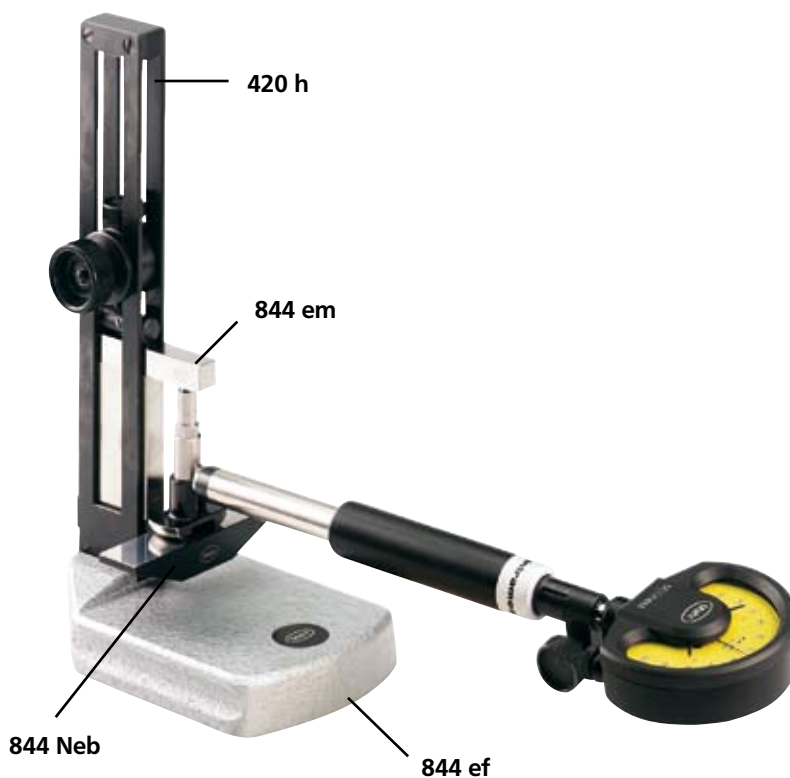

## Modular Unit System 844 N

In addition to complete Dial Bore Gages 844 N, modular units can also be compiled as required to suit a individual measuring task and or application.

### Measuring Head 844 Nk, steel

### Measuring Head 844 NHk, carbide

With built-in lever transmission system, carbide-tipped anvil and extra-wide centering bridge. With interchangeable stationary anvil. Threaded connection for Holders 844 Ng and 844 Ngk.

Measuring range mm	(inch)	Order no. 844 Nk	Order no. 844 NHk
18 - 50	(.7 - 2")	4474151	4474156
35 - 100	(1.37 - 4")	4474152	4474157
100 - 250	(4 - 10")	4474153	4474158
250 - 400	(10 - 16")	4474154	4474159
400 - 800	(16 - 32")	4474155	4474160

### Extension Set 844 Nes

For extending range of Measuring Head 844 Nk/NHk from 250-400 mm to 800 mm. Consists of additional centering bridge and two extensions.

Order no.: 4474010

### Holder 844 Ng

Shank and transfer rod made of heat-resistant Invar steel. With a locking clamp for indicator.

For meas. range mm (inch)	L mm/inch	d1 mm/inch	d2 mm/inch	Order no.
18 - 50 (.7 - 2")	200/ 8"	14/ .6"	8/ .3"	4474040
35 - 100 (1.37 - 4")	250/ 10"	18/ .7"	12/ .5"	4474041
100 - 250 (4 - 10")	350/ 14"	26/ 1.0"	18/ .7"	4474042
250 - 800 (10 - 32")	500/ 20"	30/ 1.2"	24/ .9"	4474043

### Short Holder 844 Ngk

Shank and transfer rod made of heat-resistant Invar steel. With a locking clamp for an indicator.

For meas. range mm (inch)	L mm/inch	d1 mm/inch	d2 mm/inch	Order no.
18 - 50 (.7 - 2")	120/ 5"	14/ .6"	8/ .3"	4474050
35 - 100 (1.37 - 4")	120/ 5"	18/ .7"	12/ .5"	4474051
100 - 250 (4 - 10")	150/ 6"	26/ 1.0"	18/ .7"	4474052
250 - 800 (10 - 32")	250/ 10"	30/ 1.2"	24/ .9"	4474053

### Right Angle Attachment 844 Nw

For measuring difficult to reach bores, e.g. in tight spaces, inconveniently located or on machine tools. For screwing in between 844 Ng or 844 Ngk and 844 Nk/NHk.


For meas. ranges mm	(inch)	Length* L mm/inch	Bore depth mm/inch	Order no.
18 - 50	(.7 - 2")	66/2.6"	45/1.8"	4474070
35 - 100	(1.37 - 4")	80/3.1"	55/2.2"	4474071
100 - 250	(4 - 10")	105/4.1"	70/2.8"	4474072

\* With measuring heads 844 Nk/NHk

### Extension 844 Nv

For extra deep bores. For screwing in between 844 Ng and 844 Nk/NHk. Shank and transfer rod made of Invar steel.

For instruments mm	(inch)	Length L (mm/inch)	Order no.
18 - 50	(.7 - 2")	250 / 9.8"	4474066
35 - 100	(1.37 - 4")	250 / 9.8"	4474060
100 - 250	(4 - 10")	250 / 9.8"	4474061
		500 / 19.7"	4474062
250 - 800	(10 - 32")	250 / 9.8"	4474063
		500 / 19.7"	4474064

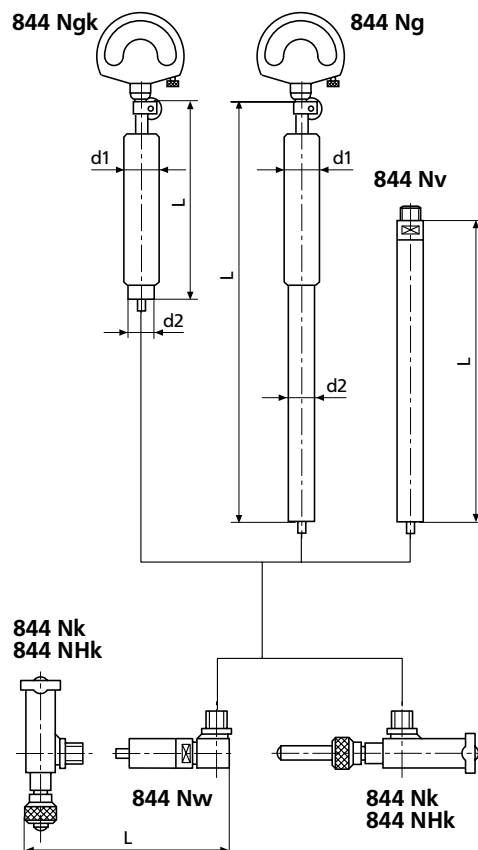

## Dial Bore Gage for Internal Serrations 844 Z



### Dial Bore Gage 844 Z

Diametrical two ball measurement " $M_{dk}$ " from 3.5 - 333 mm

### Modular Unit Parts 844 Kk

" $M_{dk}$ " from 3.5 - 26.1 mm (see table below)

### Modular Unit Parts 844 Z

" $M_{dk}$ " 26 - 333 mm (see table on opposite page)

## Features

- For diametrical two ball measurement  $M_{dk}$  to obtain the pitch diameter and conical form of internal gears in any position and at any depth
- For ball dimensions from 3.5 to 26.1 mm use the 844 Kk with carbide ball anvil s and in conjunction with an expander pin
- For ball dimensions >26 mm the measuring heads 844 z1 or 844 z2 with the appropriate modular units are to be employed
- Maximum wear resistance due to carbide ball anvils
- Constant measuring force due to built-in spring thus eliminating user influence
- Anvils, measuring heads, holder, spacer (intermediate piece) and depth extensions form a very comprehensive modular system which can rapidly be converted to measure further gear sizes

## Modular Unit Parts 844 Kk

Diametrical two ball measurement " $M_{dk}$ " from 3.5 - 26.1 mm

Ball dimen. $M_{dk}$ (mm)	Order no. ball dia. 1-5 graduation 0.5	Ball dia. according to table	Order no. ball dia. 7.5-10 graduation 0.5	Expander pin Steel
3.5 - 4.1	4482450	4482550		4470806
4.0 - 4.6	4482451	4482551		
4.5 - 5.1	4482452	4482552		
5.0 - 5.6	4482453	4482553		
5.5 - 6.1	4482454	4482554		
6.0 - 6.6	4482455	4482555		
6.5 - 7.1	4482456	4482556		
7.0 - 7.6	4482457	4482557		
7.5 - 8.1	4482458	4482558		
8.0 - 8.6	4482459	4482559		
8.5 - 9.1	4482460	4482560		4470808
9.0 - 9.6	4482461	4482561		
9.3 - 10.6	4482462	4482562	4482662	
10.3 - 11.6	4482463	4482563	4482663	
11.3 - 12.6	4482464	4482564	4482664	
12.3 - 13.6	4482465	4482565	4482665	
13.3 - 14.6	4482466	4482566	4482666	
14.5 - 16.1	4482467	4482567	4482667	
15.5 - 17.1	4482468	4482568	4482668	
16.5 - 18.1	4482469	4482569	4482669	
17.5 - 19.1	4482470	4482570	4482670	
18.5 - 20.1	4482471	4482571	4482671	
19.5 - 21.1	4482472	4482572	4482672	
20.5 - 22.1	4482473	4482573	4482673	
21.5 - 23.1	4482474	4482574	4482674	
22.5 - 24.1	4482475	4482575	4482675	
23.5 - 25.1	4482476	4482576	4482676	
24.5 - 26.1	4482477	4482577	4482677	

Table (Sizes in mm)

0.500 - 0.551 - 0.620 - 0.623 - 0.630 - 0.722 - 0.862 - 0.895 - 0.965 - 1.100 - 1.118 - 1.125 - 1.250  
 1.350 - 1.372 - 1.385 - 1.524 - 1.540 - 1.600 - 1.650 - 1.700 - 1.750 - 1.782 - 1.800 - 1.829 - 1.900  
 2.032 - 2.250 - 2.284 - 2.386 - 2.438 - 2.667 - 2.704 - 2.713 - 2.721 - 2.743 - 2.750 - 3.048 - 3.250  
 3.400 - 3.658 - 4.835 - 5.250 - 5.486 - 5.500 - 6.000 - 6.096 - 6.350 - 6.500 - 7.000

### Lifting Knob 954

enables the dial bore gage to gently guided into the serration. The measuring spindle of the indicating instrument can also be lifted.

Order no. 4372030

### Holder 844 Kg

with a clamping device for the indicating instrument. The mounting bore diameter 8 mm

Order no. 4470851

### Extension 844 Kv


for measuring in depth bores; length 64 mm

Order no. 4470070

### 844 Kk Anvil

for internal serrations; ball dimension " $M_{dk}$ " from

3.5 - 26.1 mm

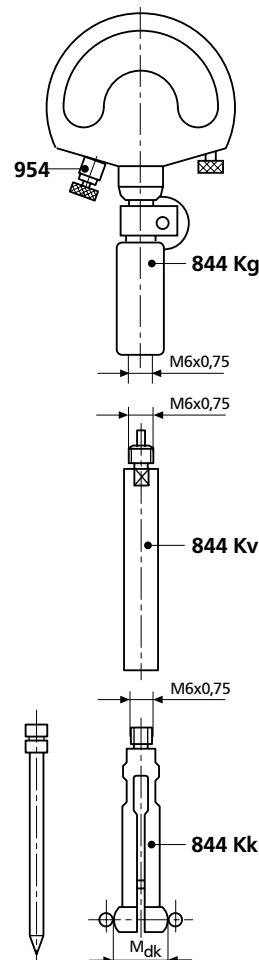

## Modular Unit Parts 844 Z

Diametrical two ball measurement from  $M_{dk}$  26-333 mm

### Measuring Heads

**844 z1** for  $M_{dk}$  26 - 130.5 mm

**844 z2** for  $M_{dk}$  48.5 - 333 mm

### Order no.

**4485000**

**4485001**

### Floating Ball Anvils with carbide ball

	Grad. (mm)	Ball dia. mm	
<b>844 z3</b> Meas. range 3 mm. for Meas. Head 844 z1	0.5	1.0 - 5.0	<b>4488300</b>
		acc. to table	<b>4488301</b>
	0.5	7.5 - 10	<b>4488302</b>
<b>844 z4</b> Meas. range 3 mm. for Meas. Head 844 z2	0.5	1.0 - 5.0	<b>4488310</b>
		acc. to table	<b>4488311</b>
	0.5	7.5 - 10	<b>4488312</b>

### Ball Anvils with carbide ball

<b>844 z5</b> Length 2.5 mm	0.5	1.0 - 5.0	<b>4488320</b>
		acc. to table	<b>4488321</b>
	0.5	7.5 - 10	<b>4488322</b>
<b>844 z6</b> Length 5.0 mm	0.5	1.0 - 5.0	<b>4488330</b>
		acc. to table	<b>4488331</b>
	0.5	7.5 - 10	<b>4488332</b>
<b>844 z7</b> Length 7.5 mm	0.5	1.0 - 5.0	<b>4488340</b>
		acc. to table	<b>4488341</b>
	0.5	7.5 - 10	<b>4488342</b>
<b>844 z8</b> Length 10.0 mm	0.5	1.0 - 5.0	<b>4488350</b>
		acc. to table	<b>4488351</b>
	0.5	7.5 - 10	<b>4488352</b>
<b>844 z15</b> Length adjustable from 24-34 mm	0.5	1.0 - 5.0	<b>4488360</b>
		acc. to table	<b>4488361</b>
	0.5	7.5 - 10	<b>4488362</b>



### Spacer (intermediate piece)

	Length (mm)	
<b>844 z9</b>	10	<b>4486501</b>
<b>844 z10</b>	20	<b>4486502</b>
<b>844 z11</b>	40	<b>4486503</b>
<b>844 z12</b>	80	<b>4486504</b>
<b>844 z13</b>	100*	<b>4486505</b>

### Wooden case

**4485013**

\* Only for 844 z2

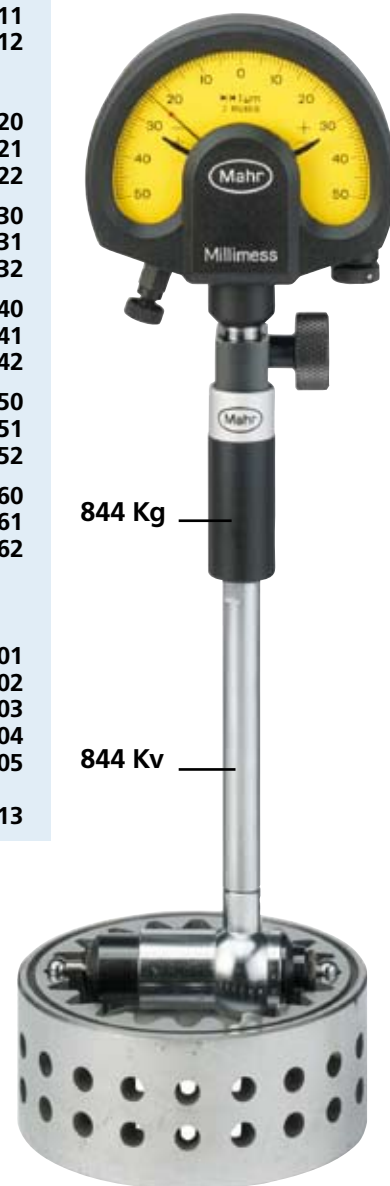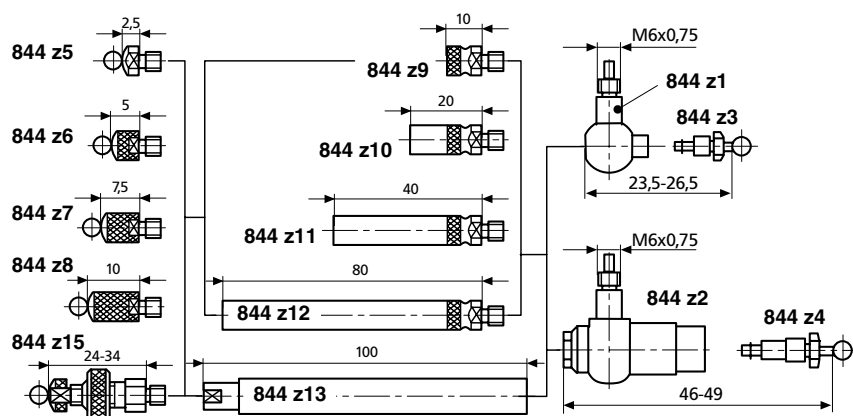

## Dial Bore Gage for Internal Serrations 844 Z

### Selecting Modular Unit Parts Measuring Head 844 z1 and Floating Ball Anvil 844 z3

M <sub>dk</sub> in mm	844 z5	844 z6	844 z7	844 z8	844 z15	844 z9	844 z10	844 z11	844 z12	844 z13
26.0 - 29.0	x									
28.5 - 31.5		x								
31.0 - 34.0			x							
33.5 - 36.5				x						
36.0 - 39.0	x					x				
38.5 - 41.5		x				x				
41.0 - 44.0			x			x				
43.5 - 46.5				x		x				
46.0 - 49.0	x						x			
47.5 - 60.5					x					
48.5 - 51.5		x					x			
51.0 - 54.0			x				x			
53.5 - 56.5				x			x			
56.0 - 59.0	x					x	x			
57.5 - 70.5					x	x				
58.5 - 61.5		x				x	x			
61.0 - 64.0			x			x	x			
63.5 - 66.5				x		x	x			
66.0 - 69.0	x							x		
67.5 - 80.5					x		x			
68.5 - 71.5		x						x		
71.0 - 74.0			x					x		
73.5 - 76.5				x				x		
76.0 - 79.0	x					x		x		
77.5 - 90.5					x	x	x			
78.5 - 81.5		x				x		x		
81.0 - 84.0			x			x		x		
83.5 - 86.5				x		x		x		
86.0 - 89.0	x						x	x		
87.5 - 100.5					x			x		
88.5 - 91.5		x					x	x		
91.0 - 94.0			x				x	x		
93.5 - 96.5				x			x	x		
96.0 - 99.0	x					x	x	x		
97.5 - 110.5					x	x	x	x		
98.5 - 101.5		x				x	x	x		
101.0 - 104.0			x			x	x	x		
103.5 - 106.5				x		x	x	x		
107.5 - 120.5					x		x	x		
117.5 - 130.5					x	x	x	x		

#### Example:


Diametrical two ball meas. M <sub>dk</sub>	73.0	mm
Ball dia.	5.486	mm

When placing an order please quote the ball diameter of the modular unit system for 844 z3 - 844 z8, as well as 844 z15. On the basis of the above specified example above result several combinations that are possible to choice from is dependent upon the work piece. For further details please refer to the illustration on Page 9-65.

The measuring application can be solved with either one of the following 4 versions:

Type	Description	Ball dia. mm	Length mm	Order no.
<b>Version 1</b>				
<b>844 z1</b>	Meas. Head		23.5-26.5	<b>4485000</b>
<b>844 z3</b>	Floating Ball Anvil	5.486		<b>4488301</b>
<b>844 z7</b>	Ball Anvil	5.486	7.5	<b>4488341</b>
<b>844 z11</b>	Spacer		40.0	<b>4486503</b>
<b>Meas. range</b>			71.0-74.0	
<b>Version 2</b>				
<b>844 z1</b>	Meas. Head		23.5-26.5	<b>4485000</b>
<b>844 z3</b>	Floating Ball Anvil	5.486		<b>4488301</b>
<b>844 z15</b>	Ball Anvil	5.486	24.0-34.0	<b>4488361</b>
<b>844 z10</b>	Spacer		20.0	<b>4486502</b>
<b>Meas. range</b>			67.5-80.5	
<b>Version 3</b>				
<b>844 z2</b>	Meas. Head		46.0-49.0	<b>4485001</b>
<b>844 z4</b>	Floating Ball Anvil	5.486		<b>4488311</b>
<b>844 z6</b>	Ball Anvil	5.486	5.0	<b>4488331</b>
<b>844 z10</b>	Spacer		20.0	<b>4486502</b>
<b>Meas. range</b>			71.0-74.0	
<b>Version 4</b>				
<b>844 z2</b>	Meas. Head		46.0-49.0	<b>4485001</b>
<b>844 z4</b>	Floating Ball Anvil	5.486		<b>4488311</b>
<b>844 z15</b>	Ball Anvil	5.486	24.0-34.0	<b>4488361</b>
<b>Meas. range</b>			70.0-83.0	

### Determination of setting values



$D_M$  = Ball diameter of the ball anvil

$M_{dk}$  = Diametrical two ball measurement

$M_{dk} + 2 D_M$  = Setting value (length of the gage block required for setting)

### Indicating Instruments

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

Dial Comparator	Readings mm / inch	Order no. mm / inch
<b>Compramess 1004/1004 Z</b>	5 $\mu$ m/ .0001"	<b>4333000/4333900</b>
<b>Millimess 1003/1003 Z</b>	1 $\mu$ m/ .00005"	<b>4334000/4334900</b>

Digital Indicators see Chapter 5

Electrical Indicating Instruments see Chapter 7



M <sub>dk</sub> in mm	844 z5	844 z6	844 z7	844 z8	844 z15	844 z9	844 z10	844 z11	844 z12	844 z13
48.5 - 51.5	x									
51.0 - 54.0		x								
53.5 - 56.5			x							
56.0 - 59.0				x						
58.5 - 61.5	x					x				
61.0 - 64.0		x				x				
63.5 - 66.5			x			x				
66.0 - 69.0				x		x				
68.5 - 71.5	x						x			
70.0 - 83.0					x					
71.0 - 74.0		x					x			
73.5 - 76.5			x				x			
76.0 - 79.0				x			x			
78.5 - 81.5	x					x	x			
80.0 - 93.0					x	x				
81.0 - 84.0		x				x	x			
83.5 - 86.5			x			x	x			
86.0 - 89.0				x		x	x			
88.5 - 91.5	x							x		
90.0 - 103.0					x		x			
91.0 - 94.0		x						x		
93.5 - 96.5			x					x		
96.0 - 99.0				x				x		
98.5 - 101.5	x					x		x		
100.0 - 113.0					x	x	x			
101.0 - 104.0		x				x		x		
103.5 - 106.5			x			x		x		
106.0 - 109.0				x		x		x		
108.5 - 111.5	x						x	x		
110.0 - 123.0					x			x		
111.0 - 114.0		x					x	x		
113.5 - 116.5			x				x	x		
116.0 - 119.0				x			x	x		
118.5 - 121.5	x					x	x	x		
120.0 - 133.0		x			x	x		x		
121.0 - 124.0			x			x	x	x		
123.5 - 126.5			x			x	x	x		
126.0 - 129.0				x		x	x	x		
128.5 - 131.5	x								x	
130.0 - 143.0					x		x			
131.0 - 134.0		x							x	
133.5 - 136.5			x						x	
136.0 - 139.0				x					x	
138.5 - 141.5	x					x			x	
140.0 - 153.0					x	x	x	x		
141.0 - 144.0		x				x			x	
143.5 - 146.5			x			x			x	
146.0 - 149.0				x		x			x	
148.5 - 151.5	x									x
150.0 - 163.0					x				x	
151.0 - 154.0		x								x
153.5 - 156.5			x							x
156.0 - 159.0				x						x
158.5 - 161.5	x					x				x
160.0 - 173.0					x	x			x	
161.0 - 164.0		x				x				x
163.5 - 166.5			x			x				x
166.0 - 169.0				x		x				x
168.5 - 171.5	x						x			x
170.0 - 183.0					x					x
171.0 - 174.0		x					x			x
173.5 - 176.5			x				x			x
176.0 - 179.0				x			x			x
178.5 - 181.										



## DO YOU HAVE DIVERSE MEASURING TASKS? **MULTIMAR MASTERS THEM WITH FLYING COLORS.**



The latest information on MULTIMAR products can  
be found on our website:  
**[www.mahr.com](http://www.mahr.com), WebCode 10281**

► | Regardless of whether gears, threads, cones or grooves are to be measured; the versatility of Multimar Universal Measuring Instruments combined with a broad range of accessories ensures a perfect solution for nearly all your internal and external measuring requirements.

## ► | Multimar. Universal Measuring Instruments

### **Multimar 25 ES**

Digital Universal Caliper

**10- 2**

### **Multimar 844 T**

Universal Measuring Instrument for Comparison Measurements

**10- 4**

### **Accessories for Multimar 25 ES / 844 T**

**10- 6**

### **Multimar 36 B**

Indicator Gage for Internal (I.D.) and External (O.D.) Measurements

**10-21**

## Digital Universal Caliper 25 ES Varimeter



### Applications

- For measuring:
- Outside and inside dimensions
  - Centering shoulders
  - Narrow collars
  - External and internal tapers
  - Dovetails
  - Grooves
  - Distances between hole centers
  - For scribing of work pieces

*Illustration is shown with accessories, these are sold separately*

### Features

#### Functions:

ON/OFF  
RESET (zero setting)  
mm/inch  
HOLD (Storage of measuring values)  
DATA (Data transmission)  
PRESET (for entering a numerical value)  
TOL (Tolerance display)

- Capacitive measuring system, life of the battery ca. 2 years
- Max measuring speed: 1.5 m/s (60"/s)
- Data output: Opto RS232C via data connection cable
- High contrast 6 mm Liquid Crystal Display
- Interchangeable measuring arms

- Due to the patented mounting fixture of the measuring arms and or measuring attachments provided on both the upper and lower longitudinal face of the arm holders, the digital display is always in the operator's line of vision
- The application range can be easily extended by reversing the measuring arms

- Both measuring arms can be moved along the beam thus having a well balanced weight distribution even with small dimensions
- Slide and beam are made of hardened stainless steel
- Supplied with: Battery

### Technical Data

Measuring range*				Resolution	Error limit (DIN 862)	Weight	Order no.	Order no. wooden case
outside mm	inside mm	outside (inch)	inside (inch)					
0 - 300	25 - 325	(0 - 12")	(1 - 13")	0.01/ .0005"	0.03/ .0015"	770/ 1.7	4118700	4118750
0 - 300	25 - 325	(0 - 12")	(1 - 13")	0.01/ .0005"	0.03/ .0015"	750/ 1.6	4118701**	4118750
0 - 600	25 - 625	(0 - 24")	(1 - 25")	0.01/ .0005"	0.03/ .0015"	1050/ 2.3	4118702	4118751
0 - 1000	25 - 1025	(0 - 40")	(1 - 41")	0.01/ .0005"	0.04/ .0020"	1470/ 3.2	4118703	4118752

\* Dependent upon which accessories are being used the measuring range can be extended by a further 75 mm (2.95") by reversing the measuring arms 844 Te/Tx


\*\* Without fine adjustment

### Accessories

	Order no.	
Setting Gage, hardened steel, screwed in to wooden case	25 Eel	4118520
Battery 3V, Type CR 2032		4102520
Data Connection Cable RS232C (2 m), SUB-D-jack 9-pin	16 ESv	4102510

Accessories for Data Processing see Chapter 11

#### 25 Eel


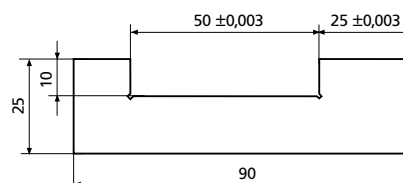


# Digital Universal Caliper 25 ES Measuring Arms, Mounting Attachments and Anvils

## Dimensions

### Range of application

mm/ <i>inch</i>	a
0 - 300 / 0 - 12"	475/18.5"
0 - 600 / 0 - 24"	775/30.5"
0 - 1000 / 0 - 40"	1175/46.2"

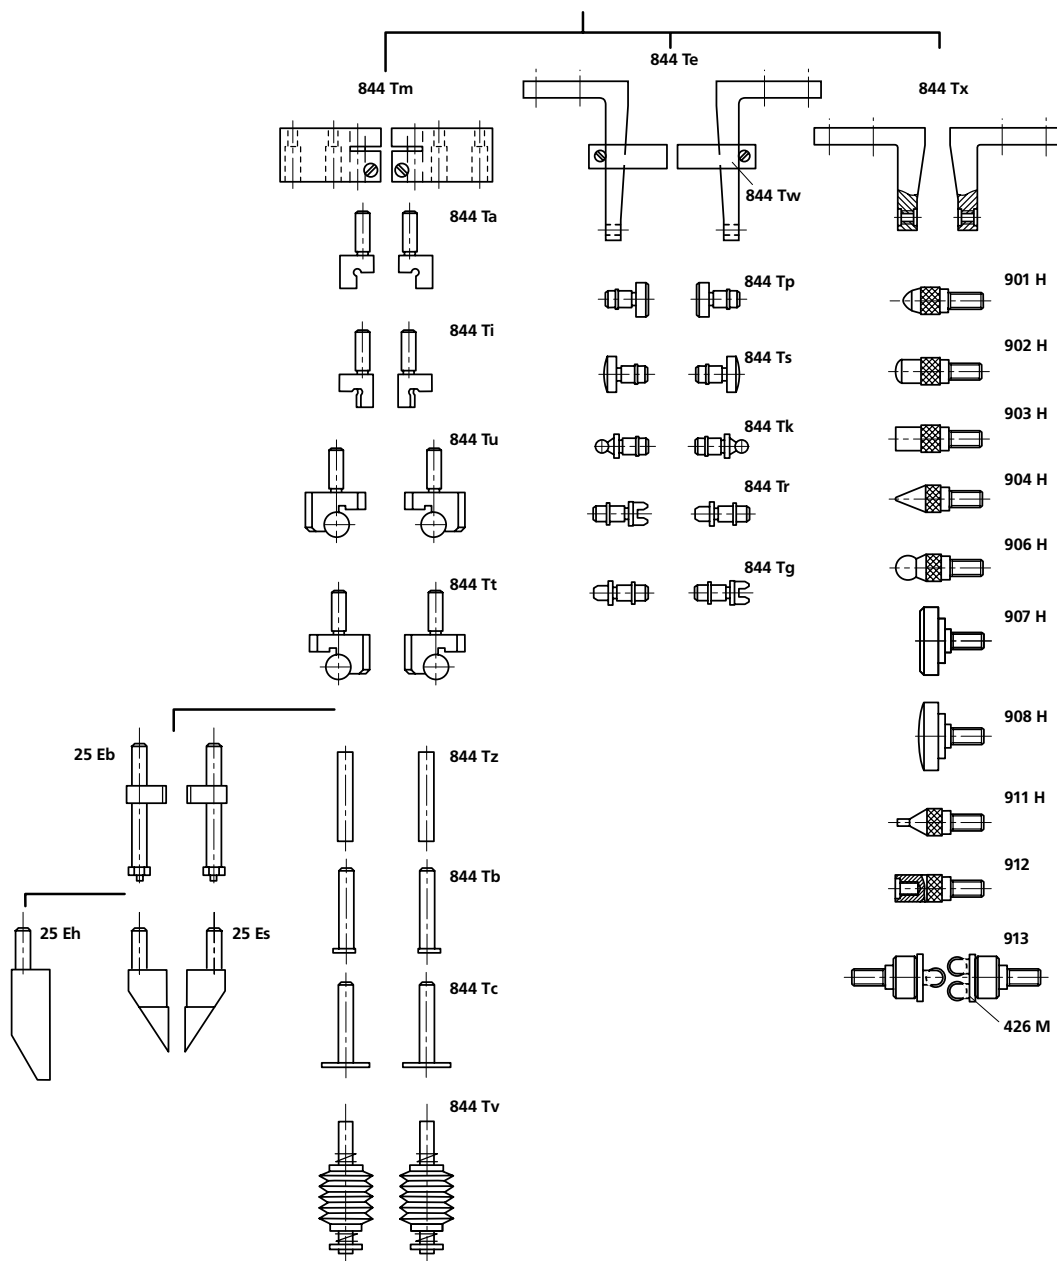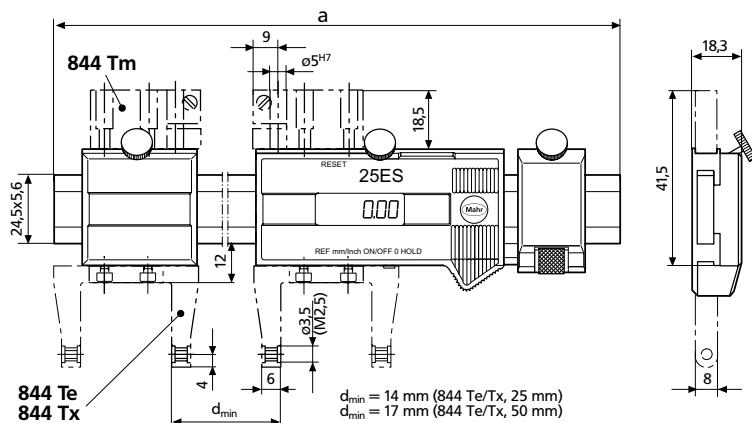

## Multimar. Universal Gage 844 T for external and internal dimensions

► | The Universal Gage **Multimar** 844 T. Easy to use and versatile; ideal for all your measuring requirements in dimensional metrology. | ◀

### Applications

- External and internal dimensions
- External and internal threads
- Centering shoulders
- Narrow collars, recesses and grooves
- External and internal tapers
- External and internal tooth profiles / gears
- and lots more

All indicating instruments with an 8 mm mounting shank can be used



Constant measuring force due to the built-in measuring force spring



The moveable measuring arm holder is mounted in a highly precision ball guide to eliminate both play and friction; it also has an extreme measuring sensitivity and accuracy due to the optimal stability and ease of movement

### Technical Data


Application range*		Extended range of application mm/ <i>inch</i>	Distance of movable anvil mm/ <i>inch</i>	Weight g/lbs	Order no.**	Order no. Wooden case
mm	( <i>inch</i> )					
25 - 110	(1 - 4.33")	25 - 185 / 1 - 7.28"	10/ .4"	775 / 1.71	4500001	4500010
100 - 260	(4 - 10.24")	100 - 335 / 4 - 13.18"	10/ .4"	1010 / 2.23	4500002	4500011
250 - 610	(10 - 24.02")	250 - 685 / 10 - 26.96"	10/ .4"	1580 / 3.48	4500003	4500012
600 - 1010	(24 - 39.75")	600 - 1085 / 24 - 42.71"	10/ .4"	2225 / 4.91	4500004	4500013
1000 - 1500	(39.37 - 59.06")	1000 - 1575 / 39.37 - 62.01"	10/ .4"	2460 / 5.42	4500005***	-
1500 - 2000	(59.06 - 78.74")	1500 - 2075 / 59.06 - 81.69"	10/ .4"	2620 / 5.78	4500006***	-
2000 - 2500	(78.74 - 98.43")	2000 - 2575 / 78.74 - 101.38"	10/ .4"	2800 / 6.17	4500007***	-

\* These application ranges only apply to internal measurements. For external measurements the range of application is reduced by 25 mm (1").  
The extension of the application range takes place when the measuring elements are rotated through 180°.  
All application ranges depend upon which anvil is being used.  
From 1000 mm (range of application) a lightweight CRP tube is used.

\*\* Excludes indicating instrument

\*\*\* Includes a transport and storage case



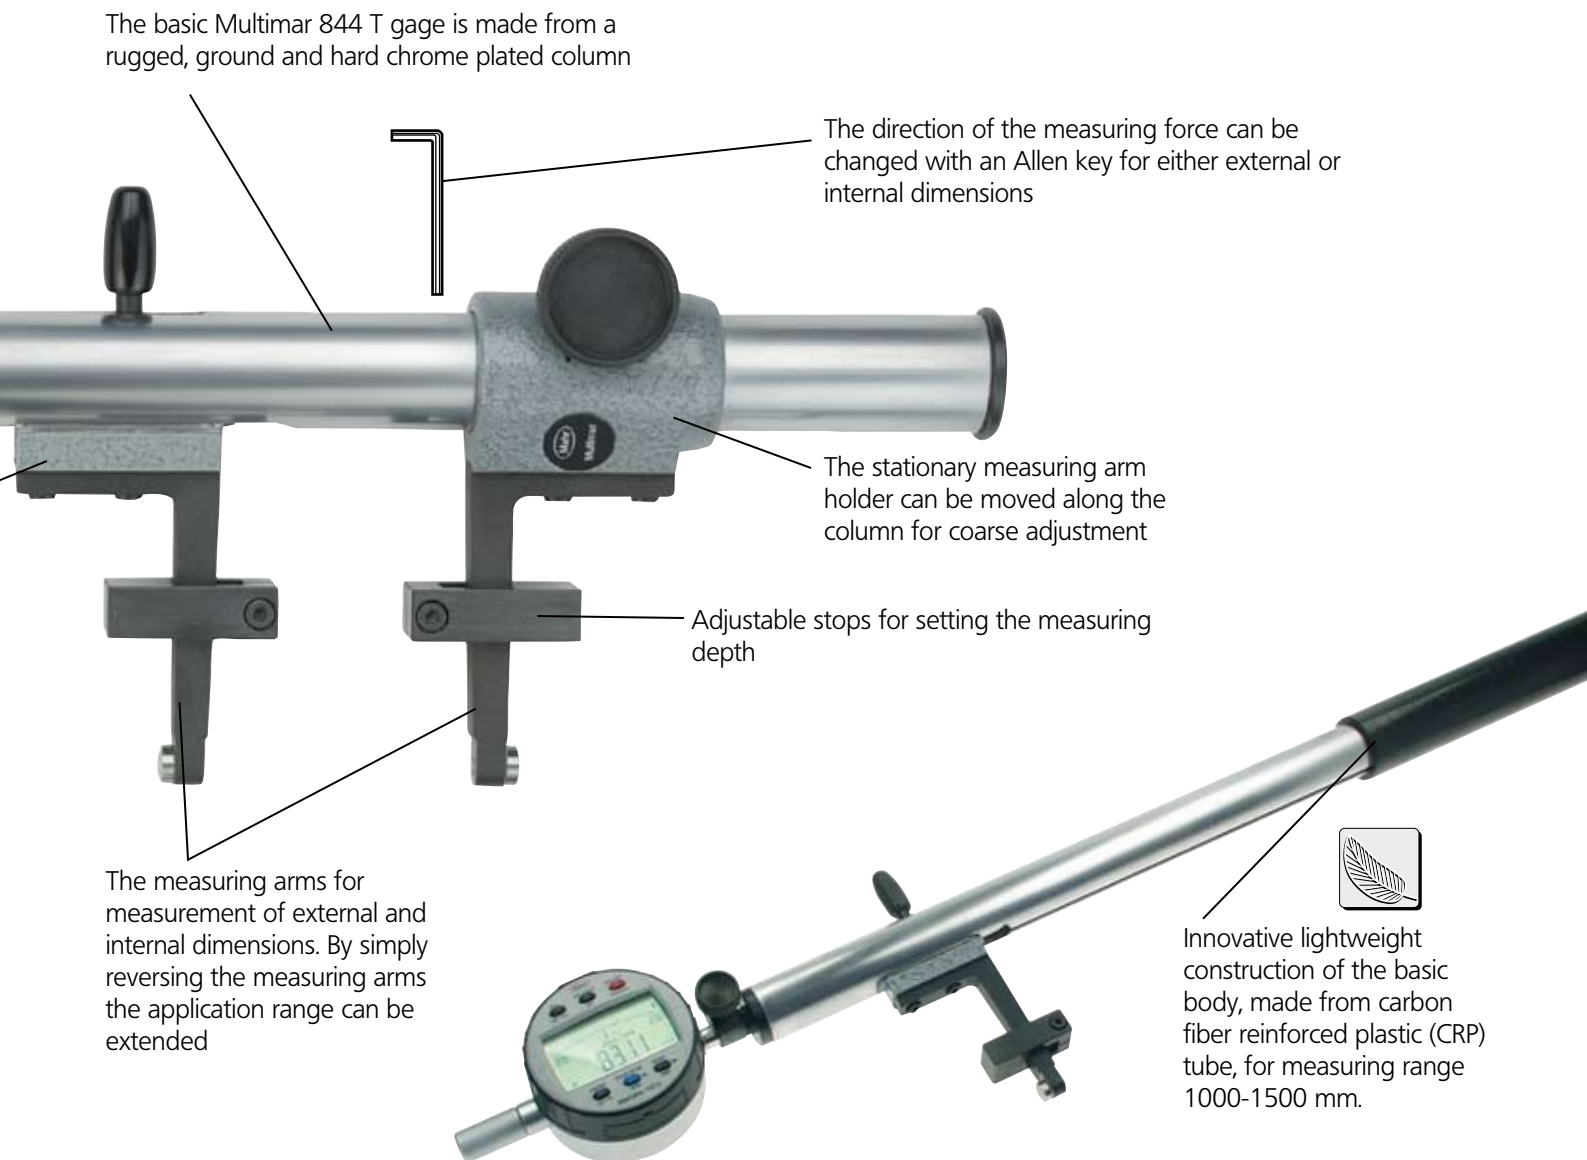

## Indicating Instruments

All indicating instruments with a 8 mm mounting shank can be used.  
Recommended are:



Indicating Instrument	Readings mm/ <i>inch</i>	Order no. mm/ <i>inch</i>
<b>MarCator 810 S</b>	0.01 mm	<b>4311000</b>
<b>Zentimes 1010 / 1010 Z</b>	0.01 mm / <b>.0005"</b>	<b>4332000/ 4332900</b>
<b>Compramess 1004 / 1004 Z</b>	5 $\mu$ m / <b>.0001"</b>	<b>4333000/ 4333900</b>
<b>Digital Indicator MarCator 1087 B</b>	0.001 mm* / <b>.00005"</b>	<b>4337062</b>
<b><math>\mu</math>Max<math>\mu</math>m XL (XLI-30000)</b>	1 $\mu$ m / <b>.00005"</b> *	<b>XLI-30000</b>

\* Resolution  
For further digital indicators please refer to Chapter 5

## Overview. Measuring Arms, Stops, Mounting Attachments and Anvils

### Dimensions

Range of application		a
mm	(inch)	mm / inch
25 - 110	(1 - 4.33")	245 / 9.6"
100 - 260	(4 - 10.24")	395 / 15.5"
250 - 610	(10 - 24.02")	745 / 29.3"
600 - 1010	(24 - 39.75")	1145 / 45.0"
1000 - 1500	(39.37 - 59.06")	1675 / 65.9"
1500 - 2000	(59.06 - 78.74")	2175 / 85.6"
2000 - 2500	(78.74 - 98.43")	2675 / 105.3"

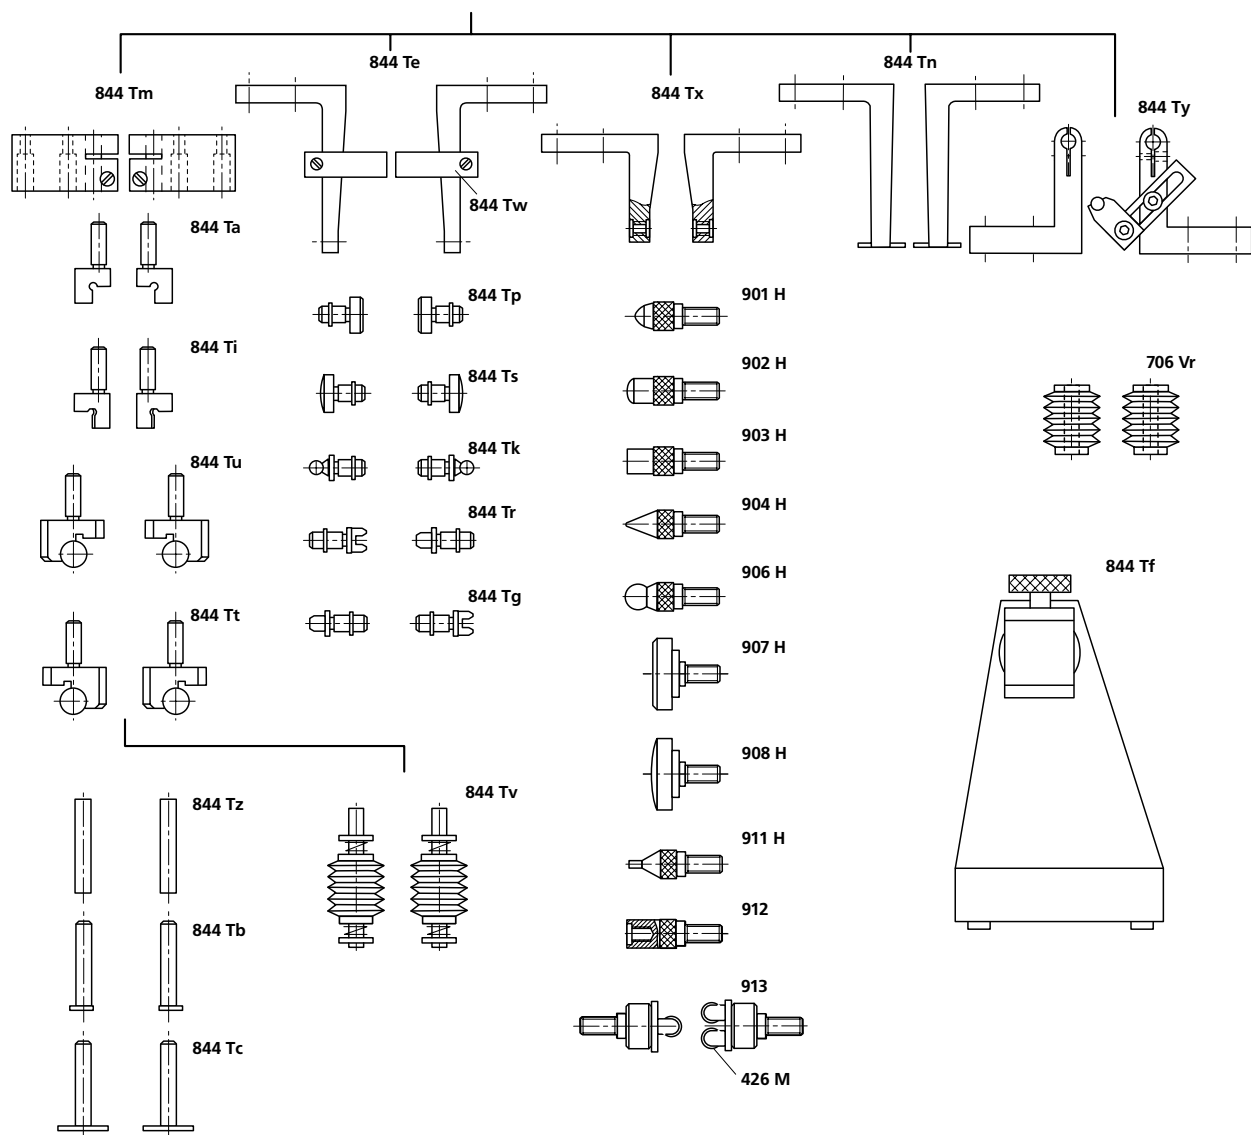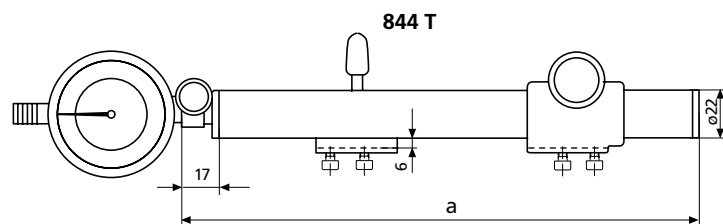


## Overview. Measuring Arms, Stops and Mounting Attachments

### Mounting Attachments 844 Tm

- Accommodates the following anvils 844 Ta, 844 Ti, 844 Tu, 844 Tt, 844 Tz, 844 Tb und 844 Tc
- Faces can also be used as stops
- Reversible arm holders for extending measuring range

Order no. 4500030




### Measuring Arms 844 Te

- For external and internal diameters
- With a 3.5 mm (0.138") diameter mount, accommodates the interchangeable anvils 844 Tp, 844 Ts, 844 Tk, 844 Tr and 844 Tg
- Reversible arm holders for extending measuring range

Throat depth a in mm	25	50	100
Order no.	4500020*	4500021*	4500022*


\* Not suitable for Digital Caliper 25 ES

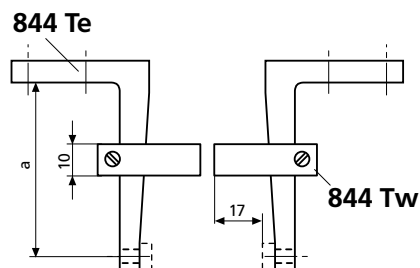

### Stops 844 Tw

- To set the measuring depth limit. Can be attached and relocated on the following measuring arms 844 Te, 844 Tn, 844 Tx.
- Reversible for external and internal measurements

Order no. 4500109



### Measuring Arms 844 Tn

- Hardened steel
- To measure external and internal diameters on recesses and grooves at a greater measuring depth


Throat depth a in mm	100
Order no.	4500036

### Measuring Arms 844 Tx

- With an M 2.5 connection thread to screw in interchangeable anvils
- For internal and external dimensions on specially formed work pieces
- Measuring arms in conjunction with the measuring arms holder is reversible thus extending the range of measurement / application

Throat depth a in mm	25	50	100
Order no.	4500080*	4500081*	4500082*


\* Not suitable for Digital Caliper 25 ES

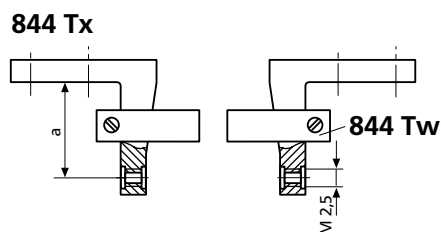

### Holder for Measuring Rollers 844 Ty

- With location bolts for the Measuring Rollers 706 Vr, plus a stop and stop pin

Order no. 4502463

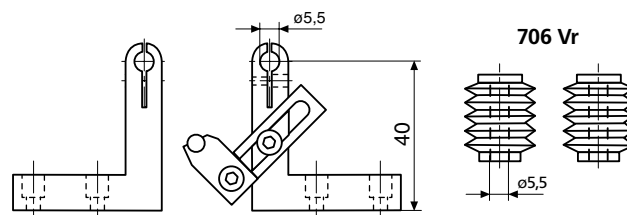

## Measuring external and internal dimensions

### Anvils for Measuring Arms 844 Te

- Hardened steel
- With a cylindrical mounting shank and retainer ring that allows free rotation in the bore of measuring arms 844 Te

#### Cat. no.

#### Order no.



**844 Tp** Flat; for external diameters, distance and widths

**4500040\***

**844 Ts** Spherical; for internal diameters

**4500045\***

\* 2 pieces are required

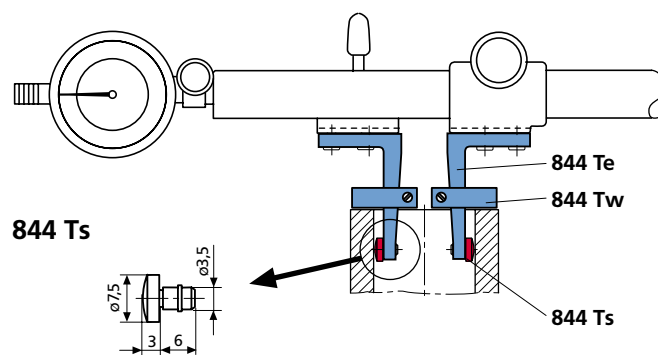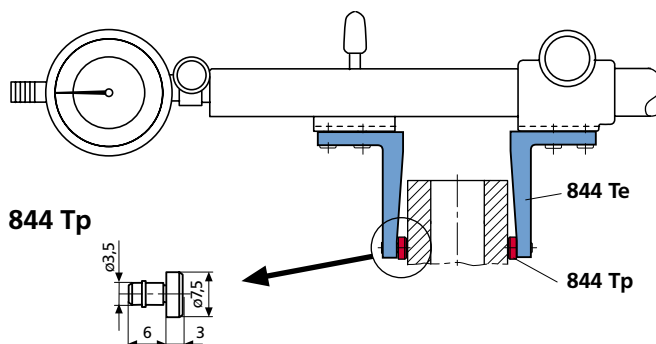

### Shoulder anvils for mounting attachments 844 Tm

- Made from hardened steel
- For measuring narrow collars such as centering shoulders and other similar measuring tasks
- With cylindrical mounting shaft to attach into the mounting attachments 844 Tm

#### Cat. no.



#### Order no.

**844 Ta** Flat; for external diameters

**4500050**

**844 Ti** Semi-cylindrical, for internal diameters

**4500055**

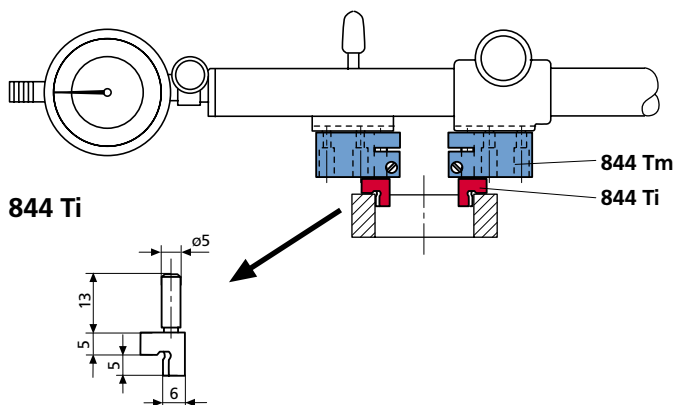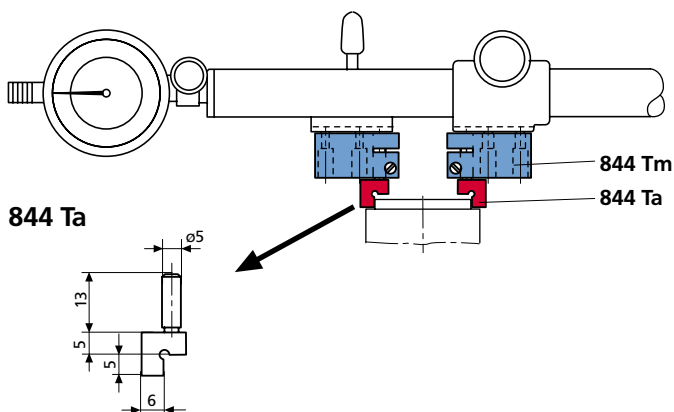

## Measuring tapers and distances

### Roller Anvils 844 Tu\* for Mounting Attachments 844 Tm

- To measure the diameter of **outside tapers and dovetail guides**
- Roller is made of hardened steel

Cat. no.

Order no.

<b>844 Tu*</b>	Roller dia.	8 mm	<b>4500047</b>
	Roller length	14 mm	
	Distance of the roller to the stop face	5 mm $\pm$ 3 $\mu$ m	

### Ball Anvils 844 Tt\* for Mounting Attachments 844 Tm


- To measure the diameter of **inside tapers** with a distance of 5 mm from the taper face
- Ball is made of hardened steel

Cat. no.

Order no.

<b>844 Tt*</b>	Ball dia.	8 mm	<b>4500046</b>
	Distance of the ball to the stop face	5 mm $\pm$ 3 $\mu$ m	

\* Outer and inner surfaces that are parallel to one another a combination sets (pair) consisting of a Roller Anvil 844 Tu and a Ball Anvil 844 Tt, are recommended.

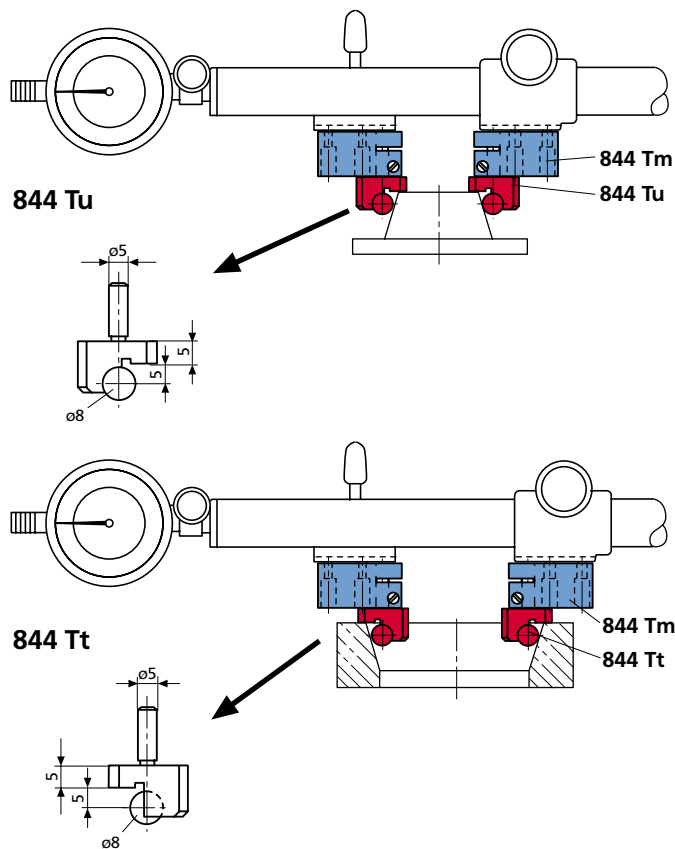

## Measuring recesses

### Anvils with Measuring Blades for Mounting Attachments 844 Tm

- For measuring centering shoulders and recesses on internal and external diameters; consists of a pin type holder, which is moved to set the measuring depth in Mounting Attachment 844 Tm and a mounted measuring blade
- The face of the Mounting Attachment 844 Tm serves as stop

#### 844 Tb


- With round measuring blades
- Ideal for workpieces that have a recess up to 2 mm in depth

#### 844 Tc

- With long measuring blades
- Ideal for workpieces that have a recess up to 7.5 mm in depth

Cat. no.	Blade Length	Blade dia.	Range of adjustment	Order no.
mm	mm	mm		
<b>844 Tb</b>	—	9	0 – 10	<b>4500015*</b>
<b>844 Tc</b>	20	—	0 – 10	<b>4500114*</b>
	20	—	40 – 50	<b>4500115*</b>

\* 2 pieces are required

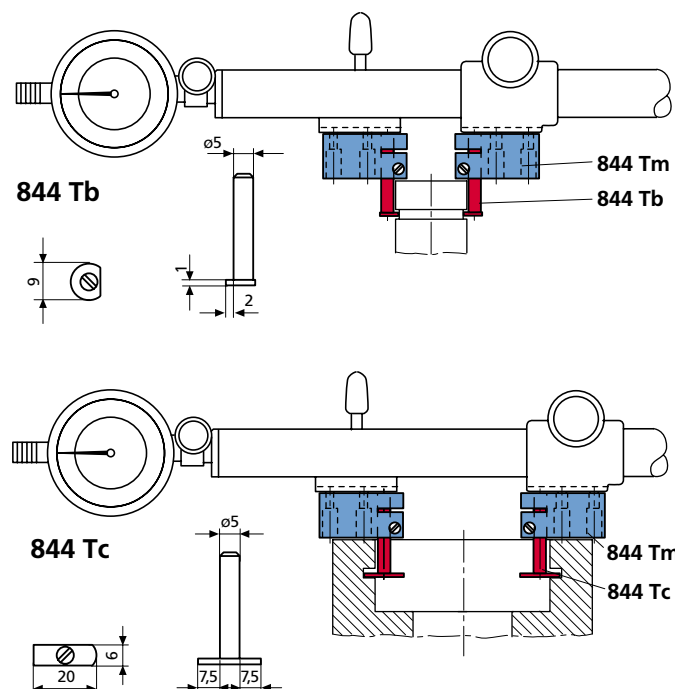

## Measuring external and internal tooth profiles


### Ball Anvils 844 Tk

#### Use in conjunction with Measuring Arms 844 Te

- Made of carbide. With cylindrical mounting shank and retainer ring which allows **free rotation inside the bore of Measuring Arms 844 Te**.

Especially suited for the measurement of internal or external helical gear wheels.

Shank dia. 3.5 mm  
Shank length 6 mm  
Manufacturing tol. ball dia.  $\pm 2 \mu\text{m}$

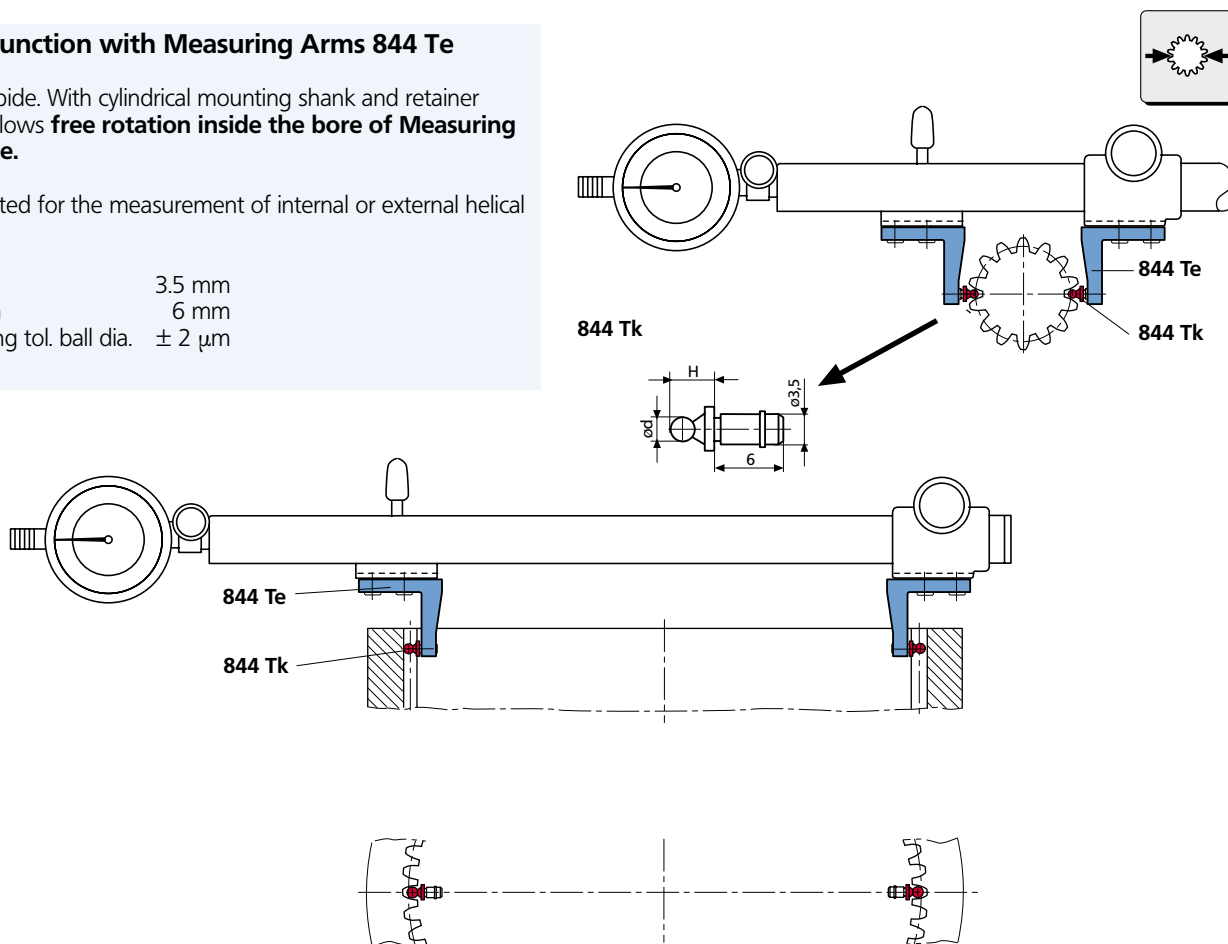

dia. d mm	H mm	Order no.*	dia. d mm	H mm	Order no.*	dia. d mm	H mm	Order no.*	dia. d mm	H mm	Order no.*
0.5	3.0	4502620	1.5	4.0	4500352	2.438	4.9	4502646	4.5	7.0	4500360
0.551	3.1	4502621	1.524	4.0	4502635	2.5	5.0	4500356	4.835	7.3	4502655
0.62	3.1	4502622	1.54	4.0	4502636	2.667	5.2	4502647	5	7.5	4500361
0.623	3.1	4502623	1.6	4.1	4502637	2.704	5.2	4502648	5.25	7.8	4502656
0.63	3.1	4502624	1.65	4.2	4502638	2.713	5.2	4502649	5.486	8.0	4502657
0.722	3.2	4502625	1.7	4.2	4502639	2.721	5.2	4502650	5.5	8.0	4500362
0.862	3.4	4502626	1.75	4.3	4500353	2.743	5.2	4502651	6	8.5	4500363
0.895	3.4	4502627	1.782	4.3	4502640	2.75	5.3	4500618	6.096	8.6	4502658
0.965	3.5	4502628	1.8	4.3	4502641	3	5.5	4500357	6.35	8.9	4502545
1	3.5	4500350	1.829	4.3	4502642	3.048	5.5	4502652	6.5	9.0	4502542
1.1	3.6	4502629	1.9	4.4	4502643	3.25	5.8	4502541	7	9.5	4502547
1.118	3.6	4502630	2	4.5	4500354	3.4	5.9	4502653	8	10.5	4502548
1.125	3.6	4502631	2.032	4.5	4502543	3.5	6.0	4500358	9	11.5	4502549
1.25	3.8	4500351	2.25	4.8	4502540	3.658	6.2	4502654	10	12.5	4502550
1.35	3.9	4502632	2.284	4.8	4502644	4	6.5	4500359			
1.372	3.9	4502633	2.3	4.8	4502544						
1.385	3.9	4502634	2.386	4.9	4502645						

\*2 pieces are required

Further sizes are available upon request (material: Steel)







## Measuring external and internal tooth profiles

### Cylindrical Measuring Pins 844 Tz

#### Use in conjunction with Mounting Attachments 844 Tm

- Made from steel, with shank for mounting into the Mounting Attachment 844 Tm.

Manufacturing tol.  $\pm 2 \mu\text{m}$

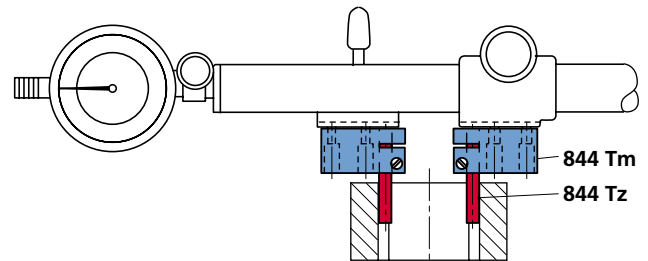

dia. $D_M$ mm	Length $l$ mm	Length $L$ mm	Order no.
1	6	19.5	4500500
1.25	6	19.5	4500501
1.5	6	19.5	4500502
1.75	10	23.5	4500503
2	10	23.5	4500504
2.5	10	23.5	4500506
3	15	28.5	4500507
3.5	15	28.5	4500508
4	15	28.5	4500509
4.5	20	33.5	4500510
5	20	33.5	4500511
5.5	20	33.5	4500512
6	20	33.5	4500513

Further sizes are available upon request (material: Steel)

## Measuring external threads


### Interchangeable Anvils 844 Tr

#### Used in conjunction with Measuring Arms 844 Te

- Pair consists of V-anvil and blade

#### For pitch diameters

Shank dia. 3.5 mm  
Shank length 6 mm

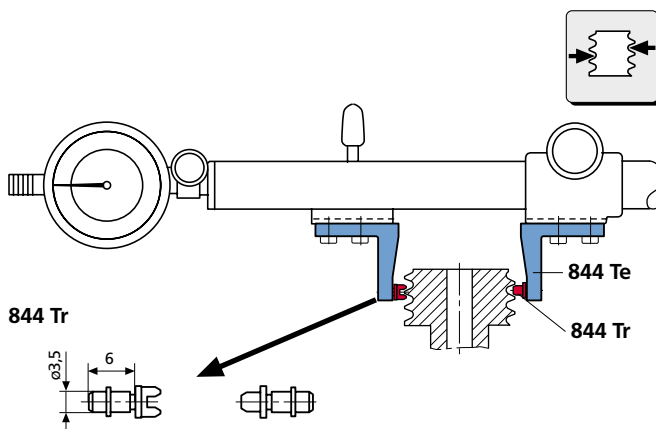

Metric external thread (60°)			Whitworth external thread (55°)			American UST external thread (60°)		
Pitch	V-anvil	Blade	Pitch range	V-anvil	Blade	Pitch range	V-anvil	Blade
mm	Order no.	Order no.	tpi	Order no.	Order no.	tpi	Order no.	Order no.
0.5 - 0.7	4501000	4501200	40 - 32	4501007	4501207	40 - 32	4501018	4501418
0.7 - 1	4501001	4501201	32 - 24	4501008	4501208	32 - 24	4501019	4501419
1.25 - 2	4501002	4501202	24 - 18	4501009	4501209	24 - 18	4501020	4501420
2 - 3.5	4501003	4501203	18 - 14	4501010	4501210	18 - 14	4501021	4501421
3.5 - 5	4501004	4501204	14 - 10	4501011	4501211	14 - 10	4501022	4501422
5 - 7	4501005	4501205	10 - 7	4501012	4501212	10 - 7	4501023	4501423
7 - 9	4501006	4501206	7 - 4.5	4501013	4501213	7 - 4.5	4501024	4501424
			4.5 - 3	4501014	4501214	4.5 - 3	4501025	4501425
			3 - 2.5	4501015	4501215			

#### For pitch diameters


Trapezoid external thread		
Pitch	V-anvil	Blade
mm	Order no.	Order no.
1	4501150	4501350
1.5	4501151	4501351
2	4501152	4501352
3	4501153	4501353
4	4501154	4501354
5	4501155	4501355
6	4501156	4501356
7	4501157	4501357
8	4501158	4501358
9	4501159	4501359
10	4501160	4501360

## Measuring external threads

### Interchangeable Anvils 844 Tr


#### Used in conjunction with Measuring Arms 844 Te

- Pair consists of V-anvil and blade
- Each pitch requires a separate V-anvil
- Blade can be used for several pitches



#### For root diameters

Shank dia. 3.5 mm  
Shank length 6 mm

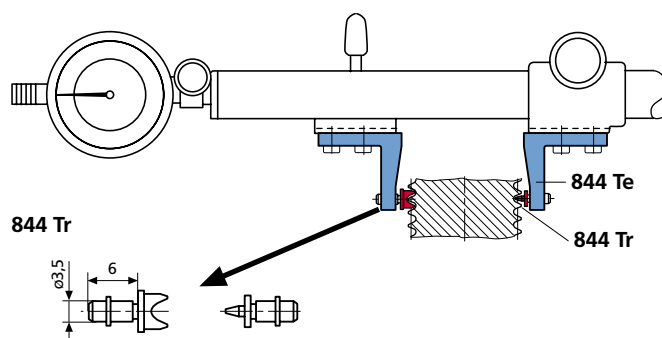

Metric external thread (60°)			Whitworth external thread (55°) American UST external thread (60°)		
Pitch	V-anvil	Blade	Pitch	V-anvil	Blade
mm	Order no.	Order no.	range tpi	Order no.	Order no.
0.5	4501026	4501232	40	4501083	4501284
0.6	4501027		36	4501108	
0.7	4501028		32	4501084	
0.75	4501029		28	4501085	
0.8	4501030		26	4501086	
0.9	4501031	4501235	24	4501087	4501290
1	4501032		22	4501088	
1.25	4501033		20	4501089	
1.5	4501034		19	4501090	
1.75	4501035		18	4501091	4501293
2	4501036	4501238	16	4501092	
2.5	4501037		14	4501093	
3	4501038		12	4501094	
3.5	4501039		11	4501095	
4	4501040	4501241	10	4501096	4501299
4.5	4501041		9	4501097	
5	4501042		8	4501098	
5.5	4501043		7	4501099	
6	4501044		6	4501100	4501302
7	4501045	4501247	5	4501101	
8	4501046		4.5	4501102	
9	4501047		4	4501103	
			3.5	4501104	4501306
			3.25	4501105	
			3	4501106	

## Measuring internal threads


### Interchangeable Anvils 844 Tg

#### Used in conjunction with Measuring Arms 844 Te

- Pair consists of V-anvil and blade.

#### For pitch diameter

Shank dia. 3.5 mm  
Shank length 6 mm

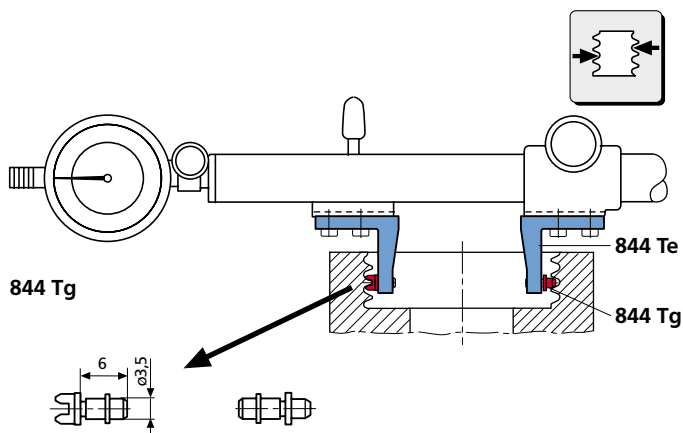

Metric internal thread (60°)			Whitworth internal thread (55°)			American UST internal thread (60°)		
Pitch	V-anvil	Tapered anvil	Pitch range	V-anvil	Tapered anvil	Pitch range	V-anvil	Tapered anvil
mm	Order no.	Order no.	tpi	Order no.	Order no.	tpi	Order no.	Order no.
0.5 - 0.7	4174300	4174600	40 - 32	4174343	4174643	40 - 32	4174415	4174615
0.7 - 1	4174301	4174601	32 - 24	4174344	4174644	32 - 24	4174416	4174616
1.25 - 2	4174302	4174602	24 - 18	4174345	4174645	24 - 18	4174417	4174617
2 - 3.5	4174303	4174603	18 - 14	4174346	4174646	18 - 14	4174418	4174618
3.5 - 5	4174304	4174604	14 - 10	4174347	4174647	14 - 10	4174419	4174919
5 - 7	4174305	4174605	10 - 7	4174348	4174648	10 - 7	4174420	4174620
7 - 9	4174306	4174606	7 - 4.5	4174349	4174649	7 - 4.5	4174421	4174621
			4.5 - 3	4174350	4174650	4.5 - 3	4174422	4174622
			3 - 2.5	4174351	4174651			

#### Trapezoid internal thread

Pitch	V-anvil	Tapered anvil
mm	Order no.	Order no.
1	4501830	4501831
1.5	4501832	4501833
2	4501834	4501835
3	4501836	4501837
4	4501838	4501839
5	4501840	4501841
6	4501842	4501843
7	4501844	4501845
8	4501846	4501847
9	4501848	4501849
10	4501850	4501851

## Measuring internal threads


### Interchangeable Anvils 844 Tg

#### Used in conjunction with Measuring Arms 844 Te

- Pair consists of V-anvil and blade
- Each pitch requires a separate V-anvil
- Pointed anvil can be used for several pitches.

#### For root diameters

Shank dia. 3.5 mm  
Shank length 6 mm

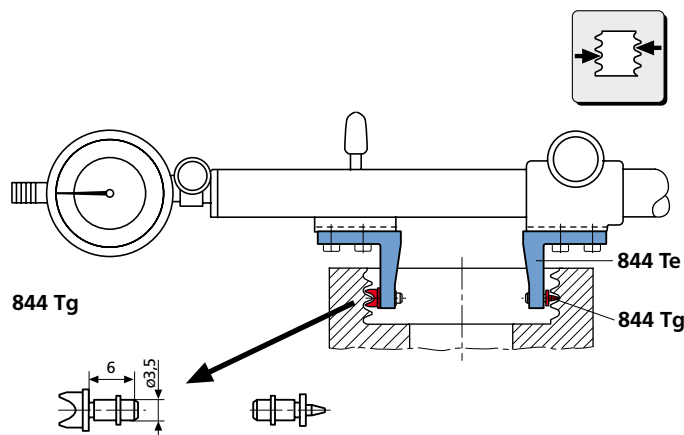

Metric internal thread (60°)			Whitworth internal thread (55°) American UST internal thread (60°)		
Pitch	V-anvil	Pointed anvil	Pitch range	V-anvil	Pointed anvil
mm	Order no.	Order no.	tpi	Order no.	Order no.
0.5	4174313	4174619	40	4174431	4174632
0.6	4174314		36	4174427	
0.7	4174315		32	4174432	
0.75	4174316		28	4174433	
0.8	4174317		26	4174435	
0.9	4174318	4174623	24	4174436	4174939
1	4174319		22	4174437	
1.25	4174321		20	4174438	
1.5	4174322		19	4174439	
1.75	4174323		18	4174440	4174943
2	4174325	4174627	16	4174442	
2.5	4174326		14	4174443	
3	4174327		12	4174445	
3.5	4174329		11	4174446	
4	4174330	4174631	10	4174447	4174949
4.5	4174331		9	4174449	
5	4174333		8	4174450	
5.5	4174334		7	4174451	
6	4174335	4174635	6	4174453	4174655
7	4174337		5	4174454	
8	4174338		4.5	4174455	
9	4174339		4	4174457	
			3.5	4174458	4174660
			3.25	4174459	
			3	4174460	



## Measuring external and internal threads

### Interchangeable Measuring Rollers 844 Tv

#### Used in conjunction with Mounting Attachment 844 Tm

- Mounting shank fits into Mounting Attachment 844 Tm
- Each has two springs to alleviate the positioning on the correct pitch thread

Mounting Shank dia.: 5 mm

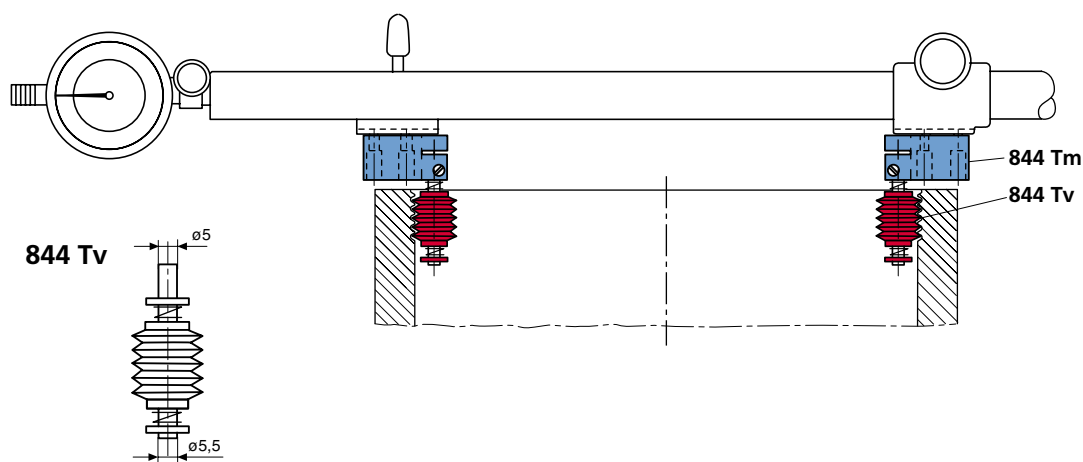

Metric Thread (60°)		Whitworth Thread (55°)		American UST Thread (60°)	
Pitch mm	Order no.	Range tpi	Order no.	Range tpi	Order no.
0.5	4501705	40	4501769	40	4501819
0.6	4501706	36	4501768	36	4501818
0.7	4501707	32	4501767	32	4501817
0.75	4501708	30	4501766	30	4501816
0.8	4501709	28	4501765	28	4501815
0.9	4501710	24	4501764	24	4501814
1	4501711	22	4501763	22	4501813
1.25	4501712	20	4501762	20	4501812
1.5	4501713	19	4501761	19	4501811
1.75	4501714	18	4501760	18	4501810
2	4501715	16	4501759	16	4501809
2.5	4501716	14	4501758	14	4501808
3	4501717	13	4501757	13	4501807
3.5	4501718	12	4501756	12	4501806
4	4501719	11	4501755	11	4501805
4.5	4501720	10	4501754	10	4501804
5	4501721	9	4501753	9	4501803
5.5	4501722	8	4501752	8	4501802
6	4501723	7	4501751	7	4501801
		6	4501750	6	4501800

**Special Threads.** Interchangeable Measuring Rollers for special threads are also available on request.






## Measuring external threads

### Measuring Roller Holder 844 Ty

- With location bolts for the Measuring Rollers 706 Vr
- With stop and stop pin

Order no. 4502463

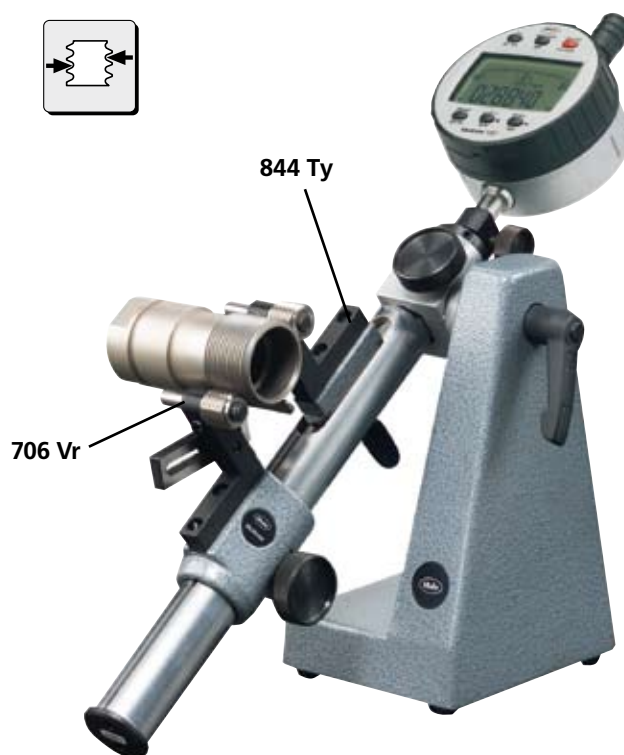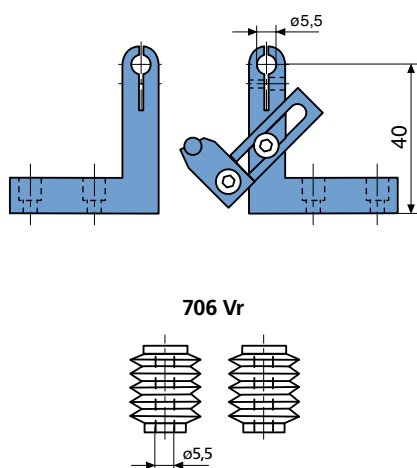

### Thread Measuring Rollers 706 Vr

Used in conjunction with Measuring roller holder 844 Ty


Metric Thread (60°)		Whitworth Thread (55°)		American UST Thread (60°)	
Pitch mm	Order no.	Range tpi	Order no.	Range tpi	Order no.
0.5	4521105	40	4521219	40	4521319
0.6	4521106	36	4521218	36	4521318
0.7	4521107	32	4521217	32	4521317
0.75	4521108	30	4521216	30	4521316
0.8	4521109	28	4521215	28	4521315
0.9	4521110	24	4521214	24	4521314
1	4521111	22	4521213	22	4521313
1.25	4521112	20	4521212	20	4521312
1.5	4521113	19	4521211	19	4521311
1.75	4521114	18	4521210	18	4521310
2	4521115	16	4521209	16	4521309
2.5	4521116	14	4521208	14	4521308
3	4521117	13	4521207	13	4521307
3.5	4521118	12	4521206	12	4521306
4	4521119	11	4521205	11	4521305
4.5	4521120	10	4521204	10	4521304
5	4521121	9	4521203	9	4521303
5.5	4521122	8	4521202	8	4521302
6	4521123	7	4521201	7	4521301
		6	4521200	6	4521300

**Special Threads.** Interchangeable Measuring Rollers for special threads are also available on request.

## Measuring external and internal dimensions


### Measuring Arms 844 Tx and associated Anvils

- With an M 2.5 connection thread to screw in the interchangeable anvils
- For internal and external dimensions on specially formed work pieces
- Measuring arms on the measuring arm holder are reversible, therefore extending the range of measurement / application



Throat depth a mm	25	50	100
Order no.	4500080*	4500081*	4500082*

\* Not suitable for Digital Caliper 25 ES

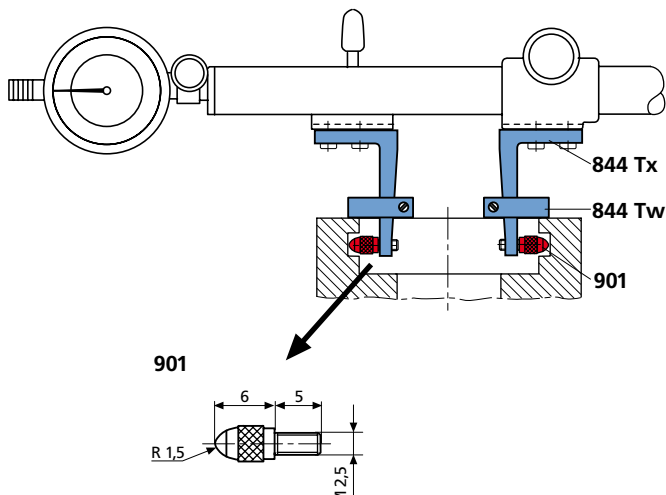


### Standard Contact Points / Anvils 901, Ball dia. 3 mm

Cat. no.		Order no.
901	with Steel ball	4360001
901 H	with Carbide ball	4360002
901 R	with Ruby ball	4360003

### Spherical Contact Points 902/Flat Contact Points 903

	902 Steel	902 H Carbide meas. face	903 Steel	903 H Carbide- tipped
Length l mm	Order no.	Order no.	Order no.	Order no.
4	4360007	—	4360070	—
6	4360009	—	4360071	4360101
8	4360010	4360040	4360072	4360102
10	4360011	4360041	4360073	4360103
12	4360012	4360042	4360074	4360104
15	4360013	4360043	4360075	4360105
20	4360014	4360044	4360076	4360106
25	4360015	4360045	4360077	4360107
30	4360016	4360046	4360300	4360110
35	4360017	4360047	4360078	4360108
40	4360019	4360049	4360310	4360111
45	4360026	4360050	4360303	—
50	4360018	4360048	4360079	4360109
55	4360031			
65	4360035			
75	4360020			
85	4360036			
95	4360029			

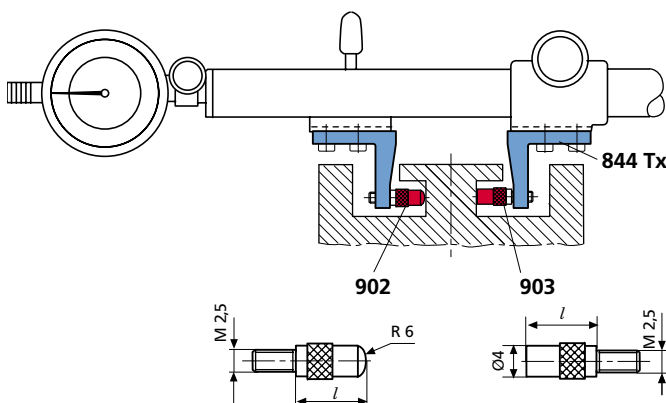

## Measuring external and internal dimensions

### Measuring Arms 844 Tx and associated Anvils

#### Ball Contact Points 906 H

With carbide ball. manufacturing tolerance ball dia. 0/-6 µm

Ball dia. d mm	l mm	Order no.	Ball dia. d mm	l mm	Order no.
1	8.5	<b>4360150</b>	5.5	9	<b>4360161</b>
1.25	8.5	<b>4360151</b>	6	9	<b>4360162</b>
1.5	8.5	<b>4360152</b>	6.35 (1/4")	9	<b>4360163</b>
1.75	8.5	<b>4360153</b>	6.5	10	<b>4360164</b>
2	8.5	<b>4360154</b>	7	10	<b>4360165</b>
2.5	8.5	<b>4360155</b>	7.5	11	<b>4360166</b>
3	8.5	<b>4360156</b>	8	11	<b>4360167</b>
3.5	8.5	<b>4360157</b>	8.5	12	<b>4360168</b>
4	8.5	<b>4360158</b>	9	12	<b>4360169</b>
4.5	8.5	<b>4360159</b>	10	13	<b>4360170</b>
5	9	<b>4360160</b>			

#### Measuring Spindle Extensions 912

Length l mm	Order no.	Length l mm	Order no.
10	<b>4360250</b>	35	<b>4360254</b>
15	<b>4360251</b>	50	<b>4360255</b>
20	<b>4360252</b>	75	<b>4360256</b>
25	<b>4360253</b>	100	<b>4360257</b>

#### Special Contact Points / Anvils


	Order no.
<b>Conical Contact Points</b> , carbide tipped	<b>904 H</b> <b>4360131</b>
<b>Flat Contact Points*</b> , steel, A = 1 cm <sup>2</sup>	<b>907</b> <b>4360200</b>
carbide tipped, dia. 7 mm	<b>907 H</b> <b>4360201</b>
<b>Spherical Contact Points</b> , steel	<b>908</b> <b>4360210</b>
carbide tipped	<b>908 H</b> <b>4360211</b>
<b>Pin Contact Point</b> , carbide tipped, dia. 1 mm, flat	<b>911 H</b> <b>4360240</b>
<b>Flat Contact Point</b> , for mounting a pin gage holder 426 M for measuring threads using the 3 wire method	<b>913</b> <b>4360400</b>

\* When using an anvil with a flat contact face the opposite anvil must have an spherical contact face.


Note:

The Order no's on pages 10-18 and 10-19 only related to one piece.


906 H




912




904 H




907




908 H



911 H



913



## Scribing with Digital Universal Caliper 25 ES

### Scriber Point 25 Es


- For straight lines and circles
- Made of hardened steel

Order no. 4118530

### Counter Holder 25 Eh

- In conjunction with 25 Es to scribe straight lines, for example; along an edge
- Made of hardened steel

Order no. 4118535

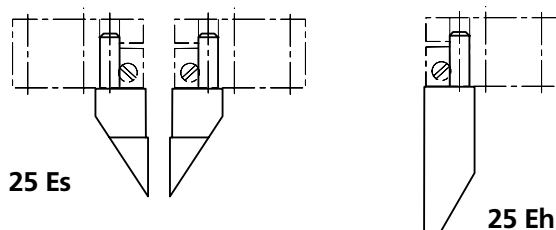


## Anvils for Distances for Digital Universal Caliper 25 ES

### Mounting Inserts 25 Eb

- For distances between the center of bores and between the center of a bore and an edge
- Carbide tipped
- Longest distance between hole centers corresponds with half the measuring range

Order no. 4118525



## Stand 844 Tf for Universal Measuring Instrument 844 T

- For stationary use of the Universal Measuring Instrument 844 T
- Measuring range 25 - 110 mm
- User has both hands free for insertion of work piece
- The indicating instrument is always in the operator's line of vision
- Strong, stable cast base with clamping device for Universal Measuring Instrument

Order no. 4450512



**I.D./O.D. Indicator Gage 36 B** for Internal and External Dimensions

The economical way to check outside diameters on the shop floor.

**EMD-36B-10****Features**

- Adjustable retraction of sensitive contact allows measurement of grooves and races. Retraction, normally set at 6 mm / 0.25", is adjustable to 10 mm / 0.40".
- Frictionless reed-spring (pantograph) motion transfer for repeatability.
- Gaging pressure is adjustable from 0 - 35 N / 0 - 8 lb.
- Two styles available. 2-point "T"-Plate or 3-point "V"-Plate.
- Two sizes available.
- Adjustable base: Gage can be positioned on any angle from horizontal to vertical.
- Variety of readout devices available.
- Reverse the top-plate to change from I.D. to O.D. measurement.
- Supplied with JW-9 Jaws.

**Indicating Instruments**

All indicating instruments that has a 8 mm mounting shank may be used. Recommended are:

Catalog no.	Resolution	Order no.
<b>MarCator 1087</b> <b>μMaxμm</b>	1 μm 1 μm	<b>4337060</b> <b>EDI-10302</b>


**Technical Data**

Style	Capacity		Order no. With 0.0001" Dial Indicator	Order no. With 0.002 mm Dial Indicator	Order no.* With Maxμm® III	Order no.* With Maxμm® III & Output	Order no.* With μMaxμm & Output	Order no. w/o Indicator, metric 8 mm mount shank
	I.D.	O.D.						
"T" Plate	.75 - 3.5" 19 - 89 mm	.25 - 5" 6 - 127 mm	36B-10	36B-10M	EMD-36B-10	EMD-36B-10D	EDI-36B-10	2003200
"T" Plate	.75 - 7.75" 19 - 197 mm	.25 - 8.75" 6 - 222 mm	36B-20	36B-20M	EMD-36B-20	EMD-36B-20D	EDI-36B-20	2003201
"V" Plate	.812 - 4.625" 21 - 117 mm	.312 - 5" 8 - 127 mm	36B-9	36B-9M		EMD-36B-9D	EDI-36B-9	
"V" Plate	.812 - 9" 21 - 229 mm	.312 - 9.5" 8 - 241 mm	36B-19	36B-19M		EMD-36B-19D	EDI-36B-19	

\* Selectable Resolution


## I.D./O.D. Indicator Gage 36 B for Internal and External Dimensions

### "T" Plates

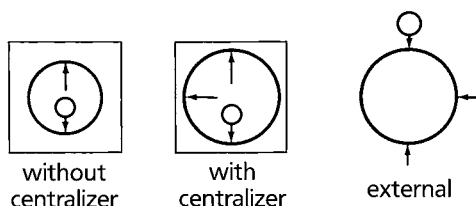

"T"-plates give a diameter reading directly across the diameter. A third contact may be used as a side-stop or centralizer.

### "V" Plates

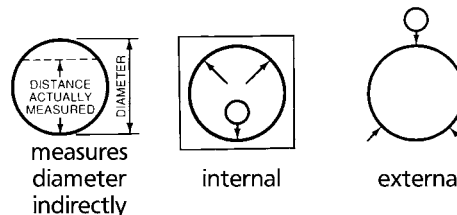

"V"-plates are self-centralizing. Three jaws are used and the measurement is of the distance between the sensitive contact and the chord formed by the two reference contacts. This measurement bears a direct relationship to the diameter and compensation is made by a special ratio indicator so diameter is read directly.

Used to inspect parts with odd number lobing conditions.

### Jaw Sets

Model numbers on the preceding page include a set of **Model JW-9** Jaws. **Model JW-58** Jaws (tungsten carbide)



JW-9 Jaws (normally furnished)

Order no. (3 jaw set)	Adjustment Height	Material: Contact and Rest Surface	Replacement Contact Pins (3 required)
JW-9	0.79-19 mm / .031-.75"	Steel	PS-55
JW-58	0.79-18 mm / .031-.72"	Carbide	PS-226
2220461*	0.79-18 mm	Carbide	2225694


\* Normally furnished with Metric Version.

For special jaw configurations or for other indicators contact Mahr Federal Customer Resources Center.

### Maxum® III Indicator for "V"-Plate Models

Digital Range	Stem Length	Order no.
$\pm 1 \text{ mm} / \pm .040''$ or $\pm .199 \text{ mm} / \pm .020''$	17 mm / .670"	2033145*

\* Maxum® III 4:5 ratio model includes Data Output (6 pin) and user selectable setup for range, resolution, units and measuring direction.

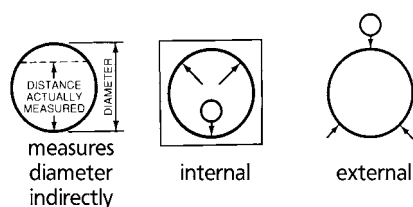

### EMD-36B-19D I.D./O.D. Gage





**I.D./O.D. Indicator Gage 36 B** for Internal and External Dimensions**Special Contacts: Steel**


Special steel ball contacts can be made in a variety of different diameters for your measurement applications.

**Special Contacts: Tungsten Carbide**

Side mounted Tungsten Carbide spherical contacts can be made for measuring internal and external gears and splines.

**Special Contacts: Doughnut**


Specially designed Doughnut shaped contacts are used, as an example, in the bearing industry calling out for wider than normal contacts to reach into bearing raceways.

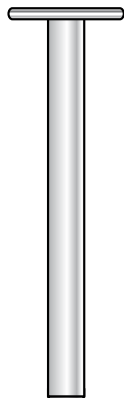**Special Contacts: TC Ball**

Spherical diameter tips are ideal for measuring inside or outside radial formed recesses of precision parts.

**Special Contacts: Pie Plate**

Special jaws shaped like large half-discs, are used by the plastic industry to accurately measure semi-flexible round cups where reduced deflection is important.

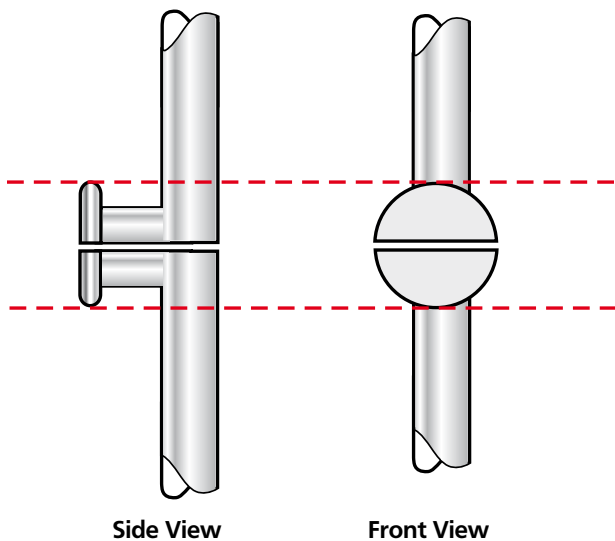**JW-9 w/TC Wear Pads**

Specially designed jaws supplied with Tungsten Carbide wear surfaces provide extra long jaw life.



## ARE YOU SEARCHING FOR THE RIGHT CONNECTIONS? THEY'RE RIGHT HERE AT MARCONNECT.



The latest information on MARCONNECT products can be found on our website:

**www.mahr.com, WebCode 213**

MarCom professional (DEFAULT.MCC)			
Programm	Messgeräte	Einstellungen	?
4 USB-Geräte	Beschreibung	Messwert	Anforderung
	Gerät, Anschlusskabel	Status	Ziel
			Messung Nr.: 0/1
USB1	Fußschalter Schalter MCI	OK	
USB2	Durchmesser 1 1087 16EXu	OK	Schalter: Fußschalter Excel: Default.xlt/Tabelle1/1
USB3	Durchmesser 2 1087 16EXu	OK	Schalter: Fußschalter Excel: Default.xlt/Tabelle1/2
USB4	Durchmesser 3 1087 16EXu	OK	Schalter: Fußschalter Excel: Default.xlt/Tabelle1/3

► | Our new digital hand held measuring instruments are equipped with MarConnect interface capability. Regardless of which interface standard you use, whether USB, Opto RS232 or Digimatic; MarConnect will always provide you with the optimal connection.

## ► | MarConnect. Data Processing

### USB Ready / MarCom Software

#### Overview

##### **MarConnect USB Ready**

**11- 2**

Simple data transmission to a PC as well as enables quick and universal assembly of a multiple measuring station.

##### **MarCom Software**

**11- 3**

Clear and flexible data acquisition

### Statistics Printer

##### **MarConnect MSP2**

**11- 5**

Statistics printer with integrated Data Logger

### Interfaces

##### **MarConnect T-Box**

**11- 6**

Interface to connect to a PC keyboard input

### Radio Transmission

##### **MarConnect Radio System FM 1**

**11- 7**

Secure and wireless data transmission

#### Overview

##### **MarConnect Data Connection Cables**

**11- 8**

To connect Measuring Instruments to Data Printers & External Devices

Mahr

## MarConnect. USB ready

► | The new flexible **MarConnect** interface from Mahr. Simplifies both data transmission to a PC and enables quick and universal assembly of a multiple measuring station. | ◀

- **Choose alternative methods of data transmission** either with a foot switch or a PC keyboard, direct on the measuring instrument or with the Timer function



- **Clear and flexible data acquisition** with the easy to use **MarCom Professional Software**

Program	Measuring Instruments	Settings			Measured Value	Data Request Transfer to
4 USB Devices						
USB1	Stahl 1	2001	2001	OK	+0.197	Timer 00:00:01
USB2	Footswitch 1	Switch	MC1	OK		
USB3	Micrometer 2	40x15	16x14	OK	+017.38	Switch: Footswitch 1
USB4	Dimension 1	16x14	16x14	OK	+003.66	Key: F1



- **Compatible** with all **MarConnect USB ready** measuring instruments




- **Multiple measuring station** is easily set up with a USB hub, up to 100 measuring devices can be simultaneously connected



- **Easily extendable** with additional USB hubs



## MarCom Software

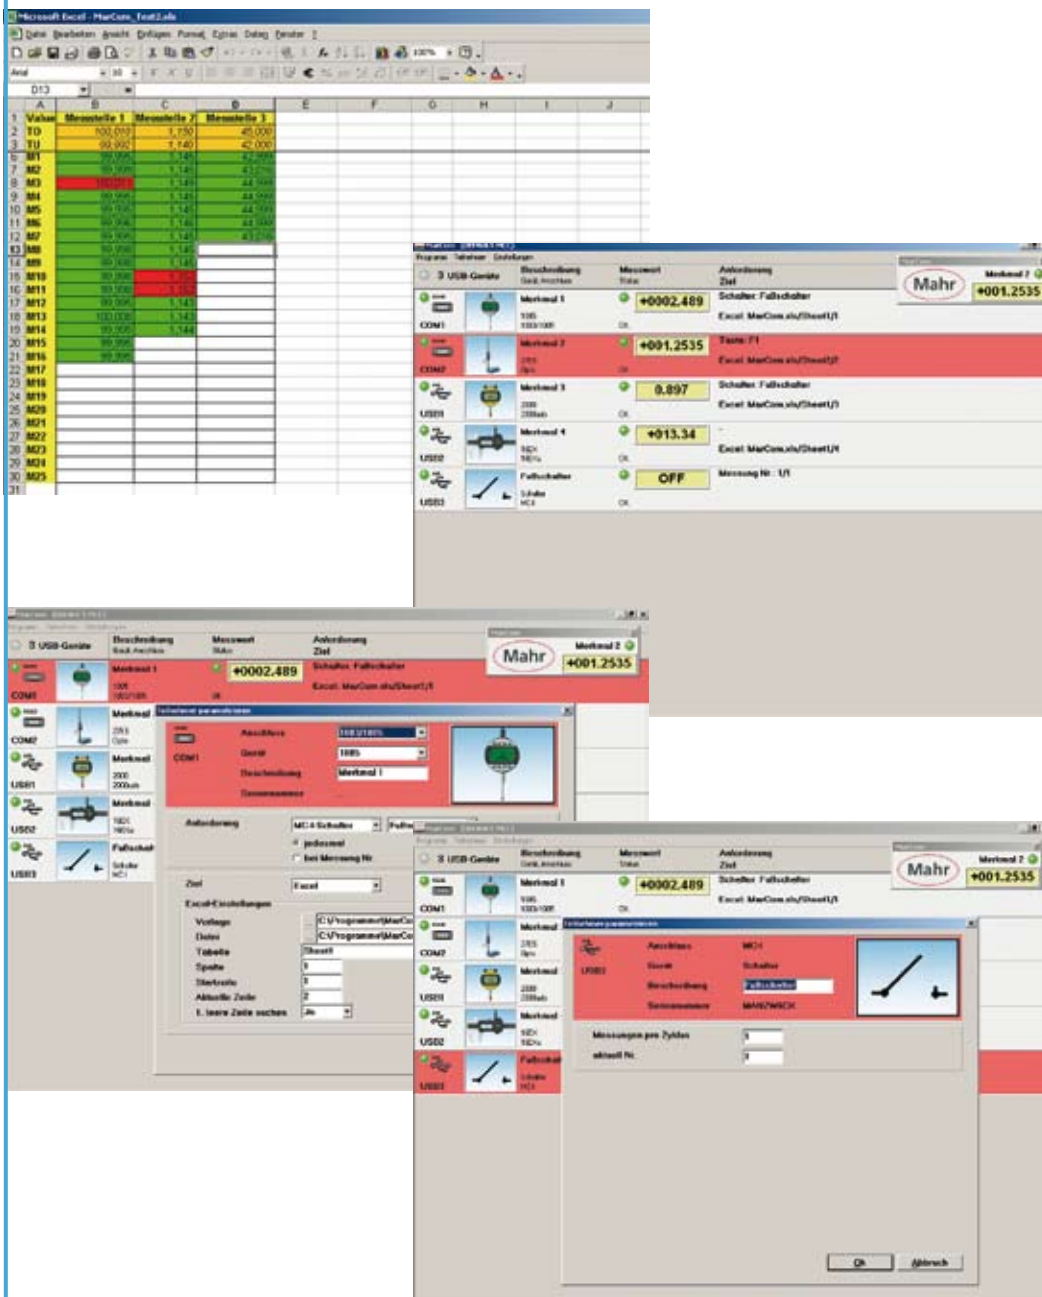

### Features

#### Software MarCom Professional

- Measured values can be directly transferred into either MS Excel (from version 97) or into a text file or key code
- The measured values from each instrument can be sent to a different column, table or folder in Excel
- Data transmission is possible via USB and 2 serial COM interfaces
- USB hub is also suitable as a measuring instrument interface
- Up to 100 measuring instruments can be connected with USB data cable
- Clear portrayal of the chosen measuring instruments with the aid of icons
- Several foot switches can be connected up via USB. Measuring instruments can be freely assigned
- Freely definable and configurable measurement cycles
- There are a variety of ways to transmit data, you can either press the "Data" button on the measuring instrument or on the data cable; via a computer, timer, keyboard; or by activating a foot switch connected to a USB interface
- Text file can be edited thus translated in diverse languages

#### Software MarCom Standard

(USB cable is not included in the scope of supply)

### System Requirements

IBM AT compatible PC  
MS Windows® 2000, XP, Vista  
USB interface, higher than 1.1  
up to 10 MB  
CD / DVD drive  
Recommended: MS Excel from Version 97 onwards



Order no.

Software MarCom Professional  
Software MarCom Standard

4102552  
4102551

Features and system requirements are identical to MarCom Professional, except that it only has one USB and one serial COM interface

## USB ready Measuring Instruments

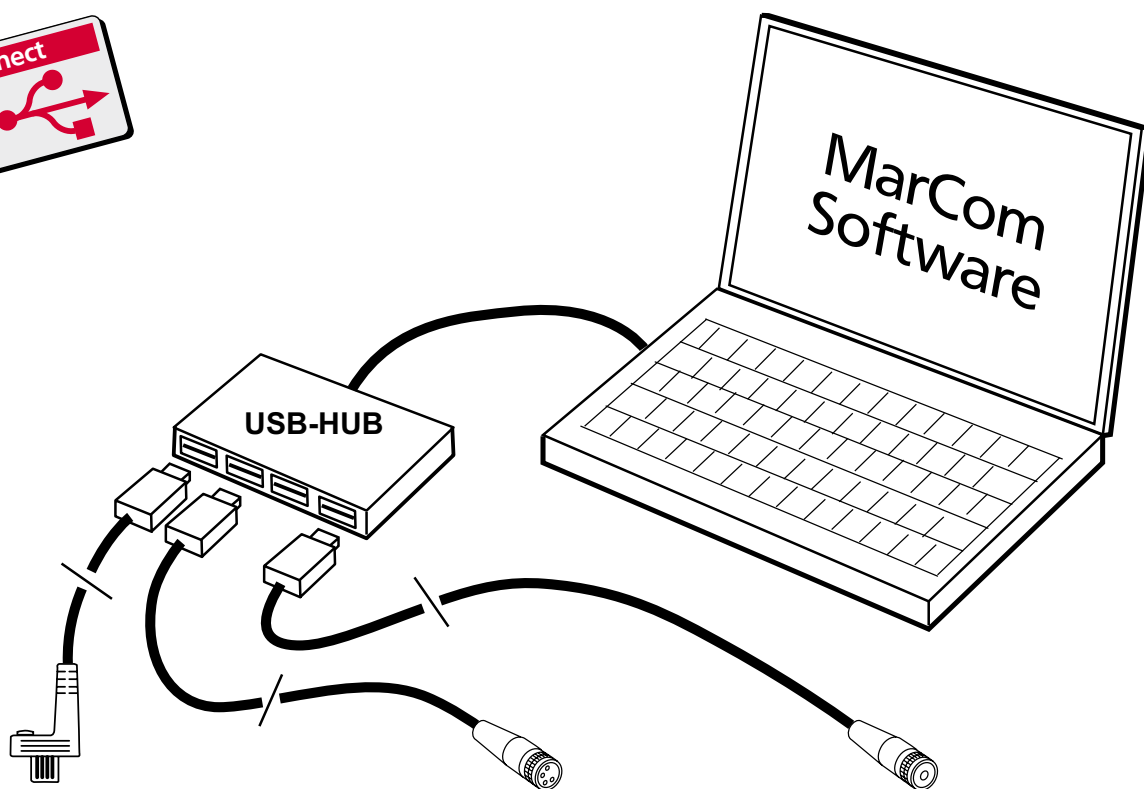

Data Connection Cable **16 EXu**  
**Order no. 4102357**  
 incl. MarCom Standard

for **MarCal.** Calipers  
 16 EX / EXP  
 16 EXV  
 18 EX / EXP  
 30 EX / EXN



for **Digimar.** Height Gages  
 814 S



for **Micromar.** Micrometers  
 40 EX, 40 EWS, 40 EWW  
 44 EX, 46 EX



for **MarCator.** Dig. Indicators  
 1075, 1080, 1081,  
 1086, 1087



Data Connection Cable **2000 usb**  
**Order no. 4346023**  
 incl. MarCom Standard

for **MarCator.** Dig. Indicators  
 1088



for **Millimes.** Digital  
 Comparators  
 2000  
 2001  
 2100



Data Connection Cable **MC-I**  
**Order no. 4102782**  
 incl. MarCom Standard

for **Foot switch**  
**Order no. 4102058**




USB-HUB 7-fold industrial model  
**220 V** **Order no. 4102553**  
**110 V (US type)** **Order no. 2245786**





## Statistics Printer MSP 2 with integrated Data Logger



The above illustration shows the use of the Statistics Printer in the Transport Bag MSP 2t

### Features

- Areas of application include; incoming goods department, on the production floor, in quality assurance department and in dispatch
- Can be connected to any of the following: Mahr Hand Measuring Instruments, Mahr Millimar Instruments, Digimatic compatible instruments and measuring instruments with a RS232C interface
- Two-line display for a simple dialog mode
- Real-time clock with date
- Measured values can easily be stored and transferred to a PC
- The following statistical parameters can be determined: process mean  $\bar{x}$ , range  $R$ , standard deviation  $\sigma_n$  and  $\sigma_{n-1}$ , Min and Max of the measured values,  $> UTol$ ,  $< LTol$ , machine capability  $C_m$  and  $C_{mk}$ , process capability  $C_p$  and  $C_{pk}$  for sampling sizes 2-25
- 3 types of print protocols: statistics, statistics with a histogram, sample charts
- List of measured values can be printed from the memory at any time
- Individual values can be chosen and deleted as desired
- Quiet and fast Thermo-printer (5 lines/sec.)
- Automatic data transfer with adjustable time interval parameter from between 1 sec. to 99 hrs.
- Alternative power sources include: mains adapter (100 - 240 V, batteries or NIMH-accumulator, type AA
- Can be deployed as an interface to the PC
- Languages can be selected, German, English and French
- Supplied with: Mains adapter, paper roll

### Technical Data

Max. measured values	999
Characters per line	24
Paper width	58 mm
Paper length	25 m
LxWxH	215 x 116 x 85 mm
Battery operation at 1100 mAh	> 7000 printed lines
Data logger powered by accu.	ca. 24 Hrs.
Protection class	IP40
Total weight incl. accu.	600 g

**Order no.** 4102040

### Accessories

	Order no.
<b>Foot Switch</b> to trigger data transmission	4102058
<b>Paper Rolls</b> 1 Pack = 5 rolls	4102041
<b>Transport Bag</b> MSP 2t	4102042
<b>Data Cable</b> to connect <b>MSP 2</b> to a PC (Data transfer / Interface mode)	4102711
<b>Data Cable</b> for connecting measuring instruments See cable overview on Page 11-8	
<b>MarCom Software</b> see Page 11-3	

**T-Box** interface to connect to measuring instruments to the keyboard input jack of a IBM compatible PC



**T-Box 204 USB**

### Features

- Measuring data is converted into **keyboard codes**, therefore suitable for any software with a manual input (e.g. MS-Excel®)
- No special driver software required
- Independent of operating system (DOS, Windows, OS/2, Unix, Linux)
- Measuring values can be processed individually or as a group
- The measured values can be directly triggered on the measuring instrument or with the optional foot switch
- Every Multi-RS232C interface is individually adjustable via the setup switch
- Termination character (e.g. Enter) can be selected via switch
- The power is supplied by the USB interface
- Supplied with:  
USB cable  
PS/2 cable

### Note:

Only suitable for German, French, US keyboards or compatible!

### Technical Data

	Inputs	Dimensions mm (L x W x H)	Order no.	Remarks
<b>T-Box 204 USB</b>	3 x Multi-RS232C Input 1 x Digimatic Input	130 x 180 x 40	<b>9102519</b>	When connecting Digimatic-measuring instruments the standard cable of the manufacturer can be used
<b>T-Box 205 USB</b>	2 x Multi-RS232C Input 3 x Digimatic Input	130 x 180 x 40	<b>4102579</b>	

### Accessories

#### Order no.

**Foot Switch** for connection to T-Box

**4102556**

**Data Cable** for connecting measuring instruments  
See cable overview on Page 11-8

**Digi-USB-1 Interface** USB Interface with one Digimatic input port



### Features

- Power supplied by the USB interface
- No driver required for the USB interface
- The USB interface is recognized as a keyboard
- Termination character such as Enter or TAB can be set up on the USB interface
- Data- key for data transmission
- Supplied with:  
USB-Interface


### Technical Data

1 x Digimatic - measuring instrument - input  
Dimensions 20 x 57 x 33 mm

**Order no.**

**4102523**

## Radio Transmission Radio system FM 1\*

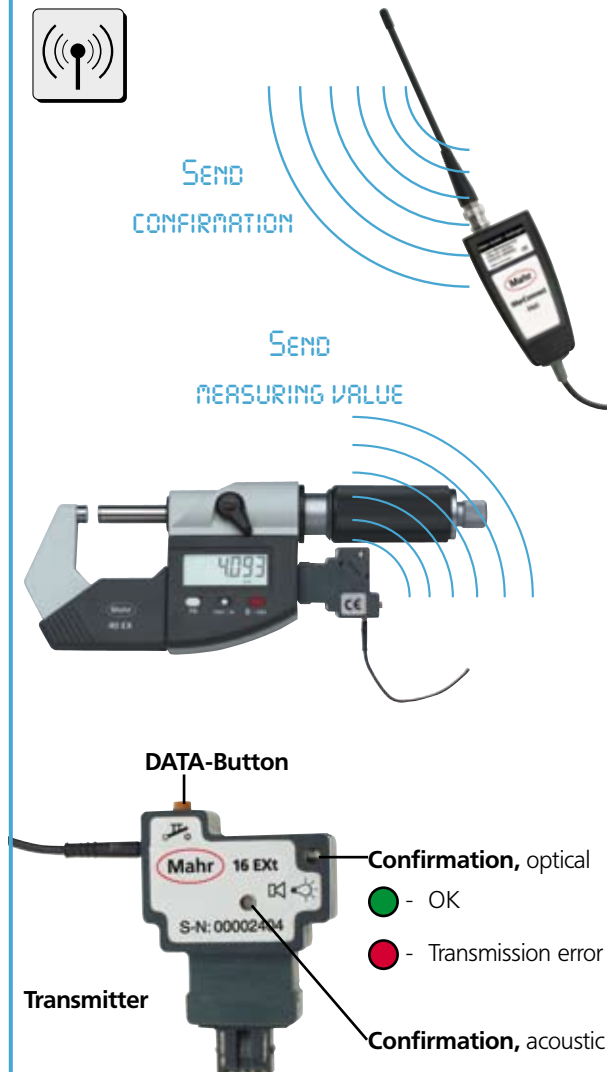

\* Only available in North America, Canada and Mexico

### Transmitter

For Measuring Instruments			Order no.
<b>MarCal</b>	16 EX, 16 EXC, 16 EXV, 18 EX, 30 EX, 30 EXN	<b>16 EXt</b>	<b>4102321</b>
<b>Digimar</b>	814 S		
<b>Micromar</b>	40 EX, 44 EX, 46 EX, 40 EWS, 40 EWW		
<b>MarCator</b>	1075, 1080, 1081, 1086, 1087		
<b>MarCal</b>	25 ES, 30 EWD, 31 ES, 32 ES	<b>16 Est</b>	<b>4102322</b>
<b>Digimar</b>	27 ES, M 814		
<b>MarTool</b>	106 ES		
<b>Millimar</b>	C1208, C1216, C1245, S1840	<b>RS232 t</b>	<b>2121315</b>
<b>Digimar</b>	CX1, CX2, 817 CLM		

Contact Mahr Federal for transmitters to be used with:  
 μMaxμm  
 Digimatic devices  
 Digimatic data cables

### Features

- Secure data transmission with dialogue between receiver and transmitter
- Acoustic and optical confirmation of receipt by the transmitter
- Compact transmitter is connected directly on the interface of the measuring instrument
- Power is supplied for the receiver via a USB-Interface on the PC
- Up to 120 measuring instruments can be connected to the receiver
- Radio transmission distance is from 10 m up to 200 m (depending on the environment)
- Radio frequency is 433.926 MHz

The transmission of the measured value takes place via actuation of the DATA button on the transmitter. The transmitter supplements the measured value with an address number, a communication control word and a double check sum. The special data coding and the feedback from the PC to the transmitter ensures absolute data security.

A transmission error is recognized by the dialogue between PC and transmitter.

The data transmission is then repeated up to three times automatically within a few milliseconds

When the data is successfully transmitted the green light on the transmitter flashes and a short beep is heard confirming transmission.

### Receiver

	Order no.
<b>Receiver for USB</b> interfaces incl. driver and basic software. Basic software consists of a software keyboard interface and software to store measured values in an MS-Excel® column.	<b>FM 1 4102320</b>




### Optional Software

	Order no.
<b>Mahr_EXDLL</b> (optional) Software for storing measuring data of several radio modules in any Excel table. Contact Mahr Federal for optional MS Excel based software that allow for:	<b>4102323</b>
<ul style="list-style-type: none"> <li>• Data manipulation of up to 120 data inputs</li> <li>• Full SPC and graphical displays</li> </ul>	

# MarConnect. Interfaces

## Overview

Connect to ...  Instrument	PC			
	 direct via USB and MarCom Software	 direct via RS232C and MarCom Software	 via Digi-USB 1	via T-Box
Foot Switch	4102058+4102782 ③	4102058+4102782 ②③	-----	4102556
16 EX / EXC 16 EXV 18 EX 30 EX / EXN 40 EX, 40 EWS, 40 EWW, 46 EX, 44 EX 1075, 1080, 1081, 1086, 1087 814 S	4102357	4102410	4102411	4102411
2000, 2001, 2100 1088	4346023	4346020	4346021	4346021
838 EA, 838 EI	-----	-----	4495084 ⑥	4495084 ⑥
Maxµm III (10 pin output) (6 pin output)	-----	-----	2239038 2239036	2239037 2239035
µMaxµm, µMaxµm XL	-----	SCB-4	2001025	2001025
25 ES 30 EWD 31 ES, 32 ES 106 ES M 814	4102510+4102330	4102510	-----	4102510
MSP 2	4102711+4102334 ④	4102711 ④	-----	-----
1240, S1840, C1245, C1208, C1216	7024634+4102331 ⑤	7024634 ⑤	-----	4102715
Digimar CX 1, CX 2, 817 CLM	7024634+4102333 ④	7024634 ④	-----	-----

① Only available in North America, Canada and Mexico

② Foot switch; only with an additional USB Port


③ Cable length 18 cm / 7"

④ Data transmission only with the "Data" key or "automatic transmission" on the measuring instrument


⑤ Foot switch to transfer data on the measuring instrument

Millimar - Order no. 5330956 / Millimar 1240 - Order no. 5312431


► | **MarConnect.** Regardless of which interface standard you use, whether; USB, OptoRS232 oder Digimatic, MarConnect always provides you with the optimum connection. | ◀

 <b>Transmitter ①</b> <b>FM 1 via</b> <b>USB</b>	<b>Data printer</b> <b>MSP 2</b>	
	-----	4102058
4102321	4102411	
-----	4346021	
Contact Mahr Federal	4495084 ⑥	
-----	2239037 2239035	
Contact Mahr Federal	2001025	
4102322	4102510	
-----	-----	
2121315 ⑦	7024634	
2121315	7024634 ④	


Standard cable length 2 m




4102058




4102782 ③




4102357




4102410




4102411




4346023




4346020




4346021




2001025 / 2239037 / 4495084 ⑥




4102510



4102330 to 4102334 ⑥



4102715 / 7024634



4102711

⑥ Cable length 1.5 m / 5 ft

⑦ Not for Millimar 1240

## THE COMPLETE SUPPORT FOR YOUR INSPECTION. **MARTOOL**



The latest information on MARTOOL products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 10436-5062**

► | MarTool measuring and inspection equipment are indispensable aids for dimensional metrology. Their simple handling make them the most versatile instruments for daily use in either the inspection room or the workshop, whether measuring an angle on a work piece or inspecting the surface plate for a height measuring instrument with the outstanding quality from MarTool you cannot go wrong.






## ► | MarTool. Measuring and Inspection Equipment

<b>MarTool 104</b> Knife-edge Straight Edges	<b>12- 2</b>
<b>MarTool 105 / 105 F /105 Y /105 Z</b> Set Squares	<b>12- 2</b>
<b>MarTool 106 UF / 106 ES</b> Universal Bevel Protactor	<b>12- 4</b>
<b>MarTool 107 AG /107 Us /107 Ug</b> Granite Surface Plates, Accessories	<b>12- 6</b>
<b>MarTool 107 MH / 107 V</b> Magnetic V-Blocks	<b>12- 8</b>
<b>MarTool 130 W / 130 WR</b> Illuminated Magnifiers	<b>12- 9</b>

# MarTool. Measuring and Inspection Equipment

## Overview Straight Edges and Squares

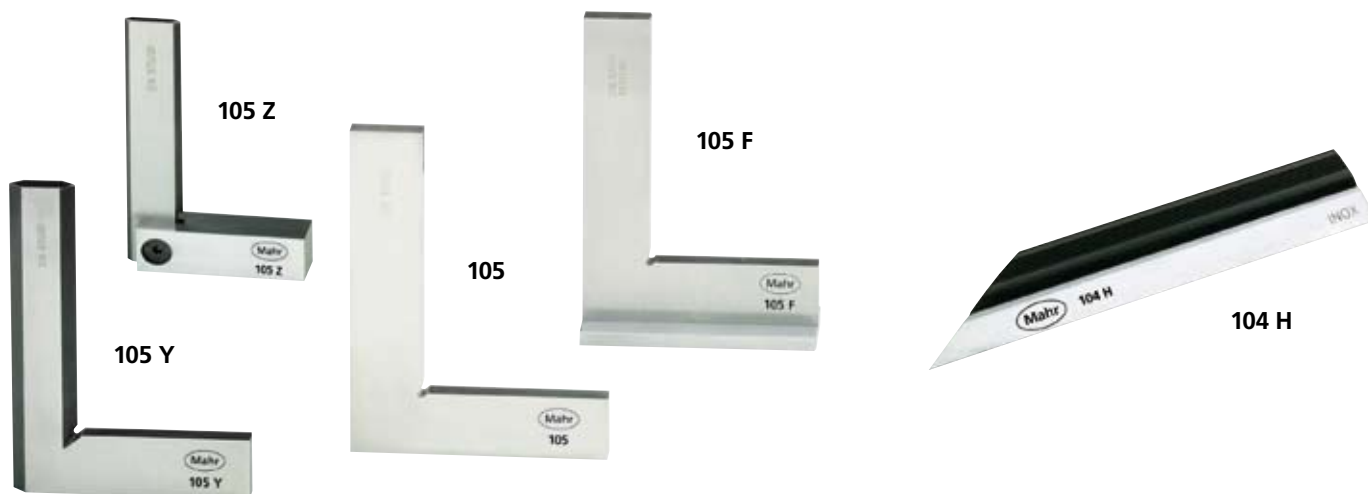

### Knife-edge Straight Edge 104 H

#### Features

- Stainless steel, hardened throughout and ground
- Heat insulators
- One end has a pointed tip
- Supplied with: case

#### Accuracy

according to DIN 874, sheet 2

To determine the straightness tolerance  $t$  of the knife edge use the following formula:

$$t = 2 + \frac{l}{250} \mu\text{m}$$

Length  $l$  in mm

#### Technical Data

Length mm	(inch)	Cross section mm	Weight kg	Order no.
75	(3")	22 x 6	0.05	4205000
100	(4")	22 x 6	0.07	4205001
125	(5")	22 x 6	0.09	4205002
150	(6")	22 x 6	0.11	4205003
200	(8")	22 x 6	0.15	4205004
300	(12")	30 x 7	0.25	4205005
400	(16")	40 x 7	0.75	4205007
500	(20")	40 x 7	0.91	4205006

### Flat Square 105/0

#### Features

- Hardened stainless steel
- Supplied with: case

#### Accuracy

Grade 0 DIN 875

#### Technical Data

Length of beams mm	(inch)	Cross section mm	Weight kg	Order no.
50 x 40	(2 x 1.6")	14 x 4	0.04	4207008
75 x 50	(3 x 2")	15 x 4	0.05	4207009
100 x 70	(4 x 3")	20 x 5	0.11	4207000
150 x 100	(6 x 4")	25 x 6	0.22	4207001
200 x 130	(8 x 5.1")	30 x 7	0.54	4207002
300 x 200	(12 x 8")	40 x 8	1.12	4207004

## Flanged Beam Square 105 F/0

### Features

#### Accuracy

Grade 0 DIN 875

To determine the right angle tolerance  $t$  of the test surface use the following formula:

$$t = 5 + \frac{l}{50} \mu\text{m}$$

(Length  $l$  is the longer beam in mm)

### Technical Data

Length of beams mm		(inch)	Cross section mm	Weight kg	Order no.
50 x 40		(2 x 1.6")	13.5 x 5	0.05	4208008
75 x 50		(3 x 2")	15 x 4	0.08	4208009
100 x 70		(4 x 3")	20 x 5	0.20	4208000
150 x 100		(6 x 4")	25 x 6	0.46	4208001
200 x 130		(8 x 5.1")	30 x 7	0.75	4208002
300 x 200		(12 x 8")	40 x 8	1.68	4208004

## Knife-edge Square 105 Y

### Features

- Hardened stainless steel
- Supplied with:  
case

#### Accuracy

Grade 00 DIN 875

### Technical Data

Length of beams mm		(inch)	Cross section mm	Weight kg	Order no.
50 x 40		(2 x 1.6")	14 x 4	0.03	4210000
75 x 50		(3 x 2")	16 x 4	0.05	4210001
100 x 70		(4 x 3")	20 x 5	0.10	4210002
150 x 100		(6 x 4")	25 x 6	0.26	4210003
200 x 130		(8 x 5.1")	30 x 7	0.43	4210004
300 x 200		(12 x 8")	40 x 8	0.96	4210005
500 x 330		(20 x 13")	45 x 10	2.20	4210006

## Square 105 Z

### Features

- Hardened stainless steel
- Precision ground narrow beam (blade) and a wide beam (stock)
- Without a knife edge
- Supplied with:  
case

#### Accuracy

Grade 0 DIN 875

To determine the right angle tolerance  $t$  of the test surface use the following formula:

$$t = 5 + \frac{l}{50} \mu\text{m}$$

(Length  $l$  is the longer beam in mm)

### Technical Data

Length of beams		Cross section		Weight	Order no.
mm	(inch)	narrow beam mm	wide beam mm	kg	
50 x 40	(2 x 1.6")	16 x 2	14 x 10	0.05	4211005
75 x 50	(3 x 2")	16 x 2	14 x 10	0.06	4211000
100 x 70	(4 x 3")	20 x 3	18 x 12	0.13	4211001
150 x 100	(6 x 4")	26 x 3	24 x 14	0.32	4211002
200 x 130	(8 x 5.1")	30 x 4	28 x 16	0.75	4211003
300 x 200	(12 x 8")	40 x 6	38 x 20	1.60	4211004

## Universal Bevel Protractor 106 UF



### Features


- With fine adjustment
- Stainless steel
- Vernier scale and main scale both have a satin chrome finish to prevent glare and to enable parallax free reading on the same plane
- Knurled screw for clamping the interchangeable beam into position
- Supplied with:  
Magnifying reading lens,  
interchangeable beam and  
case

### Technical Data


Blade length mm	Range degrees	Readings minutes	Deviation minutes	Order no.
150	360°	5'	5'	4214050
200	360°	5'	5'	4214051
300	360°	5'	5'	4214052

### Accessories

	Order no.
<b>Interchangeable Beams</b> Stainless steel, hardened (standard accessories) beam length	<b>106 Us</b>
150 mm / 6"	4214010
200 mm / 8"	4214011
300 mm / 12"	4214012
<b>Additional Accessories</b>	
<b>Stand</b> Featuring flat and V-surface for dia. 5 – 30 mm length 90 mm, width 25 mm	<b>106 UFv</b>
	4214061
<b>Acute Angle Attachment</b> for particularly small acute angles. Screws onto the beam	<b>106 UFw</b>
	4214062



106 UFv



106 UFw

## Digital Universal Bevel Protractor 106 ES



### Features


- Easy to read high contrast 8,5 mm high LCD
- Displays the angular degrees and angular minutes or decimal degrees
- Zero setting at any position of the measuring range
- Beam can be clamped with a push button
- Fine adjustment for easy setting of a desired angle
- Locking lever to prevent accidental adjustment
- Base plate and beam are made of stainless steel, the measuring edges hardened
- Data output: Opto RS232C
- Max. setting speed 3 rotations per second
- Capacitive measuring system, life of the battery ca. 2 years
- Supplied with: Battery, 300 mm beam and case

### Technical Data

Range	Resolution switchable	Deviation	Order no.
1 x 360° or 2 x 180° or 4 x 90°	1 minutes or 0.01°	± 2 minutes	<b>4214600</b>

### Accessories

	Order no.
<b>Interchangeable Beams</b> Stainless steel, hardened beam length	<b>106 ESs</b>
150 mm / 6"	<b>4214620</b>
200 mm / 8"	<b>4214621</b>
300 mm / 12"	<b>4214622</b>
<b>Battery 3V</b> , Type CR 2032	<b>4102520</b>
<b>Data Connection Cable</b> Opto RS232C (2 m), with SUB-D Jack 9 pin	<b>16 ESv</b> <b>4102510</b>
<b>Stand</b>	<b>106 ESv</b>
Featuring flat and V-surface for dia. 5 – 30 mm, length 90 mm, width 25 mm	<b>4214630</b>
<b>Acute Angle Attachment</b> for particularly small acute angles. Screws onto the beam	<b>106 UFw</b> <b>4214062</b>

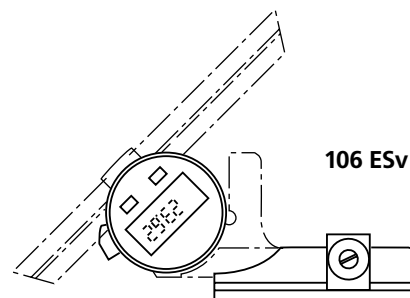

## Surface Plate 107 G made from granite



### Features

- For measuring tasks, layout work, for touching up and lapping precision parts
- Made of choice fine-grain black granite (Diabas)
- High density structure thus extremely homogeneous
- Hardness 6-7 on the Mohs' hardness scale
- Surface plate is lapped and has a satin matt finish to prevent glare
- 100 % corrosion-proof
- Non-magnetic and non-conductive
- Measuring instruments and test equipment are easy to slide over surface

### Technical Data

Size of plates mm	Thickness of plate mm	Weight kg	Order no.*			
			Grade 00 DIN 876	0 DIN 876	1 DIN 876	
400 x 250	60	18	<b>4221500</b>	<b>4221520</b>	<b>4221540</b>	Flatness tolerance $t_1$ of the surface plate are derived from the following formulas: <b>Grade acc to DIN 876</b> 00 $t_1 = 2 (1 + l/1000)$ 0 $t_1 = 4 (1 + l/1000)$ 1 $t_1 = 10 (1 + l/1000)$ Length $l$ in mm
400 x 400	60	29	<b>4221501</b>	<b>4221521</b>	<b>4221541</b>	
630 x 400	80	60	<b>4221502</b>	<b>4221522</b>	<b>4221542</b>	
630 x 630	80	95	<b>4221503</b>	<b>4221523</b>	<b>4221543</b>	
800 x 500	100	120	<b>4221504</b>	<b>4221524</b>	<b>4221544</b>	
1000 x 630	100	190	<b>4221505</b>	<b>4221525</b>	<b>4221545</b>	
1200 x 800	150	432	<b>4221506</b>	<b>4221526</b>	<b>4221546</b>	
1500 x 1000	150	675	<b>4221507</b>	<b>4221527</b>	<b>4221547</b>	
2000 x 1000	200	1200	<b>4221508</b>	<b>4221528</b>	<b>4221548</b>	

Surface plates are available in other dimensions upon request

\* Excludes stand with cabinet

### Accessories

Quantity Order no.

#### Adjustable Plate Supports 107 Asa

For mounting the surface plates upon work benches or cabinets; three are for support and two to prevent tilting

1 pce. 4221069



## Stand with Cabinet 107 Us



### Features

- Extremely sturdy design due to the rectangular tubes, covered with sheet metal
- With three height adjustable supports
- For plates sizes that are greater than 1000 mm, two additional height adjustable supports are required to prevent tilting
- All 4 corners have a support to prevent slipping and to protect against a collision
- Doors can be locked

### Technical Data

For plate sizes mm	Height mm	Order no.*
630 x 400	900 - 1000	<b>4221560</b>
630 x 630		<b>4221561</b>
800 x 500		<b>4221562</b>
1000 x 630		<b>4221563</b>
1200 x 800		<b>4221564</b>
1500 x 1000		<b>4221565</b>
2000 x 1000		<b>4221566</b>

\* Excludes surface plate

## Stand 107 Ug



### Features

- Extremely sturdy design due to the rectangular tubes
- With three height adjustable supports
- For plates sizes that are greater than 1000 mm, two additional height adjustable supports are required to prevent tilting
- All 4 corners have a support to prevent slipping and to protect against a collision

### Technical Data

For plate sizes mm	Height mm	Order no.*
630 x 400	900 - 1000	<b>4221570</b>
630 x 630		<b>4221571</b>
800 x 500		<b>4221572</b>
1000 x 630		<b>4221573</b>
1200 x 800		<b>4221574</b>
1500 x 1000		<b>4221575</b>
2000 x 1000		<b>4221576</b>

\* Excludes surface plate

## Magnetic V-Blocks 107 MH



### Features

- To used in an inspection room and workshop for both measuring and scribing
- To clamp work pieces during drilling, grinding and light milling work
- Integrated magnetic system, protected against the intrusion of moisture
- Constant magnetic force
- With the switch the upper, lower and opposite face are all simultaneously magnetized
- Surfaces and measuring faces and both hardened and ground
- Available individually or as a matched pair

### Technical Data

Accuracy (deviation):	
Flatness and parallelism	≤5 µm
Angle between front and side faces resp. V-slots	≤5 µm
Symmetry of the V-slots	≤5 µm
Height difference of the V-slots of pairs	≤5 µm
Length x Width x Height	100 x 70 x 95 mm
For shaft dia.	5 - 65 mm
V-angle	90°
Weight per piece	4 kg
Magnetic force on a flat surface	≈1000 N (100 kp)
Magnetic force of V-block	≈750 N (75 kp)
<b>Order no. V-block</b>	<b>4230000</b>
<b>Order no. pair of V-blocks</b>	<b>4230001</b>

### Accessories

	Order no.
Wooden case (for 1 V-block)	4230005

## V-Block 107 V




### Features

- For testing of small cylindrical work pieces for there ovality and polygon error
- With 108° V-slot
- Made from special hardened and ground steel
- Available individually or as a matched pair

### Technical Data

Accuracy (deviation):	
Parallelism of the V-slot to the underside of the base	≤2 µm
Height difference of the V-slots of pairs	≤5 µm
Length x Width x Height	30 x 30 x 30 mm
For shaft dia.	2 - 25 mm
V-angle	108°
Weight per piece	0.2 kg
<b>Order no. V-block</b>	<b>4229000</b>
<b>Order no. pair of V-blocks</b>	<b>4229001</b>

## Illuminated Magnifiers\*

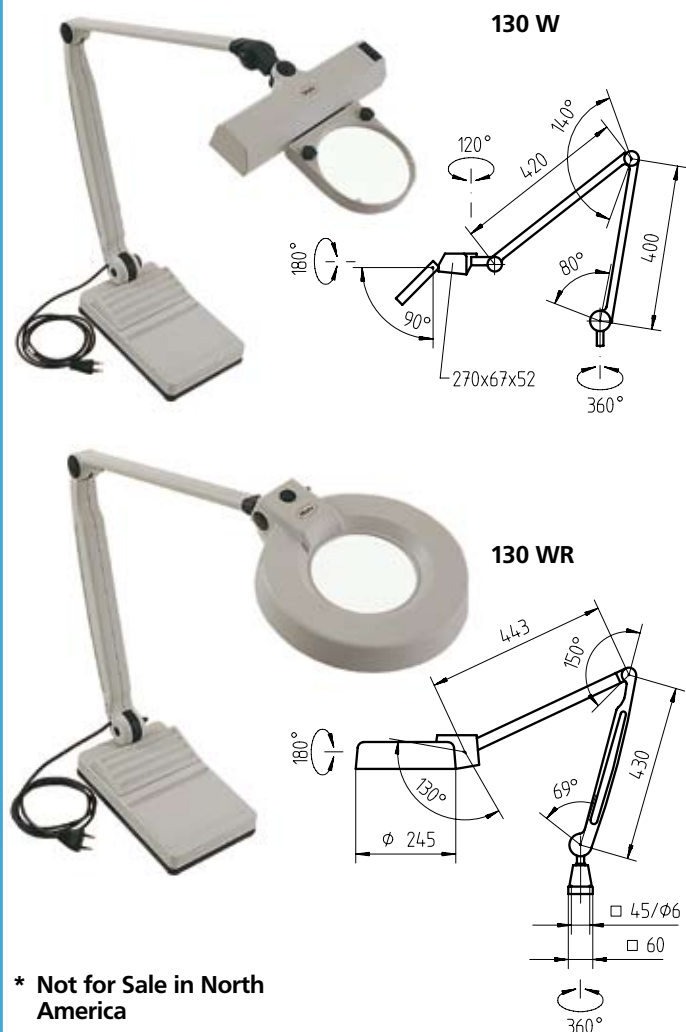

\* Not for Sale in North America

### Features

- Aid for visual spot checks, adjustments, assembly of small parts, precision work
- Illumination head with swiveling arm has to be used either with Table Base 130 t or Table Clamp 130 kl
- 3D-joint illumination head can be positioned at any level
- Spring-relieved joints for easy positioning over a large-scale action range without any re-adjustments
- Large-diameter, cut glass lens with sharpness to the edge provides distortion free magnification
- Lens diameter 120 mm with double magnification
- Fluorescent tubes provide a bright, almost shadow free illumination of objects and working area
- Low energy consumption due to energy-saving lamp
- Supplied with: Fluorescent tube and operating instructions

### Illuminated Magnifier 130 W with compact fluorescent tube

For inspecting flat parts and for assembly work

### Illuminated Magnifier 130 WR with circular fluorescent tube

or checking sunken surfaces, e.g. bores, internal threads, etc.

### Attention:

Table Base 130 t or Table Clamp 130 kl have to be ordered separately!

### Technical Data

	Type of lamp	Power supply	Dioptric power	Magnification	Order no.
<b>130 W*</b>	Compact fluorescent tubes	230 V~ / 50 Hz	4	2	<b>4298300</b>
<b>130 WR*</b>	Circular fluorescent tubes	230 V~ / 50 Hz	4	2	<b>4299300</b>

### Accessories

	Order no.	
<b>Table stand</b> for stable installation on working table	<b>130 t</b>	<b>4298310</b>
<b>Table Clamp</b> for mounting on work bench or working table clamping range: 0 – 140 mm	<b>130 kl</b>	<b>4298320</b>
<b>Compact fluorescent tube</b> for <b>130 W</b> with integrated starter		<b>4298325</b>
<b>Circular fluorescent tube</b> for <b>130 WR</b>		<b>4299005</b>



## MADE TO MEASURE. **MARGAGE**



The latest information on MARGAGE products can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 10397**

► | In 1871, at the foundation of the German Empire and during the introduction of the metric system, Mahr was already supplying dimensional standards to the weights and measurement office of several individual German states. Today, the measurement standards such as gage blocks are the basis of dimensional metrology, they are used as a setting standard for an indicating measuring instrument or applied in the calibration laboratory as a reference standard. Due to our accreditation from the PTB - Physikalisch-Technischen Bundesanstalt (German metrology institute providing scientific and technical services) and the careful selection of the materials we use, we can grant you the highest possible quality! ◀

## ► | MarGage. Standards, Gages and Gage Blocks

<b>Rectangular Gage Blocks</b> according to DIN EN ISO 3650	<b>13- 2</b>
<b>MarGage 402 / 404 / 406 / 408 / 409</b> Rectangular Gage Blocks made of steel	<b>13- 4</b>
<b>MarGage 411 / 415</b> Test Sets for Calipers	<b>13- 4</b>
<b>MarGage 417</b> Individual Rectangular Gage Blocks made of steel	<b>13- 4</b>
<b>MarGage 402C / 404C / 406C / 408C / 409C</b> Rectangular Gage Blocks made of ceramic	<b>13- 5</b>
<b>MarGage 417C</b> Individual Rectangular Gage Blocks made of ceramic	<b>13- 7</b>
<b>MarGage 418C</b> Protective Rectangular Gage Blocks made of ceramic	<b>13- 7</b>
<b>MarGage 419C</b> Test Sets for Micrometers	<b>13- 7</b>
<b>Accessories for Rectangular Gage Blocks</b>	<b>13- 8</b>
<b>Inch Gage Blocks</b> according to ANSI	<b>13-10</b>
<b>Pin Gages</b>	<b>13-12</b>
<b>MarGage 426 / 426 G / 426 S / 426 D / 426 DS / 426 M / 426 A</b> Pin Gages made of steel	<b>13-12</b>
<b>Settings Standards / Thread Gages</b>	<b>13-16</b>
<b>AGD Masters</b> Master Rings / Master Discs / Master Plugs	<b>13-16</b>
<b>MarGage 355 E / 390 / 708 E / 715 E</b> Setting Standards	<b>13-17</b>
<b>MarGage 705 / 708 G / 708 N / 715 G / 715 N / 716 G / 716 N</b> Thread Gages	<b>13-18</b>



# MarGage. Standards, Gages and Gage Blocks

## Rectangular Gages Blocks

### Application

- As comparison reference and utilization standards in the field of length measurement
- For checking gages and measuring instruments
- For setting devices of all types designed for length measurement and in particular their displays
- Can be used individually or in combinations by wringing several blocks together (see illustration)

### Accuracy

The manufacturing process is based on DIN EN ISO 3650, Mahr gage blocks are produced with the utmost care.

### Marking

Gage blocks of all grades are clearly and individually marked with an identification number.

### Material

Mahr gage blocks are made either of stainless steel or of the ceramic compound zirconium oxide ZrO<sub>2</sub> (Circonimar).

### Heat Expansion Coefficient

Steel	$11.5 \times 10^{-6} \text{ K}^{-1}$
Circonimar	$9.5 \times 10^{-6} \text{ K}^{-1}$

### Calibration Certificate

Gage blocks in sets are supplied with a Mahr calibration certificate stating deviations from the nominal size, this confirms the traceability to National Standards.

For single gage blocks Mahr calibration certificates are available on request.

A calibration certificate from the Mahr DKD Calibration Laboratory is recommended for gage blocks of calibration grade K in the range between 0,5 and 100 mm

### Dimensions

	Nominal dimension mm	Cross section mm
from	0.5 - 10	30 x 9
over	10 - 1000	35 x 9



DEUTSCHER KALIBRIERDIENST

**DKD**

GERMAN CALIBRATION SERVICE  
Calibration Laboratory for Length  
Measurement  
ACCREDITED BY THE  
PHYSIKALISCH-TECHNISCHE  
BUNDESANSTALT (PTB)

As a part of the German Calibration Service, the Mahr Calibration Laboratory calibrates steel and ceramic gage blocks of all brands in the range between 0.5 and 100 mm and issues calibration certificates. The gage block sets are marked with the official DKD calibration label.

Calibration is based on the contract concluded between the Physikalisch-Technischen Bundesanstalt in Braunschweig and the company Mahr.



## Selection of Rectangular Gage Block Sets

There are three criteria's to be considered:

### 1 Calibration and Tolerance classes according to DIN EN ISO 3650

Four tolerances classes are available.

#### Calibration class K

As primary factory standard, particularly for the calibration of subsidiary test laboratories, e.g. for gage blocks of lower tolerance classes. Supplied on request with DKD calibration certificate, indicating the deviation from the nominal size for each gage block.

#### Calibration class 0


For maximum accuracy requirements. To be used as basic standards in test laboratories and precision inspection rooms, where other gage blocks and high accuracy measuring instruments are calibrated.

#### Tolerance class 1

For high standards of accuracy. As reference gage block for the inspection room. Designed to perform particularly accurate measurements. For setting indicating measuring instruments and for checking precision gages.

#### Tolerance class 2

For checking production gages of quality IT 6 and IT 7. For setting indicating measuring instruments and for checking accurate dimensions in the jig and tool industry.

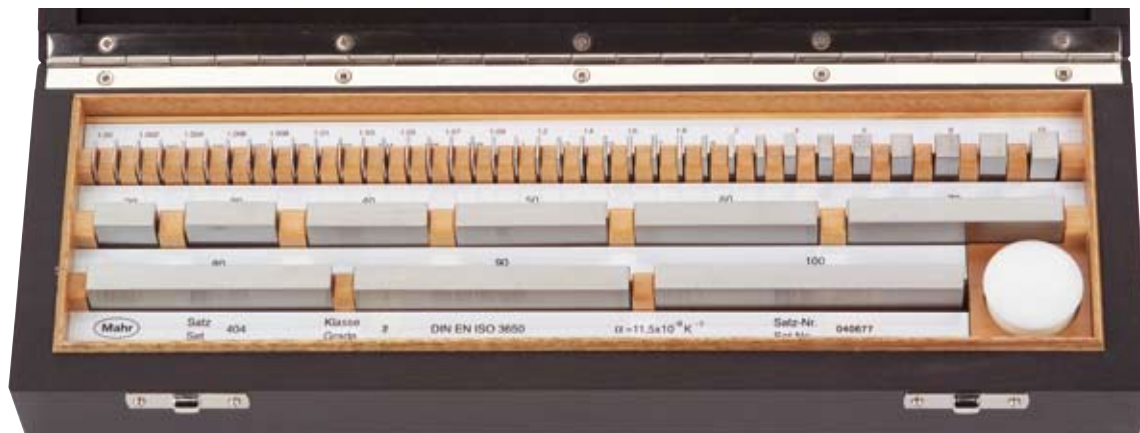

404

### 2 Material

Steel or ceramic, depending on application.

### 3 Size of Sets

The 404 or 404 C is a particularly convenient set with 46 gage blocks including one for each decimal. Larger sets are particularly suited to inspection rooms and gage testing facilities, since they offer the following advantages:

- A required dimension can be made up quicker as fewer gage blocks are needed
- Several gage block combinations can be formed from the same dimension
- Greater accuracy as individual deviations add up to smaller overall error
- Less wear as a given gage block is not used as often

## Rectangular Gage Blocks made of Steel

### Sets

- Vertical arrangement to save space
- Scope of supply: wooden case with clear labeling strips, Mahr calibration certificate (see Page 13-2)
- See the following table for nominal sizes, increments and tolerance classes:

Catalog no.	Tolerance class	Order no.	Quantity per set	Nominal sizes mm	Increments mm	Gage blocks
402/K	K	4800403	32	1.005	-	1
402/0	0	4800400		1.01 - 1.09	0.01	9
402/1	1	4800401		1.1 - 1.9	0.1	9
402/2	2	4800402		1 - 9	1	9
				10 - 30	10	3
				50	-	1
404/K	K	4800003	46	1.001 - 1.009	0.001	9
404/0	0	4800000		1.01 - 1.09	0.01	9
404/1	1	4800001		1.1 - 1.9	0.1	9
404/2	2	4800002		1 - 9	1	9
				10 - 100	10	10
406/K	K	4800014	87	0.5	-	1
406/0	0	4800010		1.001 - 1.009	0.001	9
406/1	1	4800011		1.01 - 1.49	0.01	49
406/2	2	4800012		1 - 9.5	0.5	18
				10 - 100	10	10
408/K	K	4800027	111	0.5	-	1
408/0	0	4800020		1.001 - 1.009	0.001	9
408/1	1	4800021		1.01 - 1.49	0.01	49
408/2	2	4800022		1 - 24.5	0.5	48
				25 - 100	25	4
409/K	K	4800033	121	0.5	-	1
409/0	0	4800030		1.001 - 1.009	0.001	9
409/1	1	4800031		1.01 - 1.49	0.01	49
409/2	2	4800032		1.6 - 1.9	0.1	4
				1 - 24.5	0.5	48
				25, 30, 40, 50, 60, 70, 75, 80, 90, 100		10

### Test Sets for Calipers

Catalog no.	Tolerance class	Order no.	Quantity per set	Nominal sizes mm
411/1	1	4800343	4	41.3 / 131.4 / 243.5 / 281.2
411/2	2	4800344	4	41.3 / 131.4 / 243.5 / 281.2
415/1	1	4800339	5	41.3 / 131.4 / 243.5 / 281.2 / 481.2
415/2	2	4800340	5	41.3 / 131.4 / 243.5 / 281.2 / 481.2

### Individual Rectangular Gage Blocks 417

- Tolerance classes K, 0, 1, 2
- From nominal dimension of greater than 125 mm, gage blocks are supplied in a wooden case
- Special sizes are available on request

	Nominal sizes mm	Increments mm
	0.5 - 1	0.05
over	1 - 100	same a set 409
	125 - 200	25
	250 - 500	50
	600 - 1000	100

## Rectangular Gage Blocks made of Ceramic



406 C

### Features

- Resistant to both impact and breakage. Virtually no warping of material if surfaces become scratched or edges damaged. Longer retention of wringing ability
- Corrosion-resistant, Circonimar is even without protective measures extremely resistant to alkalis, acids, oil, grinding fluid and other aggressive media
- Non-magnetic Circonimar is anti-static, anti-magnetic and non-conductive. It does not attract dust or dirt and is suitable to use in the presence of magnetic fields
- Ideal for all applications. The outstanding features of all ceramic gage blocks from Mahr provide unrivalled flexibility in practical use. Circonimar is equally well suited to inspection-room conditions and the rigors of workshop applications
- Extremely durable, thus providing a long service life as well being highly robust compared to all other materials currently be used in metrology. Therefore the interval between inspections are distinctly greater
- Similar coefficient of expansion to steel, thus allowing unrestricted use even at unfavorable temperatures
- Easy to handle. No material is easier to deal with than Circonimar; Circonimar has excellent wringing properties, no corrosion, no need for lubrication, low weight and scratch-resistant

## Rectangular Gage Blocks made of Ceramic

### Sets

- Vertical arrangement to save space
- Scope of supply: wooden case with clear labeling strips, Mahr calibration certificate (see Page 13-2)

### Nominal sizes, increments and tolerance classes

Please refer to the table below:

Catalog no.	Tolerance class	Order no.	Quantity per set	Nominal sizes mm	Increments mm	Gage blocks
<b>402 C/K</b>	K	<b>4800094</b>	32	1.005	-	1
<b>402 C/0</b>	0	<b>4800095</b>		1.01 - 1.09	0.01	9
<b>402 C/1</b>	1	<b>4800096</b>		1.1 - 1.9	0.1	9
<b>402 C/2</b>	2	<b>4800097</b>		1 - 9	1	9
				10 - 30	10	3
				50	-	1
<b>404 C/K</b>	K	<b>4800088</b>	46	1.001 - 1.009	0.001	9
<b>404 C/0</b>	0	<b>4800008</b>		1.01 - 1.09	0.01	9
<b>404 C/1</b>	1	<b>4800009</b>		1.1 - 1.9	0.1	9
<b>404 C/2</b>	2	<b>4800004</b>		1 - 9	1	9
				10 - 100	10	10
<b>406 C/K</b>	K	<b>4800016</b>	87	0.5	-	1
<b>406 C/0</b>	0	<b>4800018</b>		1.001 - 1.009	0.001	9
<b>406 C/1</b>	1	<b>4800019</b>		1.01 - 1.49	0.01	49
<b>406 C/2</b>	2	<b>4800017</b>		1 - 9.5	0.5	18
				10 - 100	10	10
<b>408 C/K</b>	K	<b>4800025</b>	111	0.5	-	1
<b>408 C/0</b>	0	<b>4800028</b>		1.001 - 1.009	0.001	9
<b>408 C/1</b>	1	<b>4800029</b>		1.01 - 1.49	0.01	49
<b>408 C/2</b>	2	<b>4800026</b>		1 - 24.5	0.5	48
				25 - 100	25	4
<b>409 C/K</b>	K	<b>4800036</b>	121	0.5	-	1
<b>409 C/0</b>	0	<b>4800038</b>		1.001 - 1.009	0.001	9
<b>409 C/1</b>	1	<b>4800039</b>		1.01 - 1.49	0.01	49
<b>409 C/2</b>	2	<b>4800037</b>		1.6 - 1.9	0.1	4
				1 - 24.5	0.5	48
				25, 30, 40, 50, 60, 70, 75, 80, 90, 100		

## Single Rectangular Gage Blocks 417 C

- Tolerance classes K, 0, 1, 2
- Special sizes are available on request

Nominal sizes mm	Increments mm
0.5	-
1	-
1.0005	-
1.001 - 1.009	0.001
1.01 - 1.5	0.01
1.6 - 2.0	0.1
2.5 - 25.0	0.5
30 - 100	10

## Pair of Protective Rectangular Gage Blocks 418 C

Catalog no.	Tolerance class	Order no.	Quantity per set	Nominal sizes mm	Increments mm	Gage blocks
418 C/0	0	4800085	2	2	-	2
418 C/1	1	4800086	2	2	-	2

## Test Set for Micrometers 419 C (DIN 863)

Catalog no.	Tolerance class	Order no.	Quantity per set	Nominal sizes mm
419 C/1	1	4800090	10	2.5 / 5.1 / 7.7 / 10.3 / 12.9 / 15.0 / 17.6 / 20.2 / 22.8 / 25 plus 1 optical parallel dia. 30 mm



## Accessories for Rectangular Gage Blocks



### Rectangular Gage Block Holder and Measuring Jaws Accessory Set 420

- In conjunction with Gage Blocks for gaging both work pieces and fixtures
- To check, set and adjust setting gages and measuring instruments
- For scribing and marking
- Delivered in a wooden case

**Order no.**                **4800100**

#### Components include:

- 2 Pairs of Measuring Jaws 420 m
- 1 Scriber Point 420 a
- 1 Centering Point 420 z
- 3 Holder 420 h for Gages Blocks  
clamping width 0-70, 0-120, 100-220 mm
- 1 Stand 420 f for Gage Block Holder

### Individual Accessories

Components included in the 420 set are also individually available:

#### Measuring Jaws 420 m

Cross section 9 x 9 mm

For internal and external measurements in conjunction with a Gage Block Holder 420 h and Gage Blocks

Thickness mm	Order no.
2 x 2 mm = 4 mm	<b>4800110</b>
2 x 5 mm = 10 mm	<b>4800111</b>

#### Scriber Point 420 a cross section 9 x 9 mm

**Order no.**                **4800112**

#### Centering Point 420 z cross section 9 x 9 mm

**Order no.**                **4800113**

#### Holder 420 h for Rectangular Gage Blocks

Clamping width mm	Order no.
0 - 70	<b>4800120</b>
0 - 120	<b>4800121</b>
100 - 220	<b>4800122</b>
100 - 420	<b>4800123</b>
400 - 820	<b>4800124</b>

#### Stand 420 f for Holder 420 h\*

Hardened and lapped. Height 25 mm  
Tolerance  $\pm 2 \mu\text{m}$

**Order no.**                **4800114**

\* Clamping width up to 420 mm



## Optical Flat 421

- To test the surface flatness on precision components or measuring instruments according to the interference principle
- Supplied in a wooden case



Dia. mm	Thickness mm	Flatness deviation $\mu\text{m}$	Order no.
45	11	$\leq 0.1$	<b>4800140</b>
100	20	$\leq 0.1$	<b>4800135</b>
150	30	$\leq 0.1$	<b>4800136</b>
300	50	$\leq 0.4$	<b>4800137</b>

## Optical Parallel 421 P

Dia. mm	Thickness mm	Flatness deviation $\mu\text{m}$	Parallelism deviation $\mu\text{m}$	Order no.
30	12	$\leq 0.15$	0.4	<b>4800180</b>

## Contact Thermometer 422



- For checking/taking the temperature
- With silver contact base, gold-plated to prevent tarnishing
- With a holding magnet to be attached to the thermometer in vertical or on inclined surfaces
- U-shaped with clamping screw
- Scope of supply: thermometer, magnet and wooden case

Readings                      0.2°C  
Measuring range        16-26°C

**Order no.                      4800170**

## Wooden Tongs 423

- To prevent heat transfer when handling gage blocks
- Self closing. See illustration below.

**Order no.                      4800142**

## Maintenance Set 424

- The most important equipment for inspecting and maintaining gage blocks
- Delivered in a wooden case.

**Order no.                      4800130**



### Components include:

#### Optical Flat 421

- To test the surface flatness of measuring surfaces according to the interference principle. Diameter 45 mm

#### Wooden Tongs 423

- To prevent heat transfer when handling gage block, self closing

#### Granite lapping stone

- To remove burr and other damage on surfaces of gage blocks. High accuracy version

#### Jar of special Vaseline

- To protect steel gage blocks against the rust

#### Brush and suede cloth

- To clean the gage blocks

## Inch Gage Blocks

### Features

- Long used as the practical standards of dimensional measurement in precision manufacturing. With accuracies, materials and manufacturing methods greatly refined, gage blocks are now of highest quality and precision.
  - As comparison reference and utilization standards in the field of length measurement.
  - For checking gages and measuring instruments.
  - Used individually or in combinations by wringing several blocks together.
- Mahr Federal gage blocks are available from stock individually and as full sets in inch (rectangular only).
- Sets are manufactured to Grade 0 only, which meet or exceed ASME B89.1.9-2002 specifications.
- Offered in steel to suit a wide range of service conditions. Steel blocks are extremely stable, hardened to Rc 62 minimum, and processed through a thorough seasoning cycle to relieve internal stresses before finish lapping.
- All sets blocks are serialized and supplied in a fitted storage case. Certification priced separately.




Mahr Federal Calibration System is certified to ISO-17025 and accredited by NVLAP and ISO-9001 certified by NQA

### Technical Data

#### Dimensions — Standard Size Blocks

Block Style	Gaging Length	Width mm / <i>inch</i>	Depth mm / <i>inch</i>
Inch — Rectangular	.400" or less	30 / <b>1.181"</b>	9 / <b>.352"</b>
	.400" and over	35 / <b>1.378"</b>	9 / <b>.352"</b>



## Inch Gage Blocks Set

### Ordering Information

#### Inch Rectangular

An 81 block set containing

Series	Number of blocks	Size
.0001"	9	.1001 - .1009
.001"	49	.101 - .149
.050"	19	.050 - .950
1.000"	4	1.000 - 4.000

**Order No. 2176361**

#### Inch Square

An 49 block set containing

Series	Number of blocks	Size
.0001"	9	.1001 - 1.009
.001"	9	.101 - .109
.01"	9	.010 - .090
.01"	9	.110 - .190
.10"	9	.100 - .900
1.000"	4	1.000 - 4.000

**Order No. 2176362**



### Technical Data

#### Grade 0 Length Tolerances

##### Nominal Length

Greater than	Less than or equal to	Unit 0.000001" (1 μinch)
0	0.4	± 5
0.4	1	± 6
1	2	± 8
2	3	± 10
3	4	± 12

## Pin Gages 426 according to DIN 2269



### Features

- To be used as setting standards for indicating measuring instruments, testing the distances between axes, tapers and other work pieces in conjunction with gage blocks. Also for determining pitch diameter of threads or pitch circle diameter on gears and serrations

### Pin Gages 426 made from steel, without a handle from dia. 5.01 mm inscribed with diameter on the end face

		Wear-resistant gage steel, hardened, multi-aged, ground and <b>lapped</b> Grade 0, DIN 2269 Manufacturing tolerance $\pm 0.5 \mu\text{m}$			Wear-resistant gage steel, hardened, multi-aged, ground and <b>lapped</b> Grade 1, DIN 2269 Manufacturing tolerance $\pm 1.0 \mu\text{m}$			Wear-resistant gage steel, hardened, multi-aged and precision ground <b>Better</b> than Grade 2, DIN 2269 Manufacturing tolerance $\pm 1.5 \mu\text{m}$	
Ø mm	mm	Length	Increments		Length	Increments		Length	Increments
		mm	0.01 mm Order no.	0.001 mm Order no.	mm	0.01 mm Order no.	0.001 mm Order no.	mm	0.01 mm Order no.
0.06 -	0.09	20	<b>4828100</b>	<b>4828300</b>	20	<b>4828110</b>	<b>4828310</b>	20	<b>4828130</b>
0.10 -	0.19	32	<b>4828101</b>	<b>4828301</b>	32	<b>4828111</b>	<b>4828311</b>	40	<b>4828131</b>
0.20 -	0.29	32	<b>4828102</b>	<b>4828302</b>	32	<b>4828112</b>	<b>4828312</b>	40	<b>4828132</b>
0.30 -	0.49	32	<b>4828103</b>	<b>4828303</b>	32	<b>4828113</b>	<b>4828313</b>	40	<b>4828133</b>
0.50 -	0.99	32	<b>4828104</b>	<b>4828304</b>	32	<b>4828114</b>	<b>4828314</b>	40	<b>4828134</b>
1.00 -	2.99	32	<b>4828105</b>	<b>4828305</b>	32	<b>4828115</b>	<b>4828315</b>	40	<b>4828135</b>
3.00 -	5.99	40	<b>4828106</b>	<b>4828306</b>	40	<b>4828116</b>	<b>4828316</b>	***	<b>4828136</b>
6.00 -	9.99	50	<b>4828107*</b>	<b>4828307*</b>	50	<b>4828117</b>	<b>4828317</b>	70	<b>4828137</b>
10.00 -	11.99				70**	<b>4828118</b>	<b>4828318</b>	70	<b>4828138</b>
12.00 -	13.99				70	<b>4828119</b>	<b>4828319</b>	70	<b>4828139</b>
14.00 -	15.99				70	<b>4828120</b>	<b>4828320</b>	70	<b>4828140</b>
16.00 -	18.99				70	<b>4828121</b>	<b>4828321</b>	70	<b>4828141</b>
19.00 -	20.00				70	<b>4828122</b>	<b>4828322</b>	70	<b>4828142</b>

\* applies up to dia. 10 mm

\*\* dia. 10 mm = 50 mm long

\*\*\* dia. 3 - 4 mm = 50 mm long,  
> 4 - 5 mm = 60 mm long,  
> 5 mm = 70 mm long

### Pin Gages 426 G made from steel, with a handle

		Wear-resistant gage steel, hardened, multi-aged, ground and <b>lapped</b> Grade 0, DIN 2269 Manufacturing tolerance $\pm 0.5 \mu\text{m}$			Wear-resistant gage steel, hardened, multi-aged, ground and <b>lapped</b> Grade 1, DIN 2269 Manufacturing tolerance $\pm 1.0 \mu\text{m}$			Wear-resistant gage steel, hardened, multi-aged and precision ground <b>Better</b> than Grade 2, DIN 2269 Manufacturing tolerance $\pm 1.5 \mu\text{m}$	
Ø mm	mm	Effective Length	Increments		Effective Length	Increments		Effective Length	Increments
		mm	0.01 mm Order no.	0.001 mm Order no.	mm	0.01 mm Order no.	0.001 mm Order no.	mm	0.01 mm Order no.
0.06 -	0.09	10	<b>4828150</b>	<b>4828350</b>	10	<b>4828160</b>	<b>4828360</b>	10	<b>4828170</b>
0.10 -	0.19	25	<b>4828151</b>	<b>4828351</b>	25	<b>4828161</b>	<b>4828361</b>	33	<b>4828171</b>
0.20 -	0.29	25	<b>4828152</b>	<b>4828352</b>	25	<b>4828162</b>	<b>4828362</b>	33	<b>4828172</b>
0.30 -	0.49	25	<b>4828153</b>	<b>4828353</b>	25	<b>4828163</b>	<b>4828363</b>	33	<b>4828173</b>
0.50 -	0.99	25	<b>4828154</b>	<b>4828354</b>	25	<b>4828164</b>	<b>4828364</b>	33	<b>4828174</b>
1.00 -	2.99	25	<b>4828155</b>	<b>4828355</b>	25	<b>4828165</b>	<b>4828365</b>	33	<b>4828175</b>
3.00 -	5.99	25	<b>4828156</b>	<b>4828356</b>	25	<b>4828166</b>	<b>4828366</b>	***	<b>4828176</b>
6.00 -	10.00	42*	<b>4828157</b>	<b>4828357</b>	42**	<b>4828167</b>	<b>4828367</b>	62	<b>4828177</b>

\* dia. 6 mm = 25 mm long

\*\* dia. 6 mm = 25 mm long

\*\*\* Ø 3 - 4 mm = 43 mm long,  
> 4 - 5 mm = 53 mm long,  
> 5 mm = 62 mm long

Length of handle see Page 13-12 (426 D)

### Accessories

Wooden case with plastic inlay for pin gages up to D = 10 mm

Number of pin gages

Order no.

max. 50 Pin gages (without handle)

**4827609**

max. 50 Pin gages (with handle)

**4827610**

max. 100 Pin gages (without handle)

**4827611**

## Pin Gage sets 426 S made of steel, without a handle in a high quality wooden box with pedestral



### Technical Data

Wear-resistant gage steel, hardened,  
multi-aged, ground and **lapped**  
Grade 0, DIN 2269  
Manufacturing tolerance  $\pm 0.5 \mu\text{m}$

Wear-resistant gage steel, hardened,  
multi-aged, ground and **lapped**  
Grade 1, DIN 2269  
Manufacturing tolerance  $\pm 1.0 \mu\text{m}$

Wear-resistant gage steel, hardened,  
multi-aged and precision ground  
**Better** than Grade 2, DIN 2269  
Manufacturing tolerance  $\pm 1.5 \mu\text{m}$

$\varnothing$ mm	Increments	Quantity of pin gages	Order no.	Increments	Quantity of pin gages	Order no.	Increments	Quantity of pin gages	Order no.
1.00 - 10.00	0.1	91	<b>4828190</b>	0.1	91	<b>4828210</b>			
0.10 - 0.50	0.01	41	<b>4828181</b>	0.01	41	<b>4828191</b>	0.01	41	<b>4828211</b>
0.50 - 1.00	0.01	51	<b>4828182</b>	0.01	51	<b>4828192</b>	0.01	51	<b>4828212</b>
0.10 - 1.00	0.01	91	<b>4828183</b>	0.01	91	<b>4828193</b>	0.01	91	<b>4828213</b>
1.00 - 2.00	0.01	101	<b>4828184</b>	0.01	101	<b>4828194</b>	0.01	101	<b>4828214</b>
2.00 - 3.00	0.01	101	<b>4828195</b>	0.01	101	<b>4828215</b>			
3.00 - 4.00	0.01	101	<b>4828196</b>	0.01	101	<b>4828216</b>			
4.00 - 5.00	0.01	101	<b>4828197</b>	0.01	101	<b>4828217</b>			
5.00 - 6.00	0.01	101	<b>4828198</b>	0.01	101	<b>4828218</b>			
6.00 - 7.00	0.01	101	<b>4828199</b>	0.01	101	<b>4828219</b>			
7.00 - 8.00	0.01	101	<b>4828200</b>	0.01	101	<b>4828220</b>			
8.00 - 9.00	0.01	101	<b>4828201</b>	0.01	101	<b>4828221</b>			
9.00 - 10.00	0.01	101	<b>4828202</b>	0.01	101	<b>4828222</b>			

Pin gage lengths are the same as the individual pin gages

## Individual Plug Gages 426 D made from steel, with a handle



### Features

- For testing diameters of small bores
- To be used as setting standards for indicating measuring instruments, testing the distances between axes, grooves and slots on work pieces in conjunction with gage blocks
- Unbreakable plastic handle inscribed with the diameter
- Set with pin gages in diameter increments of 0.01 mm
- Manufacturing tolerance  $\pm 0.5 \mu\text{m}$
- Supplied with:  
Wooden case with plastic inlay

### Technical Data

Wear-resistant gage steel. hardened. multi-aged, ground and **lapped**  
plastic handle inscribed with the diameter  
Manufacturing tolerance  $\pm 0.5 \mu\text{m}$   
Increment 0.01 mm



dia. d mm		Order no.	Dimensions					
			dia. d mm	l mm	dia. D	LG	L	
0.06 - 0.09		<b>4828230</b>	0.06 - 0.30	2.0	4	32	34	
0.10 - 0.19		<b>4828231</b>	> 0.30 - 0.50	3.5	4	32	35.5	
0.20 - 0.29		<b>4828232</b>	> 0.50 - 1.50	5.0	4	32	37	
0.30 - 0.49		<b>4828233</b>	> 1.50 - 2.00	6.0	4	32	38	
0.50 - 0.99		<b>4828234</b>	> 2.00 - 3.50	8.0	5	35	43	
1.00 - 2.99		<b>4828235</b>	> 3.50 - 6.00	10.0	5	45	55	
3.00 - 5.99		<b>4828236</b>	> 6.00 - 8.00	14.0	10	45	59	
6.00 - 10.00		<b>4828237</b>	> 8.00 - 10.00	18.0	10	45	63	

## Plug Gage Sets 426 DS made from steel, with a handle in a high quality wooden box with pedestal

### Technical Data

Wear-resistant gage steel, hardened, multi-aged, ground and **lapped**  
plastic handle inscribed with the diameter  
Manufacturing tolerance  $\pm 0.5 \mu\text{m}$

dia. mm	Increment	Quantity	Length	Order no.	dia. mm	Increment	Quantity	Length	Order no.
0.06 - 0.50	0.01	45	2*	<b>4825000</b>	5.01 - 5.50	0.01	50	10	<b>4825010</b>
0.51 - 1.00	0.01	50	5	<b>4825001</b>	5.51 - 6.00	0.01	50	10	<b>4825011</b>
1.01 - 1.50	0.01	50	5	<b>4825002</b>	6.01 - 6.50	0.01	50	14	<b>4825703</b>
1.51 - 2.00	0.01	50	6	<b>4825003</b>	6.51 - 7.00	0.01	50	14	<b>4825704</b>
2.01 - 2.50	0.01	50	8	<b>4825004</b>	7.01 - 7.50	0.01	50	14	<b>4825705</b>
2.51 - 3.00	0.01	50	8	<b>4825005</b>	7.51 - 8.00	0.01	50	14	<b>4825706</b>
3.01 - 3.50	0.01	50	8	<b>4825006</b>	8.01 - 8.50	0.01	50	18	<b>4825707</b>
3.51 - 4.00	0.01	50	10	<b>4825007</b>	8.51 - 9.00	0.01	50	18	<b>4825708</b>
4.01 - 4.50	0.01	50	10	<b>4825008</b>	9.01 - 9.50	0.01	50	18	<b>4825709</b>
4.51 - 5.00	0.01	50	10	<b>4825009</b>	9.51 - 10.00	0.01	50	18	<b>4825710</b>

\*dia. > 0.3 mm = 3.5 mm long




## Thread Pin Gages 426 M in holders 426 A with an eyelet



426 M



426 A



## Features

## 426 M

- For determining pitch diameter of external threads according to the three-wire method
- Holder has a satin chrome finish, the retainer ring can be locked yet the measuring spindle can still rotate
- Pin gages are hardened and lapped. Freely floating in holder to allow proper positioning and contact with thread flanks
- In conjunction with micrometers, indicating measuring instruments or measuring machines
- Each pair consists of:  
1 holder with 1 pin gage and  
1 holder with 2 pin gages

Manufacturing tolerance  $\pm 0.5 \mu\text{m}$   
 Mounting hole 7.5 mm  
 (Mounting hole 6.35 mm = 1/4", 6.5 mm and 8 mm on request)

## 426 MS

Set of thread Pin Gages in  
 Holder consists of:  
 18 Holder Pairs 426 M

Diameter 0.7 - 3.2 mm  
 Delivered in a wooden box

## Order no.

4820000  
 4820003

Mounting hole 7.5 mm  
 Mounting hole 6.5 mm

## 426 A

- For determining pitch diameter of external threads according to the three-wire method
- Designed to be suspended over a test specimen
- Set consists of 3 Pin Gages

Manufacturing tol.  $\pm 0.5 \mu\text{m}$   
 Pin gage length 32 mm

## Technical Data

Pin Gage	Order no.			for thread pitch			
	426 M Pair dia. 7.5 mm	426 M Pair dia. 6.5 mm	426 A Set	Metric mm	Whitworth range tpi	American UST range tpi	Trapezoid mm
0.17	4820010	4820132	4821000	0.25	0.3		
0.195	4820011	4820149	4821001			80	
0.22	4820012	4820133	4821002	0.35		72	
0.25	4820013	4820131	4821003	0.4		64	
0.29	4820014	4820134	4821004	0.45	0.5	56	
0.335	4820015	4820135	4821005	0.6		48	
0.39	4820016	4820150	4821006		40	44	40
0.455	4820017	4820137	4821007	0.7	0.75	32	36
0.53	4820018	4820151	4821008		28	32	28
0.62	4820019	4820139	4821009	1	26	24	24
0.725	4820020	4820140	4821010	1.25	22	20	20
0.895	4820021	4820141	4821011	1.5	19	18	16
1.1	4820022	4820142	4821012	1.75	14	16	14
1.35	4820023	4820143	4821013	2	12	11	12
1.65	4820024	4820144	4821014	2.5	10	9	10
2.05	4820025	4820145	4821015	3	8	7	8
2.55	4820026	4820146	4821016	4	6	6	6
3.2	4820027	4820147	4821017	5	5	5	5
4	*4820028	*4820152	4821018	6	4	4	4

\* These holder pairs require the use of a 3 mm gage block for the holder with 2 pin gages to enlarge the measuring face. This gage block is inserted into the holder recess provided.

417/1 Gage Block -steel  
 Nominal size 3 mm

Grade 1  
 Order no. 4801285

## Setting Standards for indicating measuring instruments

### AGD Masters



#### Master Rings

- Traceable certification and calibration available on request.
- Lapped to size and polished.
- Non-gaging areas black oxidized — ring faces ground.
- Meet all requirements of ANSI Specification B47.1-1988
- Manufactured in accordance with ANSI Specification B89.1.6-1984.

#### Master Plugs

- Traceable certification and calibration available on request.
- Stabilized and hardened.
- 100 % usable gaging surface.
- Ends ground square
- Lapped finish.

#### Master Discs AGD Style 3

- Traceable certification and calibration available on request.
- Lapped to size and polished.
- Non-gaging areas black oxidized — ring faces ground.
- Meet all requirements of ANSI Specification B47.1-1988
- Manufactured in accordance with ANSI Specification B89.1.5.
- Furnished with clear insulators.
- All dimensions are AGD style 3.

**Setting Standards** for indicating measuring instruments**355 E****390****715 E****Ring Gages 355 E**

- Special wear-resistant gage steel. Hardened and lapped

Dimensions	DIN 2250, Type C
Manufacturing tolerance	DIN 2250
Uncertainty of actual deviation	1/2 IT 1
Nominal diameter	0.5 - 200 mm

**Pin Gages 426**

- Special wear-resistant gage steel. Hardened and lapped. Available with or without handles.
- According to DIN 2269

For further details please refer to Page 13-15  
Nominal diameter 0.1 - 10 mm

**Reference Discs 390**

- Special wear-resistant gage steel. Hardened and lapped.

Manufacturing tolerance	$\pm 1/2$ IT 2
Uncertainty of actual deviation	1/2 IT 0
Nominal diameter over	10 - 100 mm

Setting standards with a DKD calibration certificate from the Mahr Calibration Laboratory are available on request (threads are excluded):

Pin Gages from dia.	3 mm
Ring Gages dia.	10 - 100 mm
Reference Discs dia.	3 - 100 mm

**Thread Setting Ring Gage 708 E**

- With full thread profile
- Actual deviation is engraved on the gage
- For setting indicating thread measuring instruments
- For metric threads for tolerance class "H" according to DIN 2241
- For other thread types please state tolerance requirements

**Thread Setting Plug Gage 715 E**

- With full thread profile
- Actual deviation is engraved on the gage
- For setting indicating thread measuring instruments
- Metric threads in accordance with DIN 2241: Tolerance class h applies to standard threads dia. 1 - 1.4 mm and for pitches 0.2 and 0.25, for all other sizes the tolerance class g is applicable
- For other thread types please state tolerance requirements

## Thread Gages, Checking Plug Gages



705



708 N



708 G

### Thread Limit Plug Gage 705

- Special wear-resistant gage steel. Hardened and ground
- GO end with full thread profile, pitch diameter corresponds to minimum permissible dimension of internal thread
- NO-GO end has only 3 threads and a shortened flank profile, pitch diameter corresponds to maximum permissible dimension of internal thread
- Accuracy for metric ISO threads according to DIN ISO 1502 (up to 40 mm the GO end and NO-GO end are on a common handle. Over 40 mm the GO / NO-GO end are on separate handles for easier handling)
- Nominal diameter 1 - 100 mm. For all standard and special threads

### Thread Ring Gages

- Special wear-resistant gage steel. Hardened and ground
- Accuracy of metric ISO threads according to DIN ISO 1502
- Nominal diameter 1 - 200 mm
- For all standard and special threads

#### GO Thread Ring Gage 708 G

- With full thread profile. Pitch diameter corresponds to the maximum permissible dimension of an external thread. The external diameter is relieved

#### NO-GO Thread Ring Gage 708 N

- With reduced thread profile. For checking minimum permissible dimension of pitch diameter on external thread

## Master Thread Plug Gages

- Special wear-resistant gage steel. Hardened and lapped. Accuracy for metric ISO thread DIN ISO 1502. Other threads are in accordance to the respective standards
- Diameter 1 - 200 mm
- Available for all standard and special threads

### Go Thread Checking Gage 715 G

Counter Plug Gage for GO Thread Ring Gage

### Go Thread Checking Gage 715 N

Counter Plug Gage for NO-GO Thread Ring Gage

- With full thread profile and outside diameter with maximum dimension of external thread. Plug Gage must screw easily into Ring Gage

### Wear Testing Plug Gage 716 G

For GO Thread Ring Gage

### Wear Testing Plug Gage 716 N

For NO-GO Thread Ring Gage

- Three threads with considerably shortened flanks. Must not screw in more than one turn

## Calibration Services

International Standards require complete documentation and calibration of all gaging instruments. Mahr Federal Inc., as well as being a manufacturer of quality dimensional measuring instruments, is an established primary source or high accuracy dimensional measurement services.

### Mahr Federal offers an inspection and recalibration program for dimensional standards including:

- gage blocks / master rings / master discs and plugs / masterballs (roundness)
- cylindrical form and precision reference specimens surface roughness standards.



For these services, we have created an ideal environment - a metrology laboratory in Providence, Rhode Island that is ranked as one of the world's finest:

- High quality measurements - 0.06 micron / 2.3 microinch uncertainty of measurement on gage blocks (up to 50 mm / 2" long).
- All measurements traceable to the Standards of the United States.
- Grand Masters/Primary standards used in our Measurement Center have been certified by NIST.
- Calibration system is certified to ISO-9001:2000 by NQA, USA and accredited to ISO 17025 NVLAP Lab Code 200605-0.
- We offer Fast turnaround and competitive prices.



Mahr Federal also specializes in the calibration and certification of the following gages including:

- Dial, Digital & Test Indicators
- Mikrokators®
- Micrometers
- Dial & Vernier Calipers
- Pin & Radius Gages
- Snaps, I.D. / O.D. & Bore Gages
- Dimetron® Plugs
- Plug & Ring Gages
- Groove, Caliper, Thickness
- Air Gages & Magnification Kits
- Electronic Amplifiers & Gage Heads
- Surface Finish Gages
- Level Systems



# METROLOGY SYSTEMS

► | **Rising to the challenge.** High-precision, powerful measuring instruments for complex workpieces that need to meet high quality requirements, combined and configured with your particular needs in mind — measuring systems from Mahr set the standard in the market.

► | **Our two-tier information program.** If you are interested in a specific product family (Millimar, MarSurf, MarForm, etc.), we will happily send you the relevant brochure with detailed information on request. If you require details on individual products, we will send you the appropriate data sheets.





# DIVISION

► | See what we can do – simply ask for detailed information

ALL INFORMATION AND SERVICES

CAN BE FOUND AT

[WWW.MAHR.COM](http://WWW.MAHR.COM)

SEND YOUR ORDER TO YOUR MAHR

PARTNER OR ORDER DIRECTLY FROM

MAHR GMBH GÖTTINGEN

POSTFACH 18 53

D-37008 GÖTTINGEN

TEL.: +49 551 7073-800

FAX: +49 551 7073-888

E-MAIL: [INFO@MAHR.DE](mailto:INFO@MAHR.DE)

# MAHR SYSTEMS



► | Contents

	<b>Millimar</b>	Length Metrology	<b>14- 2</b>
	<b>Precimar</b>	Precision Length Metrology	<b>15- 2</b>
	<b>MarSurf</b>	Surface Metrology	<b>16- 2</b>
	<b>MarForm</b>	Form Metrology	<b>17- 2</b>
	<b>MarGear</b>	Gear Metrology	<b>18- 2</b>
	<b>MarVision</b>	Optical Metrology	<b>19- 2</b>
	<b>MarShaft</b>	Shaft Metrology	<b>20- 2</b>
	<b>Services</b>		<b>21- 2</b>

## DIMENSIONAL METROLOGY FROM A SINGLE SOURCE.

### MILLIMAR FROM MAHR



The latest information on the MILLIMAR range of length measuring instruments can be found on our website:

**www.mahr.com, WebCode 153**

► I The entire range of dimensional metrology from a single source – in addition to perfectly matched probes and evaluation instruments, Millimar also offers high-precision mechanical components and engineered solutions for every length measurement task. Our portfolio features an impressive selection of high-quality probes for all requirements relating to measuring range, resolution, and the surface properties of the workpiece and the application environment in which the measurement is to be performed. Our range of reliable, state-of-the-art evaluation instruments uses many different top-class sensor technologies. The robust, high-precision Damar ID/OD gages are perfectly suited to our customers' requirements. Mahr gages from standard elements are available as a modular system comprising mechanical components for high-precision, stable measuring devices in production environments. Our special engineered solutions are based around the design and manufacture of high-precision, ergonomic, highly reliable part-specific measuring instruments. Flexible components for different workpieces and levels of automation round off our comprehensive portfolio.



## ► | Millimar. Length Metrology

<b>Probes</b>	<b>14- 2</b>
<b>Inductive Probes</b>	<b>14- 3</b>
<b>Incremental Probes</b>	<b>14- 3</b>
<b>Electronic Indicating Plug Gages</b>	<b>14- 3</b>
<b>Air Gages</b>	<b>14- 3</b>
<b>Millimar 1940, X 1941</b>	
Air/Electronic Converters	<b>14- 4</b>
<b>Millimar 1901 TA</b>	
Measuring Amplifier	<b>14- 4</b>
<b>Evaluation Instruments</b>	<b>14- 5</b>
<b>Millimar C 1208 / C 1216 / C 1245</b>	
Compact Measuring Instruments	<b>14- 6</b>
<b>Millimar S 1840 / S 1841</b>	
Column Amplifiers	<b>14- 7</b>
<b>Millimar X 1715 / X 1741</b>	
Measurement Interface Systems	<b>14- 8</b>
<b>Millitron 1260</b>	
Multi-Gaging Measuring Computer	<b>14- 9</b>
<b>SPC Software</b>	
Software Package for Length Metrology	<b>14- 9</b>
<b>Measuring Instruments</b>	<b>14-12</b>
<b>Diamar nk / 280</b>	
Universal Length Measuring Instruments	<b>14-13</b>
<b>Engineered Solutions</b>	<b>14-14</b>



## Millimar. Probes

### PRECISION BEGINS AT THE START OF THE MEASURING PROCESS

► | Probes are the most influential component of a measuring chain. Their characteristics determine the quality of the whole measurement. Different technologies are available depending on the particular application, including: Millimar inductive probes which are robustly built, flexible in their range of applications and attractively priced; Millimar incremental probes which are ideal for large measuring ranges and small linearity deviations over the whole measuring range; or Millimar air gages which enable reliable, contact-free measurement of even soiled workpieces, have a long lifespan and excel in terms of reproducible measuring results. | ◀





## Inductive Probes



The **Millimar P 2000** inductive probe series features 8 basic types complying with different manufacturer standards. Its key features are:

- Excellent pricing, immediate delivery
  - Precise linearity
  - Outstanding electromagnetic shielding (high EMC)
  - Graphic measuring record supplied free of charge
  - Highly resistant to wear and tear
- For details, see Section 7-4.

## Incremental Probes



**Millimar** incremental probes are used for absolute measurements in the inspection room, testing laboratory and production environment. They feature long measuring range and high resolution. Their high accuracy is achieved thanks to a precision incremental glass scale. Accuracies of  $\pm 0.2 \mu\text{m}$  ( $\pm 8 \mu\text{in}$ ),  $\pm 0.5 \mu\text{m}$  ( $\pm 20 \mu\text{in}$ ) and  $\pm 1 \mu\text{m}$  ( $\pm 40 \mu\text{in}$ ) can be achieved depending on the type.

## Electronic Indicating Plug Gages



**Indicating plug gages** are designed for rapid testing of the diameter, roundness and conicity of bores and are ideal for serial checks of parts with tight tolerances. Because no swiveling in the bore is necessary to determine the reversal point, indicating plug gages **844D** combined with Millimar indicating units is ideal for further processing of measuring results.

## Air Gages



**Air gages** record dimensional deviations fast and accurately. They are tried-and-tested measuring systems in industrial production environments and the inspection room. Highly accurate and with a long service life, these gages have a low sensitivity to environmental influences. Contact-free measurement ensures there is no risk of damage to workpieces..

### Millimar 1940. Air/Electronic Converter



Air-controlled probes are becoming more and more widespread in dimensional metrology. Air/electronic converters convert the measuring signal (air pressure) into an electronic signal.

**Millimar 1940** is particularly well-suited to measurements with narrow tolerances. Its cutting-edge carrier frequency measuring system means it can be connected to the evaluation instruments in the same way as an inductive probe.

### Millimar X 1941. Air/Electronic Converter



Air/electronic converters convert the signals from pneumatic measuring equipment (air pressure) into electrical signals. The piezo-electrical measuring system means that the **X 1941** air/electronic converter can be finely aligned with most of the pneumatic systems on the market. The **Millimar X 1941** has an analog signal output. It can therefore be very easily connected to the measuring computer and control system.

### Millimar 1901 TA Measuring Amplifier




#### Features

- The 1901 TA measuring amplifier is used to connect inductive probes to measurement control systems
- It supplies the inductive probe with an alternating voltage and converts the carrier frequency measuring signal into an output voltage
- Output voltage  $\pm 10$  V (additional option:  $\pm 5$  V / 0 V to 10 V) at the end of measuring range
- An output signal in the form of a  $\pm 5$  mA current is also available at the end of the measuring range
- Supply voltage 24 V DC
- The 1901 TA casing is designed to form an integral part of the machine environment

## Millimar. Evaluation Instruments

### GETTING THE MEASURE OF COMPLEX MEASUREMENT TASKS

► | Evaluation instruments have many different applications and therefore need to meet a broad range of requirements. They can perform anything from simple measurements on the shop floor to complex applications with a whole host of test features in fully automated production lines. These applications require high levels of reliability and precision combined with straightforward operation. Millimar evaluation instruments meet these requirements perfectly. Robust, compact, bright light-strip instruments, measurement interfaces for a wide range of applications and easy-to-use measuring computers can all be adapted for different probes and tailored to suit your particular application. | ◀



## Millimar C 1208 / C 1216

Compact, user-friendly length measuring instrument



### Description

**Millimar C 1208 / C 1216** are ideal for performing simple measuring tasks quickly. Measuring results are arranged clearly on the large backlit LCD display. Millimar C 1208 / C 1216 are very easy to operate thanks to the use of preferences.

### Features

#### Display

- Backlit LCD display with an analog and a digital display

#### Functions

- Preferences: Frequently required settings can be called up directly by pressing SELECT
- Static and dynamic measurements
- Auto-detect mode: Two measuring devices can be operated independently of each other
- One- or two-point master measurement

#### Connections

- Inputs for inductive probes or pneumatic measuring devices
- RS 232 interface
- Analog output
- 3 digital inputs and outputs

### Accessories / Versions

#### Millimar C 1208 / C 1216

- 2 inputs for inductive probes with 3 compatibility options
- 1 inputs for pneumatic measuring devices (only C 1208)
- Millimar **D1000S** configuration software
- **Millimar C 1216** also has:  
Programmable analog output voltage,  
Resolution 0.1  $\mu\text{m}$  to 0.01  $\mu\text{m}$  (5.0  $\mu\text{in}$  to 1.0  $\mu\text{in}$ ) (switchable)

## Millimar C 1245

Flexible length measuring instrument for a wide range of tasks



### Description

The modular design of the **Millimar C 1245** means it can also be easily adapted to future measuring tasks. This considerably improves the cost-effectiveness of your measuring equipment.

### Features

#### Display

- Analog indicator instrument and two-line LCD display

#### Functions

- Static and dynamic measurements
- Equation editor
- Auto-detect mode: up to 6 measuring devices can be operated independently of each other
- One- or two-point master measurement

#### Connections

- 1 to 8 measuring device inputs
- RS 232 interface
- Analog output
- 3 digital inputs and 6 digital outputs

### Accessories / Versions

#### Millimar C 1245

- 4 inputs for inductive probes with 2 compatibility options
- Up to 2 inputs for pneumatic measuring devices
- 2 inputs for incremental probes
- 4 inputs for DC signals



## Millimar S 1840

Length measuring instrument with three-color illuminated bar graph

If you want to record and evaluate measured values at a glance, the **Millimar S 1840** column gage is the perfect tool for the job, both for measurements using inductive probes and for probes with air gages.



### Features

#### Display

- Three-color illuminated bar graph, two-line LCD display

#### Functions

- Static and dynamic measurements
- Auto-detect mode: Two measuring devices can be operated independently of each other
- One- or two-point master measurement

#### Connections

- Inputs for inductive probes or pneumatic measuring devices
- RS 232 interface
- Analog output
- 3 digital inputs and outputs

### Accessories / Versions

#### Millimar S 1840

- 2 inputs for inductive probes with various compatibility options
- 1 input for pneumatic measuring devices
- Millimar **D1000S** configuration software

## Millimar S 1841

Intelligent recording and clear display of complex measuring tasks

The **Millimar S 1841** multiple column measuring instrument is the ideal multi-gaging unit for the production environment. It combines the power of a state-of-the-art measuring computer with the clarity of an illuminated bar graph.



### Features

#### Display

- Up to 4 indicating strips with three-color illuminated bar graph and LCD display

#### Functions

- Static and dynamic measurements
- Equation editor
- Auto-detect mode: Up to 6 measuring devices can be operated independently of each other
- One- or two-point master measurement

#### Connections

- 1 to 16 measuring device inputs
- RS 232 interface
- Analog output
- 6 digital inputs and 12 digital outputs

### Accessories / Versions

#### Millimar S 1841

Up to 4 displays and up to 4 modules with measuring channels for each of the following: 4 inductive probes, 1 pneumatic measuring device, 2 incremental probes, 4 DC signals

## Millimar X 1715

Intelligent measurement interface system



### Description

**Millimar X 1715** is a smart, universal measurement interface system for complex measuring tasks in production environments. It acts as a signal transformer between sensors and the electronic measurement data processing system.

### Features

#### Functions

- Static and dynamic measurements
- Equation editor
- Definition of 16 features possible
- One- or two-point master measurement

#### Connections

- 1 to 8 measuring device inputs
- RS 232 interface
- Analog output
- 3 digital inputs and 6 digital outputs

### Accessories / Versions

#### Millimar X 1715

- Up to 2 modules, each with
  - 4 channels for inductive probes
  - 1 channel for pneumatic measuring devices
  - 2 channels for incremental probes
  - 4 channels for DC signals
  - 2 channels for temperature sensors

## Millimar X 1741

Intelligent measurement interface system



### Description

Record measured values and calculating them directly in the interface as early as possible is child's play with the **Millimar X 1741**. By giving you the option of transferring just a few calculated features, it also helps increase the reliability of your automated application.

### Features

#### Functions

- Static and dynamic measurements
- Equation editor
- Definition of up to 16 features
- One- or two-point master measurement

#### Connections

- 1 to 16 measuring device inputs
- RS 232 interface
- 2 analog outputs
- 6 digital inputs and 12 digital outputs

### Accessories / Versions

#### Millimar X 1741

- Up to 4 modules, each with
  - 4 channels for inductive probes
  - 1 channel for pneumatic measuring devices
  - 2 channels for incremental probes
  - 4 channels for DC signals
  - 2 channels for temperature sensors



## Millitron 1260

Multi-gaging measuring computer



### Description

**Millitron 1260** is a process computer for measuring and evaluating several measuring values simultaneously. It is very easy to change the settings. The **Millitron 1260** can be very rapidly adapted to new measuring tasks.

### Features

#### Display

- Color LCD display, status lamps

#### Functions

- Static and dynamic measurements
- Equation editor
- One- or two-point master measurement
- SPC functions

#### Connections

- 12 measuring device inputs
- RS 232 interface
- 3 digital inputs and 3/27 digital outputs
- VGA monitor connection, printer connection

### Accessories / Versions

#### Millitron 1260

- Compatible with 19.4 kHz inductive probes

#### Millitron 1260

- Compatible with 13 kHz inductive probes

#### Millitron 1260 T

- In IP54 casing and additional digital outputs

## SPC Software D1100X

SPC measuring computer software for length metrology



### Description

Combining the Millimar X 1715 / X 1741 measurement interface with a standard PC creates a universal SPC measuring computer for length metrology.

Input masks result in simple configuration for all manner of measurement tasks.

In addition to the probes' adjustment and working ranges, the free stroke and lift-off limits can also be monitored in order to enhance the measuring certainty of a system or instrument.

The software is operated using the function keys of a standard ASCII keyboard or an operator keyboard for industrial applications. The required peripherals, such as probe boxes, inputs and outputs, are connected via an RS-232C interface and/or a network connection.

### Features

#### Computer-independent software package for Windows 2000® and Windows XP® Professional operating systems.

- Displays bar charts, measuring records, images of parts, control charts and histograms
- Evaluation of tolerances, warning limits, machine capability (cm, cmk) and process capability (cp, cpk)
- Up to 32,000 measuring programs in mixed operation
- Maximum 192 statistical characteristics per measuring program
- Static and dynamic measuring functions as well as free formula editor to link the measuring channels
- One- or two-point master measurement
- Data export in the ASCII, Excel or qs-STAT format

## Millimar. Overview of Evaluation Instruments

Millimar



	C 1208 / C 1216	C 1245	S 1840	S 1841
<b>Display</b>	LCD display with analog indicator, and two-line digital display	Analog indicator instrument	1 illuminated bar graph, two-line digital display	1 to 4 illuminated bar graphs, 1 to 4 two-line digital displays
<b>Measuring channels</b>	Depending on the type, up to: • 2 inductive probes • 1 pneum. meas. device	Two-line digital display Depending on the type, up to: • 8 inductive probes • 4 incremental probes • 2 pneum. meas. devices • 8 analog signals • 2 temperature sensors or a mixture of these inputs	Depending on the type, up to: • 2 inductive probes • 1 pneum. meas. device	Depending on the type, up to: • 16 inductive probes • 8 incremental probes • 4 pneum. meas. devices • 8 analog signals • 4 temperature sensors or a mixture of these inputs
<b>Inductive probe compatibility</b> (carrier frequency)	19.4 / 13 / 5 kHz	19.4 / 13 / 5 kHz	19.4 / 13 / 5 kHz	19.4 / 13 / 5 kHz
<b>Display range</b>	± .10, 30, 100, 300, 1,000, 3,000, 10,000 μm ± .0003, .0001, .0003, .001, .003, .01, .03 inch	± .10, 30, 100, 300, 1,000, 3,000, 10,000 μm ± .0003, .0001, .0003, .001, .003, .01, .03 inch	± .10, 30, 100, 300, 1,000, 3,000, 10,000 μm ± .0003, .0001, .0003, .001, .003, .01, .03 inch	± .10, 30, 100, 300, 1,000, 3,000, 10,000 μm ± .0003, .0001, .0003, .001, .003, .01, .03 inch
<b>Resolution</b>	0.1 μm or 0.01 μm 5 μin or 1 μin	0.1 μm or 0.01 μm 5 μin or 1 μin	0.1 μm 5 μin	0.1 μm 5 μin
<b>Combination</b>	A/-A/B/-B/ A+B/A-B/-A+B/-A-B	Equation editor for 80 characters Functions: + / - / * / ÷ / () / factor	A/-A/B/-B/ A+B/A-B/-A+B/-A-B	Equation editor for 80 characters Functions: + / - / * / ÷ / () / factor
<b>Features / program</b>	2 / 2	16 / 6	2 / 2	16 / 6
<b>Test steps</b>	1	6	1	6
<b>Dynamic measurement</b>	MAX, MIN, MAX-MIN, (MAX+MIN)/2, mean value	MAX, MIN, MAX-MIN, (MAX+MIN)/2, mean value	MAX, MIN, MAX-MIN, (MAX+MIN)/2, mean value	MAX, MIN, MAX-MIN, (MAX+MIN)/2, mean value
<b>Statistical functions</b>	No	N, x-bar, S, Xmax, Xmin, Range	No	N, x-bar, S, Xmax, Xmin, Range
<b>Classification</b>	No	Max. 998, max. 79 on I/O	No	Max. 998, max. 79 on I/O
<b>Control inputs and outputs / SPC connection</b>	3 digital inputs 3 digital outputs	3 digital inputs 6 digital outputs	3 digital inputs 3 digital outputs	6 digital inputs 12 digital outputs
<b>Analog output</b>	1 (only C 1216)	1	1	2
<b>Network</b>	Via COM server	Via COM server	Via COM server	Via COM server
<b>Measured value memory</b>	400 values	5,000 values	400 values	5,000 values
<b>SPC statistics</b>	No	No	No	No
<b>Data export</b>	ASCII	ASCII	ASCII	ASCII
<b>Printer</b>	Mahr MSP2	Serial printer with ASCII mode	Mahr MSP2	Serial printer with ASCII mode
<b>Configuration System</b>	PC, keyboard Controller	PC, keyboard Controller	PC, keyboard Controller	PC, keyboard Controller
<b>Dimensions</b>	160 x 205 x 165 mm 6.30 x 8.07 x 6.50 in	160 x 205 x 165 mm 6.30 x 8.07 x 6.50 in	47 x 487 x 150 mm 1.85 x 19.17 x 5.91 in	235 x 487 x 245 mm 9.25 x 19.17 x 9.65 in

## Millimar. Overview of Evaluation Instruments

Millimar



	X 1715	X 1741	1260	M.A.C.-6E Touch
<b>Display</b>	None Only via PC D1000X software incl. in the scope of delivery	None Only via PC D1000X software incl. in the scope of delivery	6" color LCD	15" TFT screen Touchscreen
<b>Measuring channels</b>	Depending on the type, up to: • 8 inductive probes • 4 incremental probes • 2 pneum. meas. devices • 8 analog signals • 2 temperature sensors or a mixture of these inputs	Depending on the type, up to: • 16 inductive probes • 8 incremental probes • 4 pneum. meas. devices • 8 analog signals • 4 temperature sensors or a mixture of these inputs	for: • 12 inductive probes • 2 incremental probes • 4 digital meas. instruments	Depending on the configuration level 4 to 496 for • inductive probes • incremental probes • pneum. meas. devices, analog signals
<b>Inductive probe compatibility (carrier frequency)</b>	19.4 / 13 / 5 kHz	19.4 / 13 / 5 kHz	19.4 / 13 / 5 kHz	19.4 / 13 / 5 kHz
<b>Display range</b>	± .10, 30, 100, 300, 1,000, 3,000, 10,000 μm ± .0003, .0001, .0003, .001, .003, .01, .03 inch	± .10, 30, 100, 300, 1,000, 3,000, 10,000 μm ± .0003, .0001, .0003, .001, .003, .01, .03 inch	± .10, 30, 100, 300, 1,000, 3,000, 10,000 μm ± .0003, .0001, .0003, .001, .003, .01, .03 inch	± .10, 30, 100, 300, 1,000, 3,000, 10,000 μm ± .0003, .0001, .0003, .001, .003, .01, .03 inch
<b>Resolution</b>	0.1 μm 5 μin	0.1 μm 5 μin	0.1 μm 5 μin	0.1 μm or 0.01 μm 5 μin or 1 μin
<b>Combination</b>	Equation editor for 80 characters Functions: + / - / * / ÷ / () / factor	Equation editor for 80 characters Functions: + / - / * / ÷ / () / factor	Equation editor for 38 characters Functions: + / - / * / ÷ / () / factor	Freely programmable
<b>Features / program</b>	16 / 6	16 / 6	50 / 40	192 / 32,000
<b>Test steps</b>	6	6	40	8
<b>Dynamic measurement</b>	MAX, MIN, MAX-MIN, (MAX+MIN)/2, mean value	MAX, MIN, MAX-MIN, (MAX+MIN)/2, mean value	MAX, MIN, MAX-MIN, (MAX+MIN)/2, mean value	MAX, MIN, MAX-MIN, mean value freely programmable Optional
<b>Statistical functions</b>	N, x-bar, S, Xmax, Xmin, Range	N, x-bar, S, Xmax, Xmin, Range		
<b>Classification</b>	Max. 998, max. 79 on I/O	Max. 998, max. 79 on I/O	50 / 18 on I/O	128
<b>Control inputs and outputs / SPC connection</b>	3 digital inputs 6 digital outputs	6 digital inputs 12 digital outputs	3 digital inputs 3 digital outputs (27 digital outputs with 1260T)	32 digital inputs 32 digital outputs Profibus, ...
<b>Analog output</b>	1	2	No	No
<b>Network</b>	Via COM server	Via COM server	Via COM server	Network card
<b>Measured value memory</b>	5,000 values	5,000 values	10,000 values	Measured value files on hard disk
<b>SPC statistics</b>	No	No	Yes	Yes
<b>Data export</b>	ASCII	ASCII	ASCII, VISUSTAT	ASCII, EXCEL, qs-STAT
<b>Printer</b>	Serial printer with ASCII mode	Serial printer with ASCII mode	Parallel printer with ASCII mode	Windows system USB standard printer
<b>Configuration System</b>	PC, keyboard Controller	PC, keyboard Controller	Keyboard Controller	Panel PC μP: Celeron M WIN 2000, XP Prof.
<b>Dimensions</b>	160 x 205 x 165 mm 6.30 x 8.07 x 6.50 in	235 x 180 x 160 mm 9.25 x 7.09 x 6.30 in	330 x 240 x 350 mm 12.99 x 9.45 x 13.78 in	








## Millimar. Measuring Instruments


### HIGH PRECISION AND RELIABILITY

► I The heart of any measuring system lies in the measurement mechanics. The stability of the measuring circuit governs the precision and repeatability of the measured values that the gage can achieve. As well as precise positioning of the workpiece being tested, moving parts such as slides and levers are also very important. The guides and precision bearings used make a crucial difference to the quality of your application. Diamar ID/OD gages from Mahr provide ergonomic solutions for all your inside and outside diameter testing needs. The comprehensive modular system of Millimar gages from standard elements is based on state-of-the-art elements for all measurements on shaft-shaped workpieces that is robust, easy to use and highly accurate. I ◀

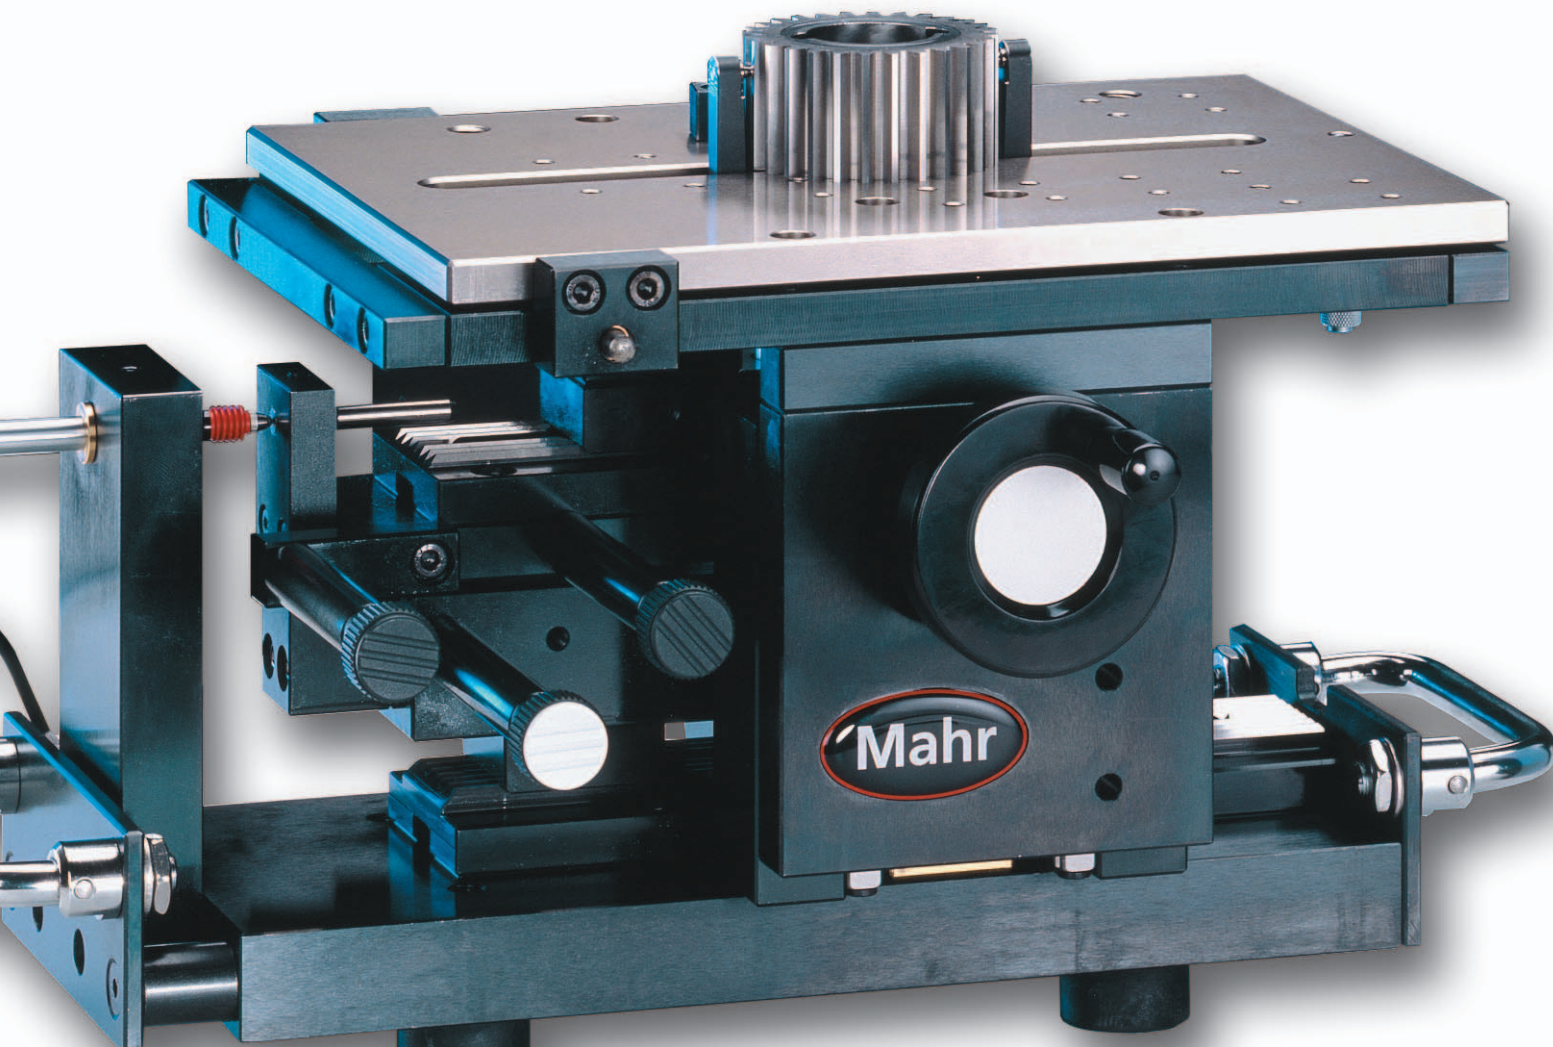

## Diamar nk

Universal length measuring instrument

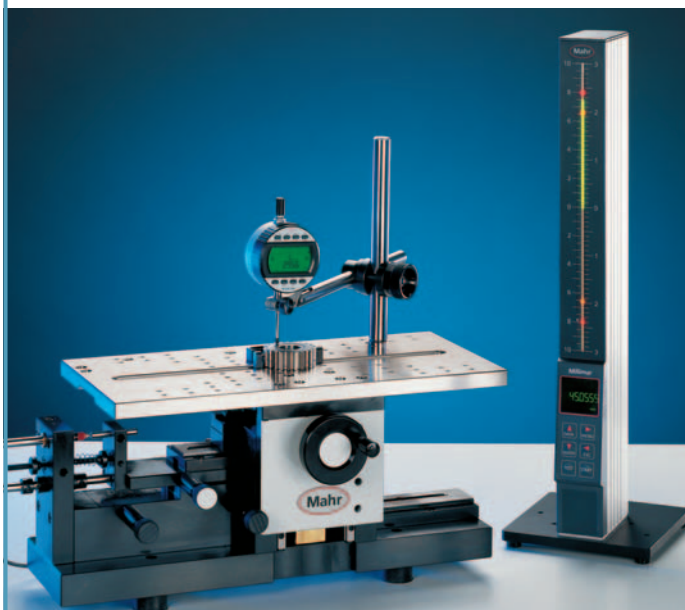

### Description

**Diamar** has an extremely wide range of applications.


It can be used for testing lengths, diameters, heights, tothing and much more. It also features numerous accessories.

### Technical Data

	DIAMAR nk	DIAMAR 280
<b>Measuring ranges:</b>		
Outside diameter	0 mm to 225 mm (0 in to 8.86 in)	0 mm to 150 mm (0 in to 5.9 in)
Inside diameter	5 mm to 225 mm (.197 in to 8.86 in)	5 mm to 150 mm (.197 in to 5.9 in)
Measuring uncertainty	< 2 µm (78 µin)	< 2 µm (78 µin)
Repeatability	< 2 µm (78 µin)	< 2 µm (78 µin)
Measuring arm lift-off	25 mm (1 in)	20 mm (.78 in)
Measuring force	0.1 N to 10 N, adjustable	0.5 N to 3 N fixed
<b>Setting range of the support table:</b>		
Height setting	50 mm (1.96 in)	45 mm (1.77 in)
Angle of tilt	-	2 degrees
Length of the column	220 mm (8.66 in)	220 mm (8.66 in)
<b>Dimensions</b>		
Length	420 mm (16.5 in)	300 mm (11.8 in)
Width	180 mm (7.0 in)	180 mm (7.0 in)
Height	155 mm (6.1 in)	160 mm (6.29 in)

## Diamar 280

Universal length measuring instrument

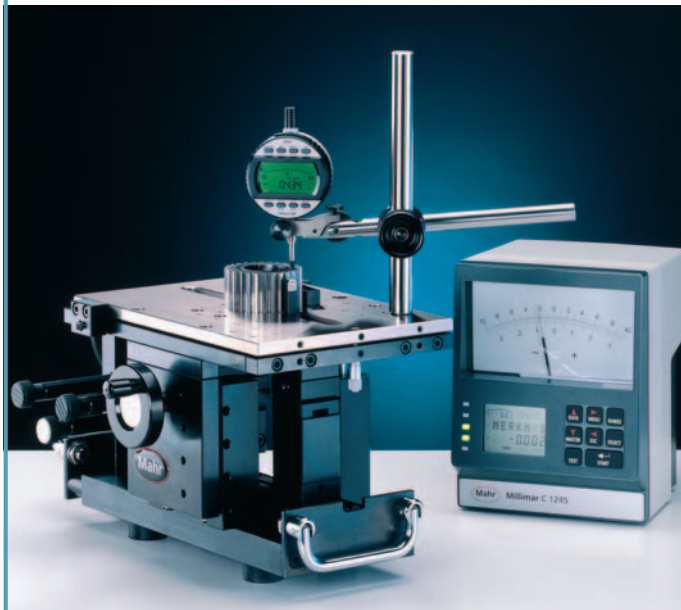

### Versions

#### Diamar nk

- Base with 350 mm x 180 mm (13.7 in x 7.0 in) table top
- Probe holder / dial indicator holder
- Height-adjustable table top, adjustment range 50 mm (1.96 in)

#### Diamar nk

- As above, but table top not height-adjustable

#### Diamar 280

- As above, but height-adjustable table top 255 mm x 180 mm (13.7 in x 7.0 in), with height adjustment range of 45 mm (1.77 in) and table tilt facility

### Accessories

Part-specific accessories such as measuring arms, anvils, stop rail, locating plate and locating pin available on request.

All **Millimar probe-based instruments**, dial gages and dial comparators can be used as evaluation instruments.



# Millimar. Engineered Solutions

## MEASURING INSTRUMENTS FOR DIMENSIONAL METROLOGY

► | The design and manufacture of high-precision, reliable part-specific gages requires extensive metrological experience and expertise. Cutting-edge Millimar length measurement components provide reliable measuring instruments for a wide range of different workpiece geometries with different levels of automation. Our portfolio covers all the necessary project stages up to the point where the measuring device is handed over, ready for operation, to the customer. These include project planning, design, manufacture, assembly, putting into service and training.

### Millimar probes

Inductive probes  
Incremental probes  
Electronic indicating plug gages  
Pneumatic measuring devices  
Air/electronic converters

From page 14-2.

### Millimar evaluation instruments



Compact devices  
Column amplifiers  
Measuring computers

From page 14-5

### Millimar measuring instruments

Measuring tables, see section 8  
Diamar nk universal measuring instrument  
Gages from standard elements

From page 14-12

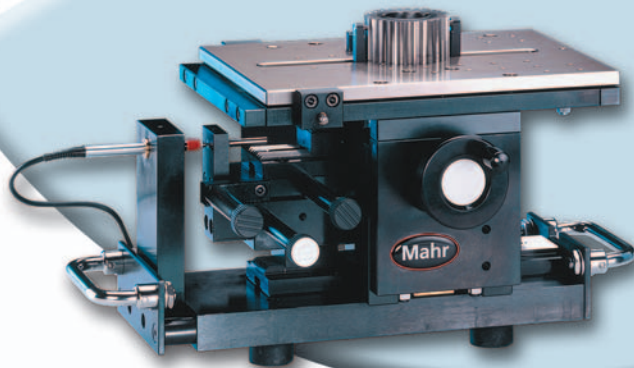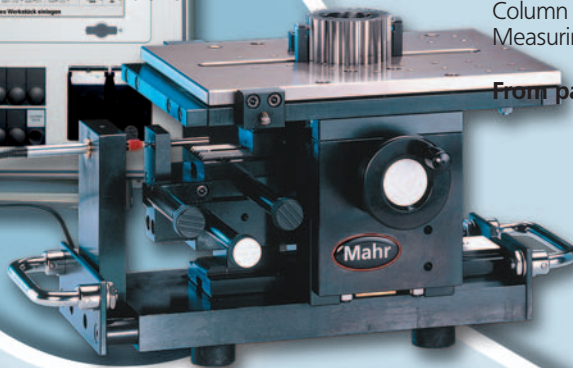



## Millimar. Engineered Solutions

The ever growing precision and productivity of machine tools is increasingly shaping the development of production technology. This is leading to improved stability and reliability in production processes. It also means full testing is no longer needed within the manufacturing chain. Nonetheless, the need for test equipment for use outside the production process is increasing accordingly.

The requirements for these — generally — single-purpose measuring instruments are:

- Appropriate precision in the mechanical sector which represents the core of the measuring instrument
- Reliability, robust design and ergonomic handling for use in demanding production environments
- Probes with appropriate resolutions and linearities for representing narrower and narrower manufacturing tolerances
- Evaluation systems that take into account the increased speed of IT development and are able to condense measured values into statistical data and transfer this data to control consoles for process monitoring

### Project planning

Workpiece drawings are used in close cooperation with the customer to define the requirements of the gage in terms of: Measurement task, test quantity, test scope, test cycle, recording and processing of measured values, loading and unload, level of automation, classification, evaluation, calibration, documentation, system environment, system interfaces, special acceptance testing regulations and much more.

### Design

Experienced designers develop the ideal technical solution for your measuring task, taking into account all the special requirements that the measuring instrument needs to satisfy. A part-specific gage is produced based on the high-precision, reliable components in the Mahr *Length Metrology* product range. This includes an extensive amount of data relating to modules and assemblies for existing gages.

### Manufacture and assembly

Individual parts are manufactured and assembled by skilled experts in our DIN EN ISO 9001 and VDA 6.4 certified plant in Göttingen or in our ISO 9001 certified plant in Providence RI, USA.

### Putting into service

Instruments can be put into service, including integration into the production line, and acceptance testing can be performed either at the Mahr plant or at the installation location. If required, this can also be done in accordance with the customer's own procedures and/or internal standards (i.e. measuring instrument compatibility certificate).


#### Gear shaft

Smooth and interrupted diameters, length measurements, radial run-out, axial run-out, etc.



#### Pulley

Concentricity and axial run-out of the keyway relative to the reference surface, keyway diameter and height dimensions, etc.



#### Connecting rod

Diameter, ovality, conicity, parallelism, distortion, perpendicularity, center distance, etc.



# ACCURACY IN THE NANOMETER RANGE USED TO BE A UTOPIAN IDEAL. **AND THEN THERE WAS PRECIMAR**



The latest information on Precimar precision length metrology can be found on our website:  
**[www.mahr.com](http://www.mahr.com), WebCode 154**

► I The Precimar product group specializes in high-precision dimensional metrology for absolute and relative measurements. Typical applications include products and test equipment for the aerospace and automotive industries and batch inspection of test equipment in calibration laboratories. Various universal length measuring machines enable reliable high-precision measurement and testing of lengths, inside and outside diameters, cylindrical and tapered threads, micrometers, snap gages, dial indicators, dial comparators, probes, gage blocks and precision products, right down to the nanometer range. Mahr also offers special measuring instruments for dial indicators, dial comparators, probes and gage blocks.

## ► I Precimar. Precision Length Metrology



<b>Precimar Dial Indicator Testing Instruments</b>	<b>15- 2</b>
<b>Optimar 100</b> Universal Dial Indicator Testing Machine	<b>15- 3</b>
<b>Precimar Gage Block Comparators</b>	<b>15- 4</b>
<b>Precimar. Models 130B-24, 130B-16</b>	<b>15- 4</b>
<b>Precimar 826 PC</b>	<b>15- 5</b>
<b>Precimar for Shop Floor Length Metrology</b>	<b>15- 6</b>
<b>LINEAR 100</b> Universal Single-axis Length Measuring Instrument	<b>15- 7</b>
<b>LINEAR 400 / 800 / 1200 / 1600 / 2000</b> Universal Single-axis Length Measuring Instruments	<b>15- 7</b>
<b>Precimar for Calibration Metrology</b>	<b>15- 8</b>
<b>ULM 300 / 600 / 1000 / 1500</b> Universal Length Measuring Instruments	<b>15- 8</b>
<b>ULM 520 S / 1000 S / 1400 S / 1700 S</b> Universal Length Measuring Instruments with Large Direct Measuring Range	<b>15- 9</b>
<b>ULM 800 L / 1500 L</b> Universal Length Measuring Instruments with Laser System	<b>15-10</b>
<b>Precimar for Precision Length Metrology</b>	<b>15-11</b>
<b>Precimar PLM 600-2</b> Universal Length Measuring Machines	<b>15-11</b>
<b>Precimar 828 CiM 1000</b> Precision Length Measuring Machines	<b>15-12</b>
<b>Data Overview</b> All Precision Length Measuring Instruments	<b>15-13</b>



## Precimar. Dial Indicator Testing Instruments

### SEMI- AND FULLY AUTOMATED TESTING OF MEASURING EQUIPMENT WITH DISPLAYS

► I Dial indicator testing instruments from Mahr ensure efficient and precise metrology. These instruments provide absolute measurements for dial indicators, dial comparators, lever-type test indicators, dial bore gages and inductive and incremental probes. Typical applications include dial indicator testing in all branches of industry, inspection rooms, calibration laboratories and production at dial indicator manufacturers. With the Optimar 100, Mahr offers a practical solution for both cost-effective, semi-automated testing of analog dial indicators and efficient, fully automated testing of digital measuring equipment. I ◀

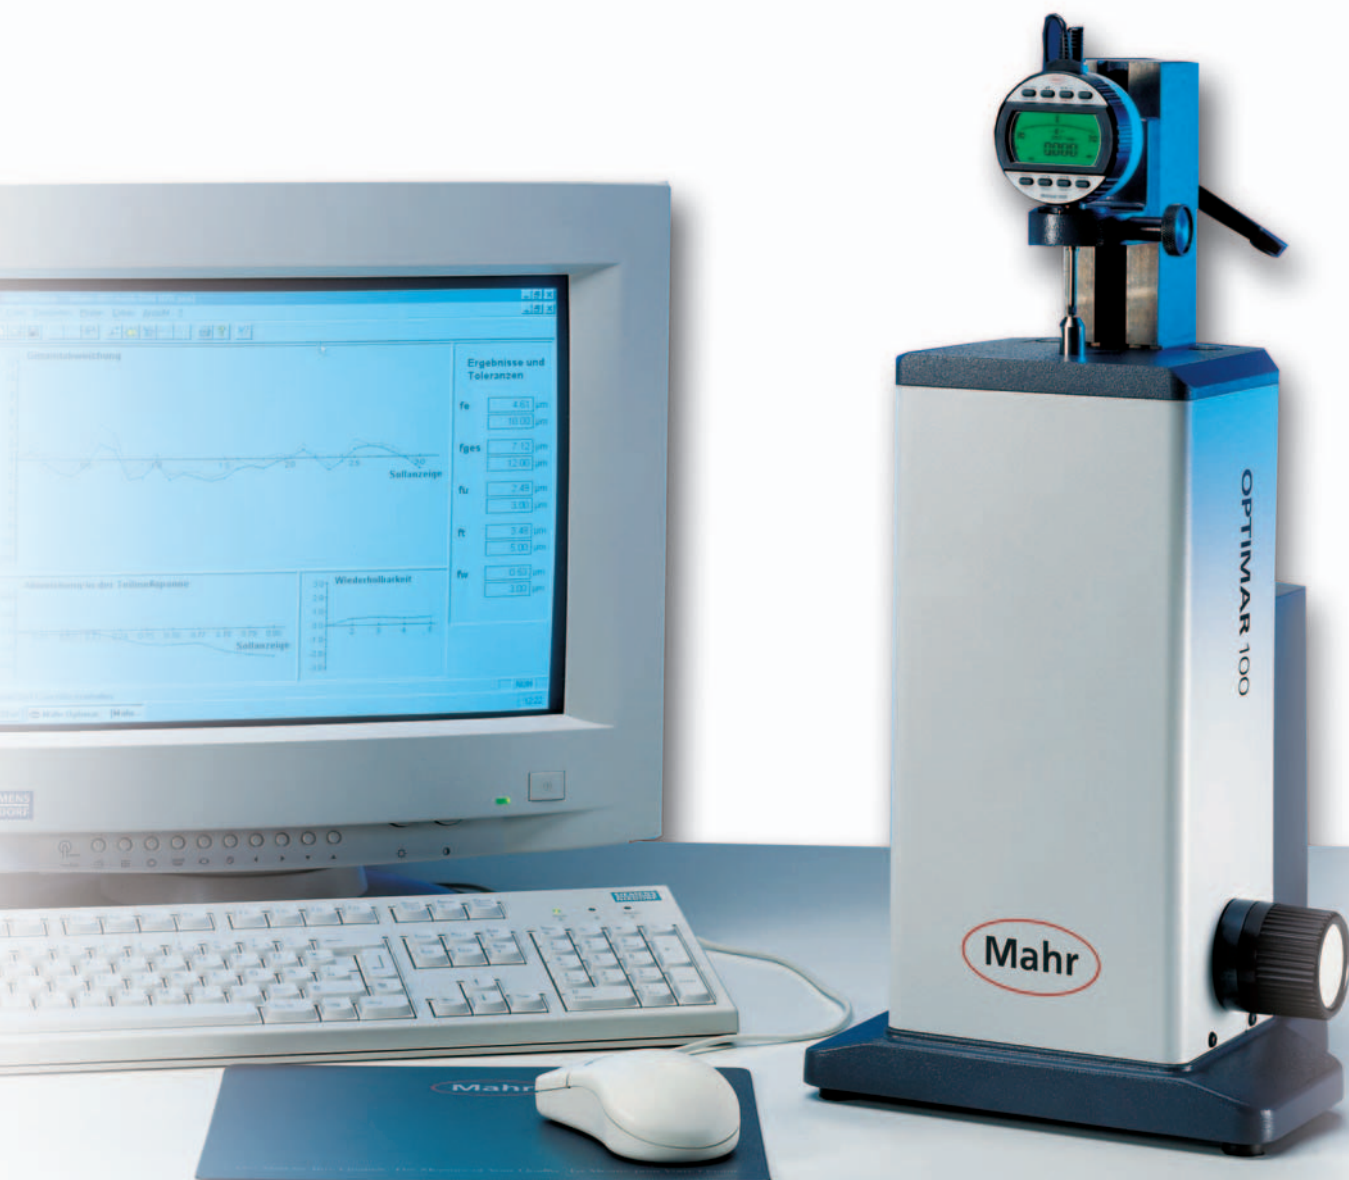



## Optimar 100

Universal dial indicator testing machine

### Description

The cost-effective testing station for semi- or fully automated testing of dial indicators, dial comparators, lever-type test indicators, 2-point inside measuring devices, and inductive and incremental probes.

Designed as a table-top unit, the **OPTIMAR 100** is user-friendly and ensures fast test runs. It features a motorized drive and is equipped with a high-resolution measuring system. The test run is software-controlled.

### Features

- For dial indicators, dial comparators, lever-type test indicators, 2-point inside measuring devices, digital dial indicators and inductive and incremental probes
- Automation of sub-processes (automated pre-positioning) using motorized measuring spindle drive
- Fully automated measuring run for digital devices
- **OPTIMAR 100** may be used horizontally (e.g. for measuring inside micrometers)
- Testpiece mounting via vertical guide. Height can be adjusted quickly (adaptation of testpieces to different measuring ranges)
- Box-shaped and thus rigid machine casing
- For testpieces with a shaft diameter of 8 mm, 28 mm or 3/8"
- Electronic handwheel for manual control of the measuring spindle's movement. Self-adjusting sensitivity of the electronic handwheel for adaptation to the specific test specimen
- Ergonomic design of all control elements
- Compliance with the Abbe comparator principle for maximum measuring accuracy
- LIF 101 measuring system with computer-aided error compensation. Testing of 2-point inside measuring devices without loss of accuracy
- Length measuring deviation in vertical and horizontal directions:  $MPE = (0.2 + L/100) \mu m$ , L in mm at  $T = 20 \text{ }^{\circ}\text{C} \pm 0.5 \text{ }^{\circ}\text{C}$ , permissible temperature gradient 0.1 K/h
- **Mahr software** or **QMSOFT software**

### Applications

- For both analog dial indicators, dial comparators, lever-type test indicators and 2-point inside measuring devices and digital dial indicators and inductive and incremental probes.



### Accessories

- Mount for lever-type test indicators
- Large selection of adapters for digital dial indicators and inductive and incremental probes
- Please ask for customized adapters if required
- Probe can be connected to Optimar via probe box
- Holder and software for testing 2-point inside measuring devices with a movable measuring bolt (testing as per VDI/VDE/DGQ 2618, sheet 13.2., 2005)
- Device for force sensor on request
- **OPTIMAR** recalibrated on site by Mahr Service Center
- Calibration set for calibration by the operator

### Technical Data

Optimar 100	Order No. 5320005
Range of measuring spindle	100 mm, 4 in (101.6 mm)
Measuring system	LIF 101 with correction of measured values
Digital increment	0.02 $\mu m$ (0.8 $\mu in$ )
Length measuring deviation (MPE)	$(0.2 + L/100) \mu m$ , (L in mm)
Positioning speed	Max. 2 mm/s (0.08 in/s)
Positioning	
Pre-positioning:	Automatic
Fine positioning:	Electronic knob
Supply voltage	Via plug-in power supply unit 110/230 V/9 V AC, 18 VA
Dimensions (L x W x H)	235 mm x 216 mm x 480 mm (9.3 in x 8.5 in x 18.9 in)



Request a brochure or see WebCode 2421.

## Precimar. Gage Block Comparator Models 130B-24 and 130B-16

Better than ever: Models 130B-24 and 130B-16  
– the industry standard



### Description

The **130B-24** gage block comparator from **Mahr Federal** is the preferred choice of many major calibration laboratories. It is exclusively designed for comparative gage block measurements. The **130B-24** model measures the industry's key dimensional standards with the ultimate in resolution and reproducibility.

### Features

- A unique "floating measuring frame" ensures precise point-to-point measurement
- Single-sensor design minimizes electronic noise
- Finely balanced system optimizes control of measuring forces
- Resolution of 0.1  $\mu\text{in}$  (0.001  $\mu\text{m}$ )
- Reproducibility of 0.2  $\mu\text{in}$  (0.005  $\mu\text{m}$ ) ( $6\sigma < 1 \mu\text{in}/0.025 \mu\text{m}$ )
- Measuring capacity of 0.010 in to 4 in (0.25 mm to 100 mm)
- Integrated measuring software and user interface
- Built-in positioner for reproducible measuring positions
- Thermometer with precision probes available as an option

#### Gage block positioner

An accurate positioner is built into the platen of the 130B-24. The reference gage block and the testpiece gage block are loaded into the openings in the template. The mechanism swings into place between the contact points and positions the gage blocks – first the reference gage block and then the testpiece gage block in its reference position and in its corners. Three easily exchangeable templates are included, one for square and two for rectangular (30 mm and 35 mm) gage blocks. Other templates are available as optional extras. The positioner is suitable for gage blocks from 0.02 in (0.5 mm) to 4 in (100 mm) long.

It can be fitted for right- or left-handed users or removed completely if necessary. An acrylic breath shield is included to protect the measuring area against body heat. Please see our special brochure for further information on the **software**.

### Technical Data for 130B-24 / 130B-16

Size (without computer)	Approx. 15 in x 15 in x 23 in (385 mm x 385 mm x 590 mm)
Weight (without computer)	Approx. 225 lbs (100 kg)
Max. gage block length	0.010 in to 4 in (0.25 mm to 100 mm)
Measuring force (upper contact)	3 oz (0.8 N)
(lower contact)	1 oz (0.3 N)
Contact tip material	Tungsten carbide (diamond - optional)
Contact tip radius	0.125 in (3.175 mm)
Sensor range	$\pm 0.015$ in ( $\pm 0.38$ mm)
Measuring range	$\pm 500 \mu\text{in}$ ( $\pm 10.0 \mu\text{m}$ )
Reproducibility	$6\sigma < 1 \mu\text{in}$ (25 nm) measured on a 1 in gage block without removing the gage block
Linearity	Deviation $< 1 \mu\text{in}$ over the central $\pm 50 \mu\text{in}$ and $< 1 \mu\text{in}$ in any 50 $\mu\text{in}$ within the $\pm 500 \mu\text{in}$ meas. range $< 20$ nm over the central $\pm 1 \mu\text{m}$ and $< 20$ nm in any $\pm 1 \mu\text{m}$ within the 10 $\mu\text{m}$ meas. range

### Precimar 130B-16

Model 130B-16 for longer gage blocks



#### The same highly linear, stable electronics as the 130B-24

Designed for gage blocks of up to 600 mm (24 in) but can also measure shorter blocks.

Approx. size (without computer)  
385 mm x 385 mm x 1,016 mm  
(15 in x 15 in x 40 in)

Approx. weight (without CPU)  
140 kg (309 lbs)

Measuring length  
2.5 mm to 600 mm (0.10 in to 24 in)

Measuring force  
(upper probe) 1.1 N  
(lower probe) 0.6 N

All other data as for the **130B-24**.



Request a brochure or see  
WebCode 10259.



## Precimar 826 PC Gage Block Measuring Unit

### Description

The **826 PC** gage block measuring unit is fast, reliable and extremely precise. In comparative measurement, it achieves a reproducibility of  $\pm 0.01 \mu\text{m}$  ( $\pm 1 \mu\text{in}$ ).

An open and extremely rigid L-shaped stand forms the basis for the two opposing high-precision probes, and the perfectly level measuring table.

Work is made easy thanks to straightforward one-handed operation for manipulating reference and test gage blocks on the measuring table.

The open design provides visual contact during testing. The user is able to view the measuring process at all times which helps to ensure a unique level of process reliability.

Two professional measuring and evaluation programs (software) meet all the needs of internal gage block tests, calibration laboratories and gage block manufacturers.

### Features

- Rigid cast-iron stand ensures a stable temperature
- Vertical slide with upper probe easily adjustable
- Very ergonomic and convenient one-handed operation for positioning the gage blocks under the probe
- Fine adjustment via rigidly connected parallelogram springs
- Electropneumatic lifting of the probes
- Extremely smooth manipulator operation thanks to high-precision ball bushings
- Measurement not influenced by manual force applied
- Gage blocks easy to move on the measuring table thanks to round, hardened high-precision support pins
- No zero point setting required because the set value is offset by the stored actual allowance of the respective reference gage block
- Very effective protection from heat due to an acrylic glass screen along the front and sides of the unit (available as an option)
- Flattening correction
- Correction of differing coefficients of thermal expansion
- Calculation of mean values
- Two measuring and evaluation programs:  
Calibration and data management or additionally with customer management, gage block storage management and multi-test-unit management

### Accessories

- **QM-Block** calibration software for calibration and data management of gage blocks and sets of gage blocks
- The evaluation software runs under Windows® NT/2000/XP

The **826** enables quick and straightforward high-precision testing of rectangular and square gage blocks in both inch and metric up to 170 mm (6.69 in) long in accordance with ISO 3650.



### Technical Data

#### 826 gage block measuring unit Order No. 4448003

Application range	0.5 mm to 170 mm (0.02 in to 6.69 in)
Usable table surface	60 mm x 55 mm (2.36 in x 2.17 in)
Reproducibility	$\pm 0.01 \mu\text{m}$ (1 $\mu\text{in}$ )
Stylus ball radius, upper probe	1.5 mm (0.06 in)
Stylus radius, lower probe	1.5 mm (0.06 in)
Direct measuring range	0.2 mm (0.008 in)
Weight	37 kg (81.6 lbs)

For testing gage blocks over 170 mm long (central length 1m) we recommend the **ULM**, **828 CiM** or **PLM** universal measuring machines.





Request a brochure or see WebCode 2335.



## Precimar. Length Metrology for Any Application

► | Nowadays, length metrology is used in many very different areas. LINEAR length measuring instruments are used as setting and measuring instruments for general shop floor applications. The well-established ULM universal length measuring instruments are the standard quality assurance instruments for calibration metrology. They are used for high-precision length measurements on precision parts. The motorized PLM and CiM instruments enable user-friendly, fast and reliable measurement with minimum uncertainty. Typical applications include precision products and test equipment. With an extensive selection of products – ranging from the straightforward LINEAR length measuring instrument and the ULM instruments to the high-precision, semi-automated CiM universal measuring machine – Mahr offers practical solutions for production environments, inspection rooms and calibration laboratories. In other words, it provides high-precision metrology with extremely efficient measurement processes. | ◀



## Precimar. LINEAR 100

### Description

**LINEAR 100** is a universal, user-friendly length measuring instrument for rapid, precise internal and external measurements up to 100 mm (3.94 in), directly in the production environment. The unit's simple design makes it possible to carry out measurements in no time at all and adapt quickly to new measurement tasks.

### Features

- Damped measuring spindle with selectable measuring forces
- Measuring force remains virtually constant over the entire measuring range
- Direct measuring range of 50 mm (1.97 in)
- Integrated measuring system based on the Abbe principle
- Adjustable measuring table for precise measuring position adjustment
- Combined internal/external measurement possible without resetting
- Easily exchangeable anvils which can be tailored to suit the specific measurement task
- Solid cast body to avoid stresses and twisting errors
- UNITRON 2CHA 2-channel display (with optional stand)
- The UNITRON display has an RS 232 interface, making it easy to transfer measured values to PCs

Universal single-axis length measuring instrument with two-channel display



Request a brochure or see WebCode 12282-8090.

## Precimar LINEAR 400 / 800 / 1200 / 1600 / 2000

### Description

**LINEAR** length measuring instruments from **Mahr** are ideal for use as setting and adjusting instruments in the manufacturing environment. They allow precise setting of internal and external comparators, internal precision measuring instruments, snap gages with displays and many other measuring instruments.

### Features

#### Applications

- Setting measuring instruments with displays such as the Multimar 844T
- Setting two-point internal measuring instruments such as the 844 N
- Checking setting standards
- Checking calipers
- Checking dial bore gages
- Measuring cylindrical parts
- Measuring internal dimensions and bores, etc.

### Versions

**LINEAR 400**  
**LINEAR 800**  
**LINEAR 1200**  
**LINEAR 1600** (on request)  
**LINEAR 2000** (on request)

Universal single-axis length measuring and setting instruments








Request a brochure or see WebCode 12283.



## Precimar ULM 300 / 600 / 1000 / 1500 for Calibration Metrology

Universal length measuring instruments

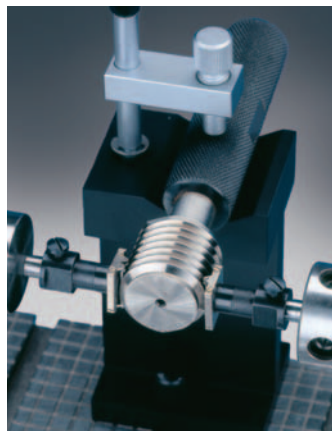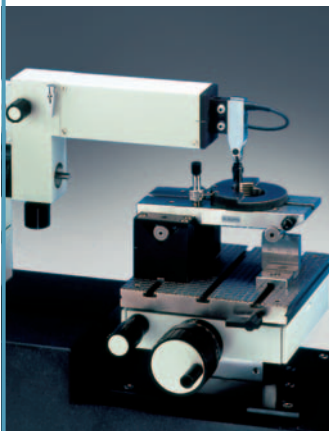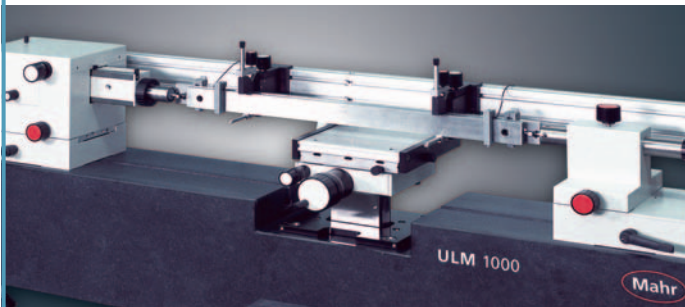

### Description

#### Model

Comparator with horizontal base (highly homogeneous and rigid granite)

#### Measuring system

X-axis: Incremental, high-precision Heidenhain length measuring system, 100 mm (3.94 in) long  
Z-axis: Incremental Heidenhain reflected light measuring system, 80 mm (3.15 in) long

#### Drives

X-axis: Manual movement and fine motion control  
Y-axis: Micrometer, 25 mm (0.98 in) (analog or digital)  
Z-axis: Permanent field motor for motorized adjustment of object table height with 3 speeds

#### Measuring force generation

Mechanical using weights

#### Operation

- Measuring spindle, manual
- Air bearings make it very easy to position the measuring element and counter-element manually (not with ULM 300)
- Height of object table can be adjusted using keypad

### Features

- Excellent measuring accuracy
- 100% compliance with Abbe comparator principle
- Online temperature measurement with 2 to 4 sensors
- Computer-aided correction of systematic machine errors (CAA)
- Computer-aided stabilization of instrument zero point
- Computer-aided correction of temperature and measuring force influences
- Measuring force remains constant over the entire measuring spindle adjustment range
- Large object table (load capacity 25 kg / 55.12 lbs) guided with high precision in the Z-direction
- Automatic reversal point recognition for static and dynamic measured value acquisition
- Great flexibility in the application range
- Large number of modular accessory sets and components to solve the most diverse measurement tasks, including threads, tapers, tapered threads and gears
- Measuring and evaluation software runs under MS Windows

Details on metrological accessories are available on request.

### Versions

ULM 300  
ULM 600  
ULM 1000  
ULM 1500



Request a brochure or see WebCode 10454.

## Precimar ULM 520 S / 1000 S / 1400 S / 1700 S

### Description

#### Model

Comparator with horizontal base (highly homogeneous and rigid granite)

#### Measuring system

**X-axis:** In the measuring element, incremental high-precision Heidenhain length measuring system, 100 mm (3.94 in) long; in the base, incremental Heidenhain reflected light measuring systems over entire length of base to left and right of object table

**Z-axis:** Incremental Heidenhain reflected light measuring system, 80 mm (3.15 in) long

#### Drives

**X-axis:** Manual movement and fine motion control

**Y-axis:** Micrometer, 25 mm (0.98 in) (analog or digital)

**Z-axis:** Permanent field motor for motorized adjustment of object table height with 3 speeds

#### Measuring force generation

Mechanical using weights


#### Operation

- Measuring spindle, manual
- Air bearings make it very easy to position the measuring element and counter-element manually
- Height of object table can be adjusted using keypad

### Features

- Combined measuring instrument for very high-precision measurements in the range up to 100 mm (3.94 in) and standard-precision measurements over the entire range of movement of the measuring element and counter-element. X measured value formed from the measuring systems of the measuring element and the base
- Particularly recommended for measurements on large testpieces, but also suitable for measurements on smaller testpieces
- Online temperature measurement with 3 sensors
- Computer-aided stabilization of instrument zero point and correction of systematic machine errors (CAA)
- Measuring force remains constant over the entire measuring spindle adjustment range
- Computer-aided correction of temperature and measuring force influences
- Large object table (load capacity 25 kg / 55.12 lbs) guided with high precision in the Z-direction
- Large number of modular accessory sets and components to solve the most diverse measurement tasks, including threads, tapers, tapered threads, gears and balls

Large universal length measuring instruments with large direct measuring range

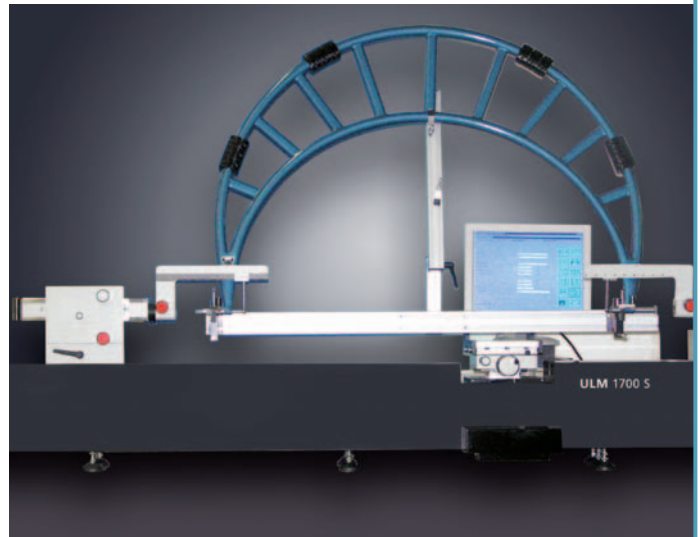

### Versions


**ULM 520 S**  
**ULM 1000 S**  
**ULM 1400 S** (on request)  
**ULM 1700 S** (on request)



Request a brochure or see WebCode 10455.

## Precimar ULM 800 L / 1500 L

Universal length measuring instruments with laser measuring system

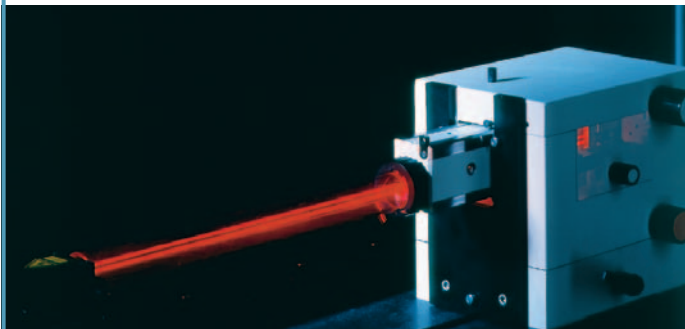

### Description

#### Model

Comparator with horizontal base (highly homogeneous and rigid granite)

#### Measuring system

X-axis: Interferential laser measuring system, 525 or 1,115 mm (20.67 or 43.90 in) long  
Z-axis: Incremental Heidenhain reflected light measuring system, 80 mm (3.15 in) long

#### Drives

X-axis: Manual movement and fine motion control  
Y-axis: Micrometer, 25 mm (0.98 in) (analog or digital)  
Z-axis: Permanent field motor for motorized adjustment of object table height with 3 speeds

#### Measuring force generation

Mechanical using weights

#### Operation

- Measuring spindle, manual
- Air bearings make it very easy to position the measuring element (with laser reflector) and counter-element manually
- Height of object table can be adjusted using keypad

### Features

- A high-end length measuring instrument with a large direct measuring range
- 100% compliance with Abbe comparator principle
- Correction of laser in terms of environmental influences such as temperature and air pressure (humidity optional)
- Separate laser generating unit outside the measuring instrument and supply by means of light-conducting cable plus laser unit cover
- Computer-aided stabilization of instrument zero point and correction of systematic machine errors (CAA)
- Online temperature measurement and computer-aided correction of temperature and measuring force influences
- Measuring force remains constant over the entire measuring spindle adjustment range
- Large object table (load capacity 25 kg / 55.12 lbs) guided with high precision in the Z-direction
- Automatic reversal point recognition for static and dynamic measured value acquisition
- Very flexible application range (both the very smallest and large testpieces can be measured)
- Large number of modular accessory sets and components to solve the most diverse measurement tasks, including threads, tapers, tapered threads and gears
- Evaluation software 828 WIN

### Main Applications

Calibration of

- Plain plug and ring gages
- Setting rings
- Snap gages
- Spherical gages, gages for deep bores
- Gage blocks
- Thread gages
- Taper and tapered thread gages
- Spline gages
- Dial indicators
- Dial comparators
- 2-point dial bore gages
- Micrometers

### Versions

ULM 800 L  
ULM 1500 L



Request a brochure or see WebCode 10456.



## Precimar PLM 600-2 for Precision Length Metrology

### Description

The motorized **Precimar PLM 600-2** enables user-friendly, fast and reliable measurement with minimum uncertainty. Typical applications include precision products and test equipment.

Maximum measuring accuracy is achieved thanks to single-step measured-value generation, exact compliance with the Abbe comparator principle, the high-quality incremental length measuring system and the CNC-controlled measuring carriage.

Other key features are the low-friction measuring force generation and the CNC-controlled measuring height adjustment. The machine bed is made of granite and uses an air-bearing measuring slide with a 200 mm (7.87 in) active travel range.

**828 WIN** from **Mahr** or external evaluation software.

Universal length measuring machine



### Features

- The Precimar **PLM 600-2** features a universal measuring table with 5 finely adjustable axes and 20 kg (44 lbs) load capacity, a state-of-the-art PC-based multiple-axis machine control system with PC workstation, the **828 WIN** "Free Measurement" basic software and a calibration certificate
- Straightforward operation using a measuring force-controlled, joystick-operated measuring slide, with progressive deflection characteristic and automatic contact detection
- Automatic detection of internal and external measurements and computer-aided reversal point detection
- A motorized measuring slide allows high travel speeds
- The CNC-controlled motorized vertical movement of the support table results in excellent measuring efficiency
- State-of-the-art machine control, data recording, processing, logging and transfer with powerful software and menu-driven operation
- Software compensates for thermal dimensional deviations
- Software enables very straightforward setting and changing of measuring force
- Low measuring uncertainty due to the use of aerostatic guides for all slides supported by the machine bed
- Electronic measuring force control and automatic contacting minimize subjective influences and prevent unintentional collisions with the testpiece

### Versions

- **PLM 600-2** with **CNC**-controlled object table (Z-axis)

Machine for absolute and relative measurement.

Typical applications include products and test equipment for the aerospace and automotive industries and series testing of test equipment in calibration laboratories.

The machine is designed for measuring lengths, inside and outside diameters, cylindrical and tapered threads, dial indicators, dial comparators, probes, long gage blocks, etc.

### Accessories

- Wide range of accessories for measuring
  - inside diameters (bores and rings, including large rings)
  - outside diameters (longitudinal, transverse and vertical mounting devices for use between centers or V-blocks)
- Huge variety of internal and external measurements thanks to numerous easily exchangeable styluses
- Fast, straightforward thread measurements on rings and mandrels thanks to semi-automated processes and a wide range of stylus balls / wires

**Details on metrological accessories are available on request.**



Request a brochure or see WebCode 2380.

## Precimar 828 CiM 1000

Precision length measuring machine



- Operation is simplified by a measuring force-controlled, joystick-operated measuring slide with progressive deflection characteristic, automatic contact detection, automatic detection of internal and external measurements and computer-aided reversal point detection
- High measuring slide travel speeds and motorized vertical movement of the support table
- Machine control, data recording, processing, logging and transfer using powerful, menu-driven software
- Minimum measuring uncertainty due to the use of aerostatic guides for all slides supported by the machine bed, the mobile bearing of the measuring spindle over a spring parallelogram which is free of both play and friction, electronic regulation of measuring forces and automatic contacting. This minimizes subjective influences and prevents unintentional collisions with the testpiece
- Correction of systematic deviations and reduction of random deviations result in a standard  $MPE_{E1}$  measuring uncertainty of  $(0.075 + L/1,000) \mu\text{m}$  (L in mm) (at 20.0 °C in inspection room, class 1 VDI/VDE 2627)
- Measuring force is easy to set with a software click and compensation of thermally induced dimensional deviations can be switched on and off

### Description

Superb performance, measuring runs of unique perfection and high-quality computer technology allow quality management that far exceeds the EN 29 000... / ISO 9000 guidelines.

The motorized **CiM 1000** allows user-friendly, fast, reliable measurement with uniquely low measuring uncertainty. Typical applications include precision products and test equipment.

The extremely high measuring precision is achieved using air-bearing components, practically friction-free measuring force generation, exact adherence to the Abbe comparator principle, a high-quality incremental length-measuring system and a CNC-controlled measuring slide. The machine bed is made of granite and uses an air-bearing measuring slide with a 300 mm (11.81 in) active travel range. The object table and left-hand measuring support can be moved to vary the application range from 0 to 1,000 mm (0 to 39.37 in) (external measurements). The 5-axis object table allows very efficient measurement with its CNC-controlled vertical movement.

**828 WIN measuring software** from Mahr or external software.

### Features

- The **Precimar 828 CiM 1000** features a universal measuring table with 5 finely adjustable axes and 20 kg (44 lbs) load capacity, a state-of-the-art Power PC-based multiple-axis machine control system with PC workstation, the 828 WIN "Free Measurement" basic software and a calibration certificate

### Versions

- **828 CiM 1000** with CNC-controlled object table (Z-axis)

Machine for absolute (up to 300 mm / 11.81 in) and relative measurement with maximum precision. Typical applications include products and test equipment for the aerospace and automotive industries and series testing of test equipment in calibration laboratories.

The 828 CiM 1000 is designed for measuring lengths, inside and outside diameters, cylindrical and tapered threads, dial indicators, dial comparators, probes, long gage blocks, snap gages, external micrometers, etc.

### Accessories

- Wide range of accessories for measuring
  - inside diameters (bores and rings, including large rings)
  - outside diameters (longitudinal, transverse and vertical mounting devices for use between centers or V-blocks)
- Huge variety of internal and external measurements thanks to numerous easily exchangeable styluses
- Fast, straightforward thread measurements on rings and mandrels thanks to semi-automated processes and a wide range of stylus balls / wires

**Details on metrological accessories are available on request.**



Request a brochure or see WebCode 2092.

## Precimar Dial Indicator Testing Instruments



**Optimar 100**

Measuring range (mm)	100
Length measuring deviation	
$MPE_{E1}$ (μm)	$0.2 + L/100$
Testing direction	Vertical and horizontal
Mode of operation	Semi-automated, fully automated

## Precimar Gage Block Measuring Units



**826 PC**



**130B-24**


**130B-16**

Testing range (mm)	0.5 to 170	0.25 to 100	2.5 to 600
Gage blocks (in)	European (rectangular) and U.S. (square)	0.010 to 4	0.10 to 24
Reproducibility (μm)	0.01	$6\sigma < 1\text{ μm}$ (25 nm)	


## Precimar Length Measuring Instruments for Production Environments



**LINEAR 100**



**LINEAR 400**



**LINEAR 800**



**LINEAR 1200**

Outside measuring range (mm)	0 to 100	9 to 420	0 to 820	0 to 1,120
Inside measuring range (mm)	15 to 100	2 to 250	2 to 650	2 to 1,050
Length measuring deviation				
$MPE_{E1}$ (μm)	$1 + L/100$	$0.7 + L/1,000$	$0.7 + L/1,000$	$0.7 + L/1,000$
Mode of operation	manual	manual	manual	manual

## Precimar Length Measuring Machines for Calibration and Precision Metrology



**ULM Series**



**PLM 600-2**



**CiM 1000**


Outside measuring ranges (mm)	0 to 1,740*	0 to 600	0 to 1,000
Inside measuring ranges (mm)	0.5 to 1,605*	0.5 to 445	0.5 to 845
Direct meas. range (mm)	100 to 1,740*	200	300
Length meas. deviation $MPE_{E1}$ (μm)	$0.1 + L/2,000 / 0.3 + L/1,500$	$0.15 + L/1,500$	$0.075 + L/1,000$
Reproducibility (μm)	0.05 / 0.1	0.05	0.03
Measuring force (N)	in steps from 1 to 11	0.1 to 13.9 infinitely adjustable	0.1 to 13.9 infinitely adjustable
Size of object table (mm)	160 x 160	350 x 150	350 x 150
Object table load capacity (N)	250	200	200
Mode of operation	manual	motorized - CNC	motorized - CNC

\* according to unit type

## FROM THE THUMBNAIL TEST... ... TO MARSURF.



The latest information on MARSURF products can be found on our website:  
**[www.mahr.com](http://www.mahr.com), WebCode 158**

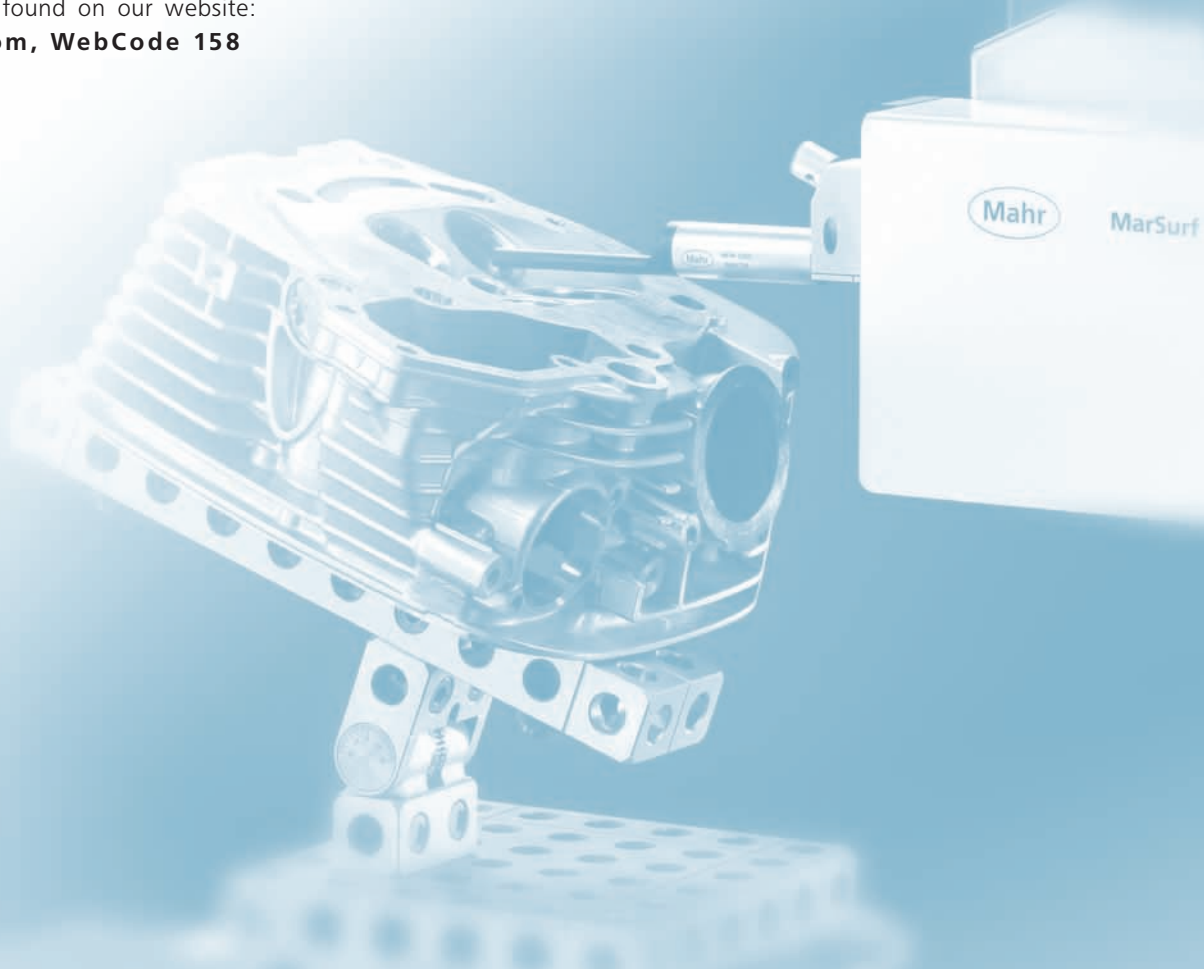

► | Wherever surface structures influence the function, processing or appearance of components or products, careful testing is essential. But how can surfaces be tested? At the beginning of the 20th Century, experts still had to test by eye and touch. A practiced eye can detect features in the  $\mu\text{m}$  range, and even the much maligned thumbnail test delivered perfectly acceptable results. Now however, we live in an age of interchangeable parts and globalization, where subjective tests like this are no longer adequate. Today, computer-aided measuring instruments provide objective data. Measurement and evaluation have become considerably easier. For decades, Mahr has been a worldwide pioneer in this area, as demonstrated by the company's numerous innovations and patented solutions in the field of surface roughness metrology. The interplay between the stylus, drive and measuring setup plays a key role in influencing the quality of surface measurement tasks. This is where Mahr's core expertise comes in, as demonstrated by the company's numerous innovations and patented solutions. Over this time, we have succeeded in perfecting the stylus method, which is now in widespread use throughout the world. We can meet even the most demanding requirements for non-contact measurement, e.g. where extremely soft materials or ultra-short measuring times are involved, thanks to the range of optical sensors offered in the MarSurf product family. Developed with Mahr quality, expertise and know-how, MarSurf is the solution for all your surface metrology needs.



## ► | MarSurf. Surface Metrology

### The Ideal Surface Measuring System for All Kinds of Industries

16- 2

### Mobile Roughness Measurement Devices

16- 4

#### MarSurf PS1

16- 5

#### Perthometer M1

16- 7

#### Perthometer M2

16- 7

### Stationary Surface Measuring Instruments for Manufacturing

16- 10

#### Perthometer S2

16- 11

#### Perthometer S2 for the Sheet Metal Industry

16- 11

### PC-based Stationary Surface Measuring Instruments

16-12

#### MarSurf XR 20

16-13

#### MarSurf XC 2

16-14

#### MarSurf XC 20

16-15

#### MarSurf XCR 20

16-16

#### MarSurf LD 120

16-17

#### MarSurf XP 20

16-18

#### MarSurf. Data Overview

16-19

#### MarSurf. Topography

16-21

#### MarSurf WS 1

16-22

### Drive Units

#### PCV 200

16-23

#### CD 120

16-23

#### PZK

16-24

#### GD 25

16-24

#### PGK 120

16-25

#### GD 120

16-25

### Accessories. Surface Probes, Standards





16-26

# MarSurf. The Surface Metrology System for all Your Industry's Needs

## THE RIGHT SOLUTION FOR EVERY TASK


► | MarSurf has a universal range of applications. Key industries include:

- Automotive industry
- Electronics industry
- Mechanical engineering industry
- Medical industry





## Automotive Industry

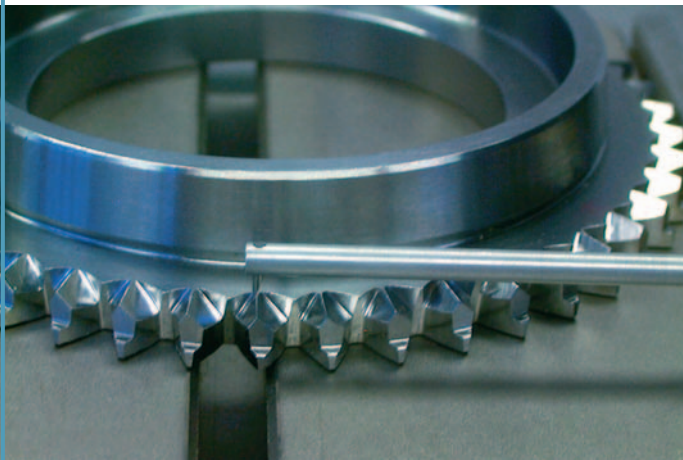

### Measurements on synchronous rings

The automotive industry is often at the forefront of surface and contour measurement. Typical applications include measurements on crankshafts, camshafts, transmission components and engine parts. The measurement of the root geometry including roughness measurement for synchronous rings ensures both easy and smooth gear changing and a long service life.


## Electronics Industry



### Measurements on wafer surfaces

Measurements can be performed in no time at all using optical sensors such as the **MarSurf WS1** system in this example, which uses the principle of white light interferometry. The vertical resolution of 0.1 nm (0.004  $\mu\text{in}$ ) ensures maximum precision. The powerful MarWin software platform with the **MarSurf XT 20** allows quick and easy topography evaluation.

## Mechanical Engineering Industry

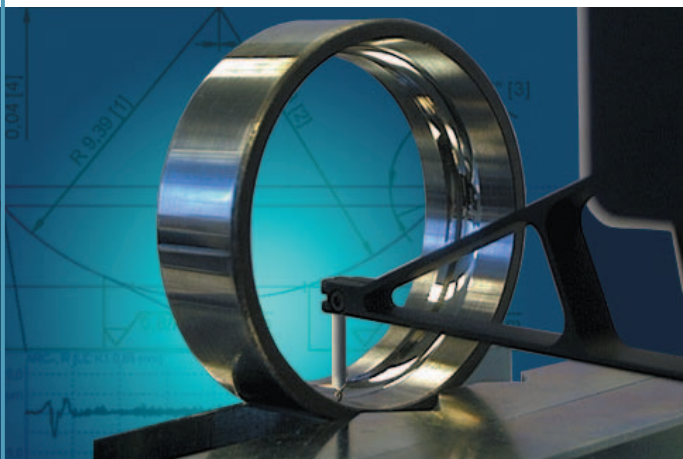

### Measurements on ball rings

Ball races today need high-precision radii and minimum form deviation. Roughness measurement ensures smooth running and long service life with as little running noise as possible. MarSurf meets these requirements through user-friendly evaluation software and extremely quiet drive units.

## Medical Technology



### Measurements on hip joints

Hip joint measurements need to be extremely accurate. Both the contour and roughness of the ball and/or socket affect the durability and performance of the joint.

## MarSurf. Handy and Precise for On-site Roughness Measurements

### MOBILE ROUGHNESS MEASUREMENT DEVICES

► | Mahr has played a key role in ensuring the success of mobile roughness measurement devices. As early as the 1980s, Mahr was setting new standards with the M4P. The products have developed in line with changing production monitoring requirements. Today's devices meet the highest international standards. Mobile roughness measurement devices from Mahr are lightweight with a convenient shape for flexible handling. They offer high-precision measurements in different positions and easy positioning using V-blocks.





## MarSurf PS1. Absolute Mobility in Surface Metrology

Entry-level roughness measurement

### Description

The **MarSurf PS1** lives up to its claim of "**Absolute mobility**" in all manner of ways, providing:

- **Battery operated**  
Over 500 measurements without having to recharge the instrument
- **An all-in-one solution** that is no larger than a digital camera. Small and lightweight (400 g / 0.88 lbs)
- **Instrument flexibility**  
The standard range of functions is sufficient for this all-purpose smart little instrument to perform your measuring tasks
- **All the measuring positions you need**  
Can be used horizontally, vertically, upside down or in any other position required by the component
- **24 parameters**  
Offer the same range of functions as a laboratory instrument
- **Error-free operation** thanks to an integrated roughness standard
- **Automatic cutoff selection** (patented) so that even non-specialists are ensured correct measuring results
- **Simple operation**  
The brief guide in pocket diary format reflects how simple the PS1 is to use. You quickly get to grips with the essential features, enabling you to complete your measuring tasks with excellent results



### MarSurf PS1. The Set

The **MarSurf PS1** comes in a complete set. Thanks to the carrying case, you always have your surface roughness measuring instrument with you as you pass through the production floor. Quick and reliable on-the-spot measurements ensure your quality requirements are met during the production process or incoming goods inspection.

The set contains:

- MarSurf PS1 base unit
- Drive unit
- 1 standard probe conforming to standards
- Built-in battery
- Roughness standard integrated into casing
- Height adjustment accessory
- Probe protection
- Charger / mains adapter
- Operating instructions
- Carrying case with shoulder strap and belt loop
- USB cable
- Mahr calibration certificate.

**Order No. 6910210**



## MarSurf PS1. Technical Data

Unit of measurement	Metric, inch
Measuring principle	Stylus method
Probe	Inductive skidded probe, 2 µm (80 µin) stylus tip, measuring force approx 0.7 mN
Parameters (24, with tolerance limits)	Ra, Rq, Rz (Ry (JIS) corr. to Rz), Rz (JIS), Rmax, Rp, Rp (ASME), Rpk, Rk, Rvk, Mr1, Mr2, A1, A2, Vo, Rt, R3z, R <sub>Pc</sub> , Rmr (tp (JIS, ASME) corr. to Rmr), RSm, R, Ar, Rx
Languages	14 including 3 Asian languages
Measuring range	350 µm, 180 µm, 90 µm (0.014 in, 0.007 in, 0.004 in)
Profile resolution	32 nm, 16 nm, 8 nm (1.3 µin, 0.6 µin, 0.3 µin)
Filter*	Phase-correct profile filter (Gaussian filter) as per DIN EN ISO 11562, special filter as per DIN EN ISO 13565-1, Is filter as per DIN EN ISO 3274 (can be disabled)
Cutoff lc*	0.25 mm, 0.8 mm, 2.5 mm; automatic (0.010 in, 0.030 in, 0.100 in)
Traversing length Lt*	1.75 mm, 5.6 mm, 17.5 mm; automatic (0.070 in, 0.22 in, 0.70 in)
Traversing length (MOTIF)	1 mm, 2 mm, 4 mm, 8 mm, 12 mm, 16 mm (0.04 in, 0.08 in, 0.16 in, 0.32 in, 0.48 in, 0.64 in)
Short cutoff*	Selectable
Evaluation length ln*	1.25 mm, 4.0 mm, 12.50 mm (0.050 in, 0.15 in, 0.50 in)
Sampling lengths*	Selectable: 1 to 5
Calibration function	Dynamic
Memory capacity	Max. 15 profiles, max. 20,000 results
Other functions	Blocking of settings (code-protected), date/time
Dimensions	140 mm × 50 mm × 70 mm (5.51 in × 1.97 in × 2.76 in)
Weight	400 g (0.88 lbs)
Battery	Li-ion battery
Interfaces	USB, MarConnect (RS232)
Long-range power supply	100 V to 264 V

\* in accordance with ISO/JIS

## MarSurf PS1. Accessories

<b>80 mm (3.15 in) probe extension</b> for example, for measuring points located deep within cylinders.	<b>Order No. 6850540</b>	<b>Accessory set</b> (not illustrated) consisting of	<b>Order No. 6910212</b>
<b>PHT 3-350 probe</b> for measurements in bores from dia. 3 mm (0.12 in).	<b>Order No. 6111521</b>	<ul style="list-style-type: none"> <li>Probe extension (6850540), length 80 mm (3.15 in)</li> <li>Adapter for transverse tracing (6850541)</li> <li>Measuring stand mount (6910201)</li> </ul>	
<b>PHT 11-100 probe</b> for measurements at recessed measuring points, e.g. in grooves from 2.5 mm (0.10 in) wide and up to 7.5 mm (0.30 in) deep.	<b>Order No. 6111524</b>	Allows the MarSurf PS1 to be mounted on the Mahr ST-D / ST-F / ST-G family of measuring stands	
<b>PHTR 100 probe</b> for measurements on concave and convex surfaces.	<b>Order No. 6111525</b>	<ul style="list-style-type: none"> <li>End face V-block (6910203)</li> </ul>	
<b>PHTF 0.5-100 probe</b> for measurements on tooth flanks.	<b>Order No. 6111522</b>	Suitable for measurements on flat faces of cylindrical and planar components	
<b>PT 150 probe</b> Dual-skid probe for measurements on metal sheets and roller surfaces according to DIN EN 10049 (SEP).	<b>Order No. 6111523</b>	<b>Printer set</b> consisting of <b>MSP2</b> printer with connection cable ( <b>MarConnect</b> )	<b>Order No. 6910211</b>
<b>Probe set</b> (not illustrated) consisting of	<b>Order No. 6910213</b>	<b>Multilingual PS1 Explorer PC Software</b> for documenting results and saving profiles on a PC. 14 languages.	<b>Order No. 6910205</b>
<ul style="list-style-type: none"> <li>PHT 3-350 probe (6111521)</li> <li>PHT 11-100 probe (6111524)</li> </ul>		<b>MarSurf XR 20 evaluation software</b> for easy <b>MarWin</b> -based evaluation and documentation.	<b>Order No. 6299009</b>

## Perthometer M1

Entry-level roughness measurement



### Description

The **Perthometer M1** is an investment that soon pays for itself, offering outstanding performance, straightforward operation, a minimum number of keys, convenience and value for money.

### Features


- Patented automatic function for profile detection and standardized setting of filters and associated traversing lengths
- Parameters as per DIN / ISO / ASME/ SEP: Ra, Rz, Rmax, RPC, JIS: Ra, Rz
- Handy shape and lightweight design of evaluation and drive unit ensure maximum flexibility

### Accessories

- The scope of delivery includes a handy carrying case with probe, drive unit and other accessories
- Other application aids are available as optional extras to ensure easy handling in line with manufacturing requirements

## Perthometer M2

Highly mobile, high-performance unit

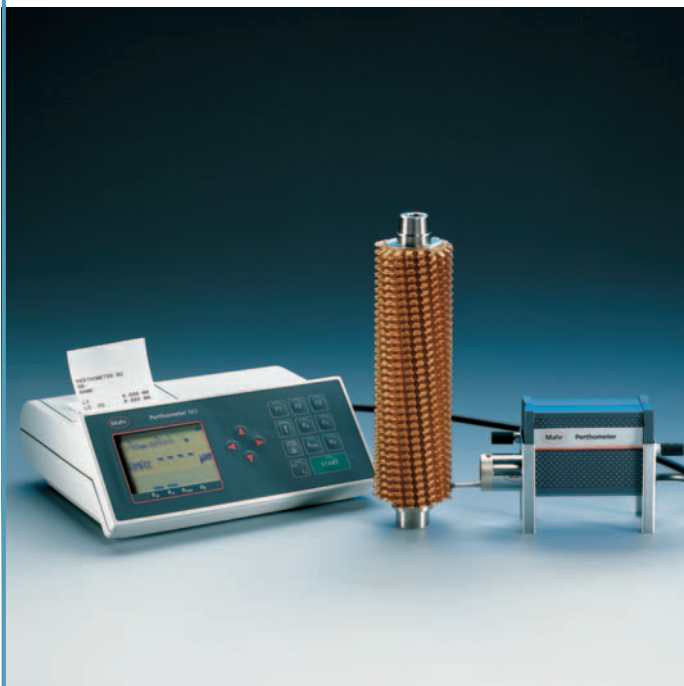

### Description

In addition to all the features of the M1, the **Perthometer M2** also supports the most common parameters, characteristic curves and parameter lists (e.g. material ratio) and evaluation in accordance with JIS or ISO (including CNOMO).

### Features

- The **Perthometer M2** features integrated storage for approx. 200 measurements
- Further functions include tolerance monitoring, vertical scale selection and setting of asymmetric intersection lines for peak count calculations
- Support as per DIN EN ISO 12085 (Motif)
- Date and time of measurement specified

### Accessories

- The scope of delivery includes a serial cable and an M-trans software that converts the data in the internal memory into a txt file



## Mobile Roughness Measurement

Efficient application aids for manufacturing

### Description

Surface measurements on workpieces in the manufacturing environment require special tools.

In addition to the standard axial measurement direction with the **PFM** drive unit, a transverse measurement is also required in some cases. The **PFM 2** drive unit of the M series is ideal for this task.

Typical applications for transverse tracing include:

- Measurements on bearings
- Measurements on crankshafts and camshafts
- Measurements in confined spaces

### Perthometer M Equipment Sets

Supplied complete in a carrying case

Perthometer M1 set  
Traceable calibration

**Order No. 6910134**  
**Order No. 9963102**


Perthometer M2 set  
Traceable calibration

**Order No. 6910135**  
**Order No. 9963102**

### For PC Evaluation

- Current MarSurf XR 20 software
- USB dongle
- License file on 3.5" diskette
- Serial data cable – 9s/9s

**Order No. 6299009**

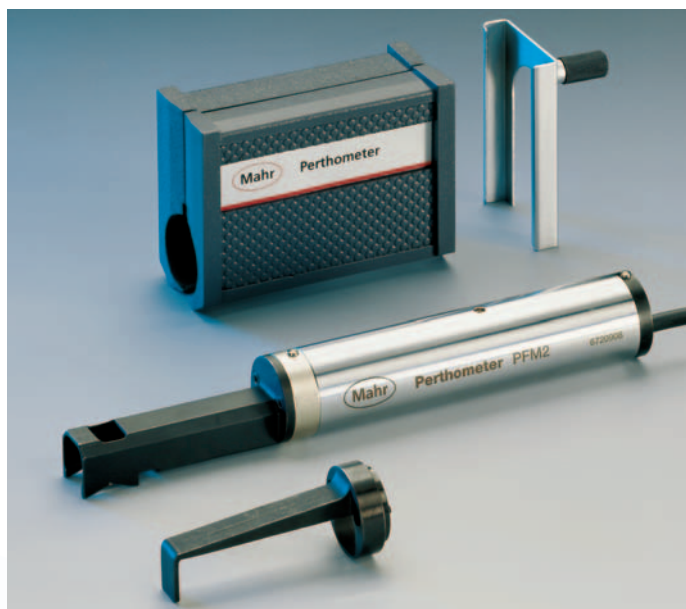

Request a brochure or  
see WebCode 2451.





## Mobile Roughness Measurement

Efficient application aids for manufacturing


### MarSurf BF-1



### MarSurf CS-1



### MarSurf DR-1

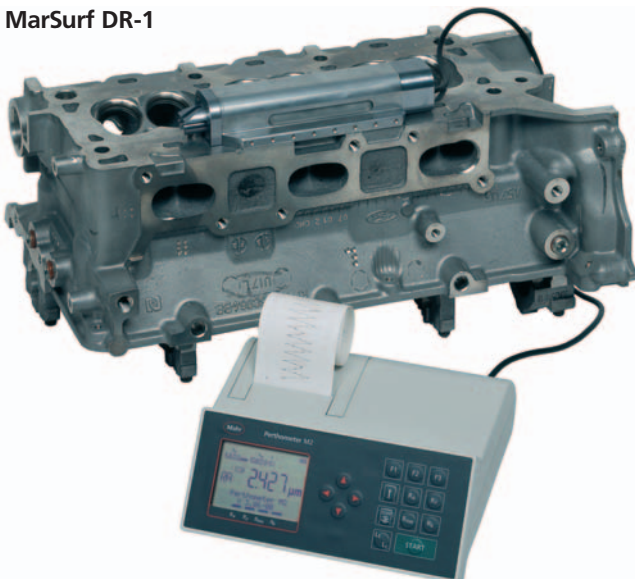

### Description


Tough manufacturing environments require quick and easy roughness measurement. The shop floor is particularly demanding on measuring instruments. **Application aids** from **Mahr** are the perfect solution.

### Features

Our application aids work with evaluation instruments in the **M1** or **M2** series. A calibration and storage station is included in the scope of delivery. Calibration standards are available, with a calibration certificate if required.

- Special design allows precise, easy positioning of measuring instrument
- Easy to use even without specialist metrological knowledge
- Drive unit protected from environmental influences that might disrupt the measurement
- Probe protection, i.e. probe is only extended during measurement
- Surface protection material ensures measurement leaves no marks on the workpiece


### MarSurf CB-2

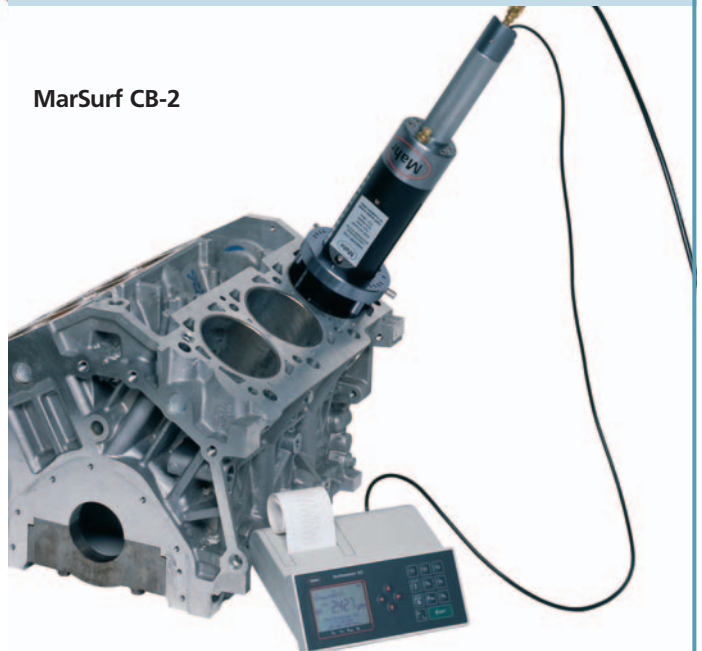

## MarSurf. Surface Measuring Instruments for Manufacturing Environments

### SURFACE MEASURING STATION FOR MANUFACTURING ENVIRONMENTS AND INSPECTION ROOMS

► I Mahr stationary surface measuring instruments for manufacturing environments are high-performance and user-friendly devices. Their flexibility they offer for evaluation and documentation makes them ideal for the increasingly demanding tasks on the shop floor. Standardized roughness, waviness and profile parameters are evaluated in accordance with international standards like ISO, JIS and ASME. Skidless probes with easily exchangeable stylus tips support rapid adaptation to frequently changing measurement tasks.



Request a brochure or see  
WebCode 2413.

## Perthometer S2

Stationary and mobile surface measuring instrument



### Description

The **Perthometer S2** meets all the surface evaluation requirements of today's manufacturing environments. It is easy to use and offers an excellent price-performance ratio.

### Features

- More than 40 parameters can be selected
- Simple operation and extensive documentation options
- Easy creation of measuring programs
- Automatic or variable selection of filters and traversing lengths
- Various calibration functions
- Integrated statistical functions
- SPC and RS 232 interface
- Mobile measurements with non-skidded probes

### Accessories

- Connection and evaluation options for **Mahr** roughness drive units with datum plane **PZK, GD 25, PGK 120**
- Carrying and storage case
- Extensive range of accessories including measuring stands, V-blocks, X/Y tables, etc.

## Perthometer S2 for the Sheet Metal Industry

Roughness measurement on metal sheets and rollers



### Description

The roughness depth structure on sheet metal surfaces significantly affects ductility and the coating process. The **Perthometer S2** with special accessories is ideally suited to the needs of the sheet metal industry.

### Features

- Standard-compliant measurement as per SEP 1940 V3 (EN 10049:2004)
- Battery-operated mobile measurement on coil / roller with high battery capacity
- Simple operation and extensive documentation options
- Automatic calibration function
- SPC and RS 232 interface
- Unit configuration allows immediate measurement without prior alignment

### Accessories

- **PZK** drive unit with adapter and hand-held V-block
- **RT 250** probe as per SEP
- Carrying case



## MarSurf. PC-based Stationary Surface Measuring Stations VERSATILE, HIGH-PERFORMANCE UNITS FOR INSPECTION ROOM AND LABORATORY

► I In surface metrology, a distinction is made between mobile units, stationary shop-floor units and PC-based surface measuring instruments. The latter provide the very best measurement and evaluation performance for surface measurement tasks. They fulfill all the key requirements of a state-of-the-art PC-based measuring and evaluation system, including compliance with international standards, versatile evaluation methods, comprehensive documentation, large storage capacity, data export and import and networking with other systems. Comprehensive QA procedures ensure the highest quality and stability of software and hardware.




Request a brochure or see WebCode 2564.



## MarSurf XR 20

Roughness and waviness measurement made easy

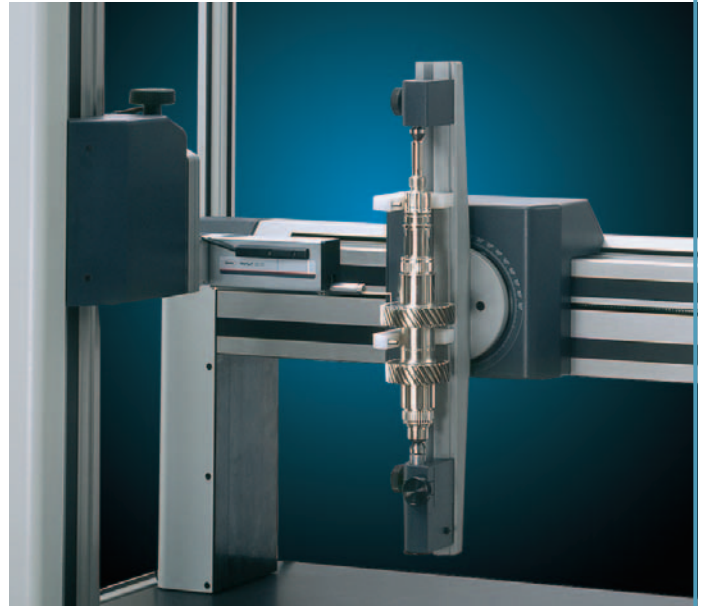

### Description

**MarSurf XR 20** is the perfect unit for moving into top-flight surface metrology. This PC-based unit supplies all the common parameters and profiles in accordance with international standards, both in the inspection room and on the shop floor. The high-performance **MarSurf XR 20** is the fruit of decades of surface metrology experience combined with forward-looking technology, clear symbols and straightforward operating aids.

### Features

- Over 65 parameters may be selected for R, P and W profiles as per ASME / ISO / JIS or MOTIF (ISO 12085)
- Tolerance monitoring and statistics for all parameters
- Fast creation of Quick & Easy measuring programs using Teach-in mode
- Comprehensive logging
- Automatic function for selecting standard-compliant selection of filters and traversing lengths (patented)
- Support for different calibration methods (static / dynamic) with specification of Ra or Rz parameter
- Adjustable servicing and calibration intervals
- Simulation mode to help users familiarize themselves with the system quickly
- Numerous measuring station configurations for customized applications

- Different user levels can be set up
- Flexible system thanks to various options and creation of customer-specific parameters
- Different user levels protect unit from operator error and ensure that no unauthorized users are able to operate the device

### Accessories

- Connection options for Mahr **PZK**, **GD 25**, **PGK 20**, **PGK 120** and **PRK** drive units
- Dominant Waviness option available
- Software can also be used as evaluation software for **M** and **S** units
- Optional **qs-STAT**-based data transfer

## MarSurf XC 2

For entry-level, high-precision contour measurement



### Features

- Creates regression straight lines and circles
- Creates points, intersection points, free points, center points, maximum and minimum points
- Determines radii, distances, angles, coordinates and line form deviations
- Performs nominal/actual comparisons
- Tolerance monitoring
- Associative elements, i.e. immediate change of variables dependent on reference elements when changes occur
- User access rights using password protection prevents incorrect operation
- Excellent calibration procedure thanks to many years' experience, i.e. including geometry calibration, measuring force calibration, bend compensation, etc.
- Stability and rigidity of the probes
- The drive unit is very smooth-running, highly stable and extremely accurate

### Description


Measuring and evaluating geometries of workpieces and tools that are relevant for correct functioning is one of the primary requirements of research, technology and industry. The fast, straightforward and cost-effective 2D contour measuring system is increasingly winning out over other systems. The tried-and-tested, user-friendly **MarSurf XC 2** is the best example of this. Not only does it meet all requirements in terms of accuracy and different evaluation criteria, it also delivers reliable results time after time.

### CD 120 Drive Unit

The **CD 120** drive unit has a patented probe arm mount for fast and flexible changing of probe arms without the need for tools. The calibration data for each probe arm is stored separately. It is also easy to calibrate several identical probe arms.

### Features

- Max. measuring range of 120 mm (4.72 in) measuring length and 50 mm (1.97 in) measuring stroke
- Automatic lifting and lowering of the probe arm with adjustable speed
- Variable setting of measuring force from 1 mN to 120 mN
- High positioning speed
- Collision protection thanks to patented probe arm mount

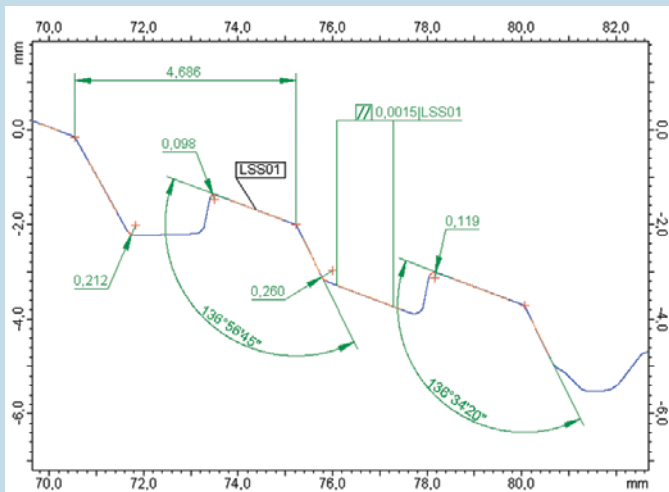



## MarSurf XC 20

The new generation of contour measurement systems


### Description

When it comes to contour evaluation, **MarSurf XC 20** is simply the best. What started over 30 years ago with the Conturograph – consisting of a drive unit and x-y plotter – has today developed into a state-of-the-art contour measurement system with the very latest technology. This perfectly coordinated configuration of instruments meets the highest performance standards. Both the drive unit and the measuring stand are controlled and positioned using the reliable measurement and evaluation software.

### Features

In addition to the functions of the **MarSurf XC 2** entry-level unit, **MarSurf XC 20** also provides additional features:


- Notes on the operating sequence can be displayed
- Interactive control elements support evaluations and automatic operating sequences
- Measurement of upper and lower contours with "twin stylus probe"; these contours can also be evaluated in relation to each other
- Creation of profile sections with evaluations of different parameters for each section
- Segmented measurement across obstacles such as bores or steep sides is possible
- Import and export of DXF files for nominal/actual comparison
- **PCV 200** drive unit with patented probe arm mount allows tool-free, reproducible changeover of probe arms
- Flexibility measuring station thanks to patented probe system
- Manual, freely variable tracing forces also support flexibility
- Synthetic creation of nominal profiles from straight lines and arcs
- Straightforward comparison of nominal and actual profiles. Several ranges can be defined within a measured profile and each of these ranges can be assigned a different tolerance and different evaluations

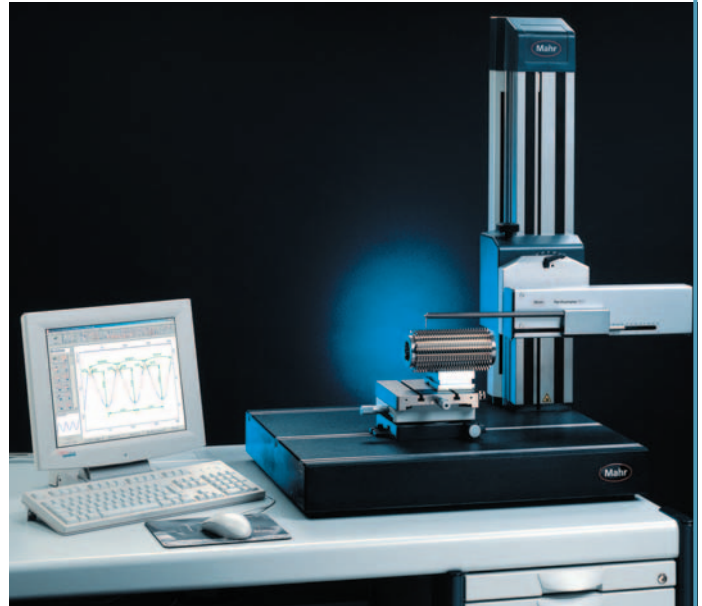

### Versions



By combining the **MarSurf XC 20** software with the high-precision **LD 120** drive and probe system and the **ST 500** or **ST 750** measuring stand, resolutions in the nm range can be achieved, thereby allowing contour and roughness depth to be determined in a single measuring run.

Additional functions such as **qs-STAT**-based data export or evaluation of dominant waviness are further optional extras.

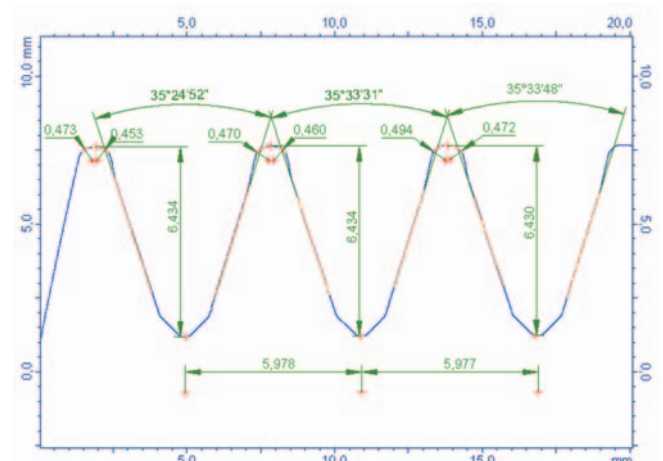

## MarSurf XCR 20

The new generation of combined roughness and contour measurement systems

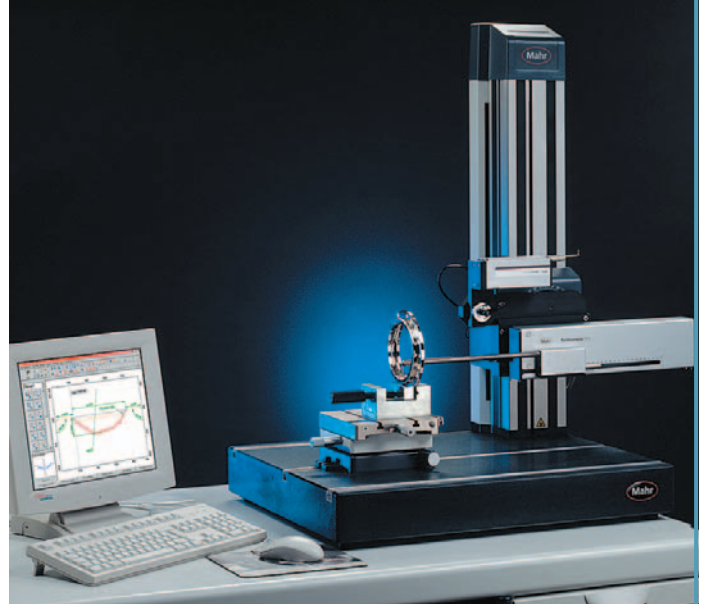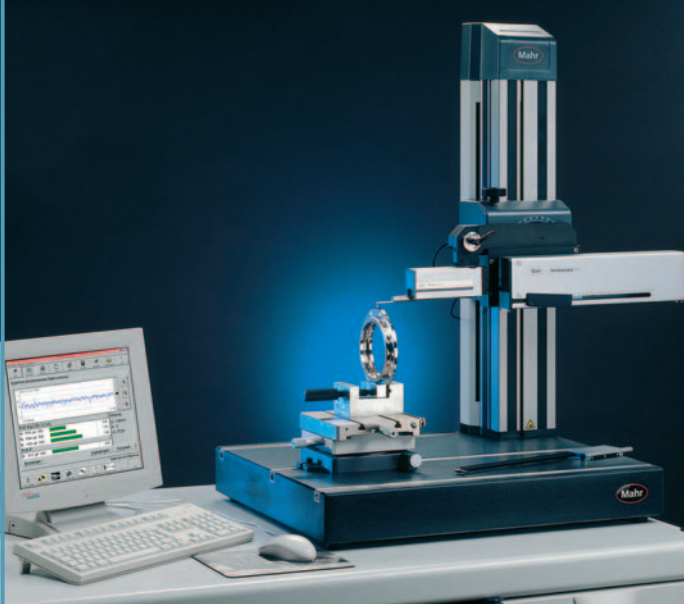

### Description

**MarSurf XCR 20** is ideal for combining contour and roughness depth evaluation.

**MarSurf XC 20 + MarSurf XR 20 = MarSurf XCR 20**

This system includes absolutely everything you need, saving both time and space. There are separate user interfaces for the roughness and contour software. **MarSurf XCR 20** is Mahr's top surface measurement system and enables even semi-automated operating sequences such as measuring stand positioning (**ST 750 CNC**) to be performed with ease.

### Features

- Saves space because both drive units (**MarSurf PCV 200** contour drive unit and **GD 25** roughness drive unit) can be adapted using the corresponding combi-mount on the **ST 500** or **ST 750** measuring stand
- Roughness and contour evaluations possible from a single measurement
- High-precision contour and roughness evaluation with the **MarSurf LD 120** measuring system on components requiring a large stroke and very high resolution
- Option of rapidly switching between roughness and contour measurements thanks to straightforward changeover within the software platform and changing of mechanical components such as drive unit and probe


### Versions

- Combi-measuring station with one measuring stand and two drive units (**PCV 200** and **MarSurf GD 25**)
- Combi-measuring station with quick-change mounts (**PGK 120**, **PCV 200**)
- **MarSurf LD 120** enables high-precision contour and roughness evaluation on components



## MarSurf LD 120

Two in one. Contour and roughness depth measurement in a single stroke

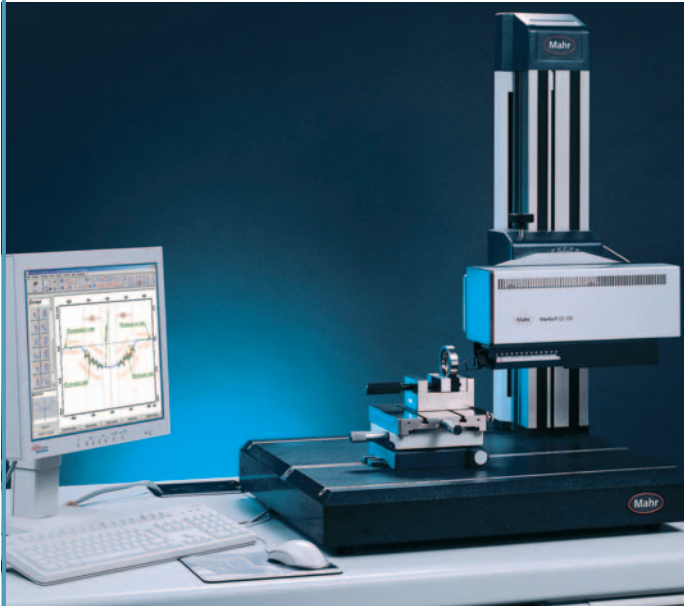

- Increased precision due to morphological filtering of the **MarSurf X series**
- Probe arms changed without re-calibration. Storage of calibration data for each probe arm and the magnetic probe mount ensure high reproducibility

### Versions

#### MarSurf LD 120 with measuring stand

This combination including measuring stand makes for a highly flexible measuring station.

#### MarSurf LD 120 compact measuring station



The **compact version** is designed for smaller workpieces and maximum accuracy. Vibration is minimized by the rigid compact stand with **small** measuring circle.

### Description

**MarSurf LD 120** is the new high-quality, high-precision **contour** and **roughness measuring station** with integrated laser measuring system. It performs roughness and contour evaluations in a single stroke. To complete both these measurement tasks with a single measurement, you need a high-precision measuring system that supports both the relatively large measuring stroke for the contour in radii, on slopes or in freeform areas and the resolution in the nm range for the roughness depth measurement.

### Features

- The magnetic probe mount ensures flexibility by supporting a wide range of probes that can be easily exchanged, while maintaining a high level of reliability
- Positioning accuracy in the  $\mu\text{m}$  range when exchanging probes, and collision protection, rigidity and stability with resolutions in the nm range
- Reliable results thanks to a calibration procedure specially geared to high accuracy
- Software can be used to set measuring forces from 0.5 to 30 mN which remain constant over the entire measuring stroke, ensuring flexibility and reliability. You can select the optimum measuring force to match the material characteristics of the workpiece and the probe of your choice

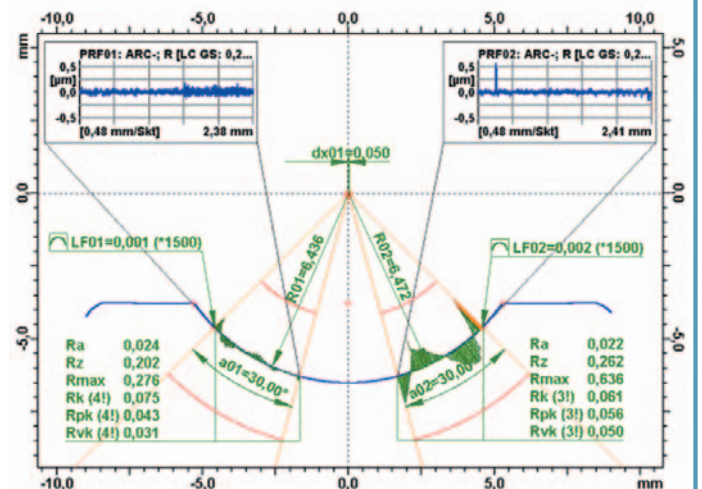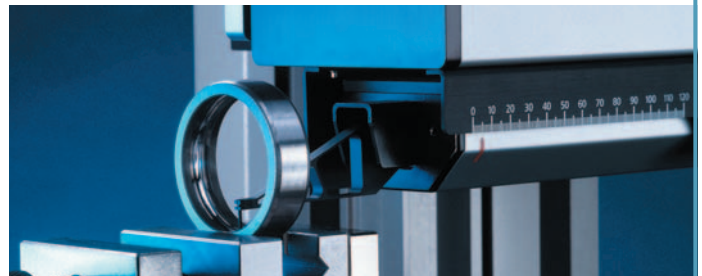



## MarSurf XP 20

A measuring station for all occasions



- Depending on the measurement task, the measuring station can be set up using modules with automatic linear/rotation axes
- Modular system affords flexibility
- One software language for all systems

### Versions

#### Manual measuring stations:

- Roughness measuring station
- Contour measuring station
- Combined roughness and contour measuring station

#### Automatic measuring stations:

- Roughness measuring station
- Contour measuring station
- Combined roughness and contour measuring station

### Description





The new Mahr software platform **MarWin** is a modular control and evaluation system with significant advantages.

This multi-product software platform provides users with a uniform basis, thereby ensuring the operational and functional reliability particularly required in automated processes.




Quick and easy configuration is achieved through the use of standardized mechanical and electronic measuring station components.

### Features

- **MarTalk** coordinates the interface between the software and the machine
- **MarScript** handles the measuring language and control systems
- Tried-and-tested **Mahr quality** components and software together with a straightforward user interface provide reliable measuring results
- Safety for your system and operators through compliance with all relevant guidelines
- Modularity, i.e. depending on the measurement task, additional axes and workpiece supports can be used in addition to the standard components
- Time saved through significant reduction in setup times for the automatic measuring station



## MarSurf. M and S Instrument Data Overview

			
	<b>MarSurf M1</b>	<b>MarSurf M2</b>	<b>MarSurf S2</b>
Parameters	Ra, Rz, Rmax, R <sub>PC</sub> ; Jis: Ra, Rz	Over 25 roughness parameters	Over 40 roughness, waviness and P profile parameters
Probe	NHT probe range (skid probe system)	NHT probe range (skid probe system)	MFV 250, R probes, FRW 750*, Focodyn*, LS1/LS10* *Depending on drive unit
Drive unit	PFM (standard drive unit) Option: PFM 2 (transverse drive unit)	PFM (standard drive unit) Option: PFM 2 (transverse drive unit)	Applicable: PZK, GD 25, PGK 120, PGK 20, PRK via PAV 62
Traversing lengths	1.75 / 5.6 / 17.5 mm (0.069 / 0.22 / 0.69 in) with PFM drive unit 1.75 / 5.6 mm (0.069 / 0.22 in) with PFM 2 drive unit	1.75 / 5.6 / 17.5 mm (0.069 / 0.22 / 0.69 in) with PFM drive unit 1.75 / 5.6 mm (0.069 / 0.22 in) with PFM 2 drive unit	0.56 / 1.75 / 5.6 / 17.5 / 56 mm (0.069 / 0.22 / 0.69 / 2.20 in) Lt var 0.56 to 120.0 mm (0.02 to 4.72 in). Depending on drive unit Measuring range / 65,536 steps
Profile resolution	12 nm (0.5 µin)	12 nm (0.5 µin)	
Languages	13 languages 3 Asian languages	13 languages 3 Asian languages	13 languages 3 Asian languages
Dimensions (L x W x H)	Approx. 190 x 170 x 75 mm (7.48 x 6.69 x 2.95 in)	Approx. 190 x 170 x 75 mm (7.48 x 6.69 x 2.95 in)	Approx. 150 x 320 x 250 mm (5.91 x 12.60 x 9.84 in)
Weight	< 1 kg (2.20 lbs)	< 1 kg (2.20 lbs)	< 3 kg (6.61 lbs)
Power supply	Primary: 90 V to 264 V Secondary: 12 V	Primary: 90 V to 264 V Secondary: 12 V	Primary: 90 V to 264 V Secondary: 9 V

## MarSurf. PS1 Data Overview



	<b>MarSurf PS1</b>
Parameters (24, with tolerance limits)	Ra, Rq, Rz (Ry (JIS) equiv. to Rz), Rz (JIS), Rmax, Rp, Rp (ASME), Rpm, Rsk (ASME), Rpk, Rk, Rvk, Mr1, Mr2, A1, A2, Vo, Rt, R3z, R <sub>PC</sub> , Rmr (tp (JIS, ASME) equiv. to Rmr), RSm, R, Ar, Rx
Measuring range	350 µm, 180 µm, 90 µm
Cutoff I <sub>c</sub> **	0.25 mm, 0.8 mm, 2.5 mm
Traversing length L <sub>t</sub> **	1.75 mm, 5.6 mm, 17.5 mm
Traversing length (as per MOTIF)	1 mm, 2 mm, 4 mm, 8 mm, 12 mm, 16 mm
Dimensions	140 mm x 50 mm x 70 mm
Weight	400 g
Long-range power supply	100 V to 264 V

\*in accordance with ISO/JIS

## MarSurf. LD 120 Data Overview



	<b>MarSurf LD 120</b>
Parameters	Roughness parameters, waviness parameters, P-profile parameters (see MarSurf XR 20)
Contour elements	Radii, distances, angles (see MarSurf XC 20)
Probe	LD A14-10-2 with diamond tip 2 µm (80 µin), 90°
Drive unit	MarSurf LD 120
Traversing lengths	0.1 mm to 120 mm (0.004 in to 4.72 in)
Measuring range	10 mm (0.39 in)
Resolution (Z)	2 nm (0.08 µin)
Measuring force (in Z)	0.5 mN to 30 mN, adjustable
Dimensions (L x W x H) of compl. ST 500 meas. stand	Approx. 700 x 550 x 720 mm (27.56 in x 21.65 in x 28.35 in)
Weight incl. ST 500	Approx. 160 kg (353 lbs)
Power supply	230 V (or 115 V possible)

## MarSurf. XC Data Overview



### MarSurf XC 2

Parameters	Radii, angles, distances, coordinates, fitting in of regression straight lines, best-fit circles, circle sections. Defining points, circles and circle sections and much more
Probes	350 mm (13.78 in) probe arms, 175 mm (6.89 in) probe arms complete with stylus tips
Drive unit	MarSurf CD 120
Traversing lengths	1 mm to 120 mm (0.04 in to 4.72 in)
Measuring range	±25 mm (±0.001 in) with 350 mm probe arm
Resolution (Z) referred to measuring system	350 mm probe arm = 0.5 µm (20 µin) 175 mm probe arm = 0.25 µm (10 µin)
Measuring force (in Z)	1 mN to 120 mN, adjustable
Dimensions (L x W x H) of compl. ST 500 meas. stand	Approx. 700 mm x 550 mm x 720 mm (27.56 in x 21.65 in x 28.35 in)
Weight of measuring station with ST 500 measuring stand	Approx. 160 kg (353 lbs)
Power supply	230 V (or 115 V possible)



### MarSurf XC 20

Parameters	Radii, angles, distances, coordinates, fitting in of regression straight lines, best-fit circles, circle sections. Defining points, circles and circle sections, multiple measurements, double contours, DXF import and much more
Probes	350 mm probe arms, 175 mm probe arms complete with stylus tips
Drive unit	MarSurf PCV 200
Traversing lengths	1 mm to 200 mm (0.04 in to 7.87 in)
Measuring range	±25 mm (±0.001 in) with 350 mm probe arm
Resolution (Z) referred to measuring system	350 mm probe arm = 0.5 µm (20 µin) 175 mm probe arm = 0.25 µm (10 µin)
Measuring force (in Z)	1 mN to 120 mN, adjustable
Dimensions (L x W x H) of compl. ST 500 meas. stand	Approx. 700 mm x 550 mm x 720 mm (27.56 in x 21.65 in x 28.35 in)
Weight of measuring station with ST 500 measuring stand	Approx. 160 kg (353 lbs)
Power supply	230 V (or 115 V possible)

## MarSurf. Data Overview XR and XT



### MarSurf XR 20

Parameters	Over 75 roughness, waviness, P-profile and motif parameters
Probes	MFW 250, R probes, FRW 750*, Focodyn*, LS 1 / LS 10*
Drive unit	Suitable: PZK, GD 25, PGK 120, PGK 20, PRK via PAV 62
Traversing lengths	Depending on drive unit 0.56 / 1.75 / 5.6 / 17.5 / 56 mm, (0.02 / 0.069 / 0.22 / 0.69 / 2.20 in) Lt var 0.56 to 120.0 mm (0.02 to 4.72 in)
Profile resolution	±25 µm = 0.5 nm, ±250 µm = 5 nm
Dimensions (L x W x H) of compl. ST 500 meas. stand	Approx. 700 x 550 x 720 mm (27.56 x 21.65 x 28.35 in)
Weight of measuring station	With ST 500 measuring stand, approx. 160 kg (353 lbs)
Power supply	230 V (115 V possible)

\*Depending on drive unit




### MarSurf XT 20

Parameters	Color-coded height presentation, grid models, photo simulation, 2D top view, any profile sections zoom function, distances, angles, radii, extreme points, comprehensive, filter functions such as Gaussian filter, median filter, polynomial filter, interpolation of invalid sections, remove spherical form, remove cylindrical form, alignment functions across sections, 3D surface roughness, parameters, export and evaluation of any profile sections in MarSurf XR 20 roughness software or MarSurf XC 2 / XC 20 contour software
Probes	
Drive unit	
Traversing lengths	
Profile resolution	
Dimensions (L x W x H) of compl. ST 500 meas. stand	
Weight of measuring station	
Power supply	Measuring data can be recorded using stylus instruments with Y-drive or MarSurf WS1 optical surface sensor.



## MarSurf XR 20 with XT 20 Topography

Upgrade to a powerful topography measuring station

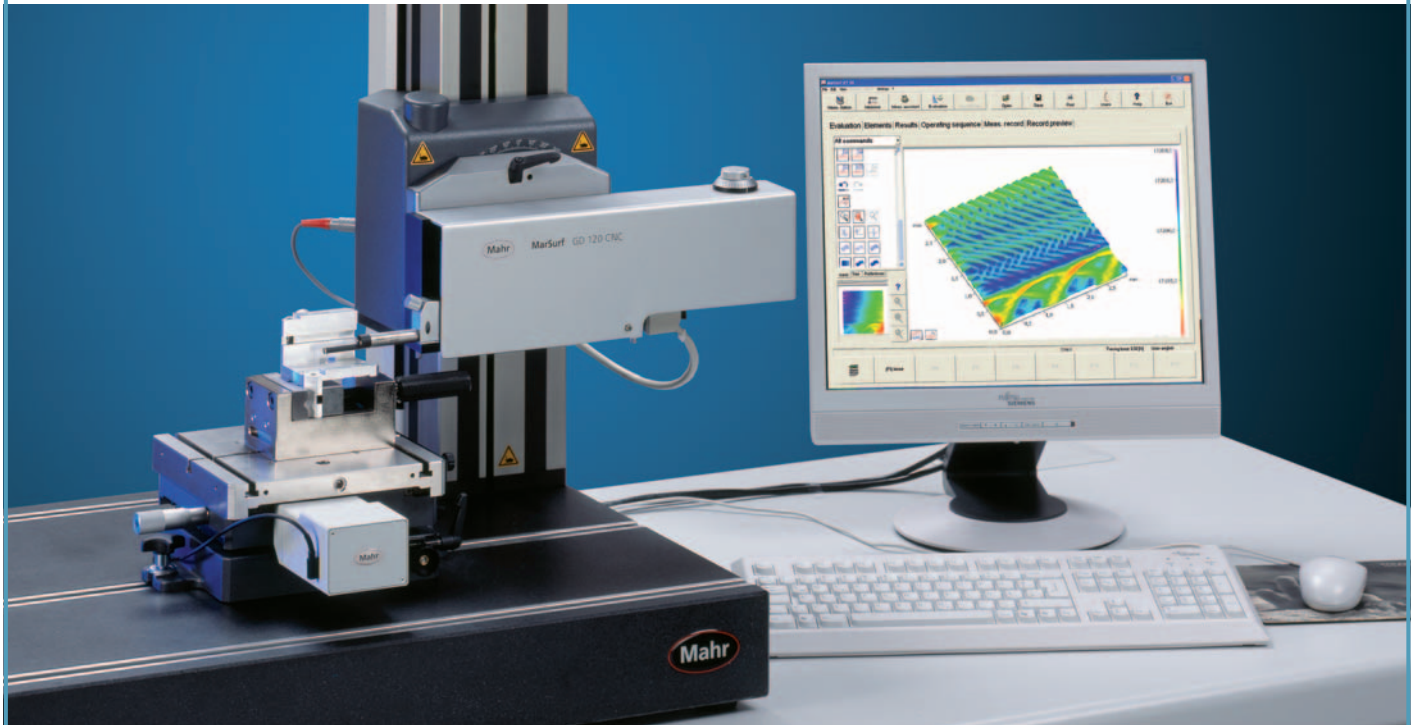

### Description

For some applications, a single tactile profile of the surface form is inadequate. 3D topographic representation and evaluation offers the opportunity to obtain more comprehensive profile information. The **MarSurf XR 20** measuring station can be turned into a topography measuring station both simply and cost-effectively, whether based on an order or an upgrade requirement. All that is needed in addition to the standard scope of delivery is a **CT 200-MOT Y-drive** for the **CT 200** XY table and the **MarWin XT 20 software**.


### CT 200-MOT Technical Data

**CT 200-MOT** technical data as for CT 200 but with motorized Y-drive.  
 Adjustment path in Y 17.5 mm (0.7 in)  
 Resolution 0.375  $\mu\text{m}$  (15  $\mu\text{in}$ )

### Measuring Station Components


As described on page 16-13, plus:

**Topography measuring station extension**  
**MarSurf XT 20 software** Order No. 6299034  
**CT 200-MOT Y-drive** Order No. 6710543

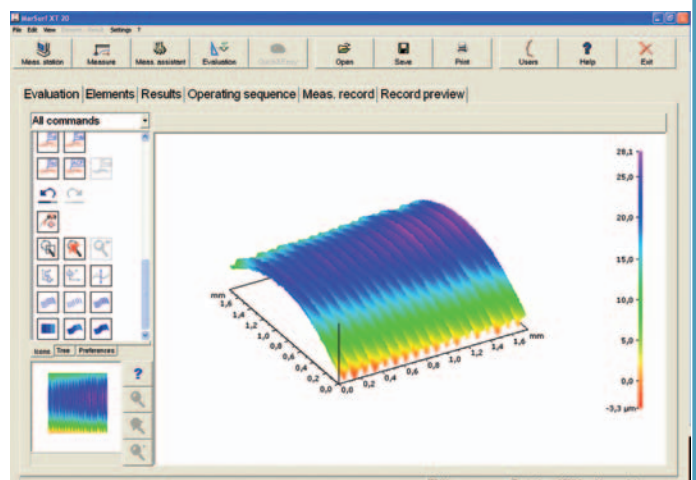


## MarSurf XR 20 with XT 20 Topography

3D measurement of molds for use in the medical industry

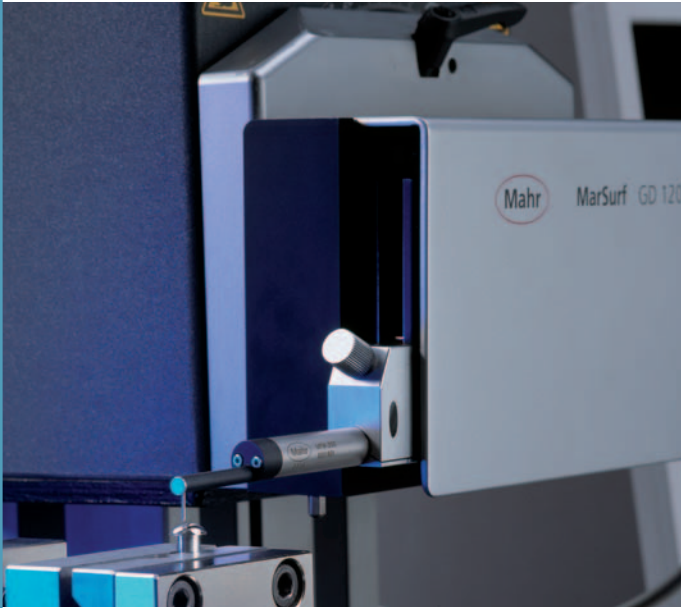


### Description

In the case of molds for items such as contact lenses, the surface topography is also of interest in addition to the individual profile for determining the roughness depth. The form and surface roughness depth over the entire topography range are critical when it comes to product function.

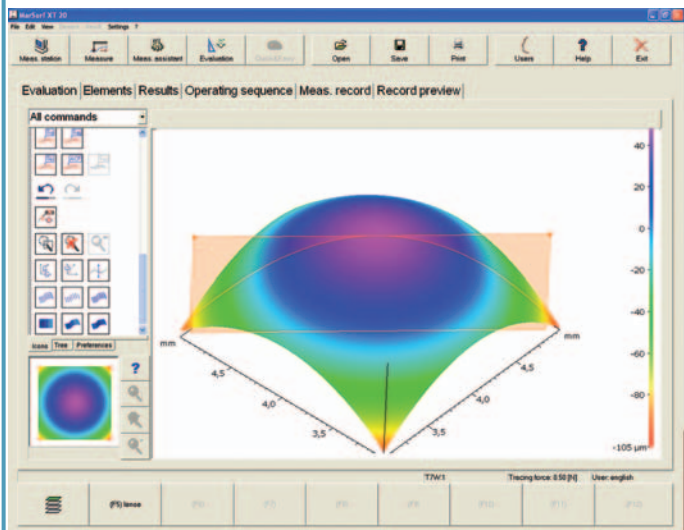

## MarSurf. WS1 White Light Sensor Measuring Station

Non-contact measurement of surface structures

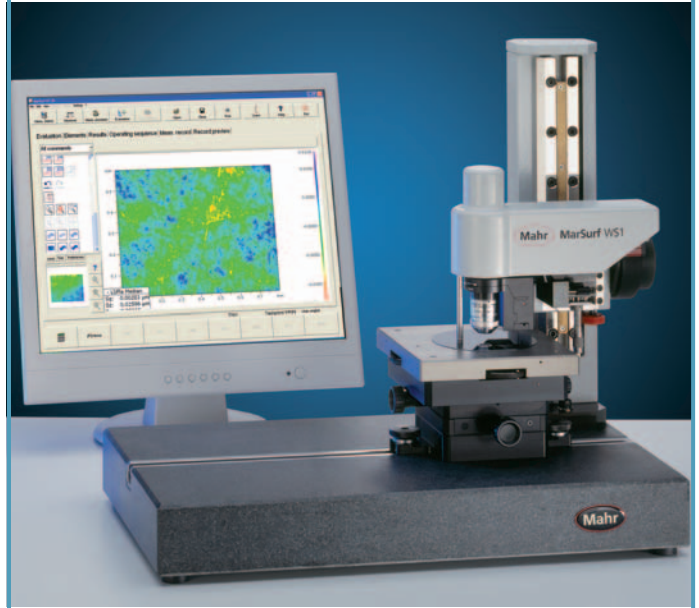

### Description

Ever higher surface qualities are being produced thanks to new processing methods and materials. This places much greater demands on a measuring system in terms of resolution and measuring accuracy.

The MarSurf WS1 is an optical surface sensor which operates according to the principle of white light interferometry. This technology enables rapid, high-precision recording of surface topographies on a wide range of materials.

### Features

- The impressive vertical resolution of 0.1 nm (0.004 µm) enables the finest of structure to be recorded
- Can be used in inspection rooms and the manufacturing environment
- The compact design saves space
- The optical design is specifically geared to the demands of industrial processing methods
- Illuminated using LED technology with a long service life
- Evaluation with the MarSurf XT 20 topography software enables a comprehensive, user-friendly topography analysis
- Can be incorporated as an OEM component

## MarSurf PCV 200

Contour drive unit



### Description


The **PCV 200** contour drive unit supports measuring paths of up to 200 mm (7.87 in).

Many contour measurement tasks, e.g. calculating double contours using the twin stylus, can be performed in conjunction with the **MarSurf XC 20** software

### Features


- Probe arm collision protection thanks to patented probe arm mount
- Programmed measuring run with lifting and lowering of the probe arm and positioning
- Selection of different measuring speeds ranging from 0.2 mm/s to 4 mm/s (0.008 in/s to 0.16 in/s)
- Variable setting of measuring force from 1 mN to 120 mN
- Measuring force remains constant over the entire measuring range

The drive unit supports a large number of probe arms of different shapes and sizes.

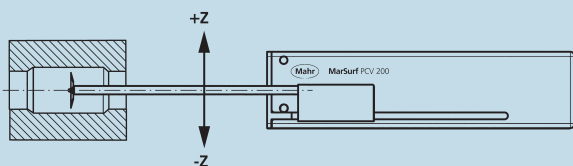

## MarSurf CD 120

Contour drive unit

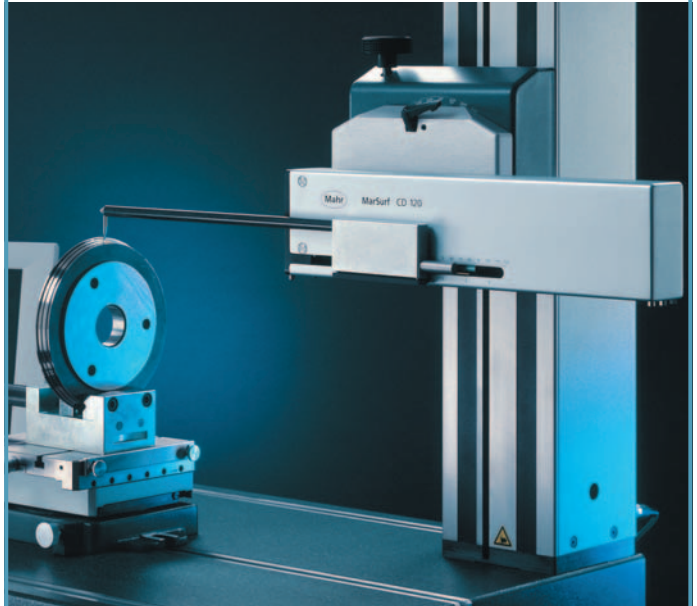

### Description


The **CD 120** contour drive unit is based on the technology of the **PCV 200** drive unit. It measures contour elements such as radii, distances, angles, etc. simply and precisely.

In conjunction with the **MarSurf XC 2** software, it constitutes the basic contour measurement unit.

### Features

- Automatic lifting and lowering of the probe arm with adjustable speed
- Probe arms available for bores larger than 2 mm (0.079 in)
- Selection of different positioning speeds ranging from 0.2 mm/s to 10 mm/s (0.008 in/s to 0.39 in/s)
- Variable setting of measuring force from 1 mN to 120 mN
- Patented probe arm mount for reproducible probe arm exchange without the need for tools

The use of complete probe arms, each with their own separately stored calibration data, allows the evaluation system to switch between different measurement tasks quickly and flexibly.

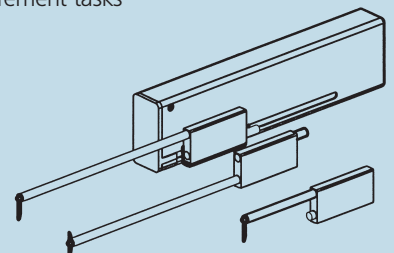



## MarSurf. PZK Drive Unit

Small and handy




### Description

This set consists of the small, handy **PZK** drive unit and the integrated, inductive **MFW 250** probe. The probe arms can be changed very quickly. The built-in datum plane allows both skid-  
ded and skidless measurements. The **PZK set** also includes a hand-held mount. The bottom of the hand-held mount takes the form of a V-block, enabling flat and cylindrical workpiece contours to be measured. This makes the **PZK** a universal system.



## MarSurf. MarSurf GD 25 Drive Unit

The standard drive unit for surface measurements

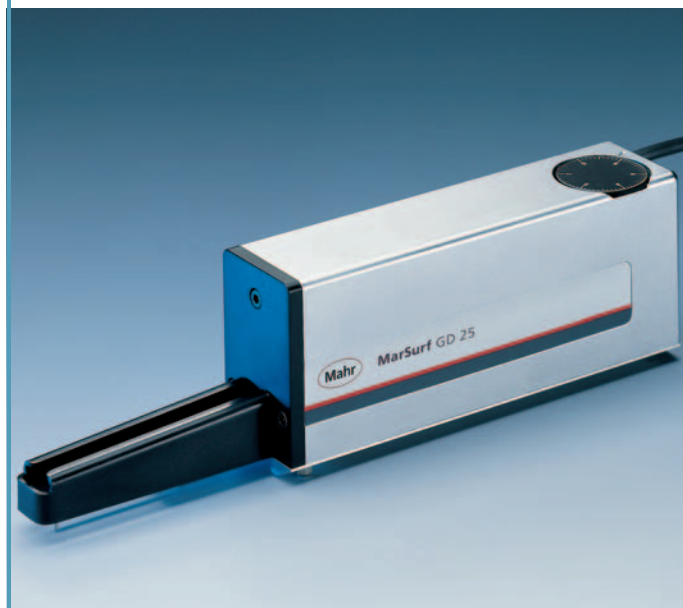


### Description

This unit provides excellent straightness precision and smooth running over a measuring length of 25.4 mm (1 in). A patented motorized height adjustment accessory ensures the probe is positioned in the range of 4 mm (0.15 in) and enables motorized probe zero setting. The **MFW 250** skidless probe can be used, along with all probes of the **R series**.



## MarSurf. PGK 120 Drive Unit

Straightforward roughness measurement for long traversing lengths

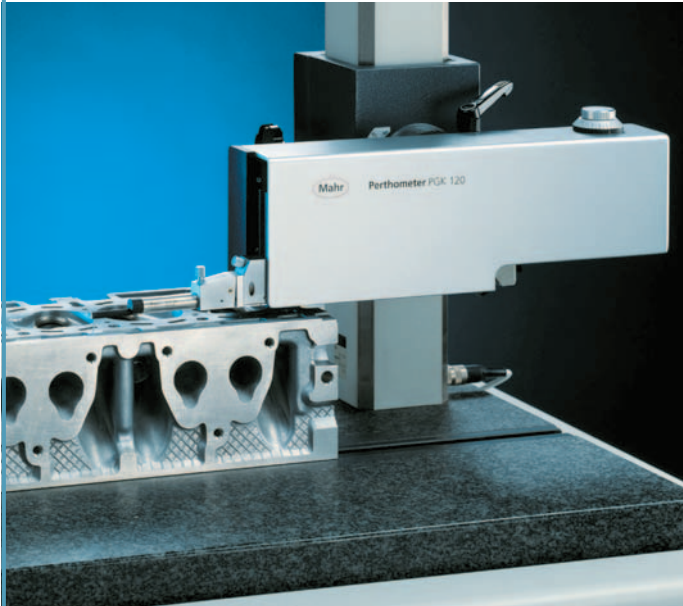

### Description

In addition to high-precision roughness measurements, the **PGK 120** drive unit is used for waviness measurements over long traversing lengths of up to 120 mm (4.72 in). Patented motorized probe zero setting over 22 mm (0.866 in) saves both setup work and time. The drive unit optionally supports problematic measuring positions such as transverse or vertical tracing using simple, adaptable probe mounts.



## MarSurf. GD 120 CNC Drive Unit

Specially designed for automated operation



### Description

Precise positioning on the horizontal axis is very important for automatic operating sequences. The **GD 120 CNC** allows precise positioning on the X-axis.

This drive unit also offers the same outstanding features as the **PGK 120**, which guarantees the precision and reliability required for automatic operation under **MarSurf XP**.



## MarSurf. Surface Probes

Probes for virtually any application



### Description

#### Non-skidded probes

Today there is a clear trend towards skidless probes. Their strength lies in the fact that they are very versatile. The diamond tip is deflected relative to the ideal geometric profile of the datum plane in the drive unit.

#### Advantages

- No skid-related filter effect
- Very short traversing lengths possible
- Calculation of W- and P-profile parameters
- Recording of profile angularity and increments

#### Single-skid probes

The most widespread in practice, single-skid probes are supported on just one skid on the workpiece and therefore need to be aligned relative to the surface.

#### Advantages

- Not sensitive to vibration because of very small measuring circle
- Suitable for curved test surfaces
- Inclination of the drive unit is uncritical

#### Dual-skid probes

Dual-skid probes are linked to the drive unit via hinges and align themselves automatically relative to the surface. They are ideal for flat workpieces.

#### Advantages

- Very insensitive to vibration
- Minimal alignment required

#### Optical probes

##### (Focodyn, LS 1 and LS 10 laser sensors)

These optical probes work in a similar way to mechanical non-skidded probes. Following the principle of dynamic focusing, the probe generates a sharp, delimited focal point on the surface.

#### Advantages:

- Non-contact profile recording
- Also suitable for soft and sensitive workpiece surfaces





## PGN Geometric Standard

DIN EN ISO 5436 type C1 sinusoidal groove profile



Surface standard with sinusoidal groove profile for dynamic monitoring of the roughness measuring station. Ra, Rz, Rmax. Optical flat. The following versions are available:

**PGN 1** Profile depth approx. 1.5 µm (60 µin), groove distance approx. 0.10 mm (0.0039 in)

**PGN 3** Profile depth approx. 3 µm (120 µin), groove distance approx. 0.12 mm (0.0047 in)

**PGN 10** Profile depth approx. 10 µm (394 µin), groove distance approx. 0.20 mm (0.0079 in)

DKD (German Calibration Service) and Mahr Calibration Certificates on request.

## PEN 10-1 Setting Standard

DIN EN ISO 5436 type A1 depth setting standard




Depth setting standard for static calibration of the vertical stroke for all non-skidded probes, single-skid probes and dual-skid probes. Measuring groove depth approx. 10 µm (394 µin), diameter 44 mm (1.73 in).

- 2 calibration grooves
- Optical flat

DKD and Mahr calibration certificates on request.

## PRN 10 Geometric Standard

Turned roughness profile

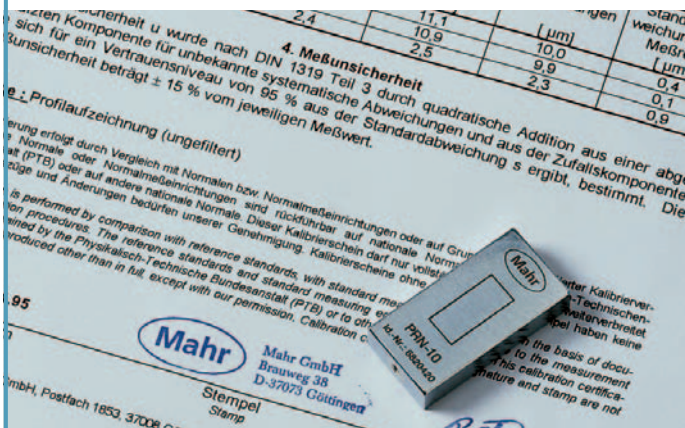

Including Mahr calibration certificate. Surface standard with turned profile, chrome-plated, profile depth approx. 10 µm (394 µin), for monitoring the roughness measuring station. Ra, Rz, Rmax.

## KN 100 Contour Standard

Standard for monitoring contour measurement systems



The **KN 100** contour standard was developed in cooperation with the PTB, the German national metrology institute. It is the first standard to allow confirmation and acceptance tests to be performed so that they are traceable to realistic geometries through concrete references. It conforms to the requirements of VDI/VDE Guideline 2629.

# IN OUR VIEW, FORM DEVIATION IS NOT A QUESTION OF PERCEPTION. **THAT IS WHY WE HAVE MARFORM**



The latest information on MARFORM products can be found on our website:  
**[www.mahr.com](http://www.mahr.com), WebCode 155**

► | To ensure the problem-free functioning and durability of a workpiece, the key factors are its dimensions and, above all, its form. Requirements in terms of roundness, flatness, straightness, coaxiality or run-out – particularly when it comes to axis-symmetrical workpieces – are becoming increasingly tough. These requirements can only be reliably tested and met using high-precision formtesters optimized for this specific purpose. Whether you are dealing with fuel injection technology, microelectronics, precision mechanics or medical technology, the key functional components are becoming ever smaller and ever more precise. To enable the production department to take advantage of the specified tolerances, measuring uncertainty must be kept as low as possible. MarForm helps you to cut process costs without increasing testing costs thanks to stable, innovative instruments with the highest possible level of automation, flexibility and precision. MarForm offers the ideal combination for all requirements. | ◀

## ► | MarForm. Form Measuring Instruments

### Formtester

MarForm MMQ 100/10	17- 3
MarForm MMQ 34	17- 4
MarForm MMQ 400	17- 5

### Reference Formtesters

MarForm MFU 100	17- 7
MarForm MFU 800	17- 8
MarForm MFK 500/600	17- 9

MarWin. Software	17-10
------------------	-------

MarForm. Overview Tables	17-14
--------------------------	-------

Accessories	17-16
-------------	-------

### Universal Formtesters


Primar	17-18
--------	-------



# MarForm. Formtesters for a Wide Range of Applications

## FORM MEASURING INSTRUMENTS FOR THE WORKBENCH OR INSPECTION ROOM

► | There are many aspects of our daily lives where we need to be able to rely on technical components functioning correctly. Take for example the ABS braking system, injection system or gearbox of a car, the drive of a PC, the compressor in an air-conditioning system, the blade of an electric razor or the landing flaps of an aircraft. For the moving components to function efficiently over long periods of time, it is vital they work together smoothly. To ensure this is the case, axis-symmetrical workpieces with narrow tolerances from the ideal are needed. Compliance with these tolerances can only be verified reliably using precision formtesters that have been specifically optimized for this application. MarForm helps you to cut process costs without increasing testing costs thanks to stable, innovative instruments exhibiting the highest possible precision. MarForm offers the ideal combination for all requirements. | ◀



## MarForm MMQ 100/MMQ 10

The Formtester with the simplest operation



MarForm MMQ 100 Formtester



### Features

**The MarForm MMQ 100 Formtester offers outstanding accuracy in a robust package designed for use in production environments. Used in combination with EasyForm software, it represents the perfect solution for performing measurement tasks simply, yet effectively.**

- Precise and fast measurement results
- Reliable thanks to mechanical bearings
- Large measuring volume
- Mobile due to its low weight and convenient size
- Fast computer-assisted workpiece alignment
- Centering and tilting screws for rough and fine adjustment
- Universal and reliable
- Suitable for use on the shop floor as no compressed air connection is required
- Touch screen, this no keyboard or mouse required
- Digital transmitters in Z and X transmit the measuring position directly to the software

The **MMQ 100** can also be operated from a laptop, thereby enabling mobile use. All you need is a power outlet!

#### Optimized for frequent form measuring tasks

- Roundness (also in a section)
- Flatness (from a circle)
- Concentricity
- Coaxiality
- Radial run-out
- Axial run-out
- Plane parallelism from opposite circles
- Fourier/waviness analysis

(1) from a polar trace



MarForm MMQ 10 Formtester

### Versions

**MMQ 10 with integrated form computer** to evaluate form and positional tolerances (DIN ISO 1101) for roundness, radial run-out, concentricity and coaxiality.

**MMQ 100 with EasyForm** as a powerful, PC-based evaluation system running on Windows® XP offers informative color records with easy-to-use software for evaluation of form and position tolerances (DIN ISO 1101) for roundness, roundness sector, radial run-out, axial run-out, concentricity, coaxiality, flatness<sup>(1)</sup>, straightness<sup>(1)</sup>, parallelism<sup>(1)</sup> and perpendicularity<sup>(1)</sup>.

The **MMQ 10 measuring station**, consisting of an **MMQ 10** Formtester with integrated computer and printer and a T20W probe, is available under **Order no. 5440088**.

The **MMQ 100 EasyForm measuring station** comes complete:

**Form Measuring Station MMQ 100 Plus** **Order no. 9999116** consisting of:

MarForm MMQ 100 Plus with digital encoders in X/Z and with T20W probe	Order No. 5440691
EasyForm PC	Order No. 3xxxxxx
WIN XP country package	Order No. 62682xx
17" TFT monitor	Order No. 5460041

#### Options for MMQ 100:

**Advanced Form** for comprehensive evaluations, based on EasyForm.

**Fourier analysis** to enhance roller bearing evaluation capabilities.


**Mahr Data Transfer Tools** for simple transfer of measuring results into statistical evaluations such as qs-STAT or MS Excel.



Request a brochure or see WebCode 1412/10146.

## MarForm MMQ 34

The MMQ 34 is the standard form measuring instrument for all your production needs and the precision inspection room

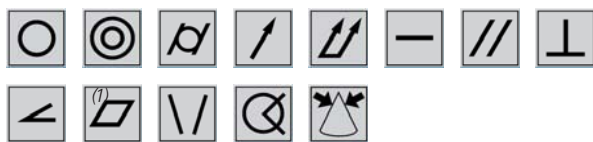

### Features

The **MMQ 34** features a high-precision motorized Z column, opening up a whole new dimension in form metrology compared to roundness measuring instruments.

In addition to

- Roundness (also in a sector)
- Flatness<sup>(1)</sup>
- Concentricity
- Coaxiality
- Radial run-out
- Axial run-out

the **MMQ 34** can also evaluate:

- Cylindricity
- Straightness (from linear or circular profiles)
- Total radial run-out
- Parallelism (from linear or circular profiles)
- Perpendicularity (from linear or circular profiles)
- Angularity (vertical)
- Conicity (vertical)
- Taper

The **MMQ 34** Formtester offers an unbeatable volume with a small footprint.

### Versions

The MarForm **MMQ 34** is available in two versions:

In addition to the C-axis, both versions offer a Z-axis length of 350 mm (13.78 in) or 500 mm (19.67 in) and a motor-driven 180 mm (7.09 in) positioning axis as the X-axis.

The **MMQ 34** is operated using the **MarWin EasyForm** software. It utilizes touchscreen technology and requires no keyboard or mouse. Creating high-performance measuring runs for all manner of workpieces is child's play thanks to the interactive wizards.

#### MMQ 34 X motorized form measuring station

Order no. 9999482

consisting of:

##### MarForm MMQ 34

Z = 350 mm, X = 180 mm pos. axis

5440667

##### MarWin and EasyForm 2.0 software

5450185

17" TFT monitor

5460041

T20W probe

5400152

T20W mount

7028306

Rim chuck with diameter of 100 mm

6710620

Deskjet printer

5460030

Windows XP Professional country package

62682xx

Cable

3018232

#### MMQ 34 X motorized form measuring station

Order no. 9999483

consisting of:

##### MarForm MMQ 34

Z=500 mm, X=180 mm pos. axis

5440668

##### MarWin and software EasyForm 2.0

5450185

17" TFT monitor

5460041

T20W probe

5400152

T20W mount

7028306

Rim chuck with diameter of 100 mm

6710620

Deskjet printer

5460030

Windows XP Professional country package

62682xx

Cable

3018232

#### Option for MMQ 34 measuring stations

15" touchscreen TFT monitor 3017725

instead of 17" standard TFT monitor 5460041

9999540




Request a brochure or see WebCode 1479.

<sup>(1)</sup> from a polar trace



## MarForm MMQ 400

The MMQ 400 is the universal form measuring machine for production and laboratory

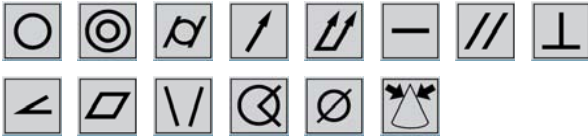

### Features

The **MMQ 400** is the universal measuring machine for extensive workpiece evaluation as per DIN ISO 1101. High-precision measuring axes in Z and X make every form measurement task possible.

**MarForm MMQ 400** for:

- High-precision workpieces
- Unusually long workpieces
- Large and heavy workpieces
- Use in production environments or precision inspection rooms

The **MarForm MMQ 400** is available for your demands in four versions and is optimally designed for each task:

- Motorized or manual centering and tilting table
- Vertical axis (Z) with measuring length of 500 mm (19.67 in) and horizontal axis (X) with measuring length of 280 mm (11.02 in) or
- Vertical axis (Z) with measuring length of 350 mm (13.78 in) and horizontal axis (X) with measuring length of 180 mm (7.09 in)
- With digital rotary decoder in the linear axes X and Z for best reproducibility of measurements.

Your **MarForm MMQ 400** is available as a semi-automated measuring station with manual centering and tilting table or as a fully automated measuring station which, in conjunction with a motorized centering and tilting table and T7W probe, is perfect for the high-precision testing of your parts without any operator intervention.

### Versions

#### **MMQ 400 form measuring station** Order No. 9999490

consisting of:

##### **MarForm MMQ 400**

Z = 350 mm, X = 180 mm

Manual centering and tilting table

MarWin PC Advanced Form

17" TFT monitor

T20W probe

T20W mount

Rim chuck with diameter of 100 mm

Deskjet printer

Windows XP Professional country package

5440713

5450186

5460041

5400151

7028306

6710620

5460030

62682XX

#### **MMQ 400 form measuring station** Order No. 9999496

consisting of:

##### **MarForm MMQ 400**

Z = 350 mm, X = 180 mm

Motorized centering and tilting table

MarWin PC AdvancedForm

17" TFT monitor

5440763

5450186

5460041



T20W probe	5400151
T20W mount	7028306
Rim chuck with diameter of 100 mm	6710620
Deskjet printer	5460030
Windows XP Professional country package	62682XX

#### **MMQ 400 form measuring station**

Order No. 9999491

consisting of:

##### **MarForm MMQ 400**

Z = 500 mm, X = 280 mm

Motorized centering and tilting table

MarWin PC AdvancedForm

17" TFT monitor

T20W probe

T20W mount

Rim chuck with diameter of 100 mm

Deskjet printer

Windows XP Professional country package

5440743

5450186

5460041

5400151

7028306

6710620

5460030

62682XX

#### **MMQ 400 form measuring station**

Order No. 9999498

consisting of:

##### **MarForm MMQ 400**

Z = 500 mm, X = 280 mm

Motorized centering and tilting table

MarWin PC AdvancedForm

17" TFT monitor

T20W probe

T20W mount

Rim chuck with diameter of 100 mm

Deskjet printer

Windows XP Professional country package

5440793

5450186

5460041

5400151

7028306

6710620

5460030


62682XX



Request a brochure or see WebCode 11321.

## MarForm. The Reference Machines for Form and Positional Tolerances OUR MOST ACCURATE FORM MEASURING INSTRUMENTS EVER


► | **High-precision form measurement cuts costs!** MarForm is the name of our ultra-precise form measuring systems. They can be used wherever there is a need to obtain information about the geometry of workpieces with very narrow tolerances. ISO 1101 describes roundness, cylindricity, straightness, parallelism etc. as form and positional deviations. These features are monitored by formtesters. The high precision of form measuring instruments cuts costs because the tolerance ranges are those actually required in your production environment. With MarForm, you have a high-precision roundness and cylindricity measuring instrument at your disposal. | ◀

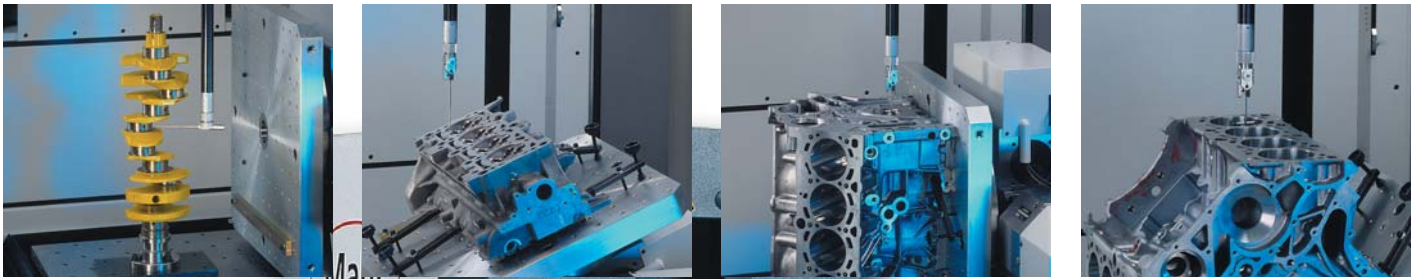

## MarForm MFU 100



Taking the reference form measuring center to a new level

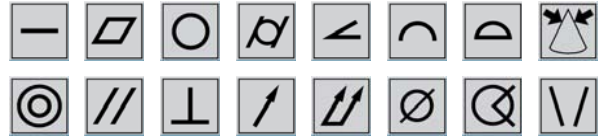

The road from high-precision measuring axes to reliable measurements is often a long one – and no instrument is better suited for this purpose than the **MFU 100**. Only the **MFU 100** has integrated reference elements for real-time spatial compensation of geometrical deviations and therefore records all profiles as high-precision 3D coordinates.

For decades, MarForm measuring instruments have been renowned for their precision and stability. The new **MarForm MFU 100** was developed with the objective of testing the form and positional features of parts with measuring volumes of a liter cost-effectively in a production environment. Our many years of experience have taken the new **MFU 100** to a new level.

With the **MarForm MFU 100**, you have a high-precision measuring instrument at your disposal whose extremely low measuring uncertainty increases the tolerance range in production environments and thus cuts production costs.

### Features

The **MarForm MFU 100** comes complete with:

- Roundness axis, circular (C)
- Motorized centering and tilting table (X, Y, A, B)
- Straightness measuring axis, vertical (Z)
- Straightness measuring axis, horizontal (X)
- Tangential multi-function axis (Y)
- T7W motorized length measuring probe
- MarWin evaluation software for form and positional features

All the axes are coordinated to ensure maximum measuring certainty.

The horizontal X-axis extends beyond the center of the workpiece, therefore making it possible to test the “true parallelism” free from other measuring influences.

The tangential Y-axis is a new and innovative feature. This additional new axis for conventional formtesters helps to locate the zenith of very small workpiece geometries in motorized applications and does so free from user influence. This means that the actual precision measurement can be started at exactly the right location, thus significantly increasing the process accuracy.

The Y-axis is also the instrument that, in combination with the vertical Z-axis and the horizontal X-axis, enables you to determine the workpiece diameter. As a result, standards-compliant testing of tolerances in the sub- $\mu\text{m}$  range is possible for the first time using

the maximum-material principle, while still offering a unique price/performance ratio.

In combination with the machine electronics, high-resolution digital scales ensure a level of positioning quality that makes it possible to test even the smallest component geometries.

The **MarForm MFU 100** is also ideally suited to scanning surfaces.

The **MarWin** software package offers the complete range of functions you would expect from a modern measuring and evaluation software package, including attractive records and electronic documentation in your corporate network.

Due to the deliberate separation of control and evaluation, the **MarForm MFU 100** is future-proof and expandable.

New language versions, special evaluations and new standards can all be incorporated with ease. The **MFU 100** has also been designed to accommodate sensors developed in the future.

In short, the **MarForm MFU 100** represents a new generation of reference form measuring instrument for precision inspection rooms and production environments.

The new **MarForm MFU 100 WP** is also available with an optional optical sensor to alternate with the T7W (motorized).




Request a brochure or see WebCode 1336.



## MarForm MFU 800



The ultra-precise form and positional tolerance testing system for the laboratory and inspection room

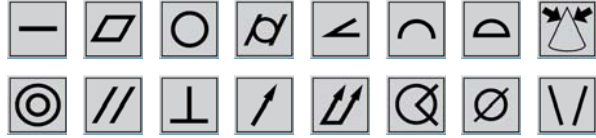

The **MFU series of Mahr form measuring instruments** has been setting the standard for high-precision form measurement tasks for more than 30 years.

Whether you are dealing with injection components, brake pistons or the calibration of gages, the **MarForm MFU** is the instrument of choice when producing high-precision fitting parts with tolerances of  $< 1 \mu\text{m}$  (40  $\mu\text{in}$ ).

The **MarForm MFU 800** is a high-precision, fully automatic reference form measuring station which offers maximum universality thanks to its large measuring volume and the high table load capacity of up to 1,000 N.

### Features

- Three high-precision measuring axes:  
Roundness measuring axis (C),  
vertical straightness measuring axis (Z = 500 mm / 19.67 in) and  
horizontal straightness measuring axis (X = 200 mm / 7.87 in)
- Each measuring axis has an air bearing and is fitted with a high-precision incremental scale system
- Fully automatic CNC workpiece alignment
- High load capacity – up to 1,000 N workpiece weight
- Motorized probe swivel unit and motorized measuring direction reversal enable measuring runs with an exceptional level of automation
- Can be used universally for a wide range of ISO 1101-compliant workpiece assessments, with evaluation of roundness, radial run-out, axial run-out, concentricity, coaxiality, total radial run-out, total axial run-out, cylindricity, straightness, parallelism, perpendicularity, angularity, flatness, conicity, line profile and taper
- Standards-compliant evaluation and filtering

**MarForm** measuring instruments are ideally suited to complex measurement tasks that demand high accuracy. This encompasses the automotive sector, injection pump technology, ABS brakes, aerospace and comprehensive measurement of automotive pistons.

The secret behind the unique reproducibility of the measurement results produced by MarForm is the high basic accuracy of the axes and its extremely high positioning accuracy.

This makes the **MarForm MFU** the reference machine of choice in the precision pyramid – guaranteed.




Request a brochure or see WebCode 1326.



## MarForm MFK 500 and MFK 600

The reference form measuring centers for the laboratory and inspection room

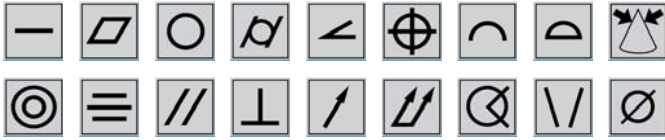

### MFK form measuring center for comprehensive workpiece assessment

**MFK formtesters** are particularly suited to testing engine blocks, cylinder heads, gearboxes, hydraulic components, crankshafts and camshafts.

Generous, optimized construction ensures high measuring accuracy over the entire machine volume. Large measuring and travel paths enable easy and safe changing of workpieces.

The **MarForm MFK 600** and **MFK 500**, made from coordinated components, offer flexibility and can be adapted for a wide range of metrology applications.

The formtester has a distortion-free granite base which is oscillation-isolated. Its high-precision horizontal surface forms the reference plane for the measuring setup. The workpiece mounting table carries and guides heavy workpieces over the granite surface using air bearings.



## Features

- Universal form measuring station with large measuring volume for heavy workpieces
- The MFK 600 has 5 measuring axes and 2 (4) calibration axes for measuring form elements and determining positions
- The MFK 500 has 3 measuring axes and 4 calibration axes for measuring form elements
- Rotating probe and automatically positioned workpieces for easy use and quick setup
- Low maintenance and able to handle continuous loads thanks to air bearings
- Collision-protected tracing systems for a wide range of measurement tasks
- Large workpiece mounting area for large individual workpieces or pallets holding several workpieces
- Roundness measuring unit with automatic adjustment to the diameter of the workpiece even if the position is eccentric
- Straightness measurements in 3 main coordinate directions
- ISO 1101-compliant workpiece evaluation
- Testing in machine and workpiece coordinates in line with manufacturing requirements
- Comprehensive evaluation of form and positional features, diameters and positional values
- A wide range of accessories and probes offer an optimum solution for all measurement tasks
- Easy expansion option with additional axes of movement for rotating workpieces while the program is running. This means that highly complex measurement tasks, such as those required for V engine blocks, can be performed "unmanned" without operator intervention

### Roundness measuring device

In addition to the measuring spindle (C-axis), the roundness measuring instrument includes an axis for automatically adjusting the probe to the workpiece diameter (R-axis). When performing roundness measurements, the R-axis guides the probe according to the form of the workpiece, even with eccentric deviations beyond the probe range.

### Straightness measuring device

The vertical straightness measuring device (Z-axis) also guides the roundness measuring device on a granite surface. With the **MFK 600**, the accuracy of the horizontal straightness measuring device (X- and Y-axes) is not affected by the workpiece's size, form or weight because the guides are separated from the supporting air bearings.

With the **MFK 500**, the X/Y-axes of the motorized centering and tilting table are available as motorized positioning axes.

**Calibration axes** (A and B) are integrated in the workpiece mounting table and can automatically align workpieces mechanically within the machine volume.

### Measuring capacity

Automatic calibration functions integrated in measuring runs allow continuous operation. Recording and processing measured values in parallel cuts the measurement time. The form measuring station's range of applications is extended by a comprehensive range of accessories.



Request a brochure or see WebCode 1307.


## MarWin. Software Modules for MarForm

**AdvancedForm** gives you total control over your form measuring station. You can perform positioning, alignment, measurement or documentation tasks with a click of the mouse – and the graphical user interface gives you a constant overview.

As with other Windows® applications, functions can be selected from menu bars with pull-down menus using the mouse.

Many functions, such as printing results, loading measuring programs or changing a program step, can be activated simply by clicking the appropriate icons.

With **AdvancedForm** you always have complete control over the form measuring station. For example, you can track the profile during measurement and intervene if necessary. Operation can be adapted to suit individual requirements, regardless of whether you want to perform a quick single measurement, conduct a program run on a series part or convert a complex measurement task into a measuring program. **AdvancedForm** provides the ideal operating strategy whatever the task. Given that tasks can vary a great deal, no operating strategy is exactly right for every application. Consequently, **AdvancedForm** provides several different operating strategies:

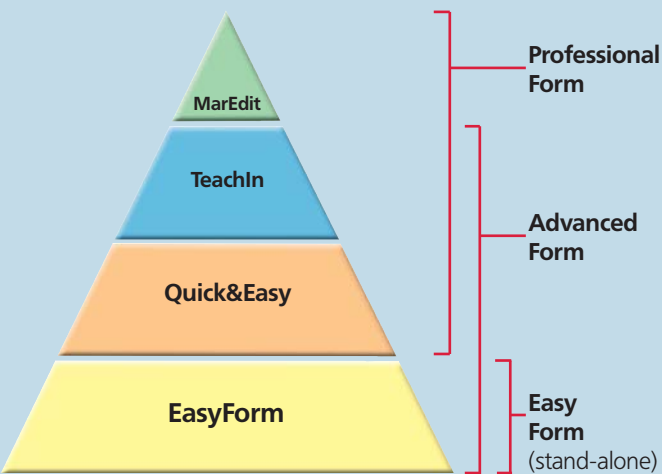

- **Measuring run preferences**  
for measurement with an existing measuring program
- **Quick&Easy**  
for rapid measurement, obtaining a measuring result quickly with the minimum of effort
- **Teach-in programming**  
for creating, modifying and running a measuring program with a large number of options
- **MarEdit (optional)**  
the operating level for applications engineers and trained specialists, to solve the most challenging and complex of tasks.

**AdvancedForm** provides a clear overview of all the required measuring and evaluation parameters. Many of these parameters have default settings which simply have to be confirmed for the majority of measurement tasks. It is, of course, also possible to adapt individual parameters to the relevant task.

**AdvancedForm** has a powerful **teach-in programming** function to create measuring programs for workpieces that are to be measured repeatedly. It can also be used for measuring runs with special positionings, measurements, evaluations and forms of presentation.

With teach-in programming, as soon as you click the mouse on an icon – e.g. for a run-out measurement and evaluation – a window opens where you can describe the feature in more detail if necessary (e.g. radial or axial run-out, datum, brief designation, tolerance, etc.). The number of measurements and their type (original measurement or new evaluation of profiles already measured) are also specified in this window. Separate windows can be opened to change measuring, evaluation and display parameters but in many cases this is not necessary because logical defaults that apply to a large number of measurement tasks have already been entered. If different settings are required for specific measurement tasks, the clear way the window is divided means that you can quickly find what you are looking for and optimize the settings in no time at all.

The layout of a measuring record, for example, can be modified right down to the finest detail. The color of the profile, reference and borders can be selected individually, and the scaling (in  $\mu\text{m}/\mu\text{in}$  per scale division), type of graph (polar or linear, centered or uncentered) and additional display parameters can be set in any combination you choose.

Measuring programs for series parts to be measured repeatedly can be saved and called up at any time to start a measuring run (see above).

Informative profile graphs – if required with several profiles in a single graph, displayed in different colors and in different ways – are then immediately available on the large color screen. If you are looking for exact numerical values, you can opt to display the results in a table.

With the new **AdvancedForm**, standards-compliant measurements and evaluations are displayed in a way which is both clear and representative. Even interactive layout options with a 3D preview in real time are possible.



## MarWin. Software Modules for MarForm

### MarWin software modules in detail

If you need to carry out form measurements, rather than creating long measuring programs you may prefer to gain direct access to a comprehensive and informative measuring record. In order to be able to do so, it is particularly important for the software to be transparent. Immediately after logging on in the **MarWin** user administration, you are directed to the MarShell, a clearly arranged user interface comparable with the Windows Desktop. It is from this **MarShell** that you start the finished measuring programs in the Preferences view. These preferences can be easily identified by means of saved images or graphics for each operator. One click is all that is needed to start the measuring program. The **MarShell** is also used to start the measuring wizard module, Quick&Easy (QE).

The **Quick&Easy** wizards provide support for "quick interim measurements" and, with little effort, guide the user quickly to his objective, namely a highly informative measuring record. A further click results in all **Quick&Easy** wizards that have so far been run being adopted as a chronological sequence into **AdvancedForm**, the **MarWin** teach-in programming function. This sequence merely has to be saved and the measuring program is then ready.

In **AdvancedForm** mode, additional functions can be added to the measuring program. The following Quick&Easy wizards assist in this process:

### 1. PREPARATION FOR MEASUREMENT



- QE Determine starting position
- Measuring station, positioning
- QE Axial run-out alignment
- QE Centering
- QE Centering and tilting



- QE Set parameters
- QE Zenith
- QE Edge search
- QE Switch coordinate system
- QE Move to calculated position


### 2. PROFILE RECORDING




- QE Circles on cylinder
- QE Circles on plane/end face
- QE Lines on cylinder
- QE Lines on plane/end face



Preferences view for starting the measuring programs

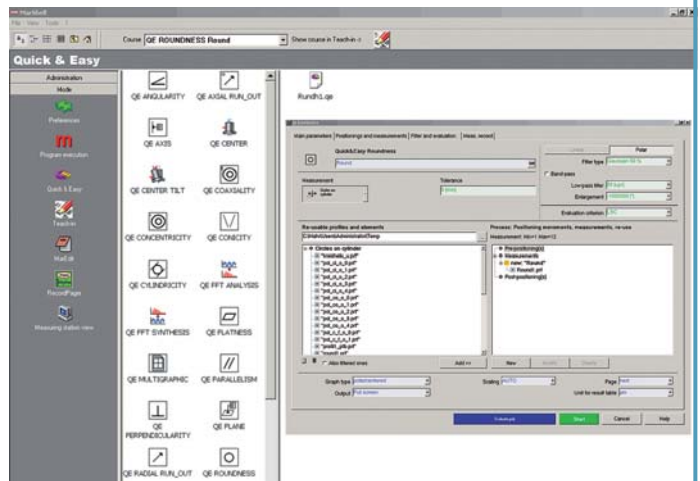

Quick&Easy Roundness

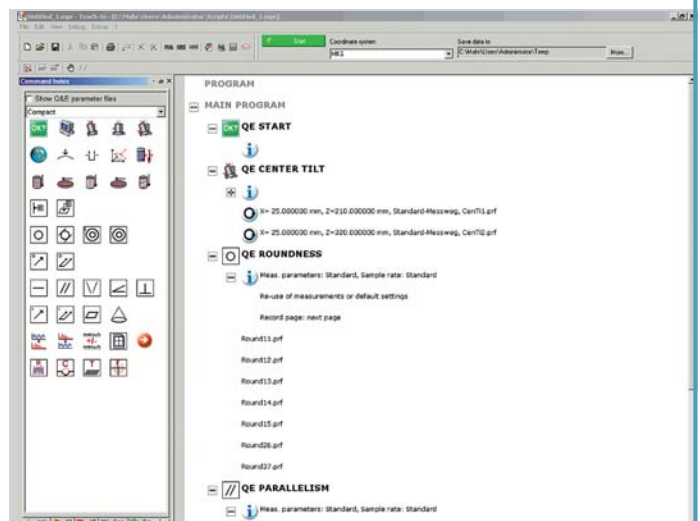

Teach-in listing

## MarWin. Software Modules for MarForm

### 3. EVALUATION



- QE Axis
- QE Plane




- QE Roundness
- QE Cylindricity
- QE Coaxiality
- QE Concentricity



- QE Radial run-out
- QE Total radial run-out




- QE Straightness
- QE Parallelism
- QE Conicity
- QE Angularity
- QE Perpendicularity



- QE Axial run-out
- QE Total axial run-out
- QE Flatness
- QE Taper

### 4. SPECIAL EVALUATION




- QE Fourier analysis
- QE Fourier synthesis (optional)
- QE Profile arithmetic

### 5. RECORD



- QE Multigraphic

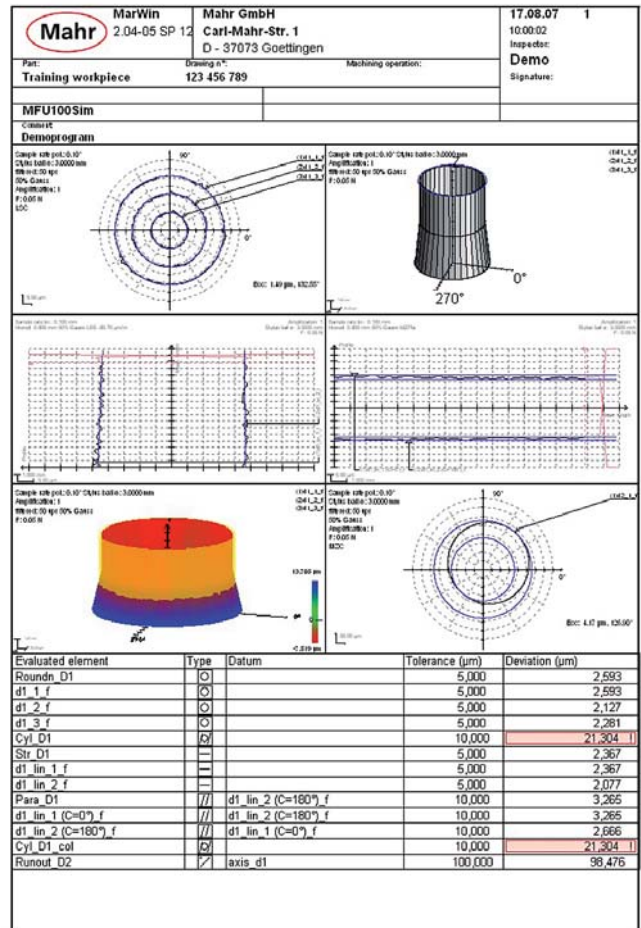

Multigraphic record

### 6. DATA EXPORT



- QE Result export (optional)

## Software Packages for Special Applications

### Expansion package for twist testing and evaluation

Can be used in conjunction with **MarForm MMQ 400** with **T7W** probe and Mahr's **MarWin** evaluation software, consisting of:

- Twist evaluation software package based on MarWin evaluation software
- Probe arm for **T7W** for twist measurement, double-ended, with diamond tip and carbide ball with 3 mm dia. for alignment

### Form and twist evaluation

- Form/positional evaluation for ovality / conicity / parallelism / parallel to twist evaluation
- Form/positional/twist evaluation of several upr values

### Evaluation and recording

After the measurements have been performed, measurement records with the following content are generated:

*Twist parameters:*

- Movement rate DG (upr) 1 to 50
- Period length DP (mm) > 0.05
- Twist angle  $D_\gamma$  (degrees) maximum of 5°, minimum depending on dia. = 50 mm and DG (e.g. 15' if dia. = 50 mm/DG = 15 upr)
- Twist direction negative/positive or right/left
- Twist depth Dt ( $\mu\text{m}$ ) > 0.1

*Graphic output:*

The measured profiles are output in the record as a graphic.

Various types of graphic output are available:

- 3D cylinder (in color, traditional and unwound)
- Polar display of polar profiles for individual assessment of the workpiece form
- Amplitude spectra of the polar profiles in a bar graph
- Display of individual generating lines as a straightness profile for individual assessment of form and position parameters
- Amplitude spectra of the linear profiles in a bar graph

Record with indication of measurement conditions

*Recording measured values:*

Various contacting strategies can be easily parameterized:

- Measurement of n generating lines (e.g. 72 according to DC standard)
- Combination measurement of n generating lines and m polar profiles (e.g. 4 + 4; high precision and low measurement time)
- Patented adaptive method (optimization of strategy and measurement time in computer)

A probe arm for **T7W** equipped with two styluses is used to record measured values:

- **Stylus #1** with 3 mm dia. carbide ball for mechanical workpiece centering and tilting on the **MMQ 400** Formtester
- **Stylus #2** with diamond tip for measuring twist and form parameters




### Expansion package for piston testing and evaluation

Can be used in conjunction with **MarForm MMQ 400** with **T7W** probe and Mahr's **MarWin** evaluation software, consisting of:

- Software package for piston-specific evaluation based on **MarWin** evaluation software
- Probe arms for piston measurement optional and customized on request

Within the framework of the piston testing and evaluation option, piston-specific features and evaluations are implemented, for example

- Determining the position of the main ovality axis
- Determining the position of the pin bore (using segment measurements in the bore) and using this to determine the ovality distortion
- Testing up to 10 ovalities using tolerance tables (symmetrical and asymmetrical) / radius- or diameter-based input and output / records for each oval: polar and linear graphs and results table; changes possible at the customer's request depending on the work involved
- Testing 2 meridians using tolerance tables (symmetrical and asymmetrical) / radius- or diameter-based input and output / records: both meridians on a single page with graphic and results table; changes possible at the customer's request depending on the work involved
- Determining the offset of the head relative to the defined piston axis
- Testing the following features in the grooves (for each groove, measurements possible at up to 4 angle positions)
  - Long-wave (0 to 50 upr) and short-wave (15 to 150 upr) properties of upper and lower groove flanks
  - Groove opening angle (total and individual) of trapezoidal grooves, output in either degrees, minutes, seconds or as a decimal
  - Straightness, axial run-out and perpendicularity of upper and lower groove flanks relative to the piston axis
- Determining special linear forms of the piston's pin bore using tolerance tables (e.g. "trumpet shape") in the same clamping operation as items 1-6 (2 measurements for each bore section)
- Determining special linear (e.g. "trumpet shape") and polar (e.g. "ovalities on one side") forms of the piston's pin bore using tolerance tables, clamped with centered bore (up to 4 linear and up to 2 polar measurements for each bore section)

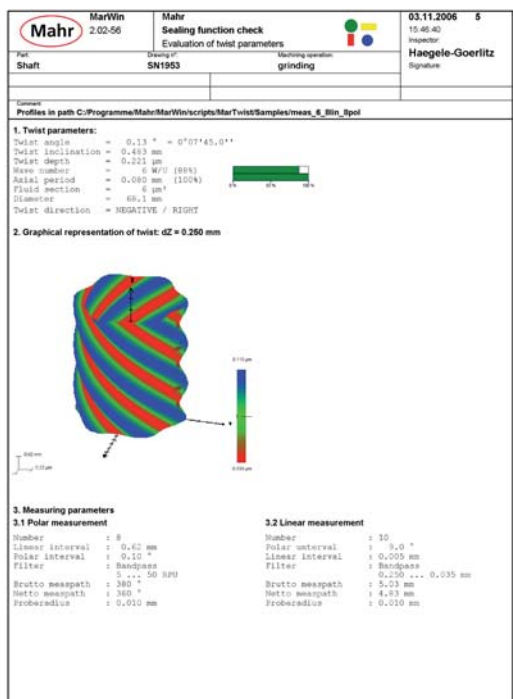

Twist measurement record



Request a brochure or see WebCode 1292.

## MarForm Overview of Standard Form Measuring Instruments



Formtester	MMQ 100	MMQ 34 Z=350 mm Z=500 mm	MMQ 400 Z=350 mm	MMQ 400 Z=500 mm
<b>Roundness measuring device, C-axis</b>				
Roundness deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ meas. height)**	0.050 + 0.0006	0.02 + 0.0005	0.02 + 0.0005	0.02 + 0.0005
Roundness deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ meas. height)*	0.025 + 0.0003	0.01 + 0.00025	0.01 + 0.00025	0.01 + 0.00025
Axial run-out deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ meas. radius)**	0.040 + 0.0006	0.04 + 0.0002	0.04 + 0.0002	0.04 + 0.0002
Axial run-out deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ meas. radius)*	0.020 + 0.0003	0.02 + 0.0001	0.02 + 0.0001	0.02 + 0.0001
<b>Centering and tilting table</b>	Manual	Manual	Man. / autom.	Man. / autom.
Table diameter (mm)	160	220	285	285
Table load capacity, centric (N)	200	600	600	600
Speed (rpm) 50 Hz / 60 Hz	5 / 6	1.66 / 5 / 10	1 / 10	1 / 10
<b>Vertical unit, Z-axis</b>				
Positioning path (mm)	300, manual	-	-	-
Manual or motorized positioning	Manual	-	-	-
Motorized measuring path (mm)	-	350/500	350	500
Straightness deviation /100 mm meas. path ( $\mu\text{m}$ )**	-	0.25	0.15	0.15
Straightness deviation /total meas. path ( $\mu\text{m}$ )**	-	0.7/0.8	0.3	0.4
Parallelism deviation of Z/C-axis in tracing direction ( $\mu\text{m}$ )	-	-	0.5	0.8
Measuring speed (mm/s)	-	0.5 / 1 / 5	0.5 to 10	0.5 to 10
Positioning speed (mm/s)	-	5 / 10 / 30	0.5 to 100	0.5 to 100
<b>Horizontal unit, X-axis</b>				
Positioning path (mm)	180	180	-	-
Manual or motorized positioning	Manual	Mot.	Mot.	Mot.
Motorized measuring path (mm)	-	-	180	280
Straightness deviation /100 mm meas. path ( $\mu\text{m}$ )***	-	-	0.4	0.5
Straightness deviation /total meas. path ( $\mu\text{m}$ )**	-	-	0.8	1.5
Perpendicularity of X/C-axis ( $\mu\text{m}$ )	-	-	1	2
Measuring speed (mm/s)	-	-	0.5 to 10	0.5 to 10
Positioning speed (mm/s)	-	5 / 10 / 30	0.5 to 30	0.5 to 30

\* Values as maximum deviation from reference circle LSC, filter 15 upr.

\*\* All values in accordance with DIN ISO 1101 at 20 °C  $\pm$  1 °C in vibration-free environment, filter 15 upr LSC or 2.5 mm LSS, 5 rpm or 5 mm/s and standard probe arm with ball dia. 3 mm.

Tested on standard, taking into account compensation algorithms.

Due to the large number of possibilities, only a few examples of machines are given here. Technical data for "your" MMQ can be obtained from Mahr on request.

## MarForm Overview of Reference and Large Formtesters

Formtester	MFU 800	MFU 100
<b>Roundness measuring device, C-axis</b>		
Roundness deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ meas. height)**	0.02 + 0.0004	0.02 + 0.0004
Roundness deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ meas. height)*	0.01 + 0.0002	0.01 + 0.0002
Axial run-out deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ meas. radius)**	0.04 + 0.0002	0.04 + 0.0004
Axial run-out deviation ( $\mu\text{m} + \mu\text{m}/\text{mm}$ meas. radius)*	0.02 + 0.0001	0.02 + 0.0002
Resolution (interpolated)	0.0005°	0.0001°
<b>Centering and tilting table</b>		
Table diameter (mm)	Automatic	Automatic
Table load capacity, centric (N)	300	180
Speed (rpm) 50 Hz/60 Hz	1,000	200
	0.1 to 15	0.1 to 15
<b>Vertical straightness measuring device, Z-axis</b>		
Measuring path (mm)	480	320
Straightness deviation /100 mm ( $\mu\text{m}$ )**	0.1	0.1
Straightness deviation /200 mm ( $\mu\text{m}$ )**	-	0.2
Straightness deviation / measuring path ( $\mu\text{m}$ )**	0.3	0.3
Parallelism deviation of Z/C-axis in tracing direction ( $\mu\text{m}$ )	0.6	0.6
Measuring speed (mm/s)	0.1 to 50	0.1 to 50
Positioning speed (mm/s)	0.1 to 50	0.1 to 50
Positioning uncertainty ( $\mu\text{m}$ ) with backward probe positioning	-	1
Positioning uncertainty ( $\mu\text{m}$ )		
(total positioning P in accordance with VDI 3441)	10	2
Resolution (interpolated) ( $\mu\text{m}$ )	0.001	0.001
<b>Horizontal straightness measuring device, X-axis</b>		
Measuring path (mm)	180	190
Straightness deviation /100 mm ( $\mu\text{m}$ )**	0.15	0.15
Straightness deviation /meas. path ( $\mu\text{m}$ )**	0.3	0.3
Perpendicularity of X/C-axis ( $\mu\text{m}$ )	0.3	0.3
Measuring speed (mm/s)	0.1 to 50	0.1 to 50
Positioning speed (mm/s)	0.1 to 50	0.1 to 50
Positioning speed ( $\mu\text{m}$ ) with backward probe positioning	-	1
Positioning uncertainty ( $\mu\text{m}$ )		
(total positioning P to VDI 3441)	4	2
Diameter measuring accuracy ( $\mu\text{m}$ )	2	0.2
Resolution (interpolated) ( $\mu\text{m}$ )	0.001	0.001
<b>Horizontal straightness measuring device, Y-axis</b>		
Measuring path (mm)	6	6
Straightness deviation / ( $\mu\text{m}/5\text{ mm}$ , filter 0.25 mm)	0.5	0.5
Perpendicularity of Y/X-axis ( $\mu\text{m}$ )	1	1
Resolution (interpolated) ( $\mu\text{m}$ )	0.005	0.005

\* Values as maximum deviation from reference circle LSC, filter 15 upr.

\*\* All values in accordance with DIN ISO 1101 at 20 °C ± 1 °C in vibration-free environment, filter 15 upr LSC or 2.5 mm LSS, 5 rpm or 5 mm/s and standard probe arm with ball dia. 3 mm. Tested on standard, taking into account compensation algorithms.



## MarForm Overview of Standard Form Measuring Instruments – Inch



Formtester	MMQ 100	MMQ 34 Z = 13.8 in Z = 19.7 in	MMQ 400 Z = 13.8 in	MMQ 400 Z = 19.7 in
<b>Roundness measuring device, C-axis</b>				
Roundness deviation ( $\mu\text{in} + \mu\text{in/in}$ meas. height)**	2.0 + 0.024	0.8 + 0.020	0.8 + 0.020	0.8 + 0.020
Roundness deviation ( $\mu\text{in} + \mu\text{in/in}$ meas. height)*	1.0 + 0.012	0.4 + 0.010	0.4 + 0.010	0.4 + 0.010
Axial run-out deviation ( $\mu\text{in} + \mu\text{in/in}$ meas. radius)**	1.6 + 0.024	1.6 + 0.008	1.6 + 0.008	1.6 + 0.008
Axial run-out deviation ( $\mu\text{in} + \mu\text{in/in}$ meas. radius)*	0.8 + 0.012	0.8 + 0.004	0.8 + 0.004	0.8 + 0.004
<b>Centering and tilting table</b>				
Table diameter (in)	Manual 6.3	Manual 8.7	Manual / autom. 11.2	Manual / autom. 11.2
Table load capacity, centric (lbs)	44	134	134	134
Speed (rpm) 50 Hz / 60 Hz	5 / 6	1.66 / 5 / 10	1 / 10	1 / 10
<b>Vertical unit, Z-axis</b>				
Positioning path (in)	11.8 manual	-	-	-
Manual or motorized positioning	Manual	-	-	-
Motorized measuring path (in)	-	13.8/19.7	13.8	19.7
Straightness deviation / 100 in meas. path ( $\mu\text{in}$ )**	-	9.84	5.9	5.9
Straightness deviation / total meas. path ( $\mu\text{in}$ )**	-	27.56/31.50	11.8	15.7
Parallelism deviation of Z/C-axis in tracing direction ( $\mu\text{in}$ )	-	-	19.7	31.5
Measuring speed (in/s)	-	0.02 / 0.04 / 0.20	0.02 to 0.40	0.02 to 0.40
Positioning speed (in/s)	-	0.20 / 0.4 / 1.18	0.02 to 4	0.02 to 4
<b>Horizontal unit, X-axis</b>				
Positioning path (in)	7	7	-	-
Manual or motorized positioning	Manual	Mot.	Mot.	Mot.
Motorized measuring path (in)	-	-	7.1	11
Straightness deviation / 100 in meas. path ( $\mu\text{in}$ )**	-	-	15.7	19.7
Straightness deviation / total meas. path ( $\mu\text{in}$ )**	-	-	31.5	59.0
Perpendicularity of X/C-axis ( $\mu\text{in}$ )	-	-	39.4	78.7
Measuring speed (mm/s)	-	-	0.02 to 0.40	0.02 to 0.40
Positioning speed (mm/s)	-	0.20 / 0.4 / 1.18	0.02 to 1.18	0.02 to 1.18

\* Values as maximum deviation from reference circle LSC, filter 15 upr.

\*\* All values in accordance with DIN ISO 1101 at 20 °C ± 1 °C in vibration-free environment, filter 15 upr LSC or 2.5 mm LSS, 5 rpm or 5 mm/s and standard probe arm with ball dia. 3 mm.

Tested on standard, taking into account compensation algorithms.

Due to the large number of possibilities, only a few examples of machines are given here. Technical data for "your" MMQ can be obtained from Mahr on request. Information on US models MMQ 6xxx is also available on request.

## MarForm Overview of Reference and Large Formtesters - Inch


Formtester	MFU 800	MFU 100
<b>Roundness measuring device, C-axis</b>		
Roundness deviation ( $\mu\text{in} + \mu\text{in/in}$ meas. height)**	0.8 + 0.016	0.8 + 0.016
Roundness deviation ( $\mu\text{in} + \mu\text{in/in}$ meas. height)*	0.4 + 0.008	0.4 + 0.008
Axial run-out deviation ( $\mu\text{in} + \mu\text{in/in}$ meas. radius)**	1.6 + 0.008	1.6 + 0.008
Axial run-out deviation ( $\mu\text{in} + \mu\text{in/in}$ meas. radius)*	0.8 + 0.004	0.8 + 0.008
Resolution (interpolated)	0.0005°	0.0001°
<b>Centering and tilting table</b>	Automatic	Automatic
Table diameter (in)	11.8	7.1
Table load capacity, centric (lbs)	225	44
Speed (rpm) 50 Hz / 60 Hz	0.1 to 15	0.1 to 15
<b>Straightness measuring device vertical, Z-axis</b>		
Measuring path (in)	18.9	12.6
Straightness deviation / 3.9 in ( $\mu\text{in}$ )**	3.9	3.9
Straightness deviation / 7.9 in ( $\mu\text{in}$ )**	-	7.9
Straightness deviation / meas. path ( $\mu\text{in}$ )**	11.8	11.8
Parallelism deviation of Z/C-axis in tracing direction ( $\mu\text{in}$ )	23.6	23.6
Measuring speed (in/s)	0.004 to 1.97	0.004 to 1.97
Positioning speed (in/s)	0.004 to 1.97	0.004 to 1.97
Positional uncertainty ( $\mu\text{in}$ ) with backward probe positioning	39.4	-
Positional uncertainty ( $\mu\text{in}$ )		
(total positioning P to VDI 3441)	393.7	78.7
Resolution (interpolated) ( $\mu\text{in}$ )	0.0394	0.0394
<b>Straightness measuring device horizontal, X-axis</b>		
Measuring path (in)	7.1	7.5
Straightness deviation / 100 in ( $\mu\text{in}$ )**	5.9	5.9
Straightness deviation / meas. path ( $\mu\text{in}$ )**	11.8	11.8
Perpendicularity of X/C-axis ( $\mu\text{in}$ )	11.8	11.8
Measuring speed (in/s)	0.004 to 1.97	0.004 to 1.97
Positioning speed (in/s)	0.004 to 1.97	0.004 to 1.97
Positional uncertainty ( $\mu\text{in}$ ) with backward probe positioning	-	39.4
Positional uncertainty ( $\mu\text{in}$ )		
(total positioning P to VDI 3441)	157.5	78.7
Diameter measuring accuracy ( $\mu\text{in}$ )	78.7	7.9
Resolution (interpolated) ( $\mu\text{in}$ )	0.0394	0.0394
<b>Straightness measuring device horizontal, Y-axis</b>		
Measuring path (in)	0.2	0.2
Straightness deviation ( $\mu\text{in}/0.2$ in, filter 0.010 in)	19.7	19.7
Perpendicularity of Y/X-axis ( $\mu\text{in}$ )	39.4	39.4
Resolution (interpolated) ( $\mu\text{in}$ )	0.2	0.2

\* Values as maximum deviation from reference circle LSC, filter 15 upr.

\*\* All values in accordance with DIN ISO 1101 at 20 °C ± 1 °C in vibration-free environment, filter 15 upr LSC or 2.5 mm LSS, 5 rpm or 5 mm/s and standard probe arm with ball dia. 3 mm.  
Tested on standard, taking into account compensation algorithms.

## Accessories for MarForm

The optimum solution using accessories

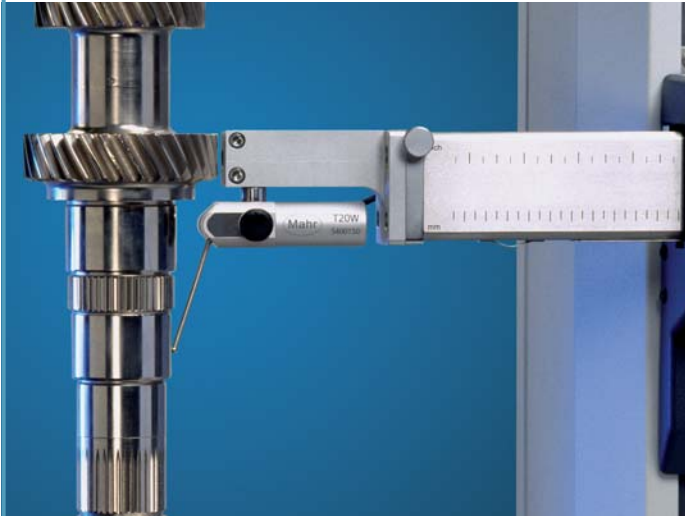

### T20W Probe

The inductive **T20W** probe is a universal device. The fact that the probe arm can be moved in a range of 190° and that there are a variety of clamping options for the probe means that measurements can also be performed in areas that are difficult to access. You can combine easily exchangeable probe arms with a variety of styluses in order to adapt the probe to the relevant measurement tasks or workpieces.

#### T20W probe with probe arm range of 190°

- Measuring range  $\pm 1,000 \mu\text{m}$  (0.039 in)
- Measuring force adjustable from 0.01 N to 0.12 N
- Switchable measuring direction
- Exchangeable probe arm
- Free travel limitation adjustable in contacting direction
- Clamping shaft dia. 8 mm (0.31 in)



### Motorized T7W Probe

The **T7W probe** is fitted with a motorized rotational axis. This makes it possible to move the probe arm gradually to the required contacting position. As a result, measurements can be performed on cylindrical surfaces and end faces. As a zero position probe, the **T7W** can also switch automatically between internal and external measurements or between end face measurements from above and below without operator intervention. Fully automatic measurement runs on complex workpieces can be carried out without operator intervention too. The probe arms of the **T7W** are exchangeable. Its motorized rotational axis enables the construction of multi-point probe arms – i.e. probe arms with several different contacting elements – making it possible to switch between different stylus ball geometries within a single measurement run.

#### Motorized T7W probe with probe arm moveable around 360° for MMQ 400, MMQ 400 CNC and MFU 100

- Total range of  $2,000 \mu\text{m}$  (0.079 in)
- Zero probe working range  $\pm 500 \mu\text{m}$  (0.02 in)
- Measuring force adjustable from 0.01 N to 0.2 N
- Two-way measuring direction
- Contacting angle freely selectable in 1° steps
- 360° adjustable (motorized)
- Probe arms easily exchangeable (magnetic mount)
- Flexible multi-point probe possible
- Probe arm module with adjustment device available
- Mechanical and electrical overload protection



## Accessories for MarForm

The optimum solution using accessories



### Clamps

#### Three-jaw chuck, dia. 100 mm (3.94 in)

with mounting flange dia. 160 mm (6.30 in) and reversible jaws for external and internal clamping. External clamping range 1 to 100 mm (0.040 to 3.93 in), internal 36 to 90 mm (1.42 to 3.54 in). Total height with flange 47 mm (1.85 in). Adjustment by means of rotating ring.

#### Rim chuck with 8 jaws, dia. 150 mm (5.91 in)

with mounting flange dia. 198 mm (7.80 in) and separate jaws for external and internal clamping. External clamping range 1 to 152 mm (0.039 to 5.98 in), internal 24 to 155 mm (0.94 to 6.10 in). Total height with flange 52 mm (2.05 in). Cannot be used with MMQ 10/MMQ 100 Formtester.

#### Three-jaw chuck, dia. 110 mm (4.33 in) (not illustrated)

with mounting flange dia. 164 mm (6.46 in). External clamping range 3 to 100 mm (0.12 to 3.94 in), internal 27 to 100 mm (1.06 to 3.94 in). Total height with flange 73 mm (2.87 in).

#### Three-jaw chuck, dia. 80 mm (3.14 in)

with mounting flange dia. 124 mm (4.88 in). External clamping range 2 to 78 mm (0.079 to 3.07 in), internal 26 to 80 mm (1.02 to 3.15 in). Total height with flange 65.5 mm (2.58 in). Adjustment by means of T-wrench.

#### Quick-clamping device (collet chuck)

Dia. 1 to 12 mm (0.039 to 0.47 in) with mounting flange dia. 124 mm (4.88 in), for external clamping. Supplied with collet chucks of dia. 1 to 8 mm (0.039 to 0.31 in) in 0.5 mm (0.02 in) steps. Total height 80 mm (3.15 in).

Further collet chuck devices are available on request.

#### Clamping disks/clamping jaws

Clamping disk set. Adjustable workpiece stop for pre-centering and clamping in series measurements.

For clamping diameter of 36 to 232 mm (1.42 to 9.13 in) depending on machine type. Comprises two stop disks with slot and an eccentric clamping disk.

**Clamping jaws (2).** With M5 fastening thread. Clamping height 40 mm (1.57 in).

Further part-specific clamps are available on request.

### Test Standards

#### Roundness standard, 40 nm

Ultra-precise measuring sphere for testing measuring spindle radial run-out accuracy. Dia. approx. 50 mm (1.97 in). Roundness deviation 0.04  $\mu\text{m}$  (1.57  $\mu\text{in}$ ).

#### Roundness standard, 100 nm (not illustrated)

High-precision measuring sphere for testing measuring spindle radial run-out accuracy. Dia. approx. 12.7 mm (0.5 in). Roundness deviation 0.10  $\mu\text{m}$  (3.94  $\mu\text{in}$ ).

#### Optical flat

Dia. 150 mm (5.91 in), for testing and adjusting the horizontal measuring device for the measuring spindle axis. Flatness deviation 0.2  $\mu\text{m}$  (8  $\mu\text{in}$ ).

#### Universal cylinder square with calibration standard

High-precision cylinder square with two surfaces for dynamic testing of probe calibration. Dia. 20 mm (0.79 in), length 150 mm (5.91 in).

#### Cylinder square

for checking and adjusting the measuring spindle axis for vertical guidance. Length 250 mm (9.84 in), dia. 80 mm (3.15 in). Deviation from cylindricity max. 1  $\mu\text{m}$  (40  $\mu\text{in}$ ). Weight approx. 11.5 kg (25.35 lbs).

#### Cylinder square (not illustrated)

for checking and adjusting the measuring spindle axis for vertical guidance. Length 360 mm (14.17 in), dia. 100 mm (3.94 in). Deviation from cylindricity max. 1  $\mu\text{m}$  (40  $\mu\text{in}$ ). Weight approx. 13 kg (28.66 lbs).

#### Magnification standard with a flick (not illustrated)

Cylinder L = 50 mm (1.97 in), dia. 20 mm (0.79 in) with minimally flattened section for testing probe sensitivity.

#### Multi-wave standard (not illustrated)

Cylindrical base unit with sinusoidal waves on outside diameter. 15, 50, 150 and 500  $\mu\text{m}$ . Used to test the sensitivity of the probe signal and the filters in form testing.



Request a brochure or see WebCode 1292.



## Primar. The Universal Form Measuring Instrument

### THREE IN ONE

► | You only need to clamp your test items once and start the measuring program – the Primar runs through all the test parameters completely automatically. The system could not be more efficient because no time is lost changing setups and transporting test items from one test machine to another. Primar covers form, gearwheel and 3D features in a single clamping operation. The broad range of applications not only saves you money in terms of investment and maintenance, but also saves you time. | ◀





## Primar MX 4

A successful combination of formtester and polar coordinate measuring instrument



### Features

The **Primar** dynamically scans axis-symmetrical workpieces for form and positional deviations. It provides  $\mu\text{m}$ -accurate measuring data quickly for your production needs.

When used with the CNC centering and tilting table, the Primar is able to perform **true form measurements**. With this type of measurement, only one axis (the high-precision C spindle) is moved to record the data, thus minimizing the measuring uncertainty. Thousands of 3D measurement values are recorded. As a result of prior CNC-controlled tilting and leveling to align the workpiece, the measurement is completely without error in accordance with the Abbe principle.

The four measuring axes of the Primar are designed such that even large and heavy workpieces can be measured.

- X-axis 300 mm (11.81 in)
- Y-axis 600 mm (23.62 in)
- Z-axis 700 mm (27.56 in)

The easily accessible turntable is generously proportioned and makes it easy to load test items.

The **Primar** enables you to perform a wide range of measurement tasks more cost-efficiently than ever before. It is the first unit capable of checking eccentric parts with formtester accuracy. This is thanks to easy-to-use family programs for gearwheels, geared tools, bevel gears, camshafts, crankshafts, pistons and connecting rods or customized measuring programs developed specifically for your workpiece.

The **Primar** can be used in the following applications:

- Mechanical and electrical engineering: Gearwheels, rotors, spindles, ball bearing cages, spur gear shafts, involute gear teeth, hollow shafts with internal toothing, pinion shafts, planetary gears, ring gears, control valves, tappets, camshafts and connecting rods
- Automotive engineering: Pistons, steering components, axle and shaft journals, propeller shafts, gearwheels, worms, bevel gears, etc.
- Customized axis-symmetrical workpieces

### Primar measuring station components

The **Primar** is customized to your specific requirements and workpieces. The machine concept allows you to add on extra options. These, like the software, are modular.

- MarForm Primar MX 4 XXL
- MarForm Primar MX 4 CNC
- Center support for fixing between centers

## Primar MX 4 Versions

MarForm Primar MX 4 XXL



### Description

Crankshafts have specific requirements in terms of form and positional measurements. The **Primar MX 4 XXL** is ideally suited to this application. Thanks to the extra-large adjustment paths (centering range  $\pm 72$  mm (2.83 in) in X- and Y-directions), the centering and tilting table is able to align main and stroke bearings relative to the C-axis with  $\mu\text{m}$  precision. The XXL table is also used when measuring connecting rods. The diagonal travel of 180 mm (7.09 in) enables both eyes to be centered.

#### Application

- Crankshaft measurements
- Connecting rod measurements

The **Primar MX4 XXL** can also optionally be fitted with a center support to mount workpieces between centers.

MarForm Primar MX 4 CNC



### Description

High-precision form, positional and 3D measurements on cylindrical workpieces can be performed with ease thanks to the centering and tilting table.

#### Application

Geometry elements can be measured perpendicular to the main workpiece axis in a single clamping operation. This enables straightness or roundness measurements to be performed on items such as a piston's pin bore. The Primar is also ideal for fast, comprehensive testing of camshafts, including the cam form.

## Primar Software Solutions

### Description

#### Primar software solutions

The process of creating a measuring program and measuring workpieces must be fast and not involve a lot of programming. This is no problem with the Primar family program. It defines each new measuring program using masks. The operator only has to enter the geometry of the workpieces and select the required features. The part is then measured automatically. It also responds quickly and flexibly when it comes to measuring part families or in the event of rapid changes. It is available for the following:

- Crankshafts
  - Camshafts
  - Pistons
  - Shaving gears
  - Hobs
  - Bevel gears
  - Spur gears
  - Worms
- There are also application programs for the following:
- Connecting rods
  - Engine blocks
  - Cylinder heads
  - Other workpieces



both these tasks. The combination of the measuring station for camshafts and the family program offers everything you will need for fast, efficient and comprehensive camshaft measurement. The nominal cam form can be imported as a file. The probe moves along this nominal cam contour. The distance between the measuring points is kept constant. This means that you get a detailed view of your cam profiles with your desired tolerance bands.

### Crankshafts



#### Family program for crankshafts

When used in combination with an XXL centering and tilting table on the C-axis, Primar is a high-performance measuring station for crankshafts. Form, position and 3D features can be measured in a single clamping operation. The family program offers a large number of features at main and stroke bearings and at the flange and journal of the crankshaft. The form features on the workpiece are always measured in formtester mode. This ensures maximum accuracy for the results. To perform the measurements, the main and stroke bearings are automatically aligned with the C-axis of the measuring instrument. The large number of measuring points provides the basis for the high quality of the measurement results. This results in high-precision workpiece axes.

### Pistons



#### Family program for pistons

The family program makes the Primar the ideal measuring station for pistons. The workpiece is aligned with the piston bore. Ovality, meridian form, diameter, the pin bore of the piston and the grooves are measured in the workpiece coordinate system. The measurements are output in piston-specific records as a graphic or as results tables.

### Connecting Rods



#### Family program for connecting rods

When used in combination with the XXL centering and tilting table, the Primar can be utilized to its full benefit with this workpiece. The workpiece is measured in its entirety. The large and small eyes are positioned automatically into the C machine axis and all the form features are measured in form mode with maximum precision. Further features such as diameter, distance, thickness and the set of teeth are measured according to the drawing requirements in the same clamping operation. Primar is thus able to perform an evaluation of the entire workpiece in a single clamping operation and offers unique determination of datum elements. The evaluation results are available in table and graphic form. The universal clamp enables you to quickly change to other conrod types with a simple adjustment of the workpiece supports.

### Camshafts


#### Family program for camshafts

To use the family program for camshafts, you need both a Formtester that records the features at the bearing points and, in order to measure the cam form, a continuous-path control system in combination with low contacting forces and recording of as many measuring points as possible. The Primar offers a simple solution to

INNOVATIVE METROLOGY IMPROVES YOUR GEAR QUALITY.  
THAT IS WHY WE HAVE MARGEAR



The latest information on MARGEAR products can be found on our website: **www.mahr.com, WebCode 157**

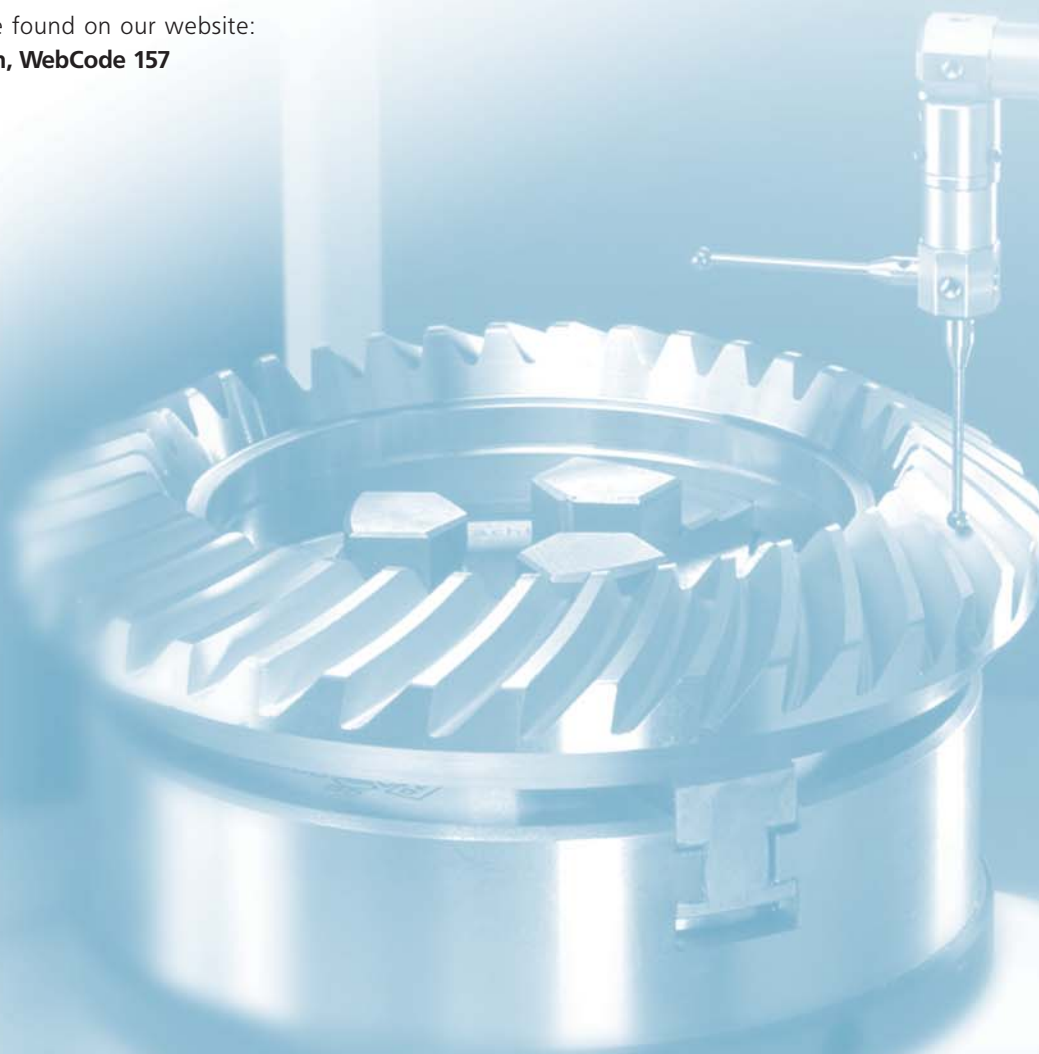

► | Maximum precision in the production environment is an important factor for a company's success. MarGear gear metrology solutions enable you to perform measurement tasks on gears and gearing tools quickly, simply and precisely in a single setup. The flexible systems – requiring no mechanical alignment or reclamping and combining gear metrology with form and positional analysis – create the ideal conditions to ensure your business remains competitive. Fully integrating metrology into the manufacturing process creates a closed-loop quality control system for gear manufacture.

## ► | MarGear. Gear Metrology

**MarGear. Gear Metrology**  
from Experienced Specialists **18- 2**

**MarGear. GMX 275, GMX 400, GMX 600** **18- 3**

**MarGear. Industry Solutions** **18- 4**

**MarGear. Software Solutions**  
MarLib, Gear CuT, Closed Loop **18- 6**






## MarGear. Gear Metrology from Experienced Specialists

### GEAR METROLOGY SOLUTIONS

► | The highly precise and flexible GMX systems represent the ideal combination of gear and form measurement in a single system. From highly specialized gear analysis to fully integrated series measurement, MarGear is your perfect partner for all levels of modern gear manufacturing. | ◀



## MarGear. GMX 275/400

Universal gear measurement centers



### Description

For fast and precise measurement and analysis of gears of all types up to an outside diameter of 275 or 400 mm (10.83 or 15.75 in). The ideal solution for both universal and specialized gear manufacturing processes. System solutions ensure maximum flexibility and availability within modern gear component manufacturing environments.

#### Fully automatic inspection of:

- Straight and helical cylindrical gears
- Spiral and hypoid bevel gears
- Crown gears
- Cylindrical worm shafts
- Conical cylindrical gears
- Segment gears
- Hobs
- Shaving cutters
- Pinion-shaped cutters
- Synchronous gears
- 3D geometry form measurements and analysis

#### Accuracies

Class I accuracy gear measuring machine for gear measurements in accordance with **VDI/VDE 2612/2613 Group 1** at  $20\text{ °C} \pm 2\text{ °C}$ , rotational axis: formtester accuracy.

## MarGear. GMX 600

Universal form and gear inspection system



### Description

The perfect combination for gear and form testing applications in a single setup. This combination saves time as well as investment and maintenance costs.

Full form testing functionality for outside diameters up to 600 mm (23.62 in). The **GMX 600** is a complete solution that can also be used to measure crankshafts, camshafts and pistons.

#### Fully automatic inspection of:


- Straight and helical cylindrical gears
- Spiral and hypoid bevel gears
- Cylindrical worm shafts
- Conical cylindrical gears
- Segment gears
- Shaving cutters
- Hobs
- Synchronous gears
- 3D geometry
- Form measurements with centering and tilting table
- Camshafts, crankshafts & pistons \*

(\* optional)

#### Accuracies

Class I accuracy gear measuring machine for gear measurements in accordance with **VDI/VDE 2612/2613 Group 1** at  $20\text{ °C} \pm 2\text{ °C}$ , rotational axis: formtester accuracy.

## MarGear. Industry Solutions

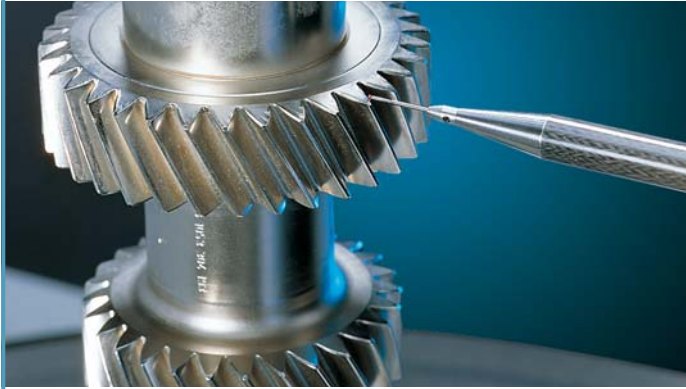


### Measurement of spur gears

- Measurement and analysis of internal and external gears up to a 90° helix angle
- Crowned and conical gears
- Analysis according to DIN 3962 or free tolerances
- Measurement and analysis of profile, flank lines (lead), pitch, run-out errors, tooth thickness and diameter over balls/pins
- Root and tip reliefs
- Tolerance bands, K-charts
- Measurement of twist
- Measurement of tip and root diameter
- Measurement of segment gears
- Measurement and analysis up to modulus of 0.3




### Measurement of bevel gears

- Measurement and analysis of flank topography based on nominal data or a master gear plus gear pitch and run-out errors
- Topography point matrix definition with up to 15 x 15 points
- Calculation of the average flank form
- Calculation of tooth thickness in normal and transverse section
- Measurement and analysis of tooth depth, face angle and root angle
- Calculation of pressure and spiral angles
- Deviation from flank form measurement
- Calculation of pitch errors according to DIN 3965

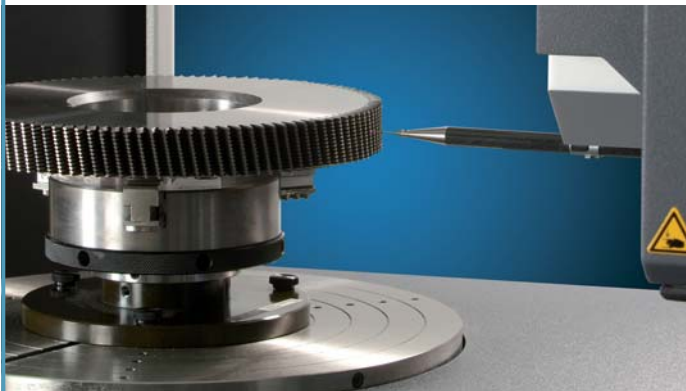

### Measurement of shaving cutters

- Measurement and analysis of shaving cutters
- Analysis according to DIN 3962 or free tolerances
- Measurement and analysis of profile, flank lines (lead), pitch, run-out errors, tooth thickness and diameter over balls/pins
- Analysis of crowning
- Automatic adjustment of measurement paths
- Automatic recognition of serration positions of plunge-type shaving cutters
- Measurement and analysis of burnishing cutters

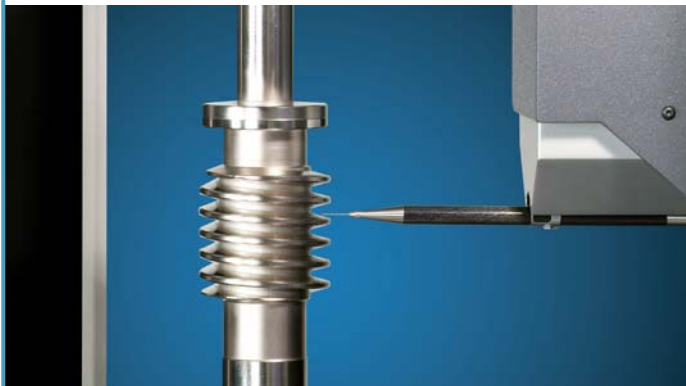

### Measurement of worm shafts

- Measurement and analysis of profile, flank lines (lead), pitch and tooth thickness on worm shafts
- Analysis of worm shafts with A, N, I or K profile
- Measurement and analysis of duplex worm shafts
- Measurement of pitch in axial or transverse plane
- Measurement of twist
- Analysis of crowning
- Analysis based on K-charts
- Analysis based on freely definable tolerances



## MarGear. Industry Solutions

### Hob measurement

- Measurement and analysis of axial and radial run-out on the collar
- Measurement of flute spacing and flute direction
- Profile measurement across or behind the cutting edge
- Measurement of thread and base pitch variation
- Analysis of form and position errors of the cutting face
- Calculation of tooth thickness
- Analysis conforming to DIN 3968 and other standards
- Measurement of special hobs as spline-shafts hobs, sprocket hobs etc.\*

\* optional



### Measurement of camshafts

- Measurement and analysis of camshafts based on design data
- Analysis of cam form and cam angle position relative to the reference groove
- Analysis of cam curves, angles and diameters and acceleration curves
- Measurement and analysis of unknown cam profiles, which can be stored as nominal or reference data
- Flexible record design
- Mask-based input without the need for time-consuming teach-in processes




### Measurement of crankshafts (GMX 600 only)

- The software package for crankshaft testing offers a wide variety of functions to measure and analyze parameters on the crankshaft's main and stroke bearings, flange and journals. All form parameters are always measured in form testing mode
- Fully automatic measurement of roundness, cylindricity, parallelism and diameter on main and stroke bearings
- Fully automatic measurement of roundness, cylindricity, parallelism, diameters and distances on the crankshaft flange
- Data input direct from the drawing
- Flexible record design



## MarGear. Software solutions – MarLib. 3D Form and Position Measurements

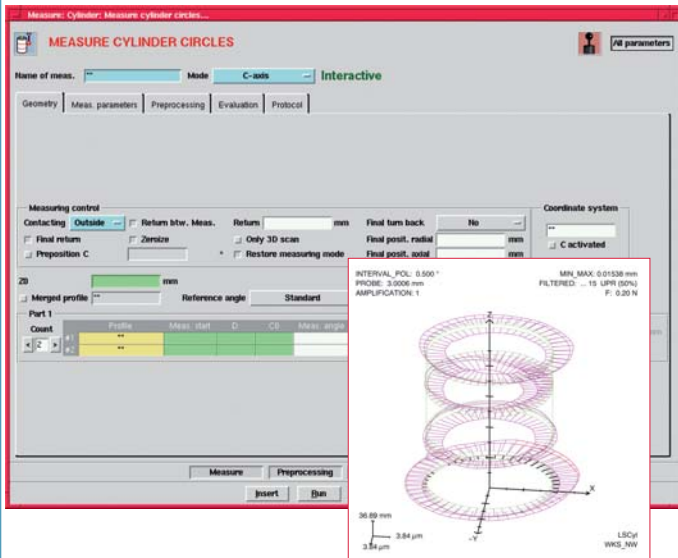

### Measurement philosophy



- Includes approx. 30 complex functions defined using parameter masks
- Geometry-oriented programming
- Each module is split into measurement, analysis and recording

### Advantages

- Short, clear and structured programs
- Quick and easy programming
- **MarLib** modules can be saved as a program
- Analysis of specific parameters such as roundness, cylindricity, diameter, etc.
- Analysis of various parameters from a single geometric element




Below: Sample record for form and position analysis, taking the example of a synchronous gear and camshaft

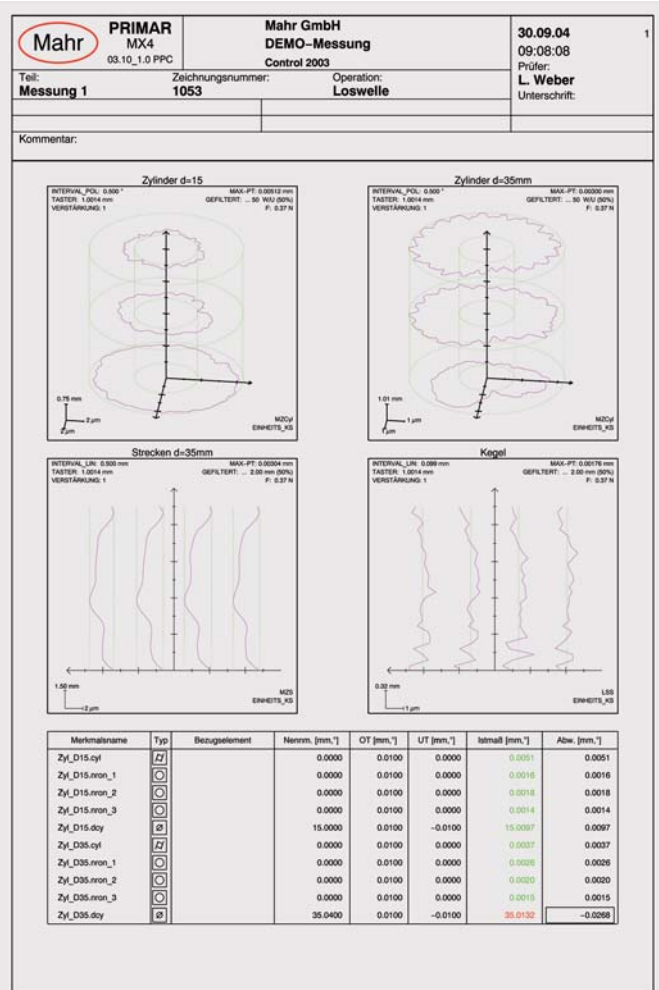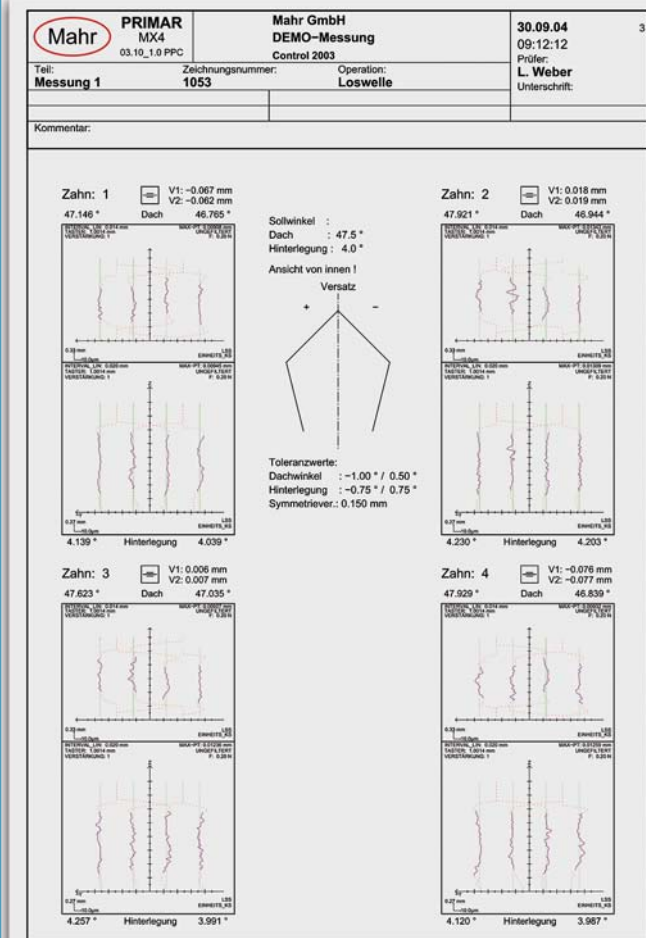



## MarGear. Software Solutions – Gear CuT

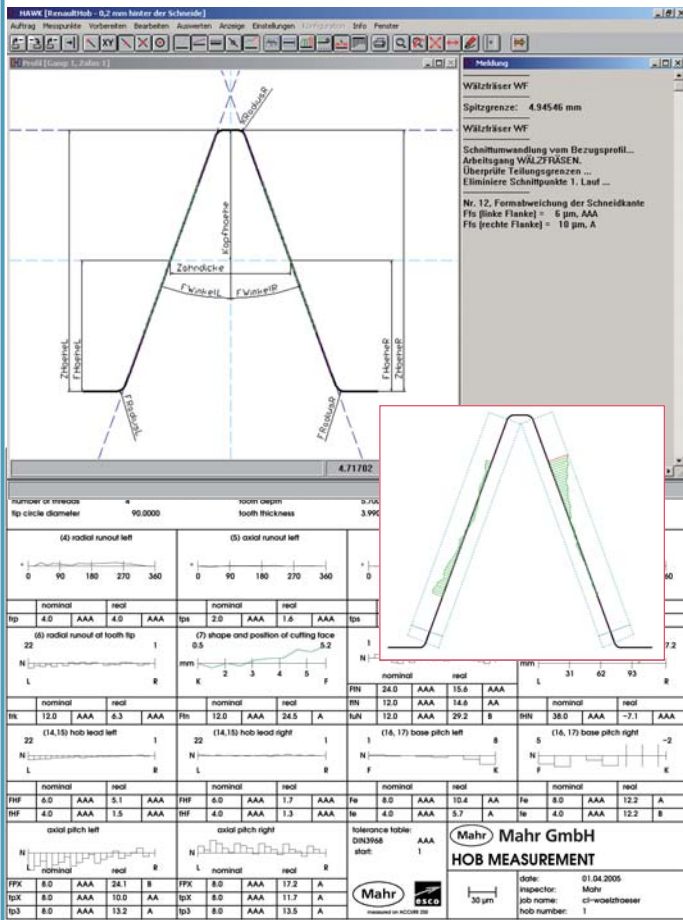

## Gear CuT – software for manufacturers of gearing tools for standard and special profiles

## Measurement philosophy

- Tactile scanning of the geometry
- Comparison of nominal and actual contours and analysis for in-process inspection
- Creation of input data for quality controlled manufacturing of gears and gear cutting tools

## Advantages

- Measuring machine programmed simply by setting dimensions in the inspection drawing (additional, non standard measures, special profiles)
- Parameter programs for standard gear cutting tools, automated generation of inspections programs and inspection drawings
- Parameterized description of the basic rack profile
- Choice between analysis in the axial section or reference profile
- Profile measurement across or behind the cutting edge
- CAD link as input for special profiles

## MarGear. Software Solutions – Closed Loop



## Philosophy

- Quality controlled manufacturing of gears and gear cutting tools
- Measuring machine becomes part of production

## Principle

- Production data available for input via CAx interfaces
- Measuring programs created automatically control the measuring machine. The scanned geometries are directly available in **Gear CuT** for profile comparison
- The high accuracy of the measuring machines and the sheer density of information that can be obtained from the measurements permit precise corrections which result in reproducibly tolerance-compliant workpieces after a single correction run

### Advantages

- Time savings of up to 80%
- High reproducible manufacturing accuracies
- Operator influence is minimized

## THE THIRD DIMENSION IN METROLOGY. OPTICAL METROLOGY FROM MAHR



The latest information on MARVISION multisensor technology can be found on our website:

**[www.mahr.com](http://www.mahr.com), WebCode 87**

► I Maximum manufacturing and quality control precision is key to your company's success. With MarVision optical coordinate measuring machines and multisensor measuring machines, Mahr offers you a quick and reliable solution to many different 2D and 3D measurement tasks – from cutting tools and precision products for the manufacturing industry and medical technology to miniaturized electronic components. Ultra-precise measuring machines, powerful image processing algorithms, part-specific evaluation software and decades of experience in optical metrology lay the foundation for meeting your high demands. I ◀

# MarVision. Optical Measuring Machines

<b>MarVision. Multisensor Technology</b>	<b>19- 2</b>
<b>Measuring Machines for the Shop Floor</b>	<b>19- 8</b>
<b>MarVision MS Product Line</b>	
<b>Measuring Machines for the Laboratory</b>	<b>19-12</b>
<b>MarVision OMS Product Line</b>	
<b>Universal 3D Coordinate Measuring Machines</b>	<b>19-15</b>
<b>MarVision PMC Product Line</b>	
<b>MarVision. Software</b>	<b>19-16</b>
<b>Vision 3D and Options</b>	
<b>MarVision. Measuring Microscopes</b>	<b>19-19</b>
<b>MarVision. Optical Coordinate Metrology</b>	<b>19-22</b>
<b>MarVision. ACCURE 250 Tool Measuring Machine</b>	<b>19-23</b>
<b>MarVision. UNI-VIS 250 Universal Measuring Machine</b>	<b>19-23</b>
<b>MarVision. TAURUS 650s Tool Measuring Machine</b>	<b>19-23</b>
<b>MarVision. Industry Solutions</b>	<b>19-24</b>
<b>MarVision. Software Solutions</b>	<b>19-26</b>
OSPREE, HAWK, Closed Loop	
<b>MarVision. Accessories</b>	<b>19-27</b>



## MarVision Multisensor Technology from Mahr



### Why use Mahr multisensor technology?

- Carrying out complete measurements without reclamping workpieces saves setup time and avoids having to invest in several separate machines
- Extremely quick optical measurements (camera, laser, white light) and tactile scanning save time during testing
- Incredibly simple operation and a standardized user interface make it quicker to get to grips with the machines

### What is multisensor technology?

Our multisensor technology allows you to solve any measurement task with the best sensor for the job. If a number of different sensors need to be combined during the measurement, this is no problem either.

- The multisensor system combines technologies for contact-free and tactile measurements (patent)
- Contact-free sensors stop the workpiece surface being deformed or damaged
- Very small features can also be reliably recorded using contact-free sensors
- Maximum optical precision in conjunction with highly accurate state-of-the-art positioning systems ensure the ultimate in measuring accuracy
- Good acceleration and positioning speed in conjunction with rapid sensors ensure a high throughput


### Which is the right sensor for my measurement task?

To save time:

- Use the **camera** to record a large number of measuring points in the shortest possible time
- Use the **focusing laser sensor (FLS)** to focus rapidly in order to align 3D workpieces
- Use the **measuring laser sensor (MLS)** to measure contours quickly
- Use the **SP25** for tactile scanning
- Use the **white-light surface sensor** to fully digitize surfaces

To maximize precision:

- Telecentric lens system with fixed focal distance and high enlargement factor in conjunction with **high-resolution camera** and Mahr image processing
- Record contour and topography point for point with the **chromatic white-light sensor (CWS)**
- Ultra-precise topography and roughness measurement with a resolution of 0.1 nm (0.004 µin) using the **interferometric white-light sensor (IWS)**

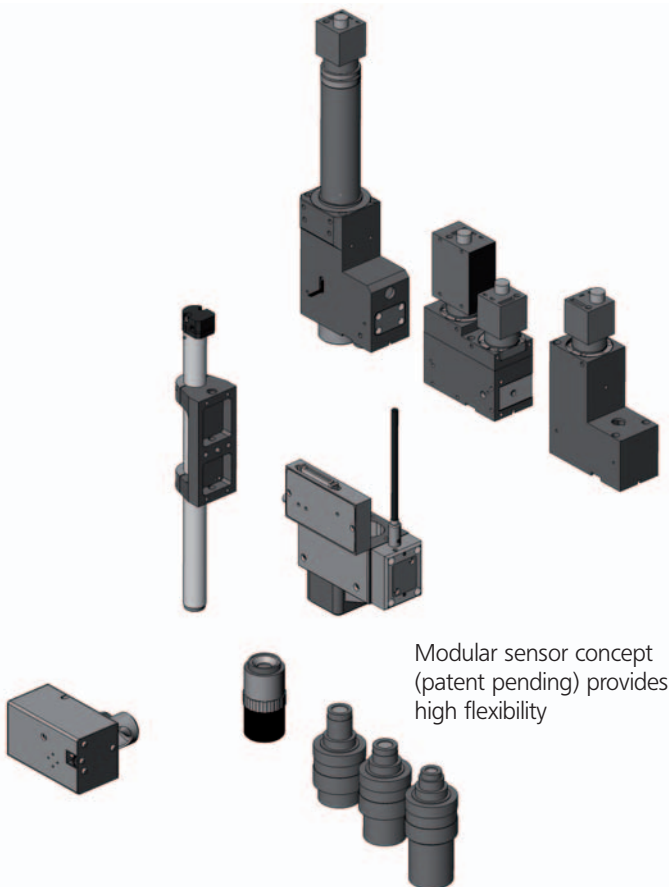


Modular sensor concept (patent pending) provides high flexibility



## MarVision Multisensor Technology from Mahr

### Digital Zoom, Optoelectronic

Enlargement 1:2, for example with 1x lens

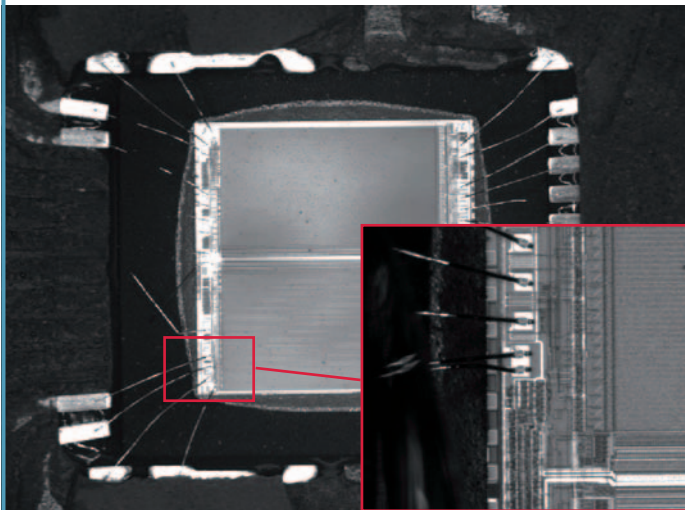

Ultra-precise optical measurement does not mean having to compromise on flexibility. You can have both precision and flexibility by using our digital zoom with fixed focal distance lens system.

On the one hand, the fact that the digital zoom is integrated in the head of the multisensor means that it is possible to work with extremely high-resolution exchangeable lenses. On the other, it is possible to activate a digital zoom that halves the field of vision and doubles the resolution with a click of the mouse.


Various exchangeable lenses give you numerous options for optimizing both resolution and the field of vision to suit all manner of measurement tasks.

### Features

- Variation of resolution and field of vision by switching the two zoom levels (1:2) electronically
- Digital CMOS camera with optoelectronic zoom
- Maximum precision for optical measurements
- Additional variation of resolution and field of vision thanks to exchangeable lenses (1x, 3x, 5x, 10x, 20x)
- High light efficiency
- Fast video focus, applicable to surfaces and at edges, to measure genuine 3D points with the lens system

### 2-stage Zoom (patent pending)

Enlargement 1:3.3, for example with 5x lens

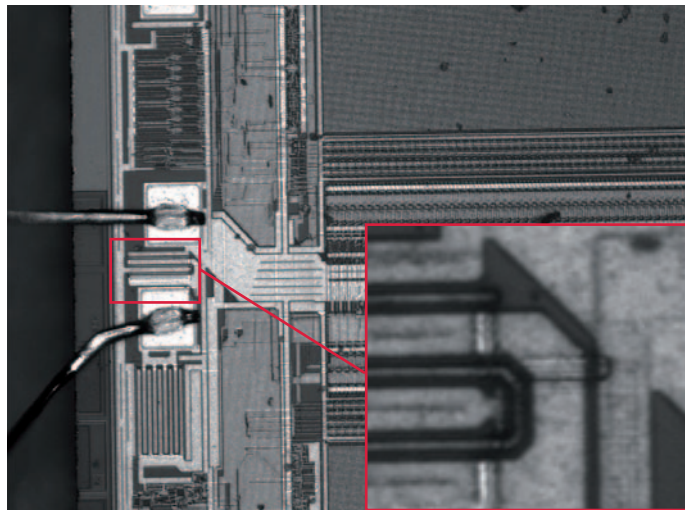

As an alternative to the digital zoom, we offer the option of switching to a different resolution level with a click of the mouse. This is done by splitting the optical path of the beam and routing the image data via an additional lens to a second camera chip (patent pending). As a result, there are two fields of view and, accordingly, two resolutions.

Electronic switching creates the effect of a two-stage zoom. Key advantages of this type of zoom are the fixed focal distance and the low-distortion lens system calculated without compromise. This system only requires a small number of lenses, thereby achieving excellent light efficiency.

### Features


- Variation of resolution and field of vision by switching of the two zoom levels (1:3.3) electronically
- Maximum precision for optical measurements
- Additional variation of resolution and field of vision thanks to exchangeable lenses (1x, 3x, 5x, 10x, 20x)
- High light efficiency
- Can be combined with the laser sensor from front lens 10x or larger
- Fast video focus, applicable to surfaces and at edges, to measure genuine 3D points with the lens system



## MarVision Multisensor Technology from Mahr

### Infinitely Adjustable Motorized Zoom

Enlargement 1:10, for example with 5x lens

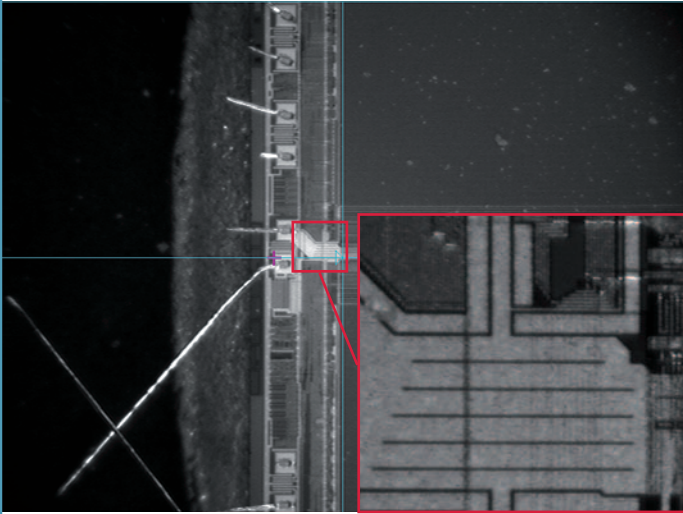

Taking into account the tolerances to be measured, it can sometimes make sense to select a measuring window and thus a field of vision that is as large as possible. This option is available with our motorized zoom. The fact that it is infinitely adjustable offers the advantage of large fields of view for alignment and high resolution with precise measurements.

With the motorized zoom function, motorized movement of lens groups adjusts the focal distance. This makes it easy to zoom in on the testpiece. Mechanical errors such as wobbling, tilting or eccentricity of the lens group are eliminated during calibration by a sophisticated compensation function, as are optical distortion and illumination changes. This compensation ensures appropriately precise and traceable measurements. The motorized zoom is available with 10x enlargement.

- Maximum flexibility for optical measurements
- Infinitely variable resolution and field of vision, electronically controlled and motor-driven (1:10)
- A number of different front lenses can be used
- Can be combined with the laser sensor from front lens 5x or larger
- Fast video focus, applicable to surfaces and at edges, to measure genuine 3D points with the lens system

### Illumination

The basic requirement for optical measurement is adequate illumination of the features for the task in hand. Three types of illumination are available and these can be used individually or combined.

#### Coaxial incident light

- Vertical light for measuring 3D features
- Extremely powerful LED light sources for incident light

#### Backlight

- This type of illumination offers the greatest contrast
- Reliable measurement of openings or outer edges
- High light intensity
- Telecentric design
- Line type design (patent pending)

#### LED ring light

- Lateral illumination to increase the contrast of 3D features
- Independent control of all segments
- Simple operation thanks to anti-twist protection and stop notches at various heights
- Different colors are available, including RGB
- Several irradiation angles are available



### Video Filter

Two kinds of video filters have been developed to obtain reproducible geometric elements from the video image:

The geometry filter eliminates all image points no longer belonging to the required geometry, e.g. radius transitions on straight lines.

Unwanted soiling, burring or splash effects at the edges are identified by the speckle filter and excluded from the measuring result.

In both cases, the measurement is very stable and independent of the operator.


- Geometry filter
- Speckle filter



## MarVision Multisensor Technology from Mahr

### Focusing Laser Sensor (FLS)

Focuses in just 200 ms

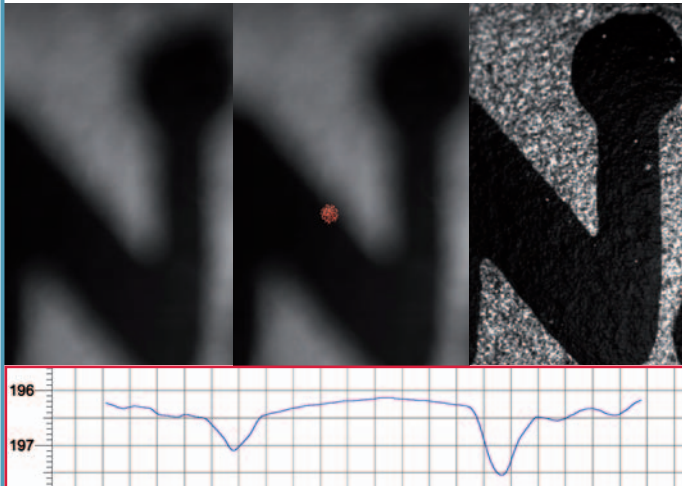

Pin-sharp images are essential for high-precision measurement. The quickest way to achieve this is with the focusing laser sensor. Thanks to its coaxial arrangement, the laser focuses precisely in the field of vision being recorded by the camera.

In conjunction with the high resolution and accuracy of the Z-axis, this makes it possible to perform precise measurements of items such as blind holes.

The fact that all the axes move during focusing enables contours to be recorded in the same way as with a contourograph, but with the advantage that there is no contact.


- Rapid focusing (200 ms) is essential for precise camera measurements
- Precise measurement of heights or bore depths
- Contour recording using several thousand points
- Contour evaluation with MarContour software
- Can be used on systems with a fixed focal distance (from front lens 10x) and on the motorized zoom system (from front lens 5x)

This sensor has many different applications. With almost any 3D measurement of workpieces there are features that it is advantageous to test using the focusing laser sensor:

- Depths of narrow grooves and small bores
- Heights of small features (e.g. pins)
- Calculating the alignment plane with 3D coordinate systems
- Form testing (e.g. flatness)
- Contour evaluation

### Measuring Laser Sensor (MLS)

Scans without the Z-axis moving

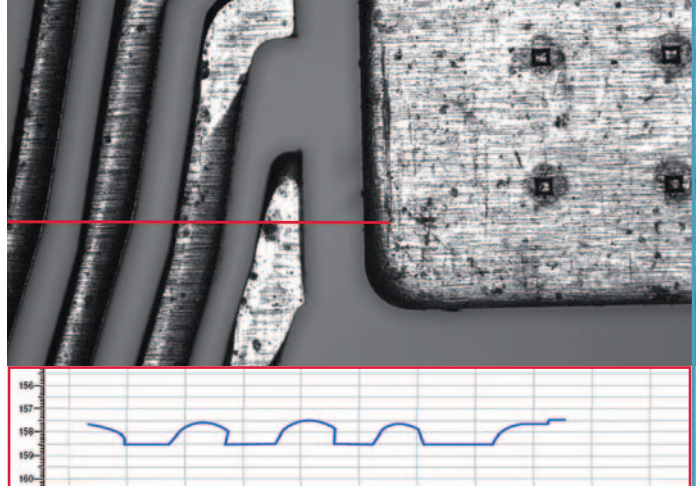

If a high scanning speed is your top priority when recording a profile, the measuring laser sensor is the best option. Height and depth measurements can be performed quickly without moving the Z-axis based on the conoscopic principle.

- Quick measurement of heights or bore depths
- Rapid contour recording using several thousand points
- Contour evaluation with MarContour software
- Large measuring range, depending on the front-lens system (8 mm to 38 mm / 0.31 in to 1.50 in)
- Large working distance, depending on the front-lens system (35 mm to 80 mm / 1.38 in to 3.15 in)
- Can be used on the motorized zoom system


The applications of the conoscopic laser sensor are ideal for recording contours quickly:

- Digitization of freeform areas
- Topography recording

## MarVision Multisensor Technology from Mahr

### Chromatic White-Light Sensor (CWS)

High-resolution point-based measurement

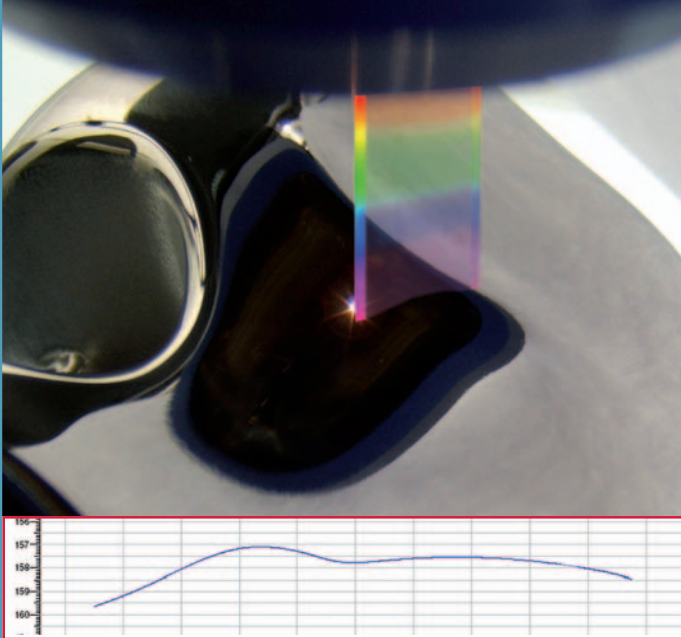

A very high-resolution system is needed to measure with micro-accuracy. Metrologically speaking, glossy surfaces also represent a major challenge. In both cases, the chromatic white-light sensor is ideal.

- Topographic recording of microstructures
- Digitization on glossy surfaces (e.g. glass, polished metal)
- Digitization of transparent materials
- Measuring range of 300  $\mu\text{m}$  to 3 mm (0.012 in to 0.12 in)
- Working distance of 4.5 mm to 22 mm (0.18 in to 0.87 in)
- Resolution of up to 10 nm (0.4  $\mu\text{in}$ )


This sensor technology is primarily used in electronics, micromechanics, optics and medical technology.

- Microlenses
- Ball grid arrays (BGA)
- Integrated circuits
- Medical implants

Due to the use of the confocal principle, measurements with this sensor are very robust.

### Interferometric White-Light Sensor (IWS)

Topography recording with maximum resolution

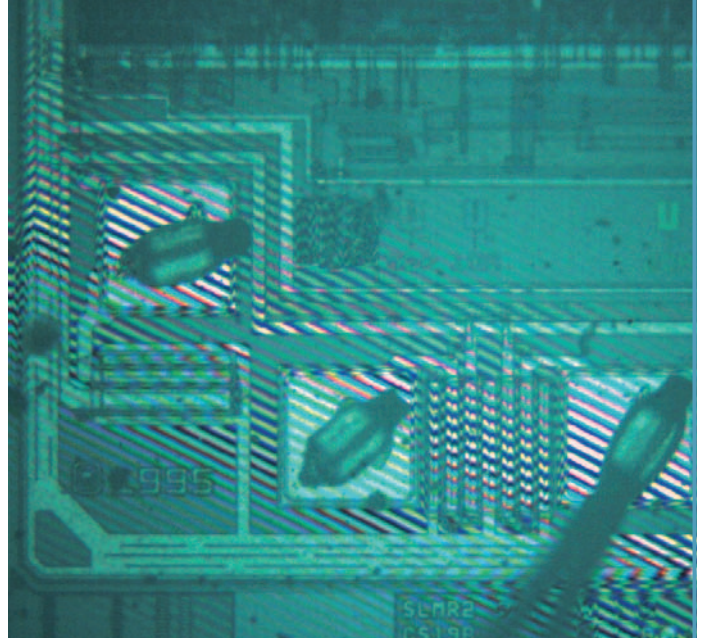

If both maximum precision and a high measuring speed are required, the latest technology from Mahr is your only option. With the interferometric white-light sensor it is possible to record the entire topography of a surface in a single measuring run. The time-consuming and comparatively inaccurate scanning of individual contours is no longer necessary. This sensor's high precision can only be achieved using the OMS air bearing systems.

- Quick and precise recording of surface topographies
- Digitization of microstructures
- Resolution of up to 0.1 nm (0.004  $\mu\text{in}$ )

This sensor technology is primarily used for testing surface structures.

- Contact-free roughness measurement
- Integrated circuits



## MarVision Multisensor Technology from Mahr

### Trigger Probes – TP20 and TP200

Point-based measurement – robust and precise

Trigger probes are 5- or 6-way probes with the special feature of being able to switch styluses without recalibrating. These probes comprise the probe mount and the removable probe modules, which can automatically be placed in the probe changer and removed again if necessary.



The probe module supports the styluses and allows tracing along all the measuring machine's axes. The connecting thread on the probe module is compatible with all standard M2 styluses. The module is held in position on the probe mount by a permanent magnet and a kinematic coupling that can be reproduced highly precisely.

- Compact size (diameter of just 13.2 mm / 0.52 in)
- Point-based contacting of measuring points
- Many different stylus combinations possible
- Wide range of stylus lengths available
- 2-, 3- or 6-position changer
- Simple calibration
- M2 stylus sets can be used for different configurations and diameters

The strengths of this sensor are its ability to record 3D elements (spheres, cones, cylinders) and all features that do not show up on a top view. Features on the sides or bottom of the workpiece can be measured during the same clamping operation that is used for contact-free optical or laser recording of the top.

### Scanning Probe – SP25

Continuous measurement – quick and effective

The SP25 is a touch probe system that can be used to perform both single-point measurements and continuous scanning. The measuring probe system provides the option of recording form features and contour profiles very quickly with a high point density. This also works at locations which cannot be accessed by optical sensors.



The system comprises a probe head, probe module, stylus holder and stylus.

The SP25 is available as an optional extra for the OMS 443, OMS 663, OMS 10106, MS 664 and MS 442 systems (ex works only, retrofitting not possible).

- Compact size (diameter of just 25 mm / 0.98 in)
- 3D touch scanning with high point density
- Two sensors in a single system – triggering and measuring probes
- Rapid data recording
- Collision protection in the probe module triggering mechanism
- 3 probe modules with a wide range of stylus lengths available
- 3- or 6-position changer
- Simple calibration
- M3 stylus sets can be used for different configurations and diameters

This sensor features high point densities for the evaluation of form features and contour profiles.

## MarVision MS Product Line

Quick and robust 3D metrology for the shop floor



The MS product line is designed to monitor quality on the shop floor. The machines do not take up much space and the mechanical support of their axes of motion makes them resistant to hostile environmental influences (temperature, vibrations). The various machines in the product line have different measuring volumes.

### Description

Multisensor measuring machines including optical sensor, laser and touch probe system implement the latest test procedures to support your quality documentation.

#### Shop-floor installation possible

Reduces the rejection rate and saves money by providing immediate feedback in the event of production errors.

#### High measuring precision

Maximizes manufacturing tolerances, thereby cutting your production costs.

#### High testing speed

Improves the reliability of testing through rapid measurement, even of large quantities.

#### Automation

Cuts your personnel costs with automatic test runs and automatic testpiece delivery.

### Features

Designed to monitor quality on the shop floor, the machines in the MS product line not only save space. The mechanical support of their axes of motion also makes them extremely resistant to hostile environmental influences such as temperature or vibrations.

A compressed air connection is only required for the optional vibration damper.

Some machines also offer several levels of precision.

#### Design type

**MarVision MS** is available either as a portable table-top measuring machine with granite base (**MS 2VT** and **MS 222**) or as a bridge-type measuring center with fixed bridge design, mobile measuring table and separate control cabinet (**MS 442**, **MS 660**, **MS 662** and **MS 664**). All 3 axes are equipped with high-precision linear guide-ways and driven by backlash-free precision spindles at the center of gravity. The machine is driven by DC servo motors.

#### Control unit

3- to 5-axis CNC with vector path control

#### Measuring system

Incremental length measuring system, resolution 0.1  $\mu\text{m}$  (4  $\mu\text{in}$ )

#### Computer

Industrial computer, Pentium, Windows® XP Multilingual

### Technical Data in Brief

#### Power supply

Mains voltage	115 V / 230 V $\pm$ 10%
Frequency	50 Hz / 60 Hz $\pm$ 5%
Power consumption	1,000 VA

#### Installation conditions

Ground vibrations	$< 5 \times 10^{-3} \text{ m/s}^2$ (corresponds to an amplitude of $< 5 \mu\text{m}$ at 5 Hz)
Humidity	40% to 70% RL
Permissible temperature gradient (relative to the reference temperature)	0.8 K/h    1.0 K/d    0.6 K/m

#### Remarks on length measuring uncertainty

- The length measuring uncertainty relates to a temperature of 20°C
- Optical measurements are performed at the maximum enlargement or with the 10x lens
- Mahr's conditions of acceptance apply
- The  $E_3$  value is determined using the touch sensor

#### Camera-probe offset

If using a camera and a probe, the measuring range in the X-direction is reduced by 50 mm (1.97 in) with the TP20 and TP200 and by 80 mm (3.15 in) with the SP25.



## MarVision MS 2VT

The XY table design of this portable table-top machine ensures easy access from all sides. The precise mechanical linear guideways are located on a solid granite slab for the X- and Y-axes and on a robust aluminum column for the Z-axis. With the optical digital zoom and the optional TP20, this system represents the most cost-effective introduction to the world of multisensors.

### Measuring ranges

<b>X</b>	250 mm (9.84 in)
<b>Y</b>	200 mm (7.87 in)
<b>Z</b>	150 mm (5.91 in)

### Length measuring uncertainty

As per VDI/VDE 2617  $E_2(XY) = (3.2 + L/125) \mu\text{m}$   
or ISO 10360-2

(L = measuring length in mm)  $E_1(Z) = (2.2 + L/150) \mu\text{m}^*$

**Travel speed** 150 mm/s (5.91 in/s)

**Weight** 260 kg (573 lbs) incl. control cabinet  
Workpiece weight on glass plate 10 kg (22 lbs)

### Installation conditions

Ambient temperature  $20^\circ\text{C} \pm 2\text{ K}$  (other reference temperatures on request)

\* Only applies to the touch probe system with probe package option

Your introduction to the world of multisensors



## MarVision MS 222 and MS 222 HA

The MS 222 also uses the tried-and-tested XY table design. With its optional base and integrated control cabinet, it is particularly compact for use on the shop floor/in production environments. The high-precision version (HA) turns this compact system into a precision measuring machine.

### Measuring ranges

<b>X</b>	250 mm (9.84 in)
<b>Y</b>	200 mm (7.87 in)
<b>Z</b>	200 mm (7.87 in)

### Length measuring uncertainty (Standard)

As per VDI/VDE 2617  $E_1 = (2.2 + L/150) \mu\text{m}$   
or ISO 10360-2  $E_2 = (3.2 + L/125) \mu\text{m}$

(L = measuring length in mm)  $E_3 = (3.9 + L/100) \mu\text{m}$

### Length measuring uncertainty (HA version)

As per VDI/VDE 2617  $E_1 = (1.9 + L/200) \mu\text{m}$   
or ISO 10360-2  $E_2 = (2.4 + L/150) \mu\text{m}$

(L = measuring length in mm)  $E_3 = (2.9 + L/100) \mu\text{m}$

**Travel speed** 150 mm/s (5.91 in/s)

**Weight** 260 kg (573 lbs) incl. control cabinet  
Workpiece weight on glass plate 10 kg (22 lbs)

### Installation conditions

Ambient temperature  $20^\circ\text{C} \pm 1\text{ K}$  (other reference temperatures on request)

Economical measuring machine for monitoring production



## MarVision MS 442

High-precision measurement on the shop floor



Compact, fast and robust – the granite bridge-type measuring center with its large, mobile measuring table and precision mechanical linear guideways sits on a fixed, solid granite base. With the accuracy of an MS 222 HA, the MS 442 supports four times the measuring volume at a comparatively low additional cost.

### Measuring ranges

<b>X</b>	400 mm (15.75 in)
<b>Y</b>	400 mm (15.75 in)
<b>Z</b>	200 mm (7.87 in)

### Length measuring uncertainty

As per VDI / VDE 2617	$E_1 = (1.9 + L / 200) \mu\text{m}$
or ISO 10360-2	$E_2 = (2.4 + L / 150) \mu\text{m}$
(L = measuring length in mm)	$E_3 = (2.9 + L / 100) \mu\text{m}$

<b>Travel speed</b>	250 mm/s (9.84 in/s)
---------------------	----------------------

<b>Weight</b>	960 kg (2,116 lbs) incl. control cabinet
Workpiece weight on glass plate	30 kg (66 lbs)

### Installation conditions

Ambient temperature	20 °C ±2 K (other reference temperatures on request)
---------------------	--

## MarVision MS 660

Economical measuring machine for fast 2D measurements



This bridge-type measuring center with fixed single-component bridge design and a measuring table that only moves in the Y-direction maximizes measuring speeds.

Combined with the high depth of field of 5 mm (0.20 in) and the large field of view of the special lens system, the MS 660 is the ideal measuring system for all flat and intricate testpieces, such as PCBs, films or stampings.

### Measuring ranges

<b>X</b>	610 mm (24.02 in)
<b>Y</b>	610 mm (24.02 in)

### Length measuring uncertainty

As per VDI/VDE 2617	$E_1 = (1.9 + L/150) \mu\text{m}$
or ISO 10360-2	$E_2 = (2.9 + L/125) \mu\text{m}$
(L = measuring length in mm)	

<b>Travel speed</b>	350 mm/s (13.78 in/s)
---------------------	-----------------------

<b>Weight</b>	1,180 kg (2,601 lbs) incl. control cabinet
Workpiece weight on glass plate	20 kg (44 lbs)

### Installation conditions

Ambient temperature	20°C ± 1 K (other reference temperatures on request)
---------------------	--

## MarVision MS 662

The granite bridge-type measuring center with large, mobile measuring table and precision mechanical linear guideways sits on a fixed, solid granite base. Its appeal lies in its high-speed measuring, robust design and easy accessibility.

The series measurement of large quantities, ideally with palletized workpieces, improves the efficiency of this system enormously.

### Measuring ranges

<b>X</b>	600 mm (23.62 in)
<b>Y</b>	600 mm (23.62 in)
<b>Z</b>	200 mm (7.87 in)

### Length measuring uncertainty

As per VDI / VDE 2617	$E_1 = (1.9 + L/200) \mu\text{m}$
or ISO 10360-2	$E_2 = (2.4 + L/150) \mu\text{m}$
(L = measuring length in mm)	$E_3 = (2.9 + L/100) \mu\text{m}$

<b>Travel speed</b>	250 mm/s (9.84 in/s)
---------------------	----------------------

<b>Weight</b>	1,190 kg (2,624 lbs) incl. control cabinet
Workpiece weight on glass plate	40 kg (88 lbs)

### Installation conditions

Ambient temperature	20 °C ± 2K (other reference temperatures on request)
---------------------	--

Universal machine for shop-floor measurement tasks



## MarVision MS 664

The measuring range of 400 mm (15.75 in) in the Z-direction means that this mechanically supported bridge-type measuring center is ideal for taller and larger testpieces.

More complex probe configurations for the triggering probe or different lengths for the scanning probe can easily be used for this larger measuring volume and can be combined with contact-free sensors in any way required.

This results in a universal measuring system with maximum flexibility.

### Measuring ranges

<b>X</b>	600 mm (23.62 in)
<b>Y</b>	600 mm (23.62 in)
<b>Z</b>	400 mm (15.75 in)

### Length measuring uncertainty

As per VDI / VDE 2617	$E_1 = (2.4 + L/150) \mu\text{m}$
or ISO 10360-2	$E_2 = (3.2 + L/125) \mu\text{m}$
(L = measuring length in mm)	$E_3 = (3.9 + L/100) \mu\text{m}$

<b>Travel speed</b>	250 mm/s (9.84 in/s)
---------------------	----------------------

<b>Weight</b>	1,290 kg (2,844 lbs) incl. control cabinet
---------------	--

Workpiece weight on glass plate	40 kg (88 lbs)
---------------------------------	----------------

### Installation conditions

Ambient temperature	20 °C ± 1 K (other reference temperatures on request)
---------------------	---

Robust measurement of large workpieces



## MarVision OMS Product Line

Maximum precision and large measuring volumes



The OMS product line combines universal multisensor technology and large measuring volumes with maximum precision. This is achieved thanks to the solid fine-grained granite bridge-type design with air bearing axes.

These features make the OMS a reference machine in your measurement laboratory. The various machines in the product line have different measuring volumes.

All the systems are available with two different levels of precision.

### Description

With its optical sensor, laser, touch probe systems and state-of-the-art test procedures, this multisensor machine reliably documents product quality.

#### Maximum measuring precision

Permits greater production tolerance, reduces rejection rates and cuts your production costs.

#### Reference in the measurement laboratory

Universal testing options provide proof of quality for you and your customers.

#### High testing speed

Improves the reliability of testing through rapid measurement, even for large quantities.

### Features

OMS systems can be operated standing up or sitting down thanks to their adjustable base. The high-end control unit developed by Mahr is operated from an innovative terminal with integrated speed selection, emergency stop and release buttons.

The SP25 measuring probe can be adapted directly to the integrated interface of this control unit. The path measuring systems used are temperature-compensated and this is also an option for the workpieces.

#### Design type

Bridge-type measuring center with fixed bridge, mobile measuring table and lower center of gravity. The side sections are integrated into the basic structure and the bridge sides are partly supported on this. All the axes are based on lapped granite guideways, precision air bearings and backlash-free ball screws. The guideway for the Y table is incorporated in the machine base in a V-shaped arrangement. The X cage around the bridge is made from just two separate sections. The backlight has a telecentric design.

#### Control unit

3- to 5-axis Mahr high-end control unit with integrated path correction

#### Measuring system

Incremental length measuring system with resolution of 5 nm (0.2 µin) for standard systems and 1 nm (0.04 µin) for high-precision systems

#### Computer

Industrial computer, Pentium, Windows® XP Multilingual

### Technical Data in Brief

#### Power supply

Mains voltage	115 V / 230 V ±10 %
Frequency	50 Hz / 60 Hz ±5 %
Power consumption	1,500 VA

#### Installation conditions

Ground vibrations	< 5 x 10 <sup>-3</sup> m/s <sup>2</sup> (corresponds to an amplitude of < 5 µm at 5 Hz)
Humidity	40 % bis 70 % RL
Permissible temperature gradient (relative to the reference temperature)	0.8 K/h 1.0 K/d 0.6 K/m

#### Remarks on length measuring uncertainty

- The length measuring uncertainty relates to a temperature of 20 °C
- Optical measurements are performed with the 10x lens
- Mahr's conditions of acceptance apply
- The E<sub>3</sub> value is determined using the touch sensor

#### Camera-probe offset

If using a camera and a probe, the measuring range in the X-direction is reduced by 50 mm (1.97 in) with the TP20 and TP200 and by 80 mm (3.15 in) with the SP25.



## MarVision OMS 443

Bridge-type measuring center with fixed bridge and mobile measuring table. All the axes are based on lapped granite guideways, precision air bearings and backlash-free ball screws. The machine's base and bridge are made from fine-grained granite. The system is driven by DC servo motors.

### Measuring ranges

<b>X</b>	450 mm (17.72 in)
<b>Y</b>	400 mm (15.75 in)
<b>Z</b>	300 mm (11.81 in)

### Length measuring uncertainty

As per VDI / VDE 2617	$E_1 = (1.1 + L/500) \mu\text{m}$
ISO 10360-2	$E_3 = (2.0 + L/300) \mu\text{m}$
(L = measuring length in mm)	

<b>Travel speed</b>	200 mm/s (7.87 in/s)
---------------------	----------------------

<b>Weight</b>	1,890 kg (4,167 lbs) incl. control cabinet
---------------	--


Workpiece weight on glass plate	50 kg (110 lbs)
on granite plate	100 kg (220 lbs)

### Installation conditions

Ambient temperature	20 °C ±0.5 K
---------------------	--------------

<b>Compressed air supply</b>	min. 6 bar ±0.1 bar
------------------------------	---------------------

Maximum precision for the toughest demands

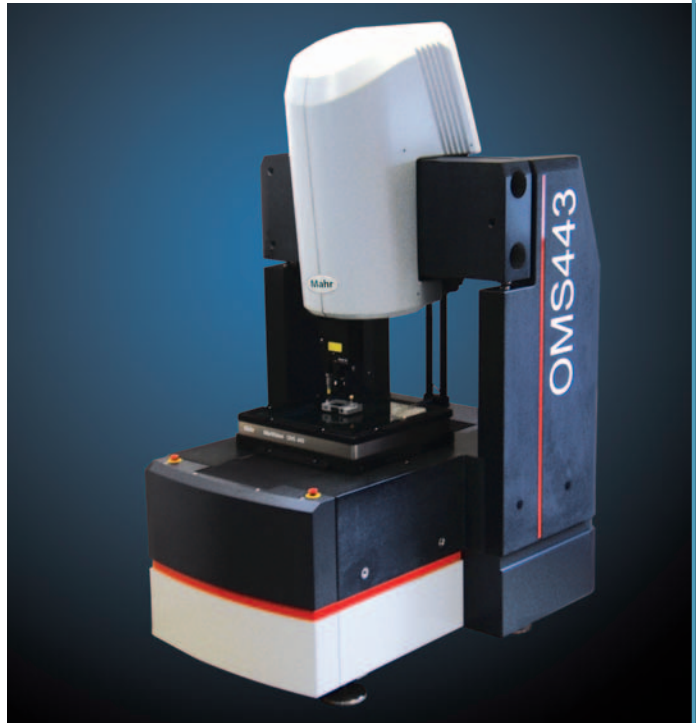

## MarVision OMS 663

Bridge-type measuring center with fixed bridge, mobile measuring table, lapped granite guideways and precision air bearings – cutting-edge technology that ensures maximum precision and a long service life.

### Measuring ranges

<b>X</b>	650 mm (25.59 in)
<b>Y</b>	600 mm (23.62 in)
<b>Z</b>	300 mm (11.81 in)

### Length measuring uncertainty

As per VDI / VDE 2617	$E_1 = (1.1 + L/500) \mu\text{m}$
ISO 10360-2	$E_3 = (2.0 + L/300) \mu\text{m}$
(L = measuring length in mm)	

<b>Travel speed</b>	200 mm/s (7.87 in/s)
---------------------	----------------------

<b>Weight</b>	2,600 kg (5,732 lbs) incl. control cabinet
---------------	---

Workpiece weight on glass plate	50 kg (110 lbs)
on granite plate	200 kg (441 lbs)

### Installation conditions

Ambient temperature	20 °C ±0.5 K
---------------------	--------------

<b>Compressed air supply</b>	min. 6 bar ±0.1 bar
------------------------------	---------------------

The universal reference for documenting quality





## MarVision OMS 10103 / 10106

Measuring large workpieces with maximum precision



Bridge-type measuring center with fixed bridge and mobile measuring table. All the axes are based on lapped granite guideways, precision air bearings and backlash-free ball screws. The machine's base and bridge are made from fine-grained granite. The system is driven by DC servo motors.

### Measuring ranges

<b>X</b>	1,050 mm (41.34 in)
<b>Y</b>	1,000 mm (39.37 in)
<b>Z</b>	300 mm (11.81 in) (OMS 10103)
<b>Z</b>	600 mm (23.62 in) (OMS 10106)

### Length measuring uncertainty

As per VDI / VDE 2617	$E_1 = (1.3 + L/400) \mu\text{m}$
ISO 10360-2	$E_3 = (2.2 + L/300) \mu\text{m}$
(L = measuring length in mm)	

<b>Travel speed</b>	200 mm/s (7.87 in/s)
---------------------	----------------------

<b>Weight</b>	7,600 kg (16,755 lbs) incl. control cabinet
---------------	--

Workpiece weight on glass plate	50 kg (110 lbs)
on granite plate	300 kg (661 lbs)

### Installation conditions

Ambient temperature	20 °C ±0.5 K
---------------------	--------------

<b>Compressed air supply</b>	min. 8 bar ±0.1 bar
------------------------------	---------------------

## High-Precision Versions of the OMS Range (HA)



OMS systems are also available in a high-precision version (HA) in terms of length measuring uncertainty. This offers benefits for demanding applications.

### OMS 443 HA and OMS 663 HA\*

#### Length measuring uncertainty

As per VDI/VDE 2617	$E_1 = (0.5 + L/900) \mu\text{m}$
or ISO 10360-2	$E_3 = (1.5 + L/500) \mu\text{m}$
(L = measuring length in mm)	

\* in the measuring volume 550 mm/500 mm/300 mm  
(21.65 in/19.69 in/11.81 in) in X/Y/Z

### OMS 10103 und OMS 10106 HA:

#### Length measuring uncertainty

As per VDI/VDE 2617	$E_1 = (0.9 + L/600) \mu\text{m}$
or ISO 10360-2	$E_3 = (1.9 + L/400) \mu\text{m}$
(L = measuring length in mm)	

## MarVision PMC Product Line

For rapid measurement of heavy items with small features



The machines in the PMC product line can support heavy loads on a solid granite base without compromising the multisensor capability.

For items that are not heavy but simply bulky, these systems can also work with a fixed backlight table which utilizes the benefits of high-contrast optical measurement.

### Description

This coordinate measuring machine with multisensor capability delivers the ultimate in quality documentation for you and your customers.

#### Multisensor technology

No need for additional investment in optical measuring machines

#### High testing speed

Improves the reliability of testing through rapid measurement of large quantities.

#### Good price-performance ratio

Large measuring volumes at very attractive prices

### Features

The MarVision PMC product line consists of coordinate measuring machines with a solid granite measuring table for reliable measurement of heavy workpieces.

The multisensor combination of touch and optical sensors allows rapid measurement, even of small features.

**MarVision PMC** is available in numerous variants with different measuring ranges.

#### Design type

Bridge-type measuring center with fixed measuring table and laterally driven bridge. Granite measuring table, cross-bar and spindle. All axes are equipped with high-precision air bearing guideways. The system is driven by DC servo motors.

#### Control unit

3- to 5-axis CNC with vector path control.

#### Measuring system

Incremental length measuring system, resolution 0.1  $\mu\text{m}$  (4  $\mu\text{in}$ ).

#### Computer

Industrial computer, Pentium, Windows® XP Multilingual.

### Technical Data in Brief

#### Length measuring uncertainty

(e.g. for PMC 650)

As per VDI / VDE 2617

$$\begin{aligned} E_1 &= (2.5 + L/450) \mu\text{m} \\ E_2 &= (2.75 + L/375) \mu\text{m} \\ E_3 &= (3.0 + L/350) \mu\text{m} \end{aligned}$$

ISO 10360-2

(L = measuring length in mm)

#### Power supply

Mains voltage

115 V / 230 V  $\pm 10\%$

Frequency

50 Hz / 60 Hz  $\pm 5\%$

Power consumption

1,500 VA

#### Installation conditions

Ambient temperature

20 °C  $\pm 1$  K

Ground vibrations

$< 5 \times 10^{-3} \text{ m/s}^2$  (corresponds to an amplitude of

$< 5 \mu\text{m}$  at 5 Hz)

Humidity

40 % bis 70 % RL

Permissible temperature gradient

(relative to the reference temperature) 0.8 K/h 1.0 K/d 0.6 K/m


#### Compressed air supply

min. 6 bar  $\pm 0.1$  bar

#### Remarks on length measuring uncertainty

- The length measuring uncertainty relates to a temperature of 20 °C
- Optical measurements are performed at the maximum enlargement or with the 10x lens
- Mahr's conditions of acceptance apply
- The  $E_3$  value is determined using the touch sensor

## MarVision Software – Simple Operation of High-Performance Systems

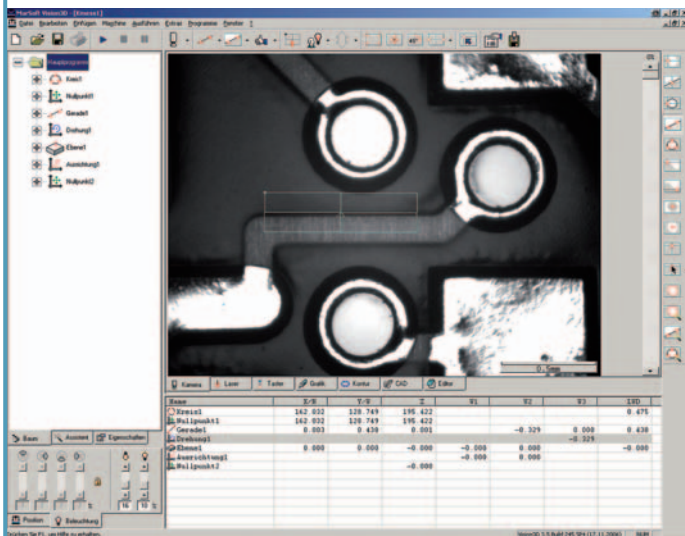

With **Vision 3D, Mahr Multisensor** offers you a software package geared specifically to multisensor technology for intuitive operation of our measuring machines.

It integrates all the various functions and sensors, such as cameras, laser sensors and touch probe systems, in a single graphic user interface.

- Comprehensive 3D measuring and evaluation software
- Extremely simple operation thanks to teach-in mode and CAD data import (both 2D and 3D)
- Clear program creation wizard
- Results output in graphs and tables
- Powerful program editor
- Uncomplicated export of measuring results into standard file formats (e.g. Excel, ASCII, MDB, etc.)
- Simple programming with automated routines
- Can be extended, with many options that can be integrated directly

### Features

#### User-friendly system

- Simplified, customized operating environment (start/stop) for use on the shop floor
- User-friendly interactive programming with the help of icons for fast results
- Powerful program editor for complex measurement tasks and complete control over all machine parameters and the Windows environment
- Rapid program creation with direct CAD data import using MarCAD 3D and MarCAD 2D, including offline
- Comprehensive online help function with sample applications

#### Comprehensive geometry analysis



- Geometric elements: Point, line, circle, ellipse, plane, cylinder, cone and sphere
- Geometric functions: Intersection, distance, angle, perpendicular line and symmetry
- Freeform areas, contours incl. nominal/actual comparison (MarContour option)
- Form and positioning tolerances: Straightness, roundness, flatness, cylindricity, parallelism, perpendicularity, angularity, position, symmetry, concentricity/coaxiality, radial run-out, total radial run-out, axial run-out, total axial run-out, linear profile and 2D profile
- Maximum material conditions (MMC)
- DIN tolerance tables: DIN 2768 (fine, medium, coarse) + DIN 1690 (A, B) and in-house tolerance tables that can be defined by the customer

#### Effective measuring reports and data export

- Clear output of measuring results in graphic form
- Table with full details
- Integrated online statistics (optional) or export to qs-STAT
- Results can also be output in text or Excel format

#### Flexible integration in existing IT environment


- Windows® XP Multilingual on industrial PC
- Can be integrated into customer networks
- Enabled for remote maintenance (optional)
- Full version of Vision 3D included with all machines
- Offline versions (for programming away from the machine – separate PC required) for Vision 3D and options available
- Upgrade packages for older installations
- Training workpiece with measuring program for independent training
- Tailored training course program for users of MarVision machines via Vision 3D and all software options

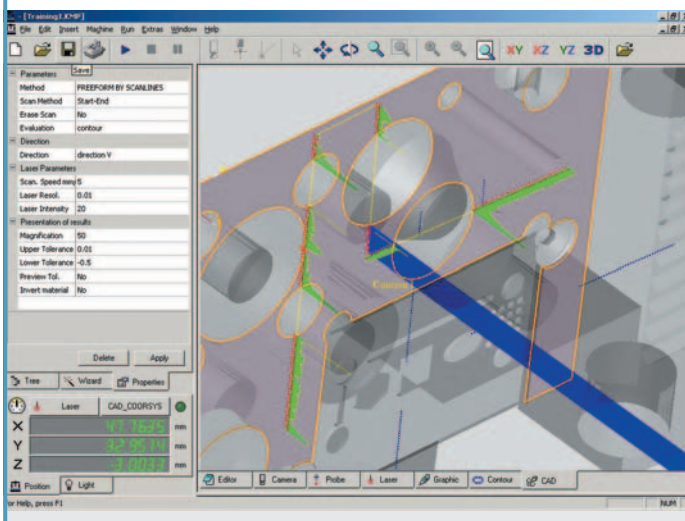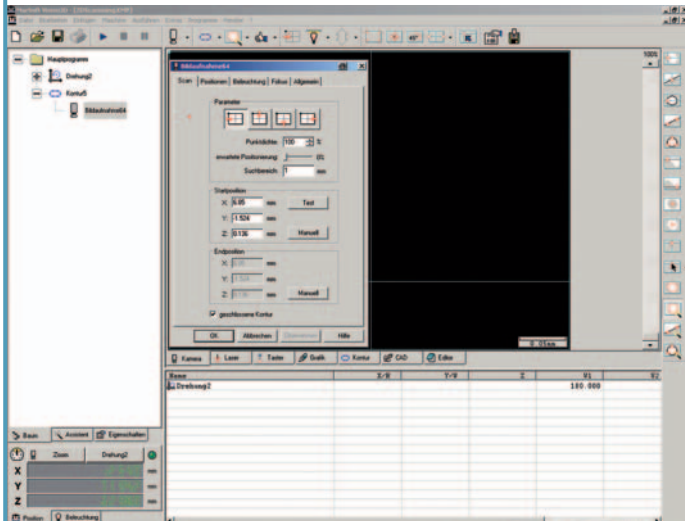



## MarVision MarCAD 2D Software

Generating measuring programs with 2D drawings

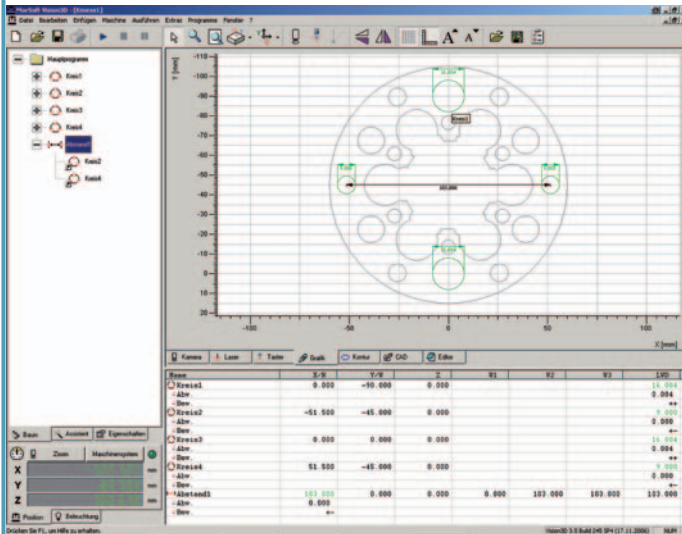

### Description


Importing 2D DXF files from your design in **MarCAD 2D**, you can generate measuring programs quickly and easily by selecting drawing elements. The elements measured in this way are then displayed in the drawing.

### Features

- Import of 2D CAD format DXF
- User-friendly graphic user interface
- Automatic program generation
- Full multisensor capability for optical sensors, lasers and touch probes
- All 2D geometric elements from Vision 3D are integrated (line, circle, point, plane, ellipse)
- Results displayed in graphic (2D drawing) and numeric (table) form
- Offline programming on separate PC (Vision 3D offline programming license required)
- Use of tolerance tables (in accordance with DIN or in-house standard)
- Adjustment of imported DXF data

## MarVision MarCAD 3D Software

Measuring programs with a click of the mouse

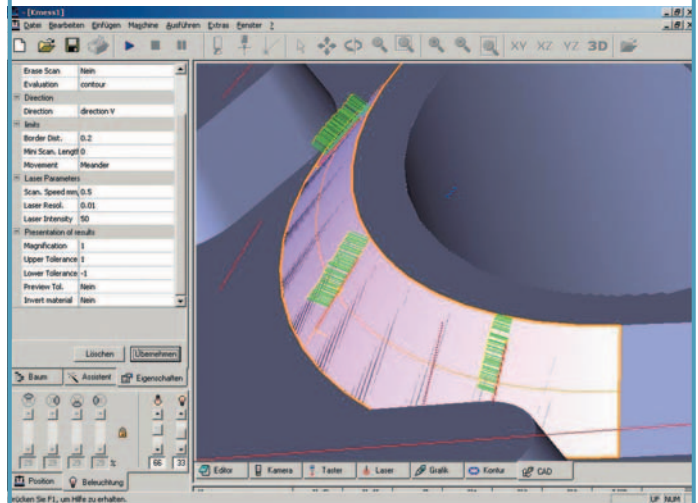

### Description


**MarCAD 3D** is a fully integrated Vision 3D software option. It enables solids to be imported, measuring programs for geometry testing to be created with a click of the mouse and the results to be displayed graphically together with the associated deviations.

### Features

- Import of STEP, IGES, BREP and DXF (optional) formats; further formats on request
- Standard geometric elements with sensor recommendation and automatic parameterization: Line, circle, plane, cylinder, cone, sphere (including segments)
- Results displayed graphically
- Nominal/actual comparison with results displayed graphically
- Freeform areas for optical and touch sensors
- Laser scanning on freeform areas with deviations displayed graphically
- Measurement path planning with collision recognition
- Offline programming on separate PC (Vision 3D offline programming license required)
- Offline simulation of measurement process
- Offline collision recognition
- Use of tolerance tables (in accordance with DIN or in-house standard)
- Use of automated routines for optical and tactile measurements

# MarVision MarContour Software

## Processing digitized contours

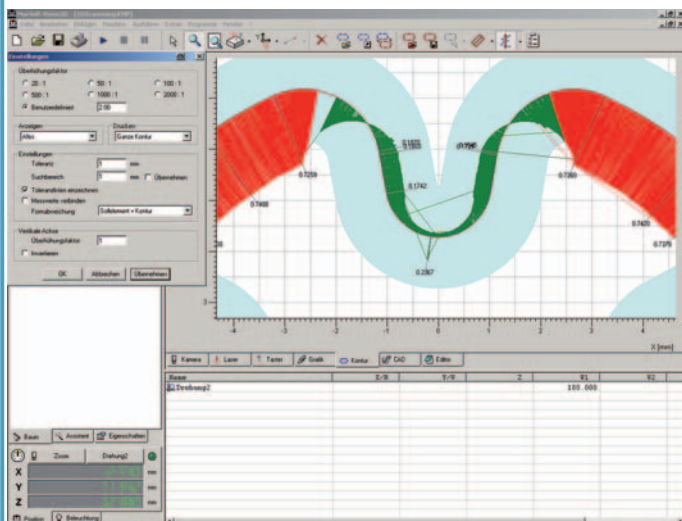

## Description

**MarContour** is a Vision 3D software option that allows a scanned contour to be automatically broken down into geometric elements and compared with nominal values, displaying the results and associated deviations graphically.

## Features

- Full multisensor capability for optical sensors, lasers and touch probes
- User-friendly graphic user interface
- Automatic geometry recognition of lines and circles (contour breakdown)
- Automatic 2D best-fit adaptations
- Evaluation of minimum and maximum points
- Tolerance exploitation displayed graphically
- Offline programming on separate PC (Vision 3D offline programming license required)
- Sensor-independent import of contour data
- Import of 2D CAD format DXF as nominal values (MarCAD 2D option required)

**MarVision MarValid Software**

Fully documented 100% check

Type	Date/Time	File	Event	Parameter	User	Computer
Information	07.07.2004 10:08:15	HMETS.DXE	Stop Application		SYSTEM	1634-04
Information	07.07.2004 10:08:06	HMETS.DXE	Start Application		SYSTEM	1634-04
Warning	07.07.2004 10:07:45	HMETS.DXE	Login: Failed		SYSTEM	1634-04
Information	07.07.2004 10:07:45	HMETS.DXE	Stop Application		SYSTEM	1634-04
Information	07.07.2004 10:07:17	HMETS.DXE	Start Application		SYSTEM	1634-04
Warning	07.07.2004 10:07:08	HMETS.DXE	Login: Failed		SYSTEM	1634-04
Warning	07.07.2004 10:07:08	HMETS.DXE	Login: Failed		SYSTEM	1634-04
Warning	07.07.2004 10:07:08	HMETS.DXE	Login: Failed		SYSTEM	1634-04
Information	07.07.2004 10:07:08	HMETS.DXE	Stop Application		SYSTEM	1634-04
Information	07.07.2004 10:06:30	HMETS.DXE	Start Application		SYSTEM	1634-04
Information	06.07.2004 14:02:21	HMETS.DXE	Stop Application		SYSTEM	1634-04
Information	06.07.2004 13:36:51	HMETS.DXE	Run measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 13:32:57	HMETS.DXE	Open measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 13:22:58	HMETS.DXE	Run measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 13:17:08	HMETS.DXE	Run measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 13:12:23	HMETS.DXE	Run measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 13:09:26	HMETS.DXE	Save measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 13:09:08	HMETS.DXE	Save measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 12:51:53	HMETS.DXE	Run measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 12:46:26	HMETS.DXE	Run measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 12:38:36	HMETS.DXE	Save measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 12:36:24	HMETS.DXE	Save measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 12:33:36	HMETS.DXE	Save measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 12:30:55	HMETS.DXE	Save measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 12:29:49	HMETS.DXE	Save measuring program	C:\HMETS\Program...	Administrator	1634-04
Information	06.07.2004 12:14:23	HMETS.DXE	Run measuring program	C:\HMETS\Server\...	Administrator	1634-04
Information	06.07.2004 12:11:50	HMETS.DXE	Run measuring program	C:\HMETS\Server\...	Administrator	1634-04
Information	06.07.2004 12:11:45	HMETS.DXE	Open measuring program	C:\HMETS\Server\...	Administrator	1634-04
Information	06.07.2004 12:11:42	HMETS.DXE	New measuring program		Administrator	1634-04
Information	06.07.2004 12:12:36	HMETS.DXE	Calibrate Camera	Suflir	Administrator	1634-04
Information	06.07.2004 12:12:52	HMETS.DXE	Calibrate Camera	Sz2com	Administrator	1634-04
Information	06.07.2004 12:11:17	HMETS.DXE	Run measuring program	Unreaded measuring	Administrator	1634-04
Information	06.07.2004 12:10:26	HMETS.DXE	Run measuring program	Unreaded measuring	Administrator	1634-04
Information	06.07.2004 12:09:01	HMETS.DXE	New measuring program	C:\HMETS\Server\...	Administrator	1634-04
Information	06.07.2004 12:02:31	HMETS.DXE	Run resource program	C:\HMETS\Server\...	Administrator	1634-04

## Description

**MarValid** is a Vision 3D software option. It provides manufacturers in the medical and pharmaceutical sectors with the prerequisites for validation in compliance with FDA CFR 21 Part 11 for the Mahr multisensor machines used in the process.

## Features

- Password administration for different users in secure database
- Controlled system access by means of password prompt
- Electronic signature for measuring records consisting of user name and password
- Computer-generated audit trail to document changes to the system and files
- Cyclical system tests
- Data backup


The aim of the provisions in FDA 21 CFR Part 11 is to improve process reliability when using computer-aided systems. With **MarValid**, they are applied in such a way that it is easy for the user to carry out the validation.

An optional comprehensive documentation package for faster implementation of a validation is available.



## MarVision. Universal Measuring Microscopes for Shop Floor and Laboratory

Introduction to optical metrology for the shop floor

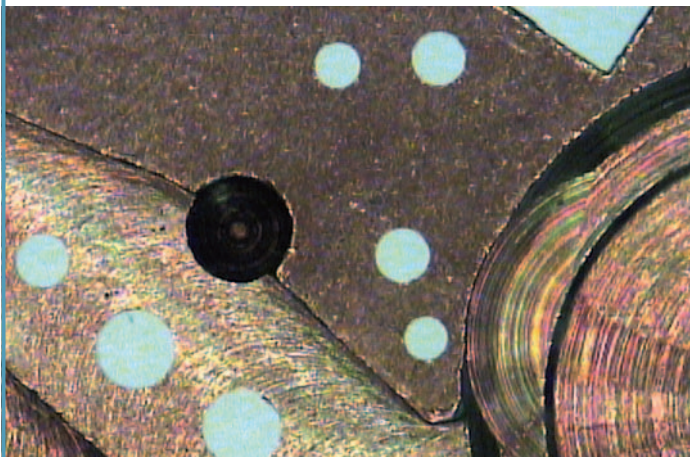

Do your requirements involve 2D measurement? Are you looking to get into optical metrology on the shop floor too? Is a manual instrument completely adequate for your tasks? If that is the case, our measuring microscopes are the ideal products for you.

### QC 200 Geometric Measuring Computer



- Universal measuring and recording functions for 2D form elements (point, straight line, circle)
- Form elements can be combined and evaluated (distance, angle, point of intersection, form)
- Teach-in programming
- Measuring results displayed graphically
- Measuring results output via parallel and serial interfaces (e.g. PC or printer)
- Record generation options
- Linear correction option

### CZW 1 Video Measuring Microscope

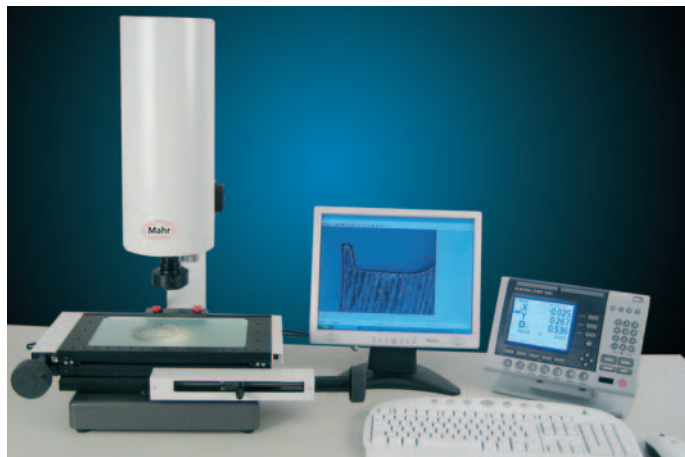


Image processing and PC evaluation are both possible with the CZW 1, but if you do not require these functions, we offer the QC 200 geometric measuring computer as an alternative. Because your testpieces may be different sizes, we offer a variety of measuring ranges and enlargements. A wide range of additional accessories is available.

- Manual zoom from 22x to 155x
- Measuring tables from 100 mm x 100 mm to 250 mm x 170 mm (3.94 in x 3.94 in to 9.84 in x 6.69 in)
- Maximum workpiece height 150 mm (5.91 in)
- Maximum table load 15 kg (33 lbs)
- Incremental length measuring system and rapid adjustment, resolution 1  $\mu\text{m}$  (40  $\mu\text{in}$ )
- Color camera (1/2")
- Display detail in X: 9 to 1.4 mm or 18 to 0.7 mm (0.35 to 0.055 in or 0.71 to 0.028 in)
- Incident light illumination with ring light
- LED backlight
- Measuring computer with 17" TFT monitor
- VideoMess software for video image display with cross-hairs
- QC 200 geometric measuring computer or QC 5000 PC evaluation software
- VED image processing software (in conjunction with QC 5000 as an option)

### Accessories

- Measuring system for Z-axis
- Z-axis extension
- Round table
- Light conductor
- Pair of V-blocks
- Center support
- Precision vice
- 0.5x and 2x front lenses
- TV adapter
- Foot-operated switch
- Calibration standard




## Video Zoom Station VZS 1



- Manual macro zoom lens 22x to 155x
- Working distance 77 mm (3.03 in)
- Maximum workpiece height 150 mm (5.91 in)
- Halogen incident and transmitted light
- 1/2" color camera
- Display detail in X: 9 to 1.4 mm or 18 to 0.7 mm (0.35 to 0.055 in or 0.71 to 0.028 in)
- Measurements in image (circle, distance, angle)
- Option of saving the video image for documentation purposes
- Measuring computer with 17" TFT monitor

## WMZ Measuring Microscope

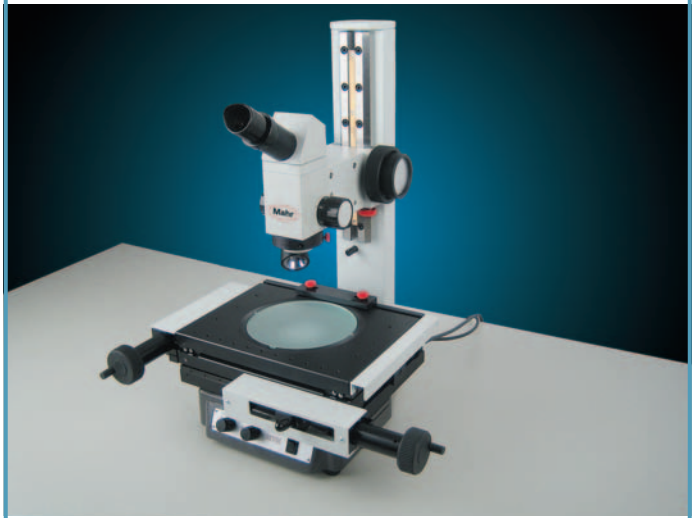

- Zoom enlargement 8 x to 40x
- Working distance 77 mm (3.03 in)
- Measuring table with incremental measuring system, resolution of 1  $\mu\text{m}$  (40  $\mu\text{in}$ ) and rapid adjustment
- Measuring ranges from 100 mm x 100 mm to 250 mm x 170mm (3.94 in x 3.94 in to 9.84 in x 6.69 in)
- Max. workpiece height 200 mm (7.87 in), Max. table load 15 kg (33 lbs)
- Halogen incident and transmitted light
- Display detail in X: 23 to 4 mm or 46 to 2 mm (0.91 to 0.16 in or 1.81 to 0.08 in)
- Digital display with data output
- Optional QC 200 geometric measuring computer

## WMS Measuring Microscope



- Zoom enlargement 8x to 40x
- Working distance 77 mm (3.03 in)
- Measuring table with measuring spindles
- Measuring range 50 mm x 50 mm (1.97 in x 1.97 in)
- Max. workpiece height 200 mm (7.87 in), Max. table load 15 kg (33 lbs)
- Halogen incident and transmitted light
- Display detail in X: 23 to 4 mm or 46 to 2 mm (0.91 to 0.16 in or 1.81 to 0.08 in)

## Further Products (on Request)




- Small microscope
- Monocular microscope
- Stereo microscope
- Stereo zoom microscope



## MarVision. Optical Coordinate Measuring Machines

### QUICK AND PRECISE TOOL MEASUREMENT FOR EVERY SITUATION

► I Thanks to their modular design, optical coordinate measuring machines provide excellent configuration flexibility based on the many hardware and software modules and can be tailored to meet specific user requirements. The applications for this coordinate metrology range from comprehensive measurement of precision/cutting tools and rotationally symmetrical parts to diamond-tipped grinding tools. I ◀



## MarVision. ACCURE 250 / UNI-VIS 250 / TAURUS 650s



### MarVision. ACCURE 250 / 250H

Precision measurements of helical cutting tools by setting the pivoted measuring head to the lead angle.

- Hobs
- Grinding worms
- Taps and thread milling cutters
- Bandsaw milling cutters

Fully automatic measurement of complex cutting tools as

- Stepped and form-cutting tools
- Ball-track milling cutters and ball-end milling cutters
- Standard and special cutting tools

<b>ACCURE 250</b>	$MPE_{E1} = (1.1 + L/450) \mu m$
	$MPE_{E2} = (1.6 + L/360) \mu m$

<b>ACCURE 250 H</b>	$MPE_{E1} = (0.7 + L/500) \mu m$
	$MPE_{E2} = (1.1 + L/300) \mu m$



### MarVision. UNI-VIS 250

Precision measurements of complex tools and rotationally symmetrical parts using tried-and-tested system solutions.

Fully automatic measurement of:

- Shafts, pistons, jet needles, precision cylindrical components
- Grinding wheels and bright-finished bodies of revolution
- Stepped tools
- Ball-track milling cutters and ball-end milling cutters
- Tool bits (inserts)

<b>UNI-VIS 250 AR/ARZ</b>	$MPE_{E1} = (1.3 + L/450) \mu m$
	$MPE_{E2} = (1.8 + L/360) \mu m$

<b>UNI-VIS 250 HR/HRZ</b>	$MPE_{E1} = (0.7 + L/500) \mu m$
	$MPE_{E2} = (1.1 + L/300) \mu m$



### MarVision. TAURUS 650s

Precision measurements on long, heavy rotary cutting tools.

Full integration into production environments.


Fully automatic measurement of:

- Stepped tools
- Ball-end milling cutters
- Ball-track milling cutters
- Reamers
- Pine-tree milling cutters

<b>TAURUS 650s</b>	$MPE_{E1} = (1.8 + L/200) \mu m$
	$MPE_{E2} = (2.5 + L/100) \mu m$




## MarVision. Industry Solutions

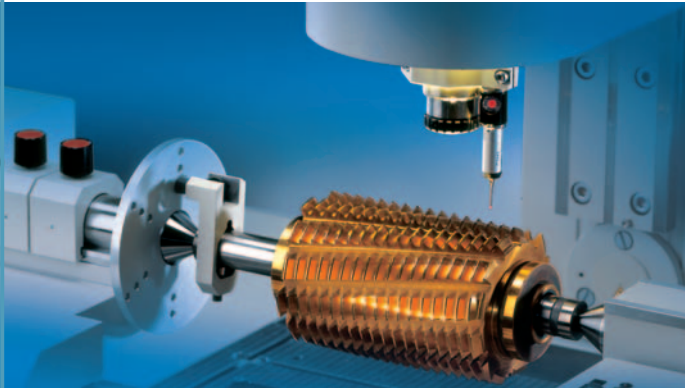


### Measurement of hobs (ACCURE 250 only)

- Comprehensive hob measurement for standard and special profiles
  - Maximum tool weights up to 15 kg (33 lbs)
  - Diameters up to 200 mm (7.87 in)
  - Lead angle  $\pm 15^\circ$
  - Free contour scanning up to a meas. point density of  $1 \mu\text{m}$  ( $40 \mu\text{in}$ )
  - Measurements conforming to DIN 3968:
    - profile form (O), pitch (O), base pitch (O), radial runout of head (O), radial runout of proof diameter (O), flute direction (O/T); form and position of cutting faces (O/T), flute pitch (T), axial runout of proof shoulder (T).
- (O - optical probing / T - touch probing)

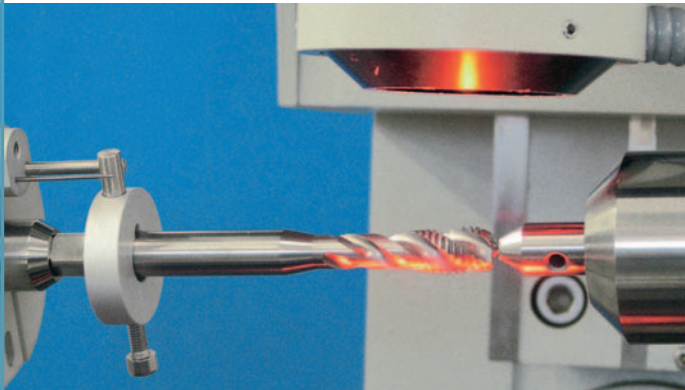


### Measurement of taps (ACCURE 250 only)

- Comprehensive measurement of right-hand and left-hand cutting taps
- Diameters from 1.4 mm to 70 mm (0.055 in to 2.76 in)
- Lead angle  $\pm 15^\circ$
- Free contour scanning up to a meas. point density of  $1 \mu\text{m}$  ( $40 \mu\text{in}$ )
- Axial section profile including starting taper, calculation of outer and core diameters, half-angle of thread, lead, taper and other dimensions are measured in transmitted light
- Rake angle, flute pitch and web diameter are measured in incident light

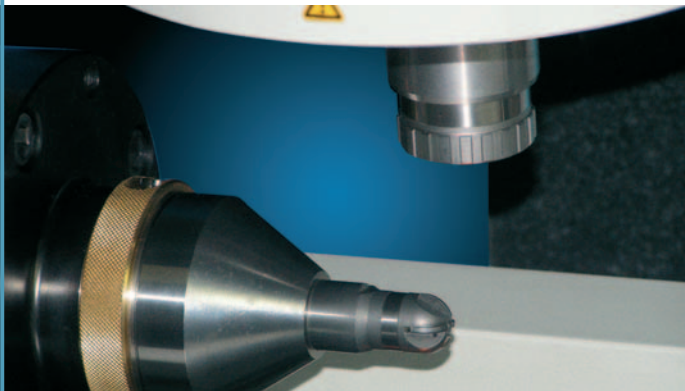

### Measurement of ball-track milling cutters (UNI-VIS 250 / TAURUS)

- Comprehensive measurement of ball-track milling cutters in axial and axis-parallel sections
- Automatic tool wobble correction
- Free contour scanning up to a meas. point density of  $1 \mu\text{m}$  ( $40 \mu\text{in}$ )
- Diameters up to 150 mm (5.91 in)
- Import of CAD data for programming the measuring machine
- Optical measurements of profile forms, lengths, angles, radii, rake angles, relief angles and radial run-out

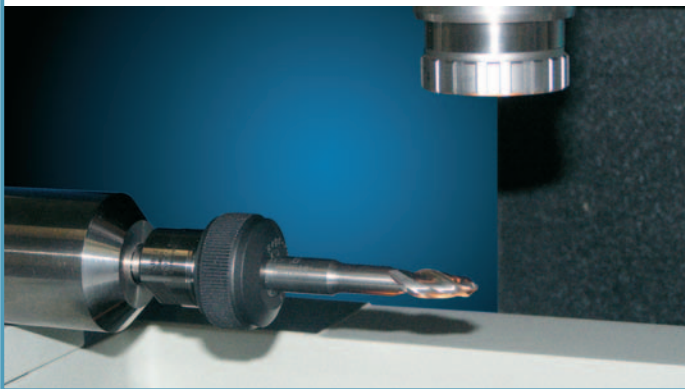


### Measurement of ball-end milling cutters (UNI-VIS 250 / TAURUS)

- Comprehensive axial-section measurement of ball-end milling cutters
- Analysis in freely selectable angular divisions of the nominal or actual circle
- Automatic tool wobble correction
- Free contour scanning up to a meas. point density of  $1 \mu\text{m}$  ( $40 \mu\text{in}$ )
- Optical measurements of profile forms, position errors relative to the nominal profile, position errors relative to the shank, radial run-out, rake angles and relief angles

## MarVision. Industry Solutions

### Measurement of rotationally symmetrical parts (UNI-VIS 250 / TAURUS)

- Comprehensive axial-section measurement of rotationally symmetrical parts in freely selectable angle positions
- Automatic tool wobble correction
- Free contour scanning up to a measuring point density of 1  $\mu\text{m}$
- High repeatability for small radii and angles thanks to intelligent correlation of measuring points with the nominal contour
- Import of CAD data for programming the measuring machine
- Optical measurements of profile forms, axial and radial lengths and distances, radii, angles and diameters

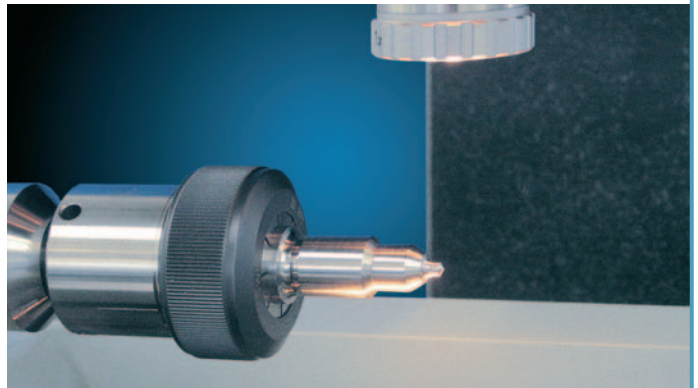


### Measurement of tool bits (inserts) (UNI-VIS 250 / TAURUS)

- Comprehensive measurement of the cutting edge contour
- Free contour scanning up to a measuring point density of 1  $\mu\text{m}$
- Import of CAD data for programming the measuring machine
- Automatic contour scanning in X, Y and Z according to CAD data
- Optical measurements of profile forms, lengths, radii, angles and rake angles




### Measurement of stepped tools (TAURUS 650s)

- Comprehensive measurement of the cutting edge contour
- Optical measurement of profile form, lengths, radii and angles
- Optional: Optical or tactile measurement of rake angles and relief angles
- Pneumatic chucks

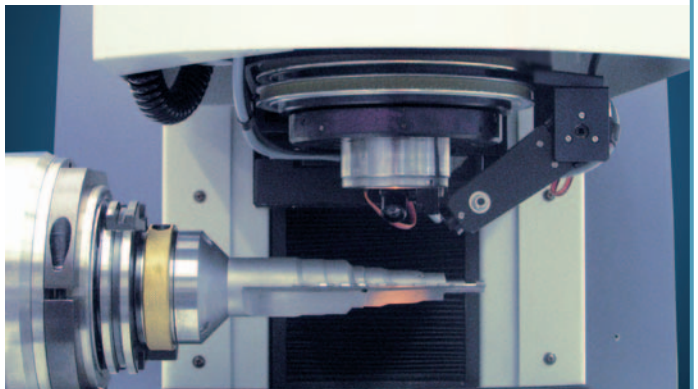



### Measurement of PCD milling tools (TAURUS 650s)

- Comprehensive measurement of the cutting edge contour
- Optical measurement of profile form, lengths, radii and angles
- Optional: Optical or tactile measurement of rake angles and relief angles
- Tactile measurement of bit seat
- Determination of overall geometry resulting from individual cutting edges
- Pneumatic chucks
- Cutting edge parameterization for flat tool bits (inserts)
- Measurement of cutting edge running

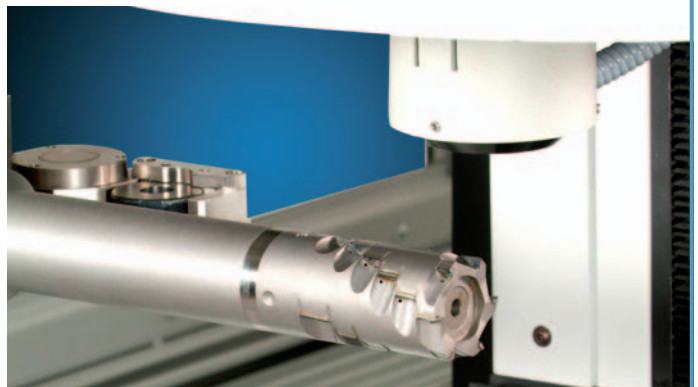



## MarVision. Software Solutions

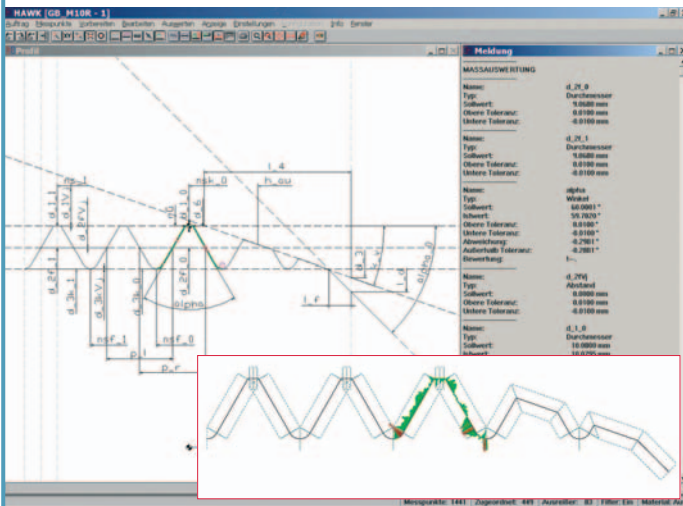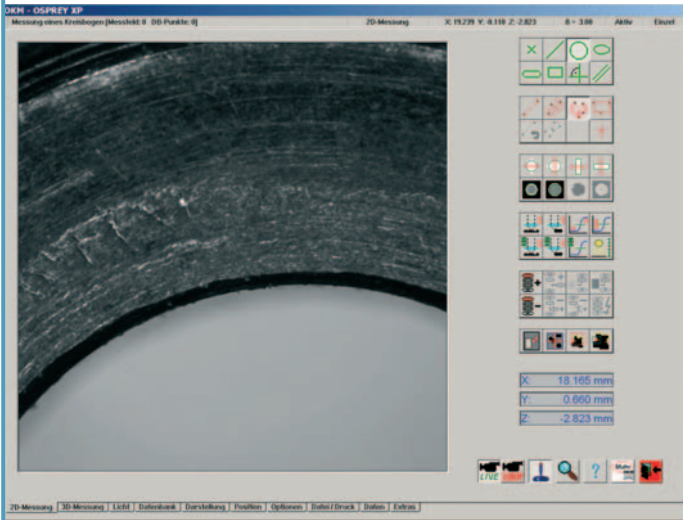

### OSPREY measurement software

- Very simple operation thanks to a clearly structured user interface
- Single-monitor solution
- Very simple creation of CNC programs
- Separate settings for illumination, edge criteria, focus, measurement and data analysis functions
- Image processing – gray level analysis using a subpixel technique
- Open communication platform between optical coordinate measuring machines and data analysis modules such as **HAWK**

### HAWK programming, data analysis and documentation tool

#### Measurement philosophy

- Complete optical contour scanning
- Actual contour assigned to nominal contour
- Measured points assigned to geometric elements using adjustable best-fit ranges
- High repeatability even with small angular and radius segments
- Data import formats: DXF, ASCII, IGES
- Data export formats: ASCII (CSV), qs-STAT

#### Advantages

- Very simple program creation by setting dimensions at the nominal contour
- Customized parameter programs for the automatic creation of measuring jobs
- Offline programming of measuring jobs at separate workstations
- Full functionality for the system owner, "single-button" control for staff

### MarVision. Software solutions – Closed Loop Precision tool grinding

#### Philosophy

- Influencing the manufacturing process
- Measuring machine becomes part of production

#### Principle

- Production data available for input via CAX interfaces
- Measurement programs created automatically control the measuring machine and the scanned geometries are directly available in **HAWK** for profile comparison
- The high accuracy of the measuring machines and the sheer density of information that can be obtained from the measurements permit precise corrections which result in reproducibly tolerance-compliant workpieces after a single correction run

#### Advantages

- Time saving of up to 80%
- Higher manufacturing accuracies
- Operator influence is minimized



## MarVision. Accessories

### Multisensor Technology

#### Optical measuring head (1, 2)

- With interchangeable lenses (1) of fixed magnification (0.7x, 1.0x, 1.5x, 3x, 5x, 10x)
- With zoom lens (zoom range 1x to 10x)

#### Probe retractor (3)

- CNC-controlled, reproducible probe extension from and retraction into the measuring head without the need for recalibration

#### Renishaw TP 20 (4)

- Probe system for tactile probing of contours

### Illumination Types

#### Annular slit illuminator 42/2000

- Bright field surface illumination for optical measuring head

### Work-Holding Fixtures

#### Set of precision collet chucks (5)

- For HSK hollow-shank chucking and internal taper

### Shop-floor Installation

Do you want to integrate your measuring machine into your production line and still get accurate measurement results? We offer various systems that protect your measuring machine against dust, vibration, oil mist and other detrimental ambient influences.

- Cabinet system (6) for the integration of all peripheral units (with or without air conditioning)
- Protective machine enclosure (7)
- Vibration damping system (8)



## MAXIMUM PRECISION FOR MEASUREMENT ON THE SHOP FLOOR. SHAFT METROLOGY FROM MAHR



The latest information on MARSHAFT products can be found on our website:  
**[www.mahr.com](http://www.mahr.com), WebCode 11935**

► | In order to be able to produce the growing variety of parts cost-effectively, manufacturers now require not only flexible production facilities, but also equally flexible measuring equipment. This is particularly true of the automotive industry and its suppliers. Given that customized vehicles with different engines and transmission systems are now the norm, items such as shaft-shaped parts need to be manufactured in a number of different designs, then measured and tested for quality assurance purposes. To measure the different parts produced in small lots, it is not cost-effective to purchase and maintain the individual multi-gaging units that were used in the past for these customized designs. A better option is to use a universal measuring machine. Such a machine should be able to adapt very quickly and flexibly to a number of different designs while also allowing fast quality assurance thanks to short measuring times. Mahr has a number of appropriate solutions.



## ► | MarShaft. Shaft Measuring Systems


<b>MarShaft.</b> Measurement of Shaft-Shaped Parts on the Shop Floor	<b>20- 2</b>
<b>MarShaft HELIO-PAN</b> Manual Shaft Measuring Machine	<b>20- 3</b>
<b>MarShaft HELIO-SCOPE</b> Optical Shaft Measuring Machine	<b>20- 3</b>
<b>MarShaft HELIO-PAN SNC</b> Automatic Shaft Measuring System	<b>20- 4</b>
<b>MarShaft HELIO-PAN ONC</b> Automatic Crankshaft Measuring Machine	<b>20- 4</b>
<b>MarShaft</b> Data Overview	<b>20- 5</b>



## MarShaft.

### MEASUREMENT OF SHAFT-SHAPED PARTS ON THE SHOP FLOOR

► | MarShaft shaft measuring machines are primarily used on the shop floor but their excellent measuring accuracy means they can also be used in measurement laboratories. The machines come in various sizes and, thanks to their modular design, can be optimized to suit the relevant measuring tasks. Measuring directly on the shop floor during production saves you having to perform time-consuming measurements in the inspection room and improves product reliability. | ◀



Mahr HELIO-PAN SNC

## MarShaft HELIO-PAN Manual

### Description

The modular design of the HELIO-PAN shaft measuring machine allows rotationally symmetrical parts to be measured quickly and flexibly.

- No operator influence
- Highly accurate measuring results
- Excellent repeatability
- Measuring system for all typical measuring tasks such as length, diameter, radial run-out, axial run-out, groove width, taper angle, roundness, coaxiality, concentricity and many others besides

### Features

- Measuring force regulator to avoid operator influences
- Ideal for use on the shop floor so can be used directly in production environments
- **HELIO-CHECK** display unit which is easy to operate

### Applications

Measurement of round parts such as:

- Gear shafts, camshafts, crankshafts, drive shafts, hollow shafts, etc.

Manually operated shaft measuring machine



## MarShaft HELIO-SCOPE

### Description

Optical measuring instrument for turned parts with matrix camera for direct use on the shop floor.

- Flexible optical measuring system for round parts
- Maximum precision directly on the shop floor
- Reliable measuring results without operator influence

### Features

- Matrix camera, camera picture approx. 8 x 8 mm (0.31 x 0.31 in)
- Easy operation thanks to touchscreen monitor
- Record generator

### Applications

Measurement of round parts such as:

- Camshafts, drive shafts, gear shafts, toothed racks, hollow shafts, etc.
- Tactile measuring unit for radial and axial run-outs (optional)
- Temperature compensation (optional)

Optical shaft measuring machine



## MarShaft HELIO-PAN SNC

Automatic shaft measuring system



### Description

The flexible HELIO-PAN SNC shaft measuring system automatically inspects shaft-shaped parts with maximum precision during production.

- Automatic measuring process
- Maximum flexibility as virtually no changeover time required
- Simple operation

### Features

- No operator influence on the measuring results
- Short measuring times
- Ideal for use on the shop floor

### Applications

Measurement of shaft-shaped parts with all kinds of different geometries

- Gear shafts, drive shafts, toothed racks, hollow shafts, camshafts

## MarShaft HELIO-PAN ONC

Automatic crankshaft measuring machine



### Description

The flexible HELIO-PAN ONC shaft measuring system automatically inspects crankshafts using both optical and tactile measurements during production.

- Automatic measuring process
- Maximum flexibility as virtually no changeover time required
- Simple operation
- Measuring system for virtually all typical measuring tasks on a crankshaft (see data sheet)

### Features


- No operator influence on the measuring results
- Short measuring times
- High measuring accuracy even under shop-floor environment conditions

### Applications

Measurement of different types of crankshafts directly in the production line.



## MarShaft Data Overview


**HELIO-PAN**
**HELIO-SCOPE**
**HELIO-PAN SNC**
**HELIO-PAN ONC**
**Measuring range**

Length (Z)	400/800/1,200 mm (15.75/31.50/47.24 in)	350 or 750 mm (13.78 or 29.53 in)	700/1,100/1,600 mm (27.56/43.31/62.99 in)	800 mm (31.50 in)
Diameter (X)	120 or 220 mm (4.72 or 8.66 in)	80 or 120 mm (3.15 or 4.72 in)	120 or 220 mm (4.72 or 8.66 in)	220 mm (8.66 in)

**Workpiece**

Weight (max.)	20 kg (44 lbs)	30 kg (66 lbs)	30 or 80 kg (66 or 176 lbs)	60 kg (132 lbs)
---------------	----------------	----------------	-----------------------------	-----------------

**Resolution** adjustable

Lengths/diameters	0.0001 mm (4 μin)	0.01 to 0.0001 mm (400 to 4 μin)	0.001/0.0001 mm (40/4 μin)	0.001/0.0001 mm (40/4 μin)
Angle	0.001°	0.01 to 0.0001°	0.01°	0.01°

**Error limits\***

Length (μm)	(2+L/100), L (length) in mm	(4+L/200), L (length) in mm	(2+L/100), L (length) in mm	(2+L/100), L (length) in mm
Diameter (μm)	(1+L/100), L (length) in mm	(2+L/200), L (length) in mm	(0.5+L/100), L (length) in mm	(0.5+L/100), L (length) in mm

**Drive**

Manual	Servo motors	Servo motors	Servo motors
--------	--------------	--------------	--------------

**Lens system**

Projector or measuring microscope possible	Telecentric precision lens system, high-resolution CCD array	-	Telecentric precision lens system, high-resolution CCD array
--	--	---	--

\* (2 σ at 20 °C ± 1 °C relative to reference standard)



## MORE THAN JUST PRODUCTS. THE MAHR SERVICE PORTFOLIO



The latest information on the MAHR  
SERVICECENTER can be found on our website:  
**[www.mahr.com](http://www.mahr.com), WebCode 9628**


► | In addition to its many branches and agencies, Mahr also has a worldwide service network. To find your contact partner, visit the Mahr website at **[www.mahr.com](http://www.mahr.com)** or see the back page of this catalog. In addition to the services that accompany our products, further services are also available from various Mahr sites, where the skill and experience of the staff reflects Mahr quality standards. We are happy to help with all your metrology questions, however specific. Just ask us! | ◀

## ► | Mahr. Services

Measuring Equipment Management	21- 2
Service and Calibration Agreements	21- 3
Application Advice	21- 3
Mahr Academy	21- 4
Calibration – Calibration Services	21- 4
Technical Service	21- 5



## Mahr Measuring Equipment Management

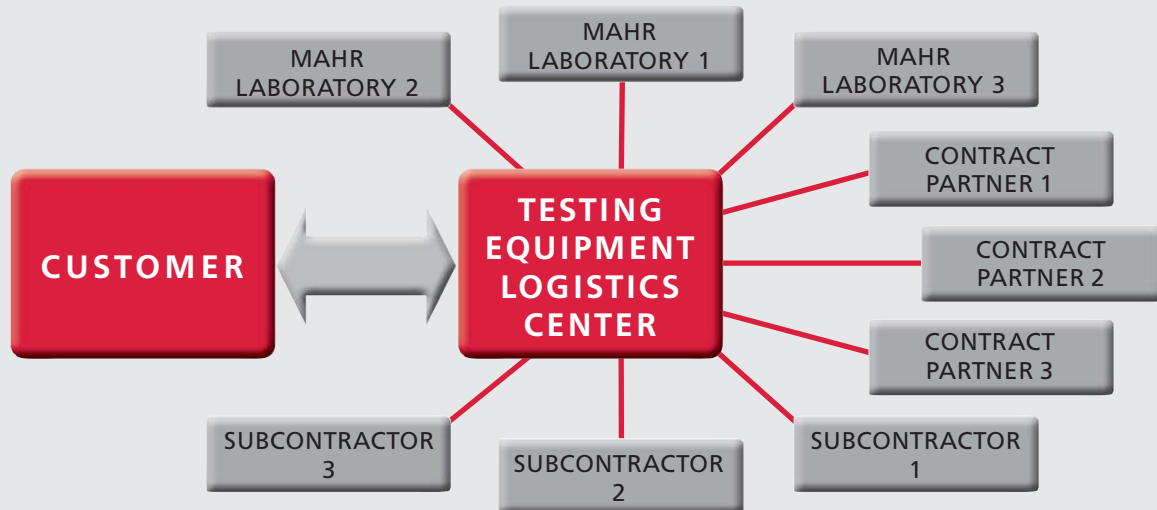

The tendency of producers to concentrate on core skills is increasing all the time. Ancillary processes such as testing equipment management or tool management are outsourced to specialists who can perform these tasks more effectively. For testing equipment, Mahr offers **Mahr service modules**, providing a **high level of service** that frees the customer from having to manage this secondary process. By taking over tasks such as calibration, repair, internal reminders and spare-parts acquisition, **Mahr** also saves the customer the administrative outlay that they involve. Description of service:

### Calibration / metrology

- Calibration of all makes of measuring and test equipment in one of the Mahr laboratories
- Calibration data received from/forwarded to partners
- On-site calibration

### Inventory management and inventory organization

#### Repair of testing equipment

- General overhaul of Mahr measuring equipment
- Repair of all makes of measuring equipment

#### Direct exchange of testing equipment

- Exchange instead of repair
- Exchange if calibrations produce a negative result

#### Acquisition of measuring instruments and equipment (general contractor)

- Acquisition of all makes of measuring equipment
- Incl. measuring sizes outside the standard Mahr product range

#### System advice, training

#### Simplified order processing/transport/logistics

- Internal administration no longer required
- Collection service

### Peripheral services

- Internal transport

When adapting these modules to the customer's organizational structures, **Mahr Measuring Equipment Management** is very flexible and offers various configuration levels and options. Customized system pre-planning is therefore also part of the service, to ensure the best all-round performance for customers. Naturally, **Mahr's services** comply with international standards such as ISO 17025. Whether the services need to comply with specific international standards or in-house requirements, high internal quality standards ensure that complex processes such as the control of measuring and testing equipment, which can be costly and involved, are performed efficiently and professionally.

### Measuring services (length metrology)

The various laboratories run by the Mahr Group and our cooperation partners have a whole range of **measurement** equipment available. Our service primarily includes the following measuring tasks:

**Tactile and optical coordinate metrology,**  
**Surface metrology (roughness),**  
**Contour metrology,**  
**Form metrology,**  
**Precision length metrology.**

Depending on the measuring task, required accuracy and machine availability, **Mahr Measuring Equipment Management (MMM)** coordinates measuring orders and performs **measurement** in its own laboratories or via the Group's laboratories or cooperation partners. Measurement services are invoiced by the hour at a fixed rate. Depending on your requirements, we can supply appropriate measurement records.

## Service Agreements



### Service and calibration agreements

The operational availability of your measuring equipment is very important to you. To ensure smooth operation over many years, Mahr recommends you have your equipment regularly inspected. The inspection of your measuring equipment, which is dependent on your conditions of use and defined with your agreement, brings you considerable advantages:

- Unscheduled equipment failures are prevented
- Wear parts are exchanged in good time and within the framework of the agreed service intervals
- Regular servicing keeps your equipment running at peak performance, including incorporation of future product improvements
- Regular inspections of your measuring equipment provide the best conditions for your quality assurance system. A sticker on your measuring equipment reminds you when the next service is due. All servicing performed is noted in the service plan and can serve as a condition for acceptance of any claims during the warranty period.

## Application Advice



### Application advice

**Do you need support when working on solutions for metrological tasks? Do you need to create measuring programs for complex workpieces? Do your users need thorough product training?**

Take advantage of the services offered by our applications engineering specialists, with their extensive knowledge and many years of experience in the dimensional metrology sector.

The names **Precimar**, **MarSurf**, **MarForm** and **MarVision** represent core skills in the fields of length metrology, form, contour and roughness metrology and coordinate metrology. Our applications engineering and technical service specialists also offer:

- Sample measurements
- Assistance with putting equipment into service
- Program creation
- Product training
- Measuring equipment capability investigations
- User training



## Mahr Academy



### Mahr Academy

The **Mahr Academy** offers you applications-specific product training and basic seminars, either at predefined seminar venues on specific dates or arranged internally within your company. Whichever type of training you choose, the aim is the same – to help your business become even more reliable and efficient and produce even higher quality goods in future. The subjects offered are relevant to all employees that work either directly or indirectly on production tasks, from new employees on the shop floor, in the inspection room and in the design department to long-serving employees and staff with management duties.

**You can find detailed information on the Mahr Academy training and seminar portfolio on our website, or ask your contact partner at Mahr who will be happy to help.**

### Summary of subjects on offer

- Introduction to length metrology
- Surface metrology
- Form metrology
- Monitoring of testing equipment
- Measuring uncertainty according to GUM

Product training and advanced training seminars for designers on request.

## Calibration Services



### Calibration laboratories

**Mahr** operates **laboratories** for **various instruments** and **sizes** in the field of **length metrology**. These ensure high dimensional accuracy and **very low measuring uncertainties**. In principle, **all measuring equipment** can be calibrated. Specific core skills are offered for the following calibration services:

- Setting rings\* / ring gages\*
- Setting plug gages\* / plug gages\*
- Setting disks\*
- Setting masters
- Setting standards for inside micrometers
- Setting standards for outside micrometers\*
- Dial comparators\*
- Lever-type test indicators\*
- Geometry and roughness standards\*
- Thread plug gages, thread ring gages
- Internal and external measuring instruments
- Inductive measuring instruments and probes\*
- Calibration spheres
- Tall cylinder squares\*
- Rulers
- Micrometers\*
- Calipers\*
- Dial indicators\*
- Measuring anvils
- Measuring tables and V-blocks
- Angularity measuring instruments
- Roughness measuring instruments
- Roughness standards\*
- Snap gages
- Radius, thread-form and sensor gages
- Standard cylinder squares\*
- Parallel gage blocks\* made of steel, ceramic and hardened metal
- Parallel pieces
- Optical flats
- Pin gages\*





- Flats
- Roundness standards\*
- Depth setting standards\*
- Magnification standards\* (flicks)
- Spline gages
- Angle standards
- Bevel protractors
- Customized objects on request

\* Calibrations with officially recognized calibration certificates that comply with national and international standards, e.g. **NIST** (National Institute of Standards and Technology), and **DKD** (German Calibration Service). **NIST** is the national standards institute in the United States.

The **DKD** (German Calibration Service) is a signatory of the multi-lateral agreement of the *European cooperation for Accreditation (EA)* and the *International Laboratory Accreditation Cooperation (ILAC)* for mutual recognition of calibration certificates.

Your **Mahr contact partner** will provide you with information on national and international recognition, e.g. as part of the multi-lateral agreement [www.european-accreditation.org/](http://www.european-accreditation.org/).

## Technical Service



### Technical Service

**Mahr measuring instruments** are developed and produced with the utmost care according to **Mahr quality guidelines** and using the very latest technology. This ensures your measuring instrument is of the very highest quality.

To provide your machine/measuring station with optimum care, Mahr has an efficient worldwide Service Organization. The **Mahr Service Organization**, run by trained expert personnel, is equipped with cutting-edge tools and instruments, many of which have been specially developed, and has an extensive selection of spare parts.

**Mahr** works according to progressive, tried-and-tested guidelines and offers a range of complementary services. To ensure the best results from your **Mahr measuring instruments** at all times, we recommend you use only the services offered by the **Mahr Service Organization**. This is the only way to ensure that only **original Mahr spare parts** and servicing procedures are used, reflecting the **Mahr quality standard**.

Visit the Mahr website at [www.mahr.com](http://www.mahr.com) to find out where your **Mahr ServiceCenter** is located.





Mahr

# Nummerverzeichnis

**Stand: 160807**

Product	Page	Product	Page	Product	Page
16 DN	1-8	40 AR	3-18	105 Y	12-3
16 Eab	1-10	40 AS	3-17	105 Z	12-3
16 Ec	1-11	40 AW	3-18	105/O	12-2
16 Eea 1	1-11	40 Eak	3-9	106 ES	12-5
16 Eea 2	1-11	40 Eal	3-9	106 ESs	12-5
16 Eea 3	1-11	40 EfK	3-9	106 ESv	12-5
16 Eei 1	1-11	40 Efl	3-9	106 UF	12-4
16 Eei 2	1-11	40 Epk	3-9	106 UFv	12-4
16 Eei 3	1-11	40 Erk	3-9	106 UFw	12-4, 12-5
16 Eei 4	1-10	40 Esk	3-9	106 Us	12-4
16 Eel	1-11	40 Etk	3-9	107 Asa	12-6
16 Em	1-5, 1-7, 1-8, 1-9, 1-11	40 Etl	3-9	107 G	12-6
16 ESt	11-7	40 EW	3-5	107 MH	12-8
16 ESv	1-14, 1-21, 1-23, 2-22, 10-2, 12-5	40 EWS	3-6	107 Ug	12-7
16 EW	1-5	40 EWW	3-8	107 Us	12-7
16 EX	1-6, 1-7	40 EX	3-7	107 V	12-8
16 EXC	1-7	40 EXL	3-5	130 kl	12-9
16 EXd	1-7, 1-10, 1-12, 1-13, 1-19, 1-20, 2-23, 3-6, 3-30, 5-39, 5-51	40 EXS	3-7	130 t	12-9
16 EXr	1-7, 1-10, 1-12, 1-13, 1-19, 1-20, 2-14, 2-20, 2-23, 3-6, 3-30, 5-39, 5-51	40 F	3-14	130 W/130 WR	12-9
16 EXt	11-7	40 FC	3-14	300 P	9-5, 9-6
16 EXu	1-7, 1-10, 1-12, 1-13, 1-19, 1-20, 2-23, 3-6, 3-30, 5-39, 5-51	40 He	9-11	301 P	9-5, 9-6
16 EXV	1-10	40 k	3-22	355 E	3-24, 9-51, 9-62, 13-17
16 FN	1-8	40 SA	3-10	390	13-17
16 GN	1-8	40 SD	3-11	400 B-3, 400 B-4	5-26
16 N	1-8	40 SH	3-11	400 B-5, 400 B-25	5-26
16 U	1-9	40 SM	3-19	400 B-50	5-25
18 DN	1-17	40 SSH	3-11	402	13-4
18 ESA	1-14	40 T	3-15	402 C	13-6
18 EX	1-12, 1-13	40 TS	3-16	404	13-4
18 N	1-16	40 W	3-13	404 C	13-6
18 NA	1-15	40 Z	3-20	406	13-4
22 P	9-24	40 Za	3-21, 9-22	406 C	13-6
25 Eb	10-20	41 H	3-22	408	13-4
25 Eel	10-2	43 A	3-22	408 C	13-6
25 Eh	10-20	43 Z	3-20	409	13-4
25 ES	10-2	44 A	3-25	409 C	13-6
25 Es	10-20	44 Ae	3-28	411/1, 411/2	13-4
26 P	9-25	44 Ak	3-28	415/1, 415/2	13-4
27 ESh	2-23	44 AS	3-25	417	13-4
27 Sp	2-23	44 Av	3-28	417 C	13-7
30 ENt	1-20	44 Cm	3-23	418 C	13-7
30 ESa	1-18, 1-19	44 Cms	3-23	419 C	13-7
30 EW	1-18	44 Cv	3-23	419 C/1	13-7
30 EWD	1-21	44 EX	3-26	420	13-8
30 EX	1-19	44 EXg	3-28	420 a	13-8
30 EXm	1-18, 1-19	44 EXS	3-26	420 f	13-8
30 EXN	1-20	44 F	3-24	420 h	9-62, 13-8
30 N	1-22	45 T	3-29	420 m	13-8
30 ND	1-21	45 Tm / Tv	3-29	420 z	13-8
30 NH	1-22	46	3-31	421/421 P	13-9
31 ES/32 ES	1-23	46 EX	3-30	422	13-9
31 ESm	1-23	49P	9-31	423	13-9
35B	8-10	57B	9-28	424	13-9
36 B	10-21	65P-40	9-37	426	13-12
40 A	3-10	75B-1	9-40	426 A	13-15
40 AB	3-17	75P-30	9-37	426 D	13-14
40 AG	3-12	75P-35	9-37	426 DS	13-14
		75P-50	9-38	426 G	13-12
		104 H	12-2	426 M	3-22, 13-15
		105 F/O	12-3	426 S	13-13

Product	Page	Product	Page	Product	Page
705	13-18	810 AG	5-35	828 CiM	15-12, 15-13
706 Vr	10-17	810 AT	5-32	828 CiM 1000	15-12
708 E	13-17	810 AU	5-34	828 WIN	15-11, 15-12
708 G/N	13-18	810 AX	5-34	828 FX	15-2, 15-3
715 E	13-17	810 AZ	5-33	828 M	15-3
715 G/N	13-18	810 S	5-32	828 PC	15-4
716 G/N	13-18	810 SB	5-33	828 PC 1000	15-4
800 a	4-9	810 SM	5-33	828 PC 500	15-4
800 b	4-10	810 SRM	5-33	828 WIN	15-4, 15-5, 15-6
800 h	4-10	810 SW	5-32	830	7-27
800 H	4-7	810 V	5-35	832	7-28
800 hs	4-10	814 a	2-22	832 Dimensionair	7-40
800 k	4-10	814 G	2-21	837	9-37
800 S	4-4	814 Gf	2-22	837 v	9-37
800 SA	4-4	814 h	2-22	838 A	9-26
800 SG	4-4	814 kh	2-22	838 AB	9-27
800 SGA	4-4	814 m	2-22	838 B	9-26
800 SGB	4-6	814 N	2-21	838 EA	9-33
800 SGE	4-5	814 Nf	2-22	838 EI	9-35
800 SGL	4-6	814 S	2-23	838 TA	9-32
800 SGM	4-5	814 s	2-22	838 TI	9-34
800 SL	4-6	814 t	2-22	840 E	9-17
800 SM	4-5	814 u	2-22	840 F	9-8
800 SR	4-8	814 ua	2-22	840 FC	9-8
800 SRM	4-8	814 X	2-22	840 Ff	9-15
800 t	4-8	815 GN	8-2	840 FG	9-12
800 V	4-7	815 MA	8-3	840 FH	9-10
800 VGM	4-7	815 MB	8-3	840 Fk	9-15
801 H	4-7	815 MG	8-4	840 FM	9-14
801 p	4-9	815 P	8-4	840 FS	9-16
801 S	4-4	815 X	8-5	844 A	3-27
801 S1	4-4	815 Y	8-5	844 Ag	3-28
801 SG	4-4	817 Ci-am	2-19, 2-22	844 AS	3-27
801 SGE	4-5	817 Ci-m	2-22	844 D	9-45, 14-3
801 SGI	4-4	817 Ci-p	2-22	844 Dg	9-49
801 SGL	4-6	817 Ci-r	2-19	844 Dge	9-49
801 SGM	4-5	817 Ci-sa	2-19, 2-22	844 Dgk	9-49
801 SL	4-6	817 CLM	2-4	844 Dk	9-46
801 SM	4-5	817 eb	2-13	844 Dkr	9-48
801 SR	4-8	817 h	2-14	844 Dks	9-47
801 SRM	4-8	817 ks	2-22	844 Dt	9-50
801 t	2-19	817 ts	2-15	844 Dtr	9-50
801 v	4-9	818	8-6	844 Dv	9-50
801 V	4-7	818 ab	8-7	844 Dvk	9-50
801 VGM	4-7	818 pb	8-7	844 Dw	9-49
802 EW	4-13	818 pe	8-7	844 ef	9-62
802 EWt	4-13	818 XNB	8-7	844 em	9-62
802 EWZ	4-13	820 FC	8-8	844 K	9-52
802 W	4-12	820 FG	8-8	844 Ka	9-56
802 Wtk	4-12	820 N	8-8	844 Ke	9-54
802 Wtl	4-12	820 NC	8-8	844 Kg	9-49, 9-51, 9-55, 9-64
802 Wts	4-12	820 NG	8-8	844 KH	9-52
802 WZ	4-12	821 FG	8-12	844 Kk	9-53, 9-54, 9-55, 9-64
803 S	5-30	821 NG	8-12	844 KS	9-52
803 A	5-30	824 FT	8-13	844 Kst	9-56
803 AZ	5-31	824 GT	8-13	844 Ksts	9-56
803 SB	5-31	824 NT	8-13	844 Kt	9-50, 9-55
803 SW	5-31	826	15-7	844 Kv	9-50, 9-55, 9-64
805 A	5-30	826 PC	15-5, 15-13	844 Kw	9-49, 9-51, 9-55
810 A	5-32	827 b	8-14, 8-15	844 N	9-60

Product	Page	Product	Page	Product	Page
844 Neb	9-62	1075	5-38	AGD Masters	13-16
844 Nes	9-63	1075 b	5-39	Air Gages	7-43
844 Ng/Ngk	9-63	1080	5-38	Air Plugs	7-43
844 NH	9-61	1081	5-38	AT-50, AT-100	4-10
844 NHk	9-63	1082 p	5-51	C 1208	7-30, 14-6
844 Nk	9-63	1085 a	5-51	C 1208 PE	7-41
844 Nv	9-63	1085 b	5-51, 6-6	C 1216	7-31, 14-6
844 Nw	9-63	1086	2-14, 5-42	C 1245	7-32, 14-6
844 T	10-4	1086 b	5-51	C 1245 PE	7-41
844 Ta	10-8	1086 W	5-45	CD 120	16-23
844 Tb	10-9	1086 Z	5-43, 5-44	CIM 1000	15-12, 15-13
844 Tc	10-9	1087	5-46	CP-2199	4-10
844 Te	10-7	1087 Z	5-47	CX 2	2-16
844 Tf	10-20	1087 B	5-50	CX 2p2	2-20
844 Tg	10-14	1088	5-48	CX t1	2-20
844 Ti	10-8	1088 W	5-49	CX t2	2-15, 2-20
844 Tk	10-10	1100	6-20	D1000S	14-7
844 Tm	10-7	1103 N	6-20	D1000X	14-7
844 Tn	10-7	1104 N	6-20	D1100 X	14-8
844 Tp	10-8	1110 N	6-20	Diamar 280	14-13
844 Tr	10-12	1150 N	6-20	Diamar nk	14-13
844 Ts	10-8	1200 IC	7-26	Dimensionair	7-36
844 Tt	10-9	1240	7-33	Dimentron Plug Gages	9-41
844 Tu	10-9	1240/1F	7-33	EB	2-19
844 Tv	10-16	1240/3D	7-33	EB I	2-13, 2-19
844 Tw	10-7	1260	14-9	EBK-1010	6-9
844 Tx	10-7, 10-18	1260 T	14-9	EBK-1012, 1013, 1018	6-9
844 Ty	10-7, 10-17	1270	14-9	ECV-1307-W2	6-9
844 Tz	10-11	1280 P	9-57	FM1	11-7
844 Z	9-64	1288	7-17	FORM-PC	17-3, 17-5
844 z	9-65	1300	7-14	Gage Blocks Inch	13-11
852	9-18	1301	7-16	GAGE4WIN	18-3
852 TS	9-19	1303	7-16	GD 120CNC	16-25
853	9-20	1304 K	7-16	GD 25	16-24
901-913	5-52, 9-13, 10-18	1310	7-14	GMX	18-2
921	6-17	1318	7-16	GMX 275	18-3
940	5-31, 5-32, 5-35, 5-39, 6-6, 6-19, 6-21	1340	7-22	GMX 400	18-3
941, 943	5-53	1340/1	7-13, 7-15, 7-22	GMX 600	18-4
951	6-17, 6-19, 6-21	1340/1F	7-13, 7-15, 7-22	HB-2157	4-10
953	6-21	1399	7-17	HELIO-PAN	20-3, 20-5
954	6-17, 6-19, 6-21, 9-55, 9-64	1492 B	4-11	HELIO-PAN ONC	20-4, 20-5
955	5-32, 5-35	1901TA	14-4	HELIO-PAN SNC	20-4, 20-5
956	5-31	1940	14-4	HELIO-SCOPE	20-3, 20-5
957	6-19	1941	14-4	Indicators A / N	5-7
958	6-21	2000	6-5	Indicators B / O	5-9
961	5-32	2000 d	5-51, 6-6	Indicators C / P	5-10
962	5-32	2000 h	6-6	Indicators D / Q	5-11
963	5-35, 6-19, 6-21	2000 m	6-6	Indicators E / R	5-12
966	5-31	2000 p	6-6	Indicators Wetproof	5-17
967	5-31	2000 r	5-51, 6-6	Indicators access.	5-22, 5-23, 5-24
970	6-19, 6-21	2000 sg	5-51, 6-6	Indicators Contacts	5-22, 5-27, 5-52
1000 A/B/Z	6-17	2000 sps	5-51, 6-6	Indicators perpendicular	5-19
1000P	9-4	2000 usb	5-51, 6-6, 11-4	K 10/100	2-13, 2-19
1002/1002 Z	6-18	2001	6-5	K 10/50	2-19
1003 XL	6-18	2100	6-4	K 10/60	2-13, 2-19
1003/1003 Z	6-18	2300	4-11	K 4/30	2-13, 2-19
1004/1004 Z	6-18	2400	8-2	K 4/72	2-19
1010/1010 Z	6-18	µDimensionair	7-38	K 6/40	2-13, 2-19
1050	6-18	µMaxµm	6-7	K5/51	2-13
		µMaxµm XLI / XLT	5-40	K6/51	2-13



Product	Page	Product	Page
KM 2	2-13	PZK	16-24
KN 100	16-27	QMDIAL	15-7
LD 120	16-17	QMSOFT	15-9
LINEAR 100	15-7	Quick&Easy	17-11
LINEAR 1200	15-7	RD-21	4-10
LINEAR 1600	15-7	RecordPager	17-13
LINEAR 2000	15-7	RS232t	11-7
LINEAR 400	15-7	S 1840	7-34, 14-7
M1	16-7	S 1840 PE	7-39
M2	16-7	S 1841	14-7
Mahr_EXDLL	11-7	S15/31,2	2-13
MarCAD 2D	19-16, 19-17, 19-18	S15/47,5	2-19
MarCAD 3D	19-16, 19-17, 19-18	S2	16-10, 16-11
MarCom	11-3	T20W	17-16
MarEdit	17-12, 17-13	T7W	17-16
MarSoft Vision 3D	19-7, 19-11, 19-15	TE-20	4-9
MarWin	17-12, 17-13	TMT 120	2-13
Maxµm III	6-10	TMT 86	2-19
MFK 500	17-9	ULM 1000	15-8
MFK 600	17-9	ULM 1000 S	15-9
MFU 100	17-7	ULM 1400 S	15-9
MFU 800	17-8	ULM 1500	15-8
Mke 20	2-19	ULM 1500 L	15-10
Mke 30	2-13	ULM 1700 S	15-9
MMQ 10	17-3	ULM 300	15-8
MMQ 100	17-3	ULM 520 S	15-9
MMQ 34	17-4	ULM 600	15-8
MMQ 400	17-5	ULM 800 L	15-10
MMQ 6200	17-4	Universal Dimensionair	7-37
MS 222	19-7, 19-8	Vision 3D	19-16, 19-17, 19-18, 19-19
MS 222 HA	19-8	WS1 White Light Sensor	
MS 442	19-7, 19-9	Surface Meas.	16-22
MS 662	19-7, 19-8	X 1715	14-8
MSP 2	11-5	X 1741	14-8
MX 4	17-19	X 1941	14-4
MX 4 CNC	17-20	XC 2	16-14
MX 4 XXL	17-20	XC 20	16-15
NB-60	8-11	XCR 20	16-16
OMS 10103/ OMS 10106	19-14	XP 20	16-18
OMS 443	19-13	XR 20	16-13
OMS 663 HA	19-14	XT 20	16-21
OMS 663	19-13	Z 10/31,2	2-13
Optimar 100	15-2, 15-3, 15-13	Z 10/60	2-13/2-19
P1300	7-6		
P1514	7-23		
P1514 H	2-14		
P1526	7-23		
P2000	14-3		
P2001	7-10		
P2004	7-10		
P2010	7-11		
P2104	7-11		
PCV 200	16-23		
PFM	16-6		
PFM 2	16-6		
PGK 120	16-25		
PLM 600-2	15-11, 15-13		
PMC	19-15		
Primar	17-18		
PS1	16-4, 16-6		

Product	Page	Product	Page
μDimensionair®	7-38, 14-4	Contact Points / Interchangeable Anvils	
μMaxµm XLI / XLT	5-40	- for ANSI/AGD Dial Indicators (inch)	5-22, 5-27
μMaxum	6-7	- for Depth Gages 75P-50	9-39
<b>A</b>		- for Dial Indicators, Dial Comparators and Probes (metric)	5-52, 5-53
Accessories for MarForm	17-17	- for Height Measuring Instrument Digimar 817 CLM	2-13
Acquisition	21-2	- for Height Measuring Instrument Digimar CX2	2-19
Adjustable Bore Gages	9-57	- for Indicating Snap Gage 840 FG	9-13
Advanced Form	17-10	- for Indicating Snap Gage 840 FH	9-11
AGD Masters	13-16	- for Indicating Thread Snap Gages	9-21
Air Gages	7-35, 14-2	- for Snap Gages 300P	9-7
Air Gaging Accessories	7-47	- for Test Indicators	4-8
Air Plugs	7-42, 14-3	- for Thread Micrometer	3-21
ANSI/AGD Dial Indicators	5-2	- for Universal Measuring Instruments	10-8
Application Advice	21-3	Contour Measuring Units	16-12, 16-13, 16-14, 16-15
Application Aids	16-7	Contour Measuring Units Data Overview	19-17, 19-18
		Contour Standards KN 100	16-27
<b>B</b>		Control Columns	17-17
Backlight	19-4	Counterbore Plugs	7-44
Bench Depth Gages	9-40	Crank Shaft Measuring Unit, automatic	20-4
Bench Micrometer	3-16	Customer Solutions	14-14
Bench Style Thickness Gages	9-30	CX 2	2-16
Bevel Protractor	12-4	CX 2p2	2-20
Blind Hole Plugs	7-44	CX t1	2-20
		CX t2	2-15, 2-20
<b>C</b>		<b>D</b>	
C 1208	7-30, 14-6	D1000 S	14-7
C 1208 PE	7-41	D1000 X	14-7
C 1216	7-31, 14-6	D1100 X	14-8
C 1245	7-32, 14-6	Data Logger	11-5
C 1245 PE	7-41	Data Processing => See MarConnect	<b>Chapter 11</b>
Calibration	21-2	Dead Load Thickness Gages	9-28
Calibration Metrology	15-8	Depth Gages	9-37
Calibration Services	21-4	Depth Measuring Bridge	1-5
Caliper Gages	9-31	Depth Micrometer	3-29
Calipers => See MarCal	<b>Chapter 1</b>	DezimeSS	6-18
Calipers with Circular Scale	1-9	Dial Bore Gage for Internal Serrations	9-64
Calipers with Scale Reading (Vernier)	1-8	Dial Gage Tester	15-2
CD 120	16-23	Dial Indicator Calibrator	5-26
Center Bench	8-6	Diamar	14-12
Ceramic Gage Blocks	13-5	Diamar 280	14-13
Ceramic Measuring Faces	1-7, 3-14, 9-2, 9-8	Diamar nk	14-13
Checking Plug Gages	13-18	Diameter Measuring Device	14-12
CIM 1000	15-12, 15-13	<b>Digimar</b> (Height Measuring Instruments)	<b>Chapter 2</b>
Circonimar	13-2	- manual / hand operated	2-21
Clamping disks	17-17	- motorized	2-4, 2-16
Clamping jaws	17-17	- with 2D and Statistics Function	2-4
Coaxial Light	19-5	Digimatic	11-8, 14-4
Column Amplifier	7-34	Digital & Dial Comparators => See MillimeSS	<b>Chapter 6</b>
Column Devices	14-5	Digital & Dial Indicators => See MarCator	<b>Chapter 5</b>
Compact Column Amplifier	7-34, 7-39, 14-7	Digital 3D-Touch Probe	4-13
Compact Units	14-5	Digital Caliper	1-4
Comparator Stands	8-8	Digital Comparator	6-2
ComprameSS	6-18	Digital Depth Gage	1-18
		Digital Indicators (Long Range)	5-36
		Digital Linear Machine Scales	1-23
		Digital Micrometer	3-5
		Digital Micrometer Head	3-30
		Digital Self-Centering Inside Micrometer	3-26
		Digital Universal Bevel Protractor	12-5

Product	Page	Product	Page
Digital Universal Caliper	10-2	GMX 275	18-3
Dimensionair® Air Gages	7-36	GMX 400	18-3
Dimensionair® Air Gaging System	7-40	GMX 600	18-3
Dimensionair® Air Rings	7-46		
Dimentron® Plug Inside Diameter Gages	9-41	<b>H</b>	
DIN Masters	13-17	Height Measuring and Scribing Instrument	2-21
Direct Exchange	21-2	Height Measuring Instruments => See Digimar	<b>Chapter 2</b>
DKD	21-5	HELIO-PAN	20-3, 20-5
Double Hook Depth Gages	1-21	HELIO-PAN ONC	20-4, 20-5
Double Prisma Guide	1-14, 1-15	HELIO-PAN SNC	20-4, 20-5
Drive Units	16-23, 16-25	HELIO-SCOPE	20-3, 20-5
<b>E</b>		<b>I</b>	
Easy Check	14-9	Illuminated Magnifiers	12-9
Easy Form	17-10	Illumination	19-4
EB	2-19	Inch Gage Blocks	13-10
EB I	2-13, 2-19	Incremental Probes	2-14, 7-23, 14-3
EBK-1010	6-9	Indicating Bench Snap Gage	9-19
EBK-1012, 1013, 1018	6-9	Indicating Depth Gage	9-37
ECV-1307-W2	6-9	Indicating Measuring Instruments	<b>Chapter 9</b>
Elcompramess	6-20	Indicating Plug Gages	9-45
Eldezimess	6-20	Indicating Snap Gages	9-2
Electrical Comparator	6-20	Indicating Thread Snap Gage	9-18, 9-20
Electrical Length Measuring Instruments	<b>Chapter 7, Chapter 14</b>	Indicator Calibrator with Digital Readout	5-25
Electronic Bore Plug Gage	14-3	Indicator Stand	8-2
Electronic Gage for External Measurement	9-33	Inductive Digital Comparators (Short Range)	6-2
Electronic Gage for Internal Measurement	9-35	Inductive Probes	7-4, 14-3
Electronic Snap Gage	9-17	Inside Micrometer	3-23
Elmess	6-20	International Laboratory Accreditation Cooperation (ILAC)	21-5
Elmillimess	6-20	Invar Steel	9-60
Elzentimess	6-20		
Enlargement Standard	17-17	<b>K</b>	
Engineered Solutions	14-14, 14-15	K 10/100	2-13, 2-19
European Cooperation for Accreditation (EA)	21-5	K 10/50	2-19
Evaluation Instruments	7-24, 14-5	K 10/60	2-13, 2-19
Extramess	6-5	K 4/30	2-13, 2-19
Extra Long Range Dial Indicators	5-15	K 4/72	2-19
		K 5/51	2-13
<b>F</b>		K 6/40	2-13, 2-19
Fixed Optics	19-5	K 6/51	2-13
Flanged Beam Square	12-3	KM 2	2-13
Flat Square	12-2	KN 100	16-27
Focodyn	16-26	Knife-edge Square	12-3
Form Measuring Unit	<b>Chapter 17</b>	Knife-edge Straight Edge	12-2
FORM-PC	17-3, 17-5		
Formtester	17-2	<b>L</b>	
Formtester => see MarForm	<b>Chapter 17</b>	Large Type Millimess	6-17
		Laser Taster	19-7
<b>G</b>		LD 120	16-17
Gage Block Testing	15-4	LED Ring Light	19-4
Gage Blocks	13-2	Length Measuring Computer	14-9
GAGE4WIN	18-3	Length Measuring Device	14-13
Gages for External Measurement	9-32	Lever Type Gage Heads	7-18
Gages for Internal Measurement	9-34	LINEAR 100	15-7
GD 120CNC	16-25	LINEAR 1200	15-7
GD 25	16-24	LINEAR 1600	15-7
Gear Measurement	18-3	LINEAR 2000	15-7
Geometry Standard	16-27	LINEAR 400	15-7
Gleason	18-2	Long Range Dial Indicators	5-15
GMX	18-3		

Product	Page	Product	Page
<b>M</b>		<b>MarGear</b> (Gear Metrology)	<b>Chapter 18</b>
M1	16-7	- Solutions for Specific Industries	18-4
M2	16-7	- Universal Measuring Center	18-3
Magnetic Bases	8-5	- Universal Gear Center for Gear and Form	18-3
Magnetic V-Blocks	12-8	- Software Solutions	18-6
Mahr Academy	21-4	MarGear GMX 275	18-3
Mahr Laser Focus	19-5	MarGear GMX 400	18-3
Mahr Measuring Equipment Management	21-2	MarGear GMX 600	18-4
Mahr Quality Guidelines	21-5	MarShaft HELIO-PAN	20-3
Mahr Service Organization	21-5	MarShaft HELIO-PAN ONC	20-4
Mahr ServiceCenter	21-5	MarShaft HELIO-PAN SNC	20-4
Mahr Spare Parts	21-5	MarShaft HELIO-SCOPE	20-3
Mahr Standard	21-5	<b>MarStand</b> (Indicator Stands, Comparator Stands, Run out Testing Instruments)	<b>Chapter 8</b>
<b>MaraMeter</b> (Indicating Measuring Instruments)	<b>Chapter 9</b>	- Center Bench	8-6
- Caliper Gages	9-31	- Comparator Stands	8-8
- Depth Gages	9-37	- Indicator Stands	8-2
- Indicating Measuring Instruments for Inside Measurements	9-41	- Magnetic Bases	8-5
- Indicating Snap Gages	9-2	- Post and Support Arm Assemblies	8-5
- Thickness Gages	9-24	<b>MarSurf</b> (Surface Measuring Systems and Systems)	<b>Chapter 16</b>
MarCAD 2D	19-17, 19-18	- Application Advice	21-3
MarCAD 3D	19-16, 19-17, 19-18	- Range of Applications	16-2
<b>MarCal</b> (Calipers)	<b>Chapter 1</b>	- Mobile Roughness Measuring Devices	16-4
- Depth Calipers	1-18	- Stationary Surface Measuring Units for Production Area	16-10
- Linear Machine Scales	1-23	- PC-based Stationary Surface Measuring Stations	16-12
- Standard Calipers	1-4	- Drive Units	16-23
- Universal Caliper	1-10	MarSurf CD 120	16-12, 16-21
<b>MarCator</b> (Dial / Digital Indicators)	<b>Chapter 5</b>	MarSurf GD 120CNC	16-23
- Dial Indicators (ANSI/AGD)	5-2	MarSurf GD 25	16-22
- Dial Indicators (DIN style)	5-28	MarSurf LD 120	16-15
- Digital Indicators (Long range)	5-36	MarSurf PCV 200	16-21
MarCom	11-3	MarSurf PGK 120	16-23
<b>MarConnect</b> (Data Processing)	<b>Chapter 11</b>	MarSurf PZK	16-22
- Data Connection Cable	11-8	MarSurf Range of Applications	16-2
- Interfaces	11-6	MarSurf S2	16-9, 16-18
- Software	11-3	MarSurf TS 50	16-17, 16-18
- Statistics Printer with Data Logger	11-5	MarSurf XC 2	16-12, 16-19, 16-21
MarContour	19-18	MarSurf XC 20	16-13, 16-19, 16-21
MarEdit	17-10	MarSurf XCR 20	16-14
<b>MarForm</b> (Form Measuring Instruments)	<b>Chapter 17</b>	MarSurf XP 20	16-16
- Application Advice	21-3	MarSurf XR 20	16-11, 16-19
- Evaluation Software	17-10	<b>MarTest</b> (Test Indicators)	<b>Chapter 4</b>
- Formtester MMQ	17-3	- 3D Touch Probe	4-12
- Piston Software	17-13	- Horizontal Version	4-7
- Reference Formtester MFU, MFK	17-7	- Standard Version	4-4
- Overview	17-14	- Vertical Version	4-7
- Universal Formtester (Primar)	17-18	- with Higher Resolution	4-5
MarForm Evaluation Software	17-6	- with Larger Measuring Range	4-8
MarForm MFK 600	17-11	- with Longer Styli	4-6
MarForm MFU	17-9, 17-10	<b>MarTool</b> (Measuring & Inspection Equipment)	<b>Chapter 12</b>
MarForm MFU 100	17-9	- Flat Squares	12-2
MarForm MFU 800	17-10	- Granite Surface Plates	12-6
MarForm MMQ 10	17-3	- Illuminated Magnifiers	12-9
MarForm MMQ 44	17-4	- Knife-edge Straight Edges	12-2
MarForm Overview	17-14, 17-15	- Universal Bevel Protractor	12-4
<b>MarGage</b> (Standards, Gages and Gage Blocks)	<b>Chapter 13</b>	- V-Blocks	12-8
- Inch Gage Blocks	13-10	MarValid	19-18
- Pin Gages	13-12		
- Rectangular Gage Blocks	13-2		
- Settings Standards	13-16		
- Thread Gages	13-17		

Product	Page	Product	Page
<b>MarVision</b> (Optical 3D Measuring Machines)	<b>Chapter 19</b>	<b>Millimar</b> (Electrical Length Measuring Instruments)	<b>Chapter 7, Chapter 14</b>
- Application Advice	21-3	- Air Gaging	7-35
- Solutions for Specific Industries	19-24	- Compact Column Amplifier	7-34, 14-7
- OMS series for measurement laboratories	19-12	- Compact Evaluation Instruments	7-24, 14-6
- Compact precision measuring machine for workshop / production line MS	19-8	- Overview of Evaluation Instruments	14-10
- Multisensor Technology	19-15	- Evaluation Instruments	7-24, 14-5
- Software	19-16	- Engineered Solutions	14-14
- Universal 3D Coordinate Measuring Machine PMC	19-15	- Incremental Probes	7-23, 14-3
MarVision Laser (Coaxial)	19-5	- Inductive Probes	7-4, 14-3
MarVision MS 222	19-9	- Evaluation Instruments	14-12
MarVision MS 222 HA	19-9	- Measuring Value Recorder	14-2
MarVision MS 442	19-10	- Pneumatic Measuring Value Recorder	14-3
MarVision MS 662	19-11	Millimar 1940	14-4
MarVision OMS 10103 / 10106	19-14	Millimar C 1208	7-30, 14-6
MarVision OMS 10103 HA / 10106 HA	19-14	Millimar C 1210	14-6
MarVision OMS 443	19-13	Millimar C 1216	7-31, 14-6
MarVision OMS 443 HA	19-14	Millimar C 1245	7-32, 14-6
MarVision OMS 663	19-13	Millimar D1000 X	14-6
MarVision OMS 663 HA	19-14	Millimar Data Overview	14-10, 14-11
MarVision PMC	19-15	Millimar Incremental Probes	7-23, 14-2, 14-3
MarVision Product Line MS	19-8	Millimar Inductive Probes	7-4, 14-2, 14-3
MarVision Product Line OMS	19-12	Millimar Pneumatic Recorder	14-2, 14-3
MarVision Product Line PMC	19-15	Millimar S 1840	7-34, 14-7
MarWin	17-10	Millimar S 1840 PE	7-39
MarWin Software	17-12, 17-13	Millimar S 1841	14-7
Maxµm III	6-10	Millimar Standard Elements	14-12
Measuring & Inspection Equipment => See MarTool	<b>Chapter 12</b>	Millimar X 1715	14-8
Measuring Computer	14-9	Millimar X 1741	14-8
Measuring Device Management	21-2	Millimar X 1941	14-4
Measuring Devices	14-12	<b>Millimes</b> (Digital and Dial Comparators)	<b>Chapter 6</b>
Measuring Interface System	14-8	- Electrical Comparator with Limit Contacts	6-20
Measuring Interfaces	14-8	- Inductive Digital Comparators (Short Range)	6-2
Measuring Probe T2W	17-16	- Mechanical Dial Comparators	6-14
Measuring Probe T7W	17-16	- Mechanical Dial Comparators with Limit Contacts	6-20
Measuring Value Recorder	14-2	Millimes	6-18
Mechanical 3D-Touch Probe	4-12	Millitast => See Digital Indicators	5-38
Mechanical Dial Comparators	6-18	Millitron => See Millimar	<b>Chapter 7, Chapter 14</b>
Mechanical Probe Systems	19-16	Millitron 1260	14-9
MFK 500	17-9	Millitron 1260 T	14-9
MFK 600	17-9	MKe 20	2-19
MFU 100	17-7	MKe 30	2-13
MFU 800	17-8	MMQ 10	17-3
<b>Micromar</b> (Micrometers)	<b>Chapter 3</b>	MMQ 100	17-3
- Micrometer	3-4	MMQ 34	17-4
- Micrometer Head	3-30	MMQ 400	17-5
- Micrometer with integrated Dial Comparator	3-14	MMQ 6200	17-4
- Inside Micrometer	3-23	Mobile Roughness Measuring Units	16-4
- Depth Micrometer	3-29	Modular Units for individual Center Benches	8-7
Micrometer => See Micromar	<b>Chapter 3</b>	Modular Units for individual Comparator Stands	8-14
Micrometer Head	3-30	Motorzoom	19-4
Micrometer with integrated Dial Comparator	3-14	MS 222	19-9
Micrometers	3-5	MS 222 HA	19-9
		MS 442	19-10
		MS 660	19-10
		MS 662	19-11
		MS 664	19-11
		MSP 2	11-5



Product	Page	Product	Page
<b>Multimar</b> (Universal Measuring Instruments)	<b>Chapter 10</b>	Precimar 828 CIM 1000	15-12, 15-13
- Indicator Gage or External and Internal Dimensions	10-21	Precimar Data Overview	15-11
- Universal Digital Caliper	10-2	Precimar PLM 600-2	15-5
- Universal Gage for External and Internal Dimensions	10-4	Precision Bench Micrometer	3-16
Multi-wave Standard A379	17-17	Precision Dial Indicators DIN style	5-32
MX 4	17-19	Precision Length Measuring Units	15-2
MX 4 CNC	17-19	Precision Length Metrology	15-11
MX 4 XXL	17-20	Precision Small Dial Indicators DIN style	5-30
<b>O</b>		Primar	17-18
OMS (10103/10106)	19-14	Primar MX 4	17-19
OMS 443	19-13	Probe T20W	17-16
OMS 663	19-13	Probe T7W	17-16
OMS 663 HA	19-14	Product Line MS	19-8
Online Statistic	19-16	Product Line OMS	19-12
Optical Flat	13-9	Product Line PMC	19-15
Optical Flat Plate	17-17	Product Training	21-4
Optical Metrology	16-22	Professional Form	17-10
Optical Parallel	13-9	PS1 Mobile Roughness Measuring Unit	16-4, 16-6
Optical Probe	19-7	Puppitast => See MarTest	<b>Chapter 4</b>
Optical Sensor	19-5	PZK	16-24
Optimar 100	15-2, 15-3, 15-13	<b>Q</b>	
Option Piston	17-13	Q-DAS qs STAT	14-9
<b>P</b>		QM-Block	15-5
P/E Converter	14-4	QMSOFT	15-3
P1300	7-6	Quick Clamping Device	17-17
P1514	7-23	Quick Height	2-4
P1514 H	2-14	Quick&Easy	17-11
P1526	7-23	Quick Mode	2-4, 2-9
P2000	14-3	<b>R</b>	
P2001	7-10	Radio Transmission	11-7
P2004	7-10	Repair	21-2
P2010	7-11	Rectangular Gages Blocks	13-2
P2104	7-11	Rectangular Gage Blocks made of Ceramic	13-5
Pantograph Electronic Gage Heads	7-20	Rectangular Gage Blocks made of Steel	13-4
PCV 200	16-23	Reference Discs	13-17
Perpendicular Dial Indicators	5-19	Reference Formtester	17-7
Perpendicularity Measurements	2-10, 2-20	Reference Standard	17-17
Perthometer	16-11	Rim Chuck	17-17
Perthometer => See MarSurf	<b>Chapter 16</b>	Roughness Measuring Units	16-4
Perthometer M1	16-5, 16-18	Roundness Standard	17-17
Perthometer M2	16-5, 16-18	<b>S</b>	
PFM	16-8	S 1840	7-34, 14-7
PFM 2	16-8	S 1840 PE	7-39
PGK 120	16-25	S 1841	14-7
Pin Gages	13-12	S15/31,2	2-13
Piston Software	17-7	S15/47,5	2-13, 2-19
PLM 600-2	15-11, 15-13	S2	16-10, 16-11
Plug Gages	9-46	Self-Centering Dial Bore Gages	9-52, 9-60
PMC	19-15	Self-Centering Inside Micrometer	3-25
Portable Thickness Gages	9-24	Self-Centering Measuring Pistol	3-27
Post and Support Arm Assemblies	8-5	Seminar Offer	21-4
<b>Precimar</b> (Precision Length Metrology)	<b>Chapter 15</b>	Service Agreements	21-3
- Application Advice	21-3	Service and Calibration Agreements	21-3
- Data Summary	15-13	<b>Services</b>	<b>Chapter 21</b>
- Length Measuring Machines	15-7	Setting Standard for Micrometers	3-22
- Dial Indicator Testing Machine	15-2	Setting Standards	13-16, 16-25
- Gage Block Measuring Unit	15-4	Settings Gages	13-17
- Universal Length Measuring Machine	15-8	Shaft Measuring Center, Automatic	20-4
Precimar 826 PC	15-7		

Product	Page	Product	Page
Shaft Measuring Machine, manual	20-3	Universal Bevel Protractor	12-4
Shaft Measuring Maschine, optical	20-3	Universal Calibrator	5-26
<b>Shaft Measuring Technology</b>	<b>Chapter 20</b>	Universal Caliper	1-10
Shaft whipper	17-17	Universal Form Measuring Machine	17-18
Single Revolution Dial Indicators	5-13	Universal Gage	10-4
Single-skid Probe	16-26	Universal Measuring Instruments => See Multimar	<b>Chapter 10</b>
Skidless Pickup	16-26	Universal Test Cylinder	17-17
Snap Gages	9-2	USB-Hub	11-4
Software	11-3	USB-Ready	11-2
Software Platform	17-12	<b>V</b>	
Speed Read Dial Indicators	5-13	Vernier Caliper with Circular Scale	1-9
Spring (Pantograph) Type Gage Heads	7-20	Vernier Calipers	1-8
Squares	12-2	Vision 3D	19-16
Stand	12-7	<b>W</b>	
Stand with Cabinet	12-7	Waterproof Measuring Instruments	1-4, 1-18, 3-5, 3-26, 4-12, 4-13, 5-17, 5-31, 5-32, 5-45, 5-49, 6-4, 6-5, 6-7, 6-10, 7-6, 7-10, 7-14, 7-22
Standard Elements	14-12	Wetproof Dial Indicators	5-17
Stationary PC-Based Surface Measuring Units	16-12	Wire Insulation Thickness Gages	9-29
Statistics	2-12, 11-5	With Line Scale (Vernier)	1-8
Statistics Printer	11-5	Workshop Length Metrology	15-6
Statistics Printer with Data Logger	11-5	WS1 White-Light Interferometric Surface Measuring Instrument	16-22
Steel Gage Blocks	13-3	www.european-accreditation.org/	20-5
Supramess	6-18	www.mahr.com	20-5
<b>Surface Measuring Units</b>	<b>Chapter 16</b>	<b>X</b>	
Surface Measuring Units Data Overview	16-20	X 1715	14-8
Surface Probes	16-26	X 1741	14-8
<b>T</b>		X 1941	14-4
T20W	17-16	XC 2	16-14
T7W	17-16	XC 20	16-15
Tactile Sensor	19-4	XCR 20	16-16
Teach-In	17-10	XP 20	16-18
Technical Service	21-5	XR 20	16-13
Telecentric Objective	19-5	XT 20	16-21
Test Indicators => See MarTest	<b>Chapter 4</b>	<b>Z</b>	
Testing Plates	12-6	Z 10/31,2	2-13
Thermometer	13-9	Z 10/60	2-13, 2-19
Thickness Gages	9-24	Zentimes	6-18
Thread Gages	13-17		
Thread Interchangeable Anvils	3-21, 9-21, 10-12		
Thread Micrometer	3-20		
Thread Pin Gages	13-15		
Three-jaw Chuck	17-17		
Through Hole Plugs	7-43		
TMT 120	2-13		
TMT 86	2-19		
Topography	16-21, 16-22		
Touch Probe	4-12		
Training	21-2, 21-4		
Twist Testing	17-13		
<b>U</b>			
ULM 1000	15-8		
ULM 1000 S	15-9		
ULM 1400 S	15-9		
ULM 1500	15-8		
ULM 1500 L	15-10		
ULM 1700 S	15-9		
ULM 300	15-8		
ULM 520 S	15-9		
ULM 600	15-8		
ULM 800 L	15-10		

## AMERICAS

### USA

#### Mahr Federal Inc.

Headquarters:  
1144 Eddy Street,  
Providence, RI 02905  
Phone: +1-401-784-3100  
+1-800-343-2050 (toll-free)  
Fax: +1-401-784-3246  
e-mail: [information@mahr.com](mailto:information@mahr.com)

Cincinnati Resource Center:  
11435 Williamson Road,  
Cincinnati, OH 45241  
Phone: +1-513-489-6116  
Fax: +1-513-489-6302  
e-mail: [information@mahr.com](mailto:information@mahr.com)

Los Angeles Resource Center:  
11145 Knott Avenue, Suite G  
Cypress, CA 90630  
Phone: +1-714-379-7051  
Fax: +1-714-379-0468  
e-mail: [information@mahr.com](mailto:information@mahr.com)

#### Mahr Metering Systems Corporation

1415 A Cross Beam Dr.  
Charlotte, NC 28217  
P.O. Box 7547  
Charlotte, NC 28241  
Phone: +1-704-525-7128  
+1-800-459-7867 (toll-free)  
Fax: +1-704-525-8290  
e-mail: [Info@MahrMeteringSystems.com](mailto:Info@MahrMeteringSystems.com)  
[info@mmscusa.com](mailto:info@mmscusa.com)

### Mexico

#### Mahr Corp. de Mexico S.A. de C.V.

Francisco Garza Sada #690,  
Col. Chepevera  
C.P. 64030 Monterrey,  
Nuevo León, México  
Phone: +52-81-8333-20-10  
Fax: +52-81-8347-27-93  
e-mail: [ventas@mahr.com.mx](mailto:ventas@mahr.com.mx)

### Brazil

#### Mahr do Brasil Ltda.

Av. Washington Luis, 703  
04662-001 São Paulo, SP  
Brazil  
Phone: + 55-11-6687 5566  
Fax: + 55-11-6687 5550  
e-mail: [apoio.vendas@mahr.com.br](mailto:apoio.vendas@mahr.com.br)

## EUROPE

### Germany

#### Mahr GmbH Göttingen

Postfach 1853  
37008 Göttingen  
Carl-Mahr-Str. 1  
37073 Göttingen  
Phone: +49-551-7073-800  
Fax: +49-551-7073-888  
e-mail: [info@mahr.de](mailto:info@mahr.de)

#### Mahr GmbH Esslingen

Postfach 100254  
73702 Esslingen  
Reutlinger Straße 48  
73728 Esslingen  
Phone: +49-711-9312-600  
Fax: +49-711-9312-725  
e-mail: [mahr.es@mahr.de](mailto:mahr.es@mahr.de)

#### Mahr Multisensor GmbH

Wendelstraße 90  
66787 Wadgassen  
Phone: +49-6834-9411 0  
Fax: +49-6834-48785  
e-mail: [info.marvision@mahr.de](mailto:info.marvision@mahr.de)

#### Mahr OKM GmbH

Carl-Zeiss-Promenade 10  
07745 Jena  
Phone: +49-3641 642696  
Fax: +49-3641 643368  
e-mail: [info-okm@mahr.de](mailto:info-okm@mahr.de)

### Poland

#### Mahr GmbH Przedstawicielstwo w Polsce

ul. Plocka 15 c / 53  
01-231 Warsaw  
Phone: +48-792-665446  
e-mail: [arkadiusz.kolakowski@mahr.com](mailto:arkadiusz.kolakowski@mahr.com)

### Russian Federation

#### Mahr Representative Office

ul. Godovikova, dom 9, stroenie 3  
129085 Moscow  
Phone: +7-926-841 0011  
e-mail: [sergey.bryankin@mahr.com](mailto:sergey.bryankin@mahr.com)

### Czech Republic

#### Mahr spol. s.r.o.

Ulice Kpt. Jaroše 552  
41712 Proboštov  
Czech Republic  
Phone: +420-417-816 711  
Fax: +420-417-560 237  
e-mail: [Info-cz@mahr.com](mailto:Info-cz@mahr.com)

### Austria

#### Mahr Austria GmbH

Hirschstettnerstraße 19-21  
1220 Wien, Austria  
Phone: +43 (1) 204 36 73-0  
Fax: +43 (1) 204 36 73-15  
e-mail: [info-austria@mahr.com](mailto:info-austria@mahr.com)

### France

#### Mahr France

B.P. 27  
6, rue Lavoisier-Z.I.  
91430 Igny, France  
Phone: +33-1-69351919  
Fax: +33-1-69351900  
e-mail: [info@mahr.fr](mailto:info@mahr.fr)

### Switzerland

#### Mahr AG Schweiz

Zürcherstrasse 68  
8800 Thalwil, Switzerland  
Phone: +41-44 723 39 99  
Fax: +41-44 723 39 98  
e-mail: [ch@mahr.com](mailto:ch@mahr.com)

### United Kingdom / Ireland

#### Mahr U.K. Plc.

19 Drakes Mews  
Crownhill, Milton Keynes  
MK 8 0ER, Great Britain  
Phone: +44-1908-563700  
Fax: +44-1908-563704  
e-mail: [info@mahr.uk.com](mailto:info@mahr.uk.com)

## ASIA

### China

#### Mahr China Ltd.

Hong Kong Office:  
Unit G, 14F., CDW Building,  
388 Castle Peak Road,  
Tsuen Wan, N.T.  
Hong Kong  
Phone: +852-2357 9683  
Fax: +852-2763 9613  
e-mail: [info@mahr.com.hk](mailto:info@mahr.com.hk) or  
[sales@mahr.com.hk](mailto:sales@mahr.com.hk)

Beijing Office:  
Room 1502, Rong Xin Tower,  
West Station, Fengtai District,  
Beijing 100055, China  
Phone: +86-10-6332 4481/2/3  
Fax: +86-10-6332 4492  
e-mail: [info@mahr.com.hk](mailto:info@mahr.com.hk) or  
[sales@mahr.com.hk](mailto:sales@mahr.com.hk)

Shanghai Office:  
1/F., No. 1146 Jia,  
West Yan An Road, Changning District,  
Shanghai 200052, China  
Phone: +86-21-5238 5353  
Fax: +86-21-5238 6012  
e-mail: [info@mahr.com.hk](mailto:info@mahr.com.hk) or  
[sales@mahr.com.hk](mailto:sales@mahr.com.hk)

Guangzhou Office:  
Unit 1203, East Tower,  
Guangzhou International Commercial Center,  
No. 122 Ti Yudong Road,  
Guangzhou 510620, China  
Phone: +86-20-3887 1132/1173  
Fax: +86-20-3887 1172  
e-mail: [info@mahr.com.hk](mailto:info@mahr.com.hk) or  
[sales@mahr.com.hk](mailto:sales@mahr.com.hk)

#### Mahr Precision Metrology (Suzhou) Ltd.

#399 Su Hong Road  
Suzhou, Industrial Park  
Suzhou 215021, P.R. China  
Phone: +86-512-62585862  
Fax: +86-512-62585870  
e-mail: [info\\_suzhou@mahr.com](mailto:info_suzhou@mahr.com)

### Taiwan

#### Mahr China Ltd.

Taiwan Branch Office:  
No. 109, Sec. 1, Wunhua 1st Road,  
Linkou Township, Taipei County 24447,  
Taiwan R.O.C.  
Phone: +886-2-2600 6360  
Fax: +886-2-2600 6362  
e-mail: [info@mahr.com.hk](mailto:info@mahr.com.hk) or  
[sales@mahr.com.hk](mailto:sales@mahr.com.hk)

### Korea

#### Mahr Korea Ltd.

Panwon B/D 6 F  
38-30 Jangchung-dong 1-ga,  
Chung-ku, Seoul 100-391  
South Korea  
Phone: +82-2-579-4981  
Fax: +82-2-579-498- 6/7  
e-mail: [sales@mahr.co.kr](mailto:sales@mahr.co.kr)

### Japan

#### Mahr Japan Co., Ltd.

712-4-1, Mamedo-cho, Kohoku-ku,  
Yokohama, 222-0032, Japan  
Phone: +81-45-540-3591  
Fax: +81-45-540-6252  
e-mail: [info@mahr.co.jp](mailto:info@mahr.co.jp)

Osaka Branch  
2-3-5, Andoji-cho, Chuo-ku,  
Osaka-shi, 542-0061, Japan  
Phone: +81-6-6763-5191  
Fax: +81-6-6763-5192  
e-mail: [info@mahr.co.jp](mailto:info@mahr.co.jp)

### Malaysia

#### Mahr Malaysia Sdn. Bhd.

No. 130, Block B 1,  
Leisure Commerce Square  
No. 9, Jalan PJS 8/9,  
46150 Petaling Jaya, Selangor Darul Ehsan  
Malaysia  
Phone: +60-3-78772060  
Fax: +60-3-78772040  
e-mail: [sales@mahr.com.my](mailto:sales@mahr.com.my)

### Thailand

#### Mahr S.E.A. Co. Ltd.

719 KPN Tower, 10th Floor  
Rama 9 Rd., Bangkok, Huaykwang  
Bangkok 10310, Thailand  
Phone: +66-2-717 1050-4  
Fax: +66-2-717 1055  
e-mail: [sales\\_msea@mahr.com](mailto:sales_msea@mahr.com)

### India

#### Mahr Metrology India Private Ltd.

II Floors, Sona Towers  
71/B Millers Road,  
Bangalore - 560 052, India  
Phone: +91-80-41076787  
Fax: +91-80-41176787  
e-mail: [mahrindia@mahr.com](mailto:mahrindia@mahr.com)

Please refer to our website [www.mahr.com](http://www.mahr.com)  
for addresses of our worldwide Sales  
Partners (not included in the Mahr Group)

© by Mahr GmbH, Esslingen / Göttingen

We reserve the right to make changes to  
our products, especially due to technical  
improvements and further developments.

All illustrations and technical data are there-  
fore without guarantee.

3759620-01.09.2007 Printed in Germany

WWW.MAHR.COM

|  
- 0 +



EXACTLY